

ARCHITECT:

Lavallee Brensinger Architects

305 Commercial Street
Portland, ME 04101
207.558.7200
www.LBPA.com

STRUCTURAL ENGINEER:

Foley Buhl Roberts & Associates

500 N Commercial Street, Suite 403
Manchester, NH 03101
603.622.4578
www.fbra.com

MECHANICAL / ELECTRICAL / PLUMBING & FIRE
PROTECT ENGINEER:

Salas O'Brien

160 Veranda Street
Portland, ME 04103
www.salasobrien.com



SMCC HEALTH SCIENCE CENTER

DRAWING LIST

SHEET#	SHEET NAME
A0.00	COVER SHEET
STRUCTURAL	
S0.1	GENERAL NOTES AND TYPICAL DETAILS
S1.3	PARTIAL ROOF FRAMING PLAN
ARCHITECTURAL	
AD1.0	GROUND FLOOR PLAN - DEMO
AD1.1	FIRST FLOOR PLAN - DEMO
AD1.2	SECOND FLOOR PLAN -DEMO
A0.1	LEGENDS, SYMBOLS, NOTES, PARTITION TYPES
A0.2A	CODE ANALYSIS TEXT, SYMBOLS, AND RATINGS
A0.2B	CODE ANALYSIS TEXT, SYMBOLS, AND RATINGS
A0.3A	DOOR / WINDOW SCHEDULE
A1.0	GROUND FLOOR PLAN
A1.1	FIRST FLOOR PLAN
A1.2	SECOND FLOOR PLAN
A1.3	ROOF PLAN
A4.2	STAIR PLANS, SECTIONS, AND DETAILS
A6.1	INTERIOR ELEVATION
A6.2	INTERIOR ELEVATION
A6.3	INTERIOR ELEVATION
A7.1	MILLWORK DETAILS
A8.0	GROUND FLOOR REFLECTED CEILING PLAN
A8.1	FIRST FLOOR REFLECTED CEILING PLAN
A8.2	SECOND FLOOR REFLECTED CEILING PLAN

INTERIOR DESIGN

AI0.1	GENERAL NOTES, LEGENDS, ROOM FINISH SCHEDULES
AI1.0	INTERIOR FINISH PLAN - GROUND FLOOR
AI1.1	INTERIOR FINISH PLAN - FIRST FLOOR
AI1.2	INTERIOR FINISH PLAN - SECOND FLOOR

PLUMBING

P-000	PLUMBING AND HVAC NOTES, LEGEND AND ABBREVIATIONS
PD1.1	PLUMBING DEMOLITION PLAN - GROUND LEVEL
PD1.2	PLUMBING DEMOLITION PLAN - FIRST FLOOR
PD1.3	PLUMBING DEMOLITION PLAN - SECOND FLOOR
PL1.1	PLUMBING PLAN - GROUND LEVEL
PL1.2	PLUMBING PLAN - FIRST FLOOR
PL1.3	PLUMBING PLAN - SECOND FLOOR


DRAWING LIST (CONT)

SHEET#	SHEET NAME
MECHANICAL	
MD1.0	MECHANICAL DEMOLITION PLAN - GROUND LEVEL
MD1.1	MECHANICAL DEMOLITION PLAN - FIRST FLOOR
MD1.2	MECHANICAL DEMOLITION PLAN - SECOND FLOOR
MD1.3	MECHANICAL DEMOLITION PLAN - ROOF PLAN
M1.0	MECHANICAL PLAN - GROUND LEVEL
M1.1	MECHANICAL PLAN - FIRST FLOOR
M1.2	MECHANICAL PLAN - SECOND FLOOR
M1.3	MECHANICAL ROOF PLAN
ELECTRICAL	
ED1.0	ELECTRICAL DEMOLITION PLAN - GROUND FLOOR
ED1.1	ELECTRICAL DEMOLITION PLAN - FIRST FLOOR
ED1.2	ELECTRICAL DEMOLITION PLAN - SECOND FLOOR
E0.0	ELECTRICAL LEGEND
E5.0	ELECTRICAL DETAILS
E6.0	ELECTRICAL ONE-LINE DIAGRAM & SCHEDULES
EL1.0	LIGHTING PLAN - GROUND FLOOR
EL1.1	LIGHTING PLAN - FIRST FLOOR
EL1.2	LIGHTING PLAN - SECOND FLOOR
EP-1.0	ELECTRICAL PLAN - GROUND FLOOR
EP-1.1	ELECTRICAL PLAN - FIRST FLOOR
EP-1.2	ELECTRICAL PLAN - SECOND FLOOR
EP-1.3	ELECTRICAL PLAN - ROOF

LAVALLEE
BRENSINGER

ARCHITECTS

Boston | Manchester | Portland
155 Dow Street, Suite 400, Manchester, NH 03101
603.622.5450
www.LBPA.com



HEALTH SCIENCE
CENTER

BGS NUM: 3809

79 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE



CONTENT: COVER SHEET	
DRAWN BY:	MOL
PROJECT NO:	25-062-00
DATE:	05/08/2026
REVISED:	
SCALE:	12" = 1'-0"
A0.00	
Project Phase	
CONSTRUCTION DOCUMENTS	
COPYRIGHT © 2026 BY LAVALLEE BRENSINGER PLLC. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

GENERAL

- G1. THE GENERAL NOTES APPLY UNLESS NOTED OTHERWISE ON THE DRAWINGS OR IN THE SPECIFICATIONS.
- G2. STRUCTURAL WORK SHALL CONFORM TO REQUIREMENTS OF THE MAINE UNIFORM BUILDING AND ENERGY CODE.
- G3. THE INTENT OF THE STRUCTURAL DRAWINGS IS TO SHOW THE MAIN STRUCTURAL FEATURES AND DESIGN FOR THE COMPLETED PROJECT. ARCHITECTURAL DETAILS AND OTHER COMPONENTS THAT MAY BE NECESSARY TO CONSTRUCT THE PROJECT ARE SHOWN INCIDENTALLY ONLY AND NOT COMPLETELY.
- G4. STRUCTURAL DRAWINGS SHALL BE USED IN CONJUNCTION WITH THE ARCHITECTURAL, SITE, MECHANICAL, ELECTRICAL, PLUMBING, AND FIRE PROTECTION DRAWINGS, APPROVED SHOP DRAWINGS, AND SPECIFICATIONS.
- G5. REFER TO ARCHITECTURAL, SITE, MECHANICAL, ELECTRICAL, PLUMBING, AND FIRE PROTECTION DRAWINGS FOR VERIFICATION OF LOCATIONS AND DIMENSIONS OF ALL SHAFTS, INSERTS, CURBS, OPENINGS, SLEEVES, ANCHOR BOLTS, FLOOR PITCHES, ANGLE FRAMES, AND OTHER PROJECT REQUIREMENTS NOT SHOWN ON STRUCTURAL DRAWINGS.
- G6. THE CONTRACTOR SHALL INFORM THE ARCHITECT OF ALL DISCREPANCIES BETWEEN DRAWINGS OF DIFFERENT TRADES PRIOR TO INITIATION OF ANY WORK.
- G7. EXISTING DIMENSIONS AND CONDITIONS MUST BE VERIFIED OR DETERMINED IN THE FIELD AND ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT BEFORE PROCEEDING WITH THE AFFECTED PORTION OF THE WORK.
- G8. THE CONTRACTOR SHALL PROVIDE ALL THE NECESSARY ENGINEERED TEMPORARY BRACING AND SHORING TO SAFELY SUPPORT THE NEW AND EXISTING WORK AND THE APPLIED LOADS UNTIL THE PERMANENT STRUCTURE IS FULLY INSTALLED AND AT FULL STRENGTH.
- G9. SHOP DRAWINGS FOR STRUCTURAL STEEL SHALL BE SUBMITTED TO THE ARCHITECT AND A STAMPED APPROVAL RECEIVED BEFORE FABRICATION MAY PROCEED. FABRICATION AND ERECTION SHALL PROCEED FROM APPROVED SHOP DRAWINGS ONLY.
- G10. NOTES AND DETAILS SHOWN ON ANY STRUCTURAL DRAWINGS SHALL BE CONSIDERED TYPICAL FOR ALL SIMILAR CONDITIONS, UNLESS NOTED.
- G11. REFER TO ARCHITECTURAL DRAWINGS FOR DIMENSIONS NOT SHOWN.
- G12. THE CONTRACTOR SHALL SUBMIT LOADING DATA FOR ANY EQUIPMENT SUCH AS LIFTS, ETC. PROPOSED FOR USE ON THE BUILDING DURING CONSTRUCTION.
- G13. TYPICAL DETAILS PROVIDE MINIMUM REQUIREMENTS UNLESS MORE STRINGENT REQUIREMENTS ARE NOTED IN DRAWINGS OR SPECIFICATIONS.

STRUCTURAL LOADS - MAINE UNIFORM BUILDING AND ENERGY CODE
(IBC 2021 WITH MAINE AMENDMENTS & ASCE 7-16)


L1.	DEAD LOADS	
A.	WEIGHT OF BUILDING COMPONENTS	
1.	TYPICAL ROOF AREAS	EXISTING
L2.	SNOW LOADS	
A.	GROUND SNOW LOAD - (TR-02-6 TABLE 1)	$P_g = 50 \text{ PSF}$
B.	FLAT ROOF SNOW LOAD - (ASCE 7-16 - SECTION 7.3)	$P_f = 38.5 \text{ PSF}$
C.	SNOW EXPOSURE FACTOR - (ASCE 7-16 - TABLE 7.3-1)	$C_e = 1.0$
D.	SNOW IMPORTANCE FACTOR - (ASCE 7-16 - TABLE 7.3-3)	$I_s = 1.1$
E.	ROOF THERMAL FACTOR - (ASCE 7-16 - TABLE 7.3-2)	$C_t = 1.0$
F.	ROOF SLOPE FACTOR - (ASCE 7-16 - FIGURE 7.4-1)	$C_s = 1.0$
G.	SNOW DRIFT - (ASCE 7-16 - SECTION 7.6 THROUGH 7.9)	
L3.	LIVE LOADS	
A.	CONSTRUCTION LOADS	
1.	UNIFORM LOAD (STEEL DECK)	20 PSF
2.	CONCENTRATED LOAD (BARE STEEL DECK)	150 PLF (PERPENDICULAR TO DECK SPAN)

STRUCTURAL STEEL FRAMING (SECTION 051200)

- S1. STRUCTURAL STEEL WORK SHALL CONFORM TO THE LATEST EDITIONS OF AISC 360 "SPECIFICATION FOR STRUCTURAL STEEL BUILDINGS" AND AISC 303 "CODE OF STANDARD PRACTICE FOR STEEL BUILDINGS AND BRIDGES", AS MODIFIED BY THE SPECIFICATIONS.
- S2. WELDING SHALL BE IN ACCORDANCE WITH THE LATEST AWS "D1.1-STRUCTURAL WELDING CODE-STEEL".
- S3. STRUCTURAL STEEL SHALL CONFORM TO THE FOLLOWING, UNLESS NOTED:
- | | | | |
|----|-------------------------------------|-------------------|------------------------|
| A. | W, WT, C, AND MC SHAPES: | ASTM A992 | $F_y = 50 \text{ KSI}$ |
| B. | ALL OTHER STRUCTURAL SHAPES: | ASTM A572 | $F_y = 50 \text{ KSI}$ |
| C. | SQUARE, RECTANGULAR, AND ROUND HSS: | ASTM A500 GRADE C | $F_y = 50 \text{ KSI}$ |
| D. | STRUCTURAL STEEL PIPE: | ASTM A53 GRADE B | $F_y = 35 \text{ KSI}$ |
| E. | STRUCTURAL STEEL PLATES AND BARS: | ASTM A572 | $F_y = 50 \text{ KSI}$ |
- S4. CONNECTIONS MAY BE BOLTED OR WELDED, UNLESS SPECIFICALLY NOTED OTHERWISE. CONNECTIONS SHALL BE DESIGNED AND DETAILED IN ACCORDANCE WITH AISC STANDARDS, USING THE ASD METHOD.
- S5. CONNECTIONS SHALL BE WELDED TO CONFORM WITH AWS D1.1, OR BOLTED TO CONFORM TO ASTM F3125, TYPE N BOLTS.
- S6. SIMPLY SUPPORTED BEAM-TO-BEAM CONNECTIONS SHALL BE DOUBLE ANGLE TYPE IN CONFORMANCE WITH THE AISC "STEEL CONSTRUCTION MANUAL", UNLESS SPECIFICALLY NOTED OTHERWISE ON THE STRUCTURAL DRAWINGS.
- S7. SPLICING STRUCTURAL MEMBERS WHERE NOT DETAILED ON DRAWINGS IS PROHIBITED WITHOUT PRIOR APPROVAL OF ARCHITECT.
- S8. STRUCTURAL STEEL EXPOSED TO THE WEATHER IN THE FINISHED PROJECT SHALL BE HOT DIP GALVANIZED TO CONFORM TO ASTM A123.
- S9. REFER TO THE SPECIFICATION FOR PAINTING AND SURFACE PREPARATION REQUIREMENTS.
- S10. THE CONTRACTOR SHALL PROVIDE ALL NECESSARY TEMPORARY GUYING AND BRACING REQUIRED TO ERECT AND HOLD THE NEW STRUCTURE FOR WIND AND CO-CONSTRUCTION LOADS. TEMPORARY TOWER SUPPORTS SHALL REMAIN IN PLACE UNTIL ALL ELEMENTS REQUIRED FOR STABILITY OF THE STEEL FRAME ARE COMPLETED.

CAST-IN-PLACE CONCRETE (SECTION 033000)

- C1. ALL CONCRETE WORK FOR THE BUILDING AND SITE SHALL CONFORM TO THE LATEST EDITION OF ACI 318 "BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE".
- C2. CONCRETE SHALL BE PLACED IN THE PRESENCE OF THE APPROVED TESTING AGENCY.
- C3. CONCRETE QUALITY IN ACCORDANCE WITH THE REQUIREMENTS OF THESE DRAWINGS AND SPECIFICATIONS IS ESSENTIAL TO THE STRUCTURAL PERFORMANCE OF THE BUILDING. CONCRETE THAT IS NOT IN ACCORDANCE WITH THE DRAWINGS AND SPECIFICATIONS WILL NOT BE ACCEPTED.
- C4. NORMAL WEIGHT CONCRETE SHALL HAVE AN AIR-DRY UNIT WEIGHT OF 145 PCF.
- C5. CONCRETE MINIMUM 28-DAY STRENGTH, UNLESS NOTED OTHERWISE, SHALL CONFORM TO FOLLOWING:
- | | | |
|----|------------------|--------------------------|
| A. | SLABS ON GRADE : | 4000 PSI (NORMAL WEIGHT) |
|----|------------------|--------------------------|
- C6. REINFORCING STEEL SHALL CONFORM TO ASTM A615, GRADE 60, DEFORMED BARS. LAP ALL CONTINUOUS BARS A MINIMUM OF 40 DIAMETERS, UNLESS NOTED. PROVIDE MATCHING CORNER AND INTERSECTION BARS.
- C7. WELDED WIRE FABRIC SHALL CONFORM TO ASTM A1064 IN FLAT SHEETS. LAP ONE AND ONE-HALF SQUARES AT ALL JOINTS AND TIE AT 3'-0" o.c. AT SLAB ON GRADE. PLACE WELDED WIRE FABRIC ON SLAB BOLSTERS WITH SAND PLATES SPACED AT 3'-0" o.c. EACH WAY. PROVIDE 6x6 W1-x1-4 WELDED WIRE REINFORCEMENT IN CONCRETE STAIR TREADS AND LANDINGS.
- C8. PROVIDE REINFORCING STEEL DETAILING, LAP SPLICES, EMBEDMENTS, BAR SUPPORTS, SPACERS, AND ACCESSORIES AS RECOMMENDED IN THE LATEST EDITION OF THE "ACI DETAILING MANUAL". ACCESSORIES, SUCH AS SLAB BOLSTERS AND BEAM AND SLAB CHAIRS, IN CONTACT WITH EXPOSED SURFACES, SHALL BE ZINC COATED AND PLASTIC TIPPED.
- C9. REINFORCING STEEL DETAILS NOT SHOWN ON THE DRAWINGS SHALL BE IN ACCORDANCE WITH THE "ACI DETAILING MANUAL".
- C10. CLEAR CONCRETE COVER FOR REINFORCING BARS OR WELDED WIRE FABRIC SHALL CONFORM TO THE FOLLOWING, UNLESS NOTED:
- | | | |
|----|--------------------------|-----------------|
| A. | INTERIOR SLABS ON GRADE: | 1-1/2" FROM TOP |
|----|--------------------------|-----------------|
- C11. SET AND TIE ALL REINFORCING STEEL BEFORE PLACING CONCRETE. SETTING DOWELS AND REINFORCING STEEL INTO WET CONCRETE IS PROHIBITED.
- C12. NO REINFORCING STEEL SHALL BE CUT OR OMITTED IN THE FIELD BECAUSE OF CONFLICT WITH SLEEVES, DUCT OPENINGS, OR RECESSES. REINFORCING STEEL MAY BE MOVED ASIDE WITHOUT CHANGE IN LEVEL, WITH THE APPROVAL OF THE ARCHITECT.
- C13. NO CHASES, RECESS, OPENINGS, OR SLEEVES SHALL BE INSTALLED IN CONCRETE WITHOUT APPROVAL OF THE ARCHITECT.
- C14. NO CONDUITS SHALL BE PLACED IN CONCRETE SLABS ON DECK OR SLABS ON GRADE.
- C15. PROVIDE SEALANT FOR ALL EXPOSED-TO-VIEW CONSTRUCTION JOINTS, CONTROL JOINTS, AND SHEAR KEYS.

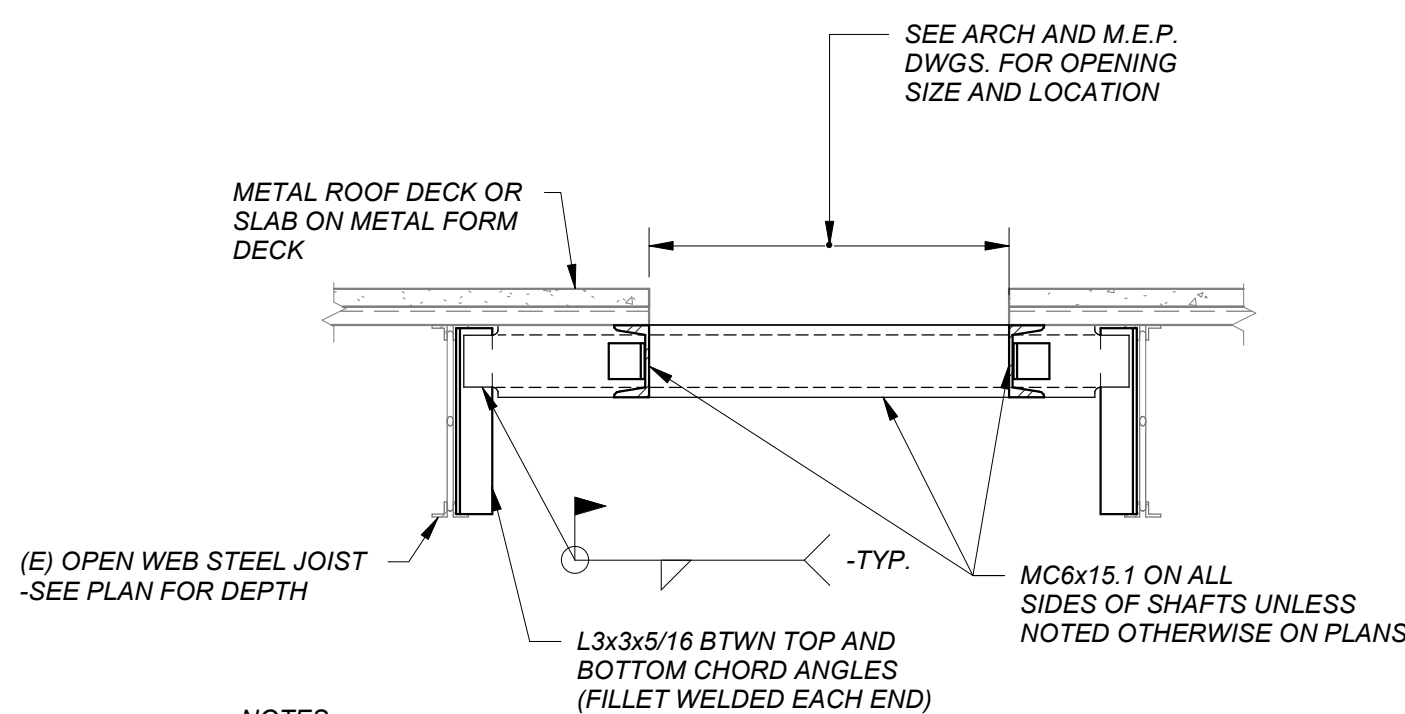


NOTES:

- DETAIL ABOVE APPLIES TO OPENINGS IN ROOF AND FLOOR STRUCTURE TO BE PROVIDED FOR ROOF DRAINS, FANS, M.E.P. SHAFTS, ETC.
- REFER TO ARCHITECTURAL AND M.E.P. DRAWINGS FOR SIZE AND LOCATION OF OPENINGS. COORDINATE WITH EQUIPMENT REQUIREMENTS.
- FRAMING SHOWN ON THE PLANS GOVERN OVER THAT WHICH IS INDICATED ON THE DETAIL ABOVE.
- WHERE ADDED LOAD TO JOISTS OCCURS BETWEEN TOP CHORD PANEL POINTS, ADD L1-1/2x1-1/2x1/4 TO BOTTOM CHORD PANEL POINTS.

ROOF AND FLOOR OPENINGS

STEEL CONSTRUCTION


S1

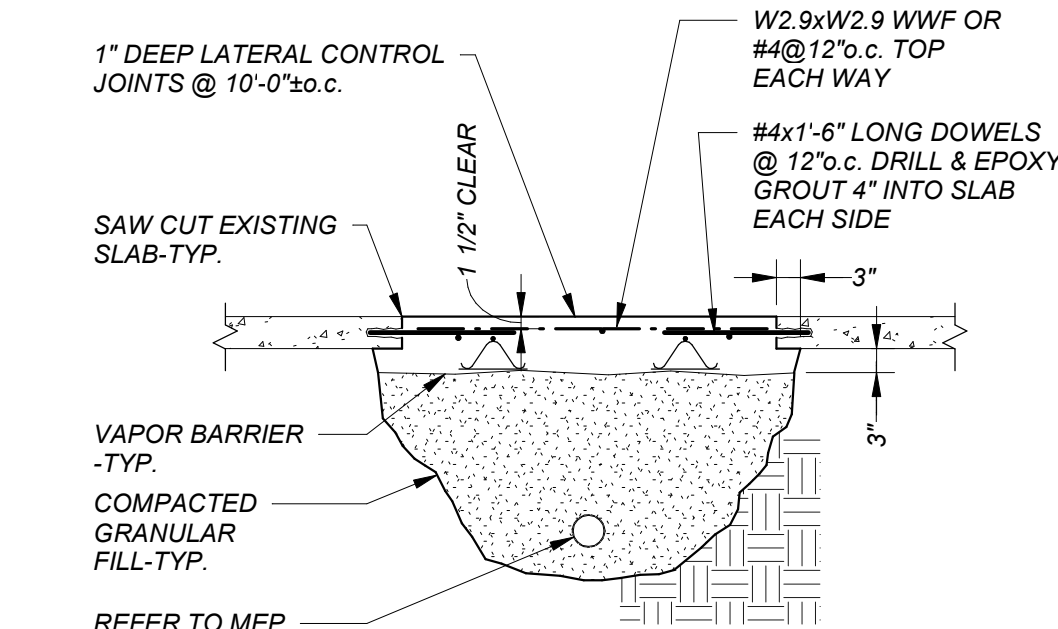

TRENCH REPAIR

EXISTING CONSTRUCTION

XC3

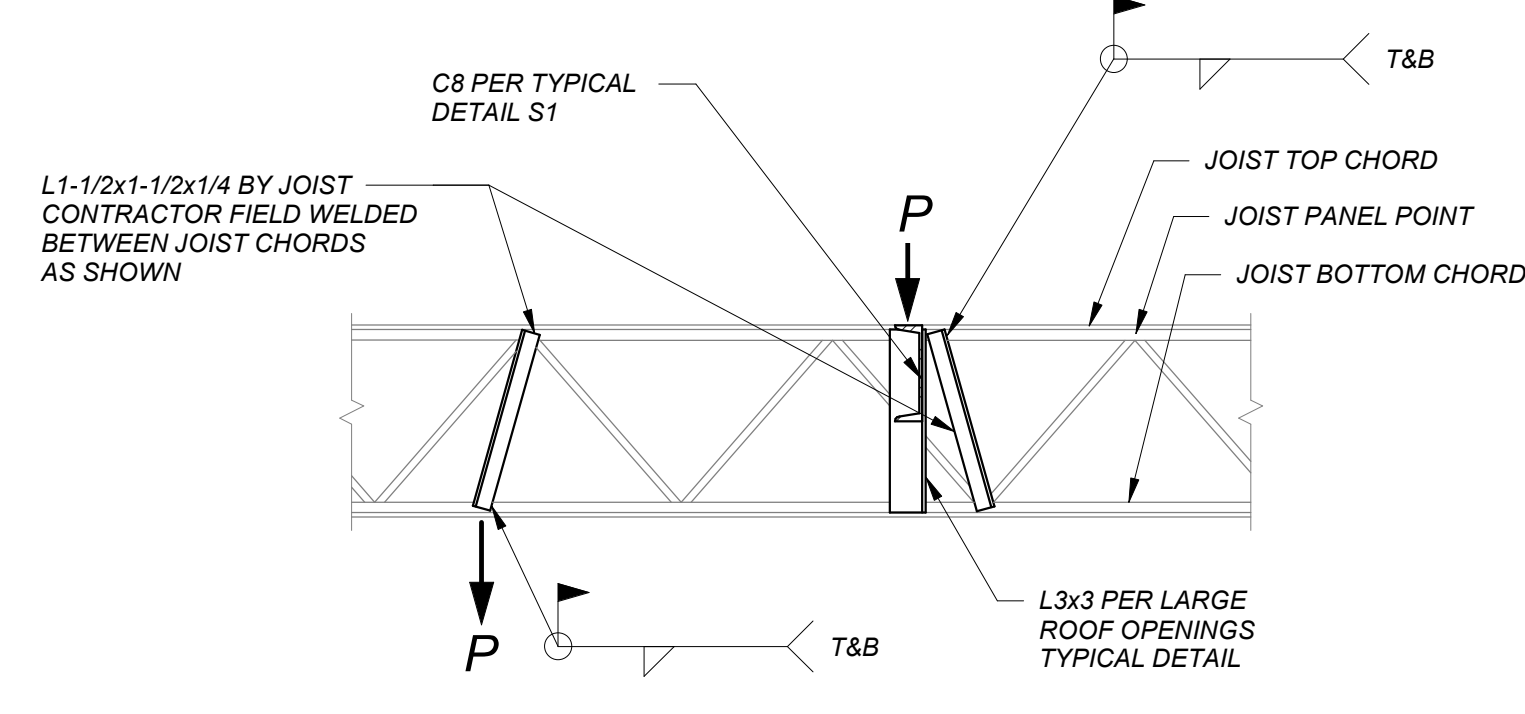

JOIST ELEVATION

NOTE:

USE ANGLE BRACES WHERE CONCENTRATED LOADS DO NOT OCCUR AT JOIST PANEL POINTS.

JOIST REINFORCING AT LOAD DETAIL

STEEL CONSTRUCTION

S2

LAVALLEE
BRENSINGER
ARCHITECTS

Boston | Manchester | Portland

155 Dow Street, Suite 400, Manchester, NH 03101
603.622.5450
www.LBPA.com

structural engineers
Foley Buhl Roberts
& ASSOCIATES INC.

207-300-2500
fbra.com

254 Commercial Street
Portland ME 04101



SMCC

HEALTH SCIENCE
CENTER

BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE

FOR ADDITIONAL INFORMATION, REFER TO PROJECT MANUAL.

CONTENT: GENERAL NOTES & TYPICAL DETAILS	
DRAWN BY:	KMM
PROJECT NO:	25-062-00
DATE:	05/08/2026
REVISED:	
SCALE:	As indicated
S0.1	
Project Phase CONSTRUCTION DOCUMENTS	
COPYRIGHT © 2026 BY LAVALLEE BRENSINGER PLLC. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	


SMCC

**HEALTH SCIENCE
CENTER**


BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE




CONTENT: PARTIAL ROOF FRAMING PLAN	
DRAWN BY:	KMM
PROJECT NO:	25-062-00
DATE:	05/08/2026
REVISED:	
SCALE:	As indicated
S1.3	
Project Phase CONSTRUCTION DOCUMENTS	
COPYRIGHT © 2026 BY LAVALLEE BRENSINGER PLLC. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

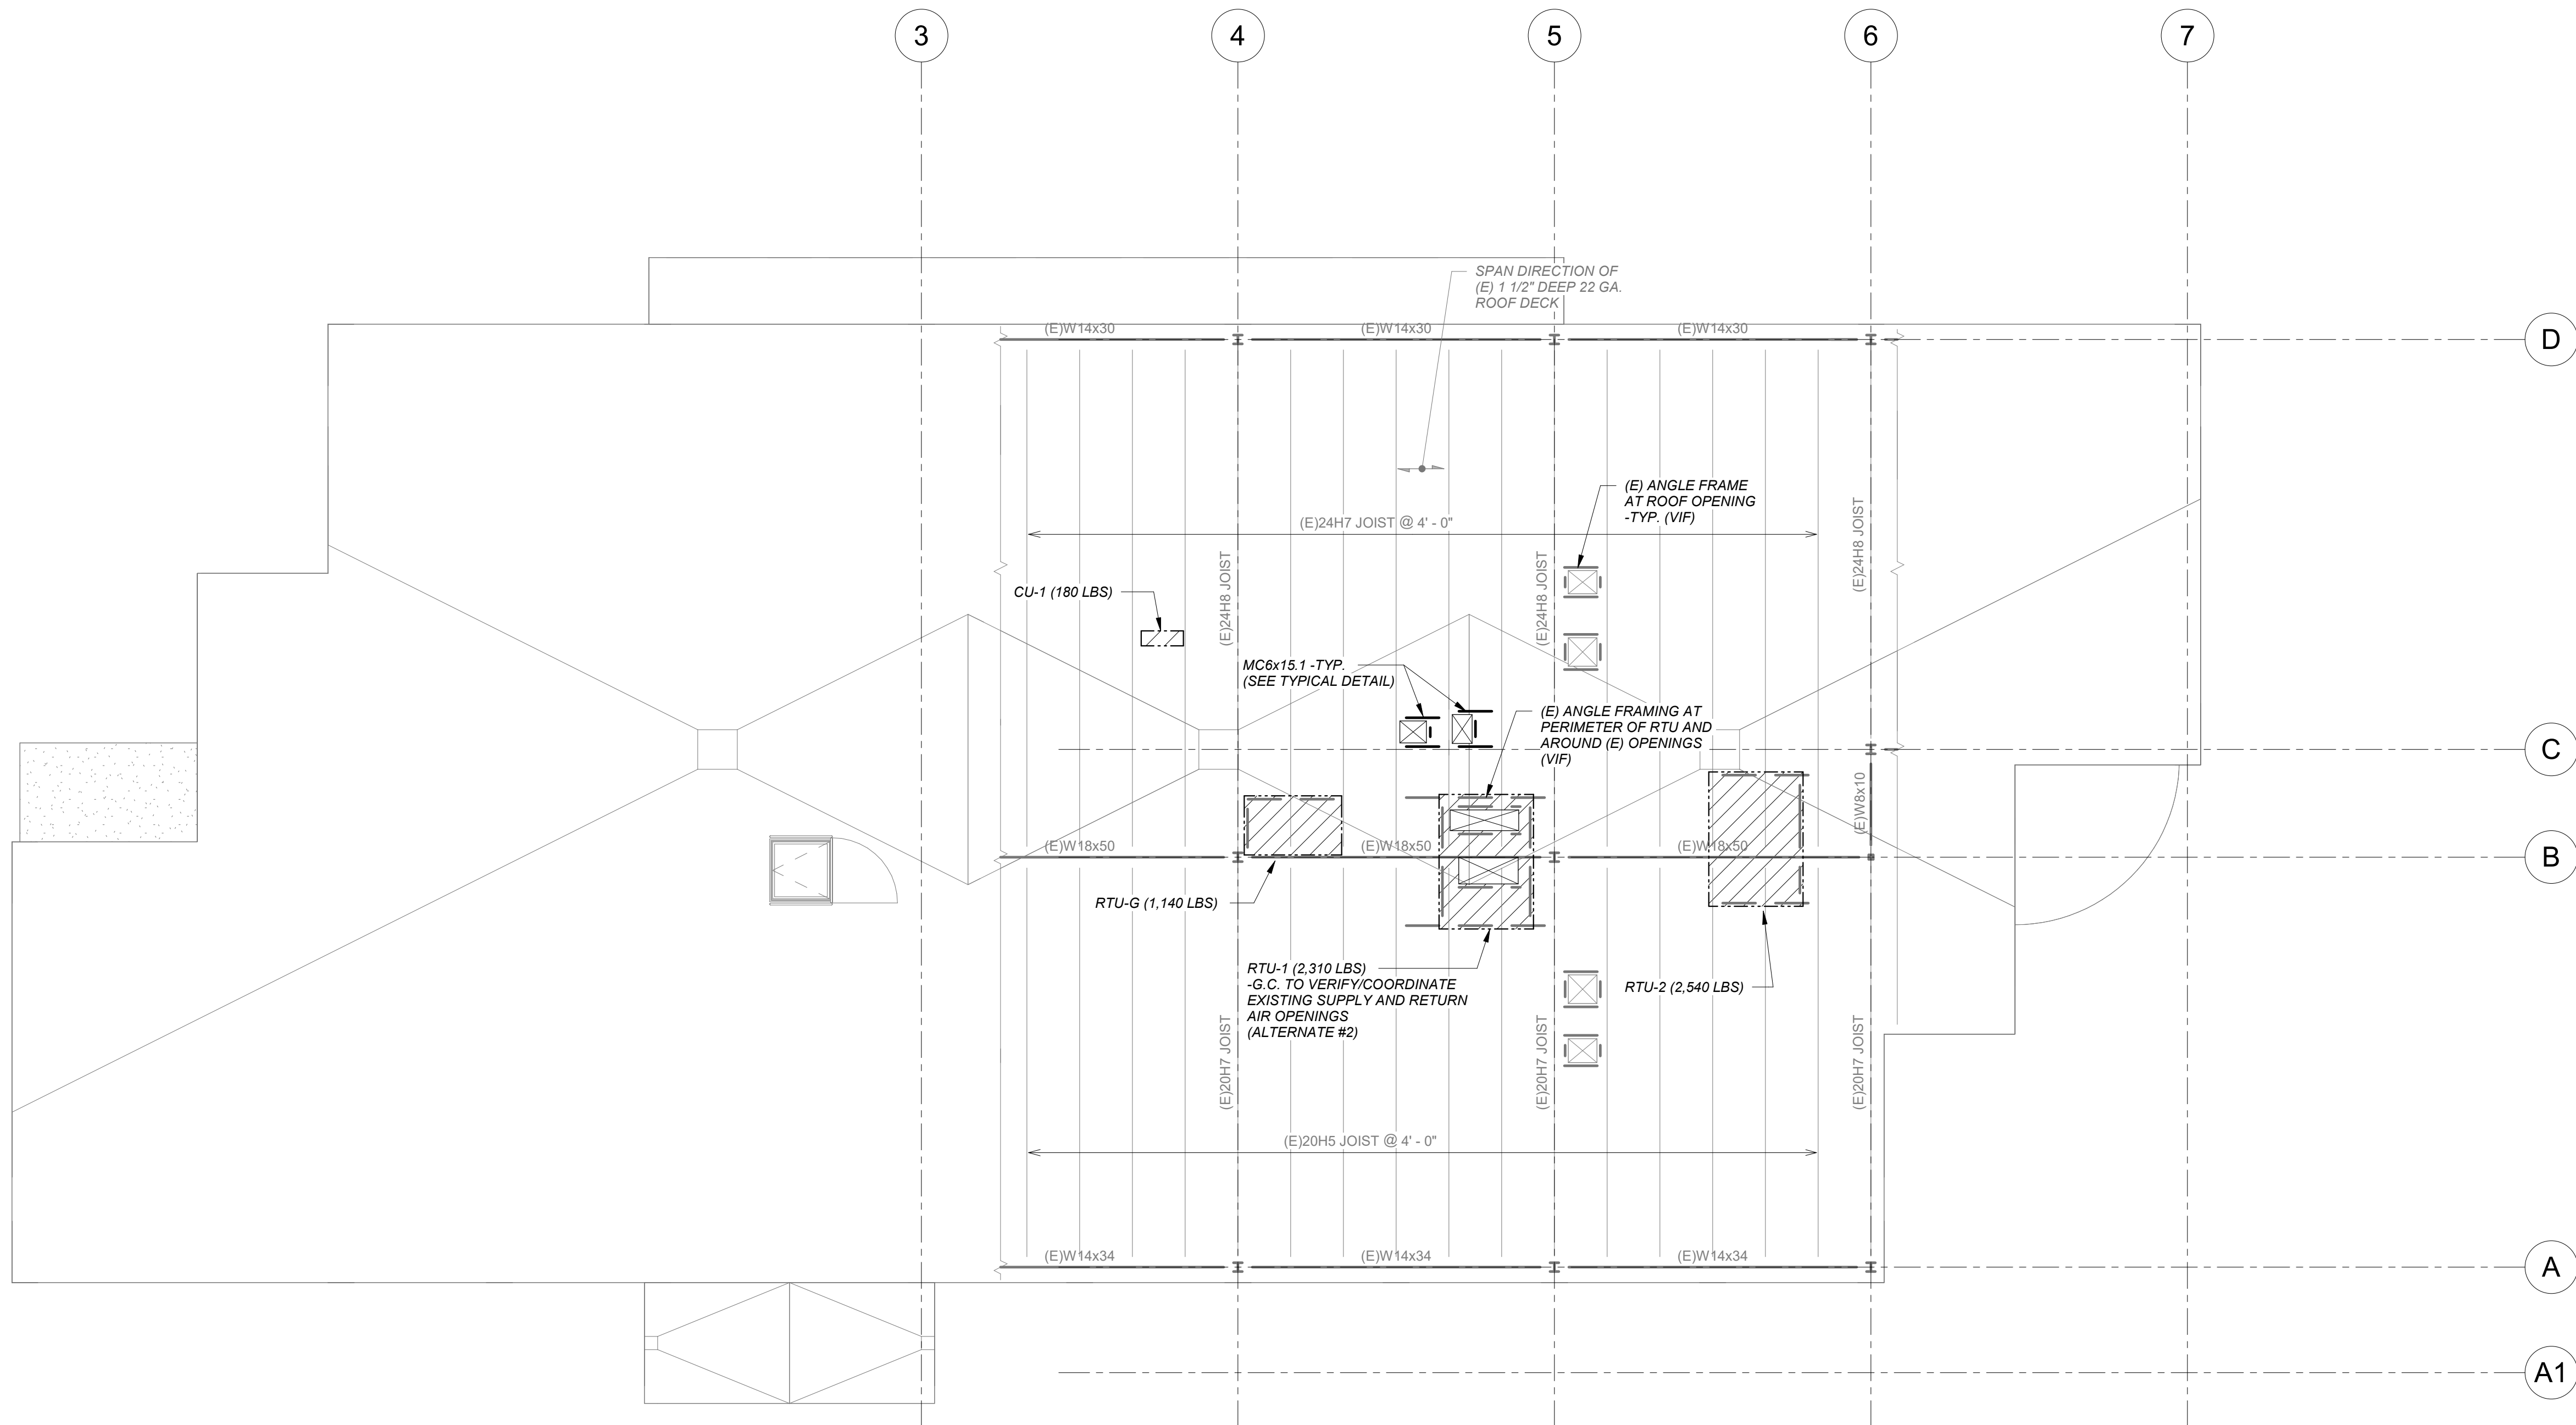

PARTIAL ROOF FRAMING PLAN
1/8" = 1'-0"

- NOTES:**
- FOR GENERAL NOTES AND TYPICAL DETAILS REFER TO DRAWING S0.1.
 - FOR NEW SECOND FLOOR OPENINGS (NOT SHOWN) REFER TO TYPICAL DETAILS.

5/8/2026 3:42:26 PM Autodesk Docs: /25-062-00/SMCC/HS or Reno/25-062-00_S/AD1_025.rvt

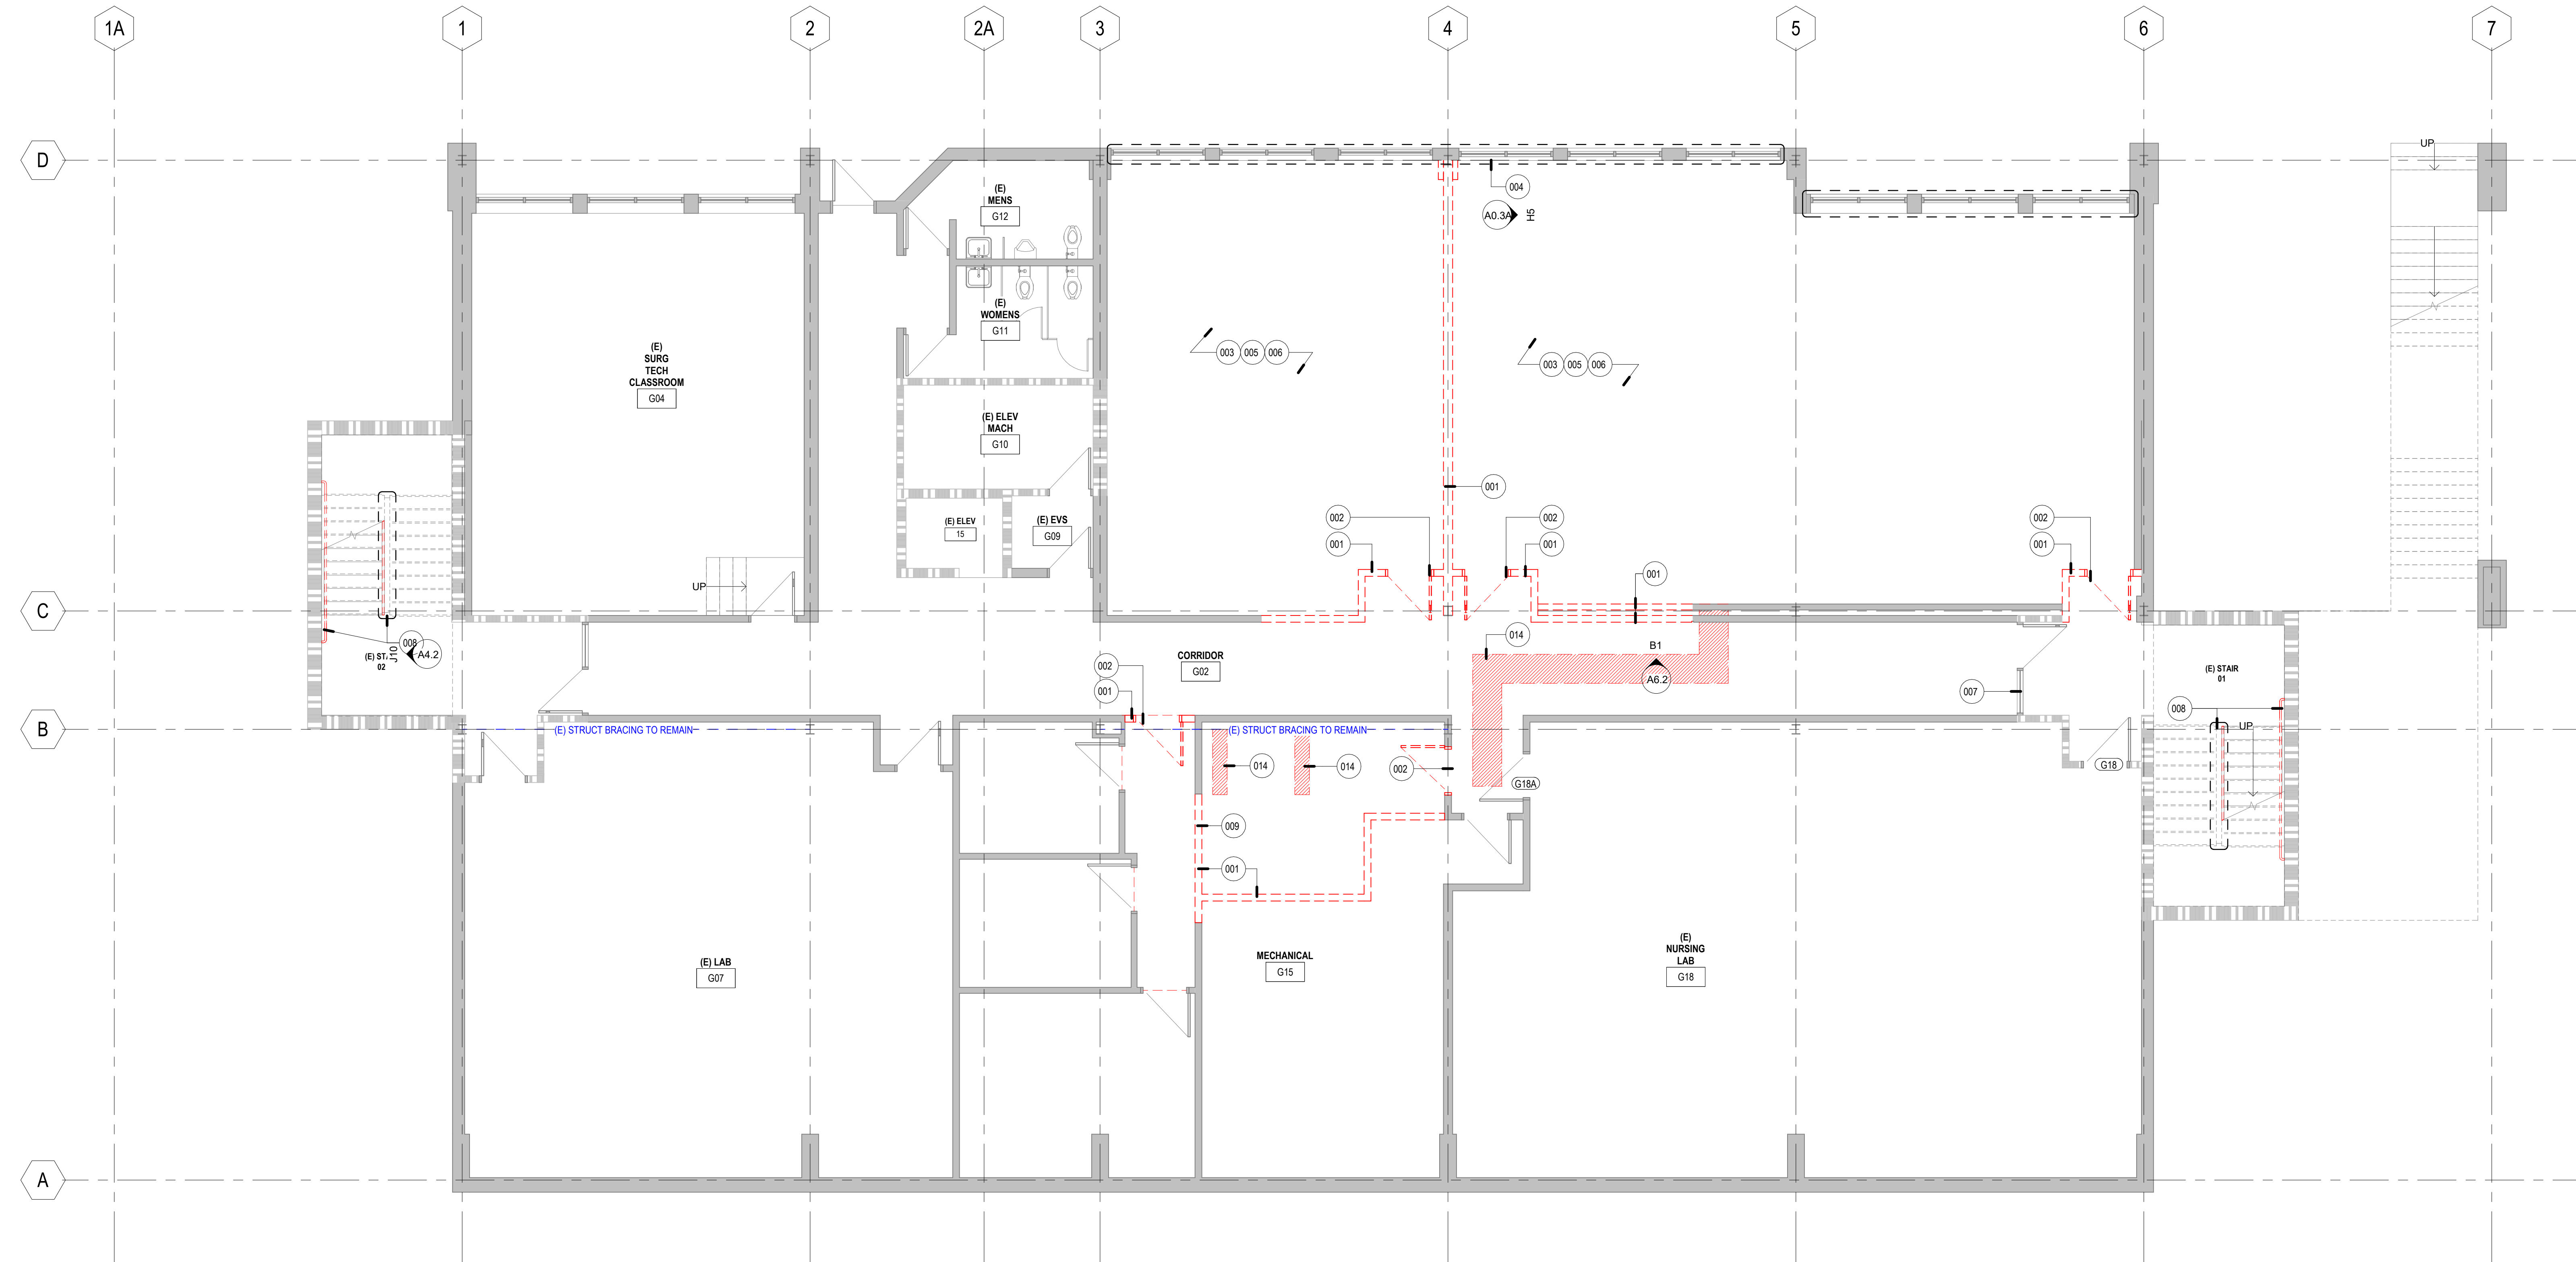

DEMO - LEGEND	
Key Value	Keynote Text
001	EXISTING PARTITION TO BE REMOVED. REFER TO CONSTRUCTION PLANS FOR EXTENTS
002	EXISTING DOOR TO BE REMOVED
003	EXISTING FLOORING TO BE REMOVED
004	EXISTING EXTERIOR WINDOW FINISHED TO BE PRESERVED TYP. REFER TO FINISH PLAN
005	EXISTING ACT CEILING TO BE REMOVED. REFER TO CONSTRUCTION PLANS FOR EXTENTS
006	EXISTING LIGHTING / CEILING MOUNTED EQUIPMENT TO BE REMOVED. REFER TO RCP FOR EXTENTS
007	EXISTING GLAZING TO BE REMOVED / REPLACED. REFER TO DOOR SCH.
008	EXISTING GUARDRAILS / HANDRAILS TO BE REMOVED / REPLACED
009	NEW DOOR LOCATION. REFER TO CONSTRUCTION PLAN
014	CONC FLOOR TRENCHING FOR (N) PLUMBING. REFER TO PLUMBING DWGS.

DEMOLITION LEGEND:

S1 DEMOLITION NOTE

EXISTING CONSTRUCTION TO REMAIN

EXISTING CONSTRUCTION TO BE REMOVED

NOTE : ALL NUMBERS OMITTED ARE NOT IN USE

DEMOLITION NOTES:

GENERAL NOTES:

1. THE DEMOLITION PLANS AND ELEVATIONS ILLUSTRATE THE CONCEPT OF THE ARCHITECTURAL DEMOLITION. THEY ARE NOT INTENDED TO BE A COMPLETE REPRESENTATION OF ALL DEMOLITION WORK REQUIRED. ALL DRAWINGS AND SPECIFICATIONS ARE TO BE CONSIDERED WHEN DETERMINING THE SCOPE OF DEMOLITION FOR THE PROJECT. IT IS THE INTENT OF THE DRAWINGS AND SPECIFICATIONS TO REQUIRE DEMOLITION OF ALL BUILDING ELEMENTS AS NECESSARY FOR THE INSTALLATION OF WORK REQUIRED BY THE SCOPE OF THIS PROJECT.

2. DASHED LINES GENERALLY REPRESENT ITEMS TO BE REMOVED. IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD VERIFY EXACT LIMITS AND DETAILS OF REQUIRED DEMOLITION AND COORDINATE WITH PLANS AND DETAILS.

3. REMOVE PARTITIONS TO STRUCTURE ABOVE, UNLESS OTHERWISE INDICATED BY CONSTRUCTION DETAILS.

4. REMOVE MASONRY FOR NEW OPENINGS AS REQUIRED FOR THE INSTALLATION OF NEW LINTELS.

5. REMOVE DOORS, FRAMES AND HARDWARE INCLUDING SIDELIGHTS, TRANSOMS AND THRESHOLDS WHERE DOORS ARE SHOWN DASHED. UNLESS OTHERWISE INDICATED.


6. REMOVE PORTIONS OF ALL SUSPENDED CEILINGS FOR THE INSTALLATION OF NEW WORK TO BE DONE ABOVE CEILINGS, UNLESS OTHERWISE INDICATED. SAVE USABLE COMPONENTS FOR REINSTALLATION WHERE CEILINGS ARE NOT BEING REPLACED.

7. REMOVE ALL CHALK, MARKER AND TACK BOARDS, SHELVING AND OTHER EQUIPMENT ON WALLS TO BE REMOVED OR FURRED.

8. REMOVE CONCRETE SLABS AND FILLS AS REQUIRED FOR INSTALLATION OF NEW MECHANICAL, ELECTRICAL AND PLUMBING SERVICES. SEE MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS.

9. ANY/ALL PENETRATIONS, OPENINGS, IMPERFECTIONS OR OTHER DAMAGE RESULTING FROM THE REMOVAL OF COMPONENTS AND STRUCTURES AS INDICATED OR REQUIRED TO COMPLETE THE SCOPE OF WORK SHALL BE PATCHED/REPAIRED IN KIND UNLESS SPECIFICALLY NOTED OTHERWISE. REFER TO THE PROJECT MANUAL FOR RELEVANT MATERIAL SECTIONS INCLUDING STANDARDS AND RELATED REQUIREMENTS.

10. COORDINATE MODIFICATION, REMOVAL, AND REINSTALLATION OF EXISTING ACT AND ASSOCIATED HARDWARE / CEILING FIXTURES WITH SPRINKLER DWGS.



SMCC

**HEALTH SCIENCE
CENTER**

BGS NUM: 3809

79 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE

CONTENT: GROUND FLOOR PLAN - DEMO	
DRAWN BY:	MOL
PROJECT NO:	25-062-00
DATE:	05/08/2026
REVISED:	
SCALE:	As indicated
AD1.0	
Project Phase CONSTRUCTION DOCUMENTS	
COPYRIGHT © 2026 BY LAVALLEE BRENSINGER PLLC. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

5/8/2026 3:42:28 PM AutoCAD Doc: /25-062-00 SMCC-HS Or Reno25-062-00_SINOC_125.rvt

J1
AD1.1
FIRST FLOOR - PLAN - DEMO
3/16" = 1'-0"



DEMO - LEGEND	
Key Value	Keynote Text
001	EXISTING PARTITION TO BE REMOVED. REFER TO CONSTRUCTION PLANS FOR EXTENTS
002	EXISTING DOOR TO BE REMOVED
003	EXISTING FLOORING TO BE REMOVED
005	EXISTING ACT CEILING TO BE REMOVED. REFER TO CONSTRUCTION PLANS FOR EXTENTS
008	EXISTING GUARDRAILS / HANDRAILS TO BE REMOVED / REPLACED
010	EXISTING WINDOW TO BE REMOVED
012	EXISTING HEADWALLS TO BE REMOVED / SALVAGED / REINSTALLED IN NEW SIM LAB. REFER TO CONSTRUCTION DWGS
013	NEW OPENING IN EXISTING FLOOR FOR NEW DUCTWORK SHAFT

DEMOLITION LEGEND:

S1

DEMOLITION NOTE

EXISTING CONSTRUCTION TO REMAIN

EXISTING CONSTRUCTION TO BE REMOVED

NOTE : ALL NUMBERS OMITTED ARE NOT IN USE

DEMOLITION NOTES:

GENERAL NOTES:

1. THE DEMOLITION PLANS AND ELEVATIONS ILLUSTRATE THE CONCEPT OF THE ARCHITECTURAL DEMOLITION. THEY ARE NOT INTENDED TO BE A COMPLETE REPRESENTATION OF ALL DEMOLITION WORK REQUIRED. ALL DRAWINGS AND SPECIFICATIONS ARE TO BE CONSIDERED WHEN DETERMINING THE SCOPE OF DEMOLITION FOR THE PROJECT. IT IS THE INTENT OF THE DRAWINGS AND SPECIFICATIONS TO REQUIRE DEMOLITION OF ALL BUILDING ELEMENTS AS NECESSARY FOR THE INSTALLATION OF WORK REQUIRED BY THE SCOPE OF THIS PROJECT.

2. DASHED LINES GENERALLY REPRESENT ITEMS TO BE REMOVED. IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD VERIFY EXACT LIMITS AND DETAILS OF REQUIRED DEMOLITION AND COORDINATE WITH PLANS AND DETAILS.

3. REMOVE PARTITIONS TO STRUCTURE ABOVE, UNLESS OTHERWISE INDICATED BY CONSTRUCTION DETAILS.

4. REMOVE MASONRY FOR NEW OPENINGS AS REQUIRED FOR THE INSTALLATION OF NEW LINTELS.

5. REMOVE DOORS, FRAMES AND HARDWARE INCLUDING SIDELIGHTS, TRANSOMS AND THRESHOLDS WHERE DOORS ARE SHOWN DASHED, UNLESS OTHERWISE INDICATED.

6. REMOVE PORTIONS OF ALL SUSPENDED CEILINGS FOR THE INSTALLATION OF NEW WORK TO BE DONE ABOVE CEILINGS, UNLESS OTHERWISE INDICATED. SAVE USABLE COMPONENTS FOR REINSTALLATION WHERE CEILINGS ARE NOT BEING REPLACED.

7. REMOVE ALL CHALK, MARKER AND TACK BOARDS, SHELVING AND OTHER EQUIPMENT ON WALLS TO BE REMOVED OR FURRED.

8. REMOVE CONCRETE SLABS AND FILLS AS REQUIRED FOR INSTALLATION OF NEW MECHANICAL, ELECTRICAL AND PLUMBING SERVICES. SEE MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS.

9. ANY/ALL PENETRATIONS, OPENINGS, IMPERFECTIONS OR OTHER DAMAGE RESULTING FROM THE REMOVAL OF COMPONENTS AND STRUCTURES AS INDICATED OR REQUIRED TO COMPLETE THE SCOPE OF WORK SHALL BE PATCHED/REPAIRED IN KIND UNLESS SPECIFICALLY NOTED OTHERWISE. REFER TO THE PROJECT MANUAL FOR RELEVANT MATERIAL SECTIONS INCLUDING STANDARDS AND RELATED REQUIREMENTS.


10. COORDINATE MODIFICATION, REMOVAL, AND REINSTALLATION OF EXISTING ACT AND ASSOCIATED HARDWARE / CEILING FIXTURES WITH SPRINKLER DWGS.

LAVALLEE
BRENSINGER

ARCHITECTS

Boston | Manchester | Portland

155 Dow Street, Suite 400, Manchester, NH 03101
603.622.5450
www.LBPA.com



SMCC

HEALTH SCIENCE
CENTER

BGS NUM: 3809

79 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE

FOR ADDITIONAL INFORMATION, REFER TO PROJECT MANUAL.

CONTENT:
FIRST FLOOR PLAN - DEMO

DRAWN BY: MOL

PROJECT NO: 25-062-00

DATE: 05/08/2026

REVISED:

SCALE: As indicated

AD1.1

Project Phase
CONSTRUCTION DOCUMENTS

COPYRIGHT © 2026 BY LAVALLEE BRENSINGER PLLC.
ALL RIGHTS RESERVED.
NO REPRODUCTION WITHOUT PERMISSION.

5/8/2026 3:42:35 PM Autodesk Docs: /25-062-00/SMCC/HS or Reno/25-062-00_SMCC_1/25-14

J1 SECOND FLOOR - PLAN - DEMO
AD1.2 3/16" = 1'-0"

DEMO - LEGEND	
Key Value	Keynote Text
001	EXISTING PARTITION TO BE REMOVED. REFER TO CONSTRUCTION PLANS FOR EXTENTS
002	EXISTING DOOR TO BE REMOVED
003	EXISTING FLOORING TO BE REMOVED
004	EXISTING EXTERIOR WINDOW FINISHED TO BE PRESERVED TYP. REFER TO FINISH PLAN
005	EXISTING ACT CEILING TO BE REMOVED. REFER TO CONSTRUCTION PLANS FOR EXTENTS
006	EXISTING LIGHTING / CEILING MOUNTED EQUIPMENT TO BE REMOVED. REFER TO RCP FOR EXTENTS
008	EXISTING GUARDRAILS / HANDRAILS TO BE REMOVED / REPLACED
013	NEW OPENING IN EXISTING FLOOR FOR NEW DUCTWORK SHAFT
015	PARTIAL DEMO OF INDICATED DOOR AND HARDWARE, FRAME TO REMAIN. REFER TO DOOR SCHEDULE.

DEMOLITION LEGEND:


- S1 DEMOLITION NOTE
- EXISTING CONSTRUCTION TO REMAIN
- EXISTING CONSTRUCTION TO BE REMOVED

NOTE : ALL NUMBERS OMITTED ARE NOT IN USE

DEMOLITION NOTES:

- GENERAL NOTES:
1. THE DEMOLITION PLANS AND ELEVATIONS ILLUSTRATE THE CONCEPT OF THE ARCHITECTURAL DEMOLITION. THEY ARE NOT INTENDED TO BE A COMPLETE REPRESENTATION OF ALL DEMOLITION WORK REQUIRED. ALL DRAWINGS AND SPECIFICATIONS ARE TO BE CONSIDERED WHEN DETERMINING THE SCOPE OF DEMOLITION FOR THE PROJECT. IT IS THE INTENT OF THE DRAWINGS AND SPECIFICATIONS TO REQUIRE DEMOLITION OF ALL BUILDING ELEMENTS AS NECESSARY FOR THE INSTALLATION OF WORK REQUIRED BY THE SCOPE OF THIS PROJECT.
 2. DASHED LINES GENERALLY REPRESENT ITEMS TO BE REMOVED. IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD VERIFY EXACT LIMITS AND DETAILS OF REQUIRED DEMOLITION AND COORDINATE WITH PLANS AND DETAILS.
 3. REMOVE PARTITIONS TO STRUCTURE ABOVE, UNLESS OTHERWISE INDICATED BY CONSTRUCTION DETAILS.
 4. REMOVE MASONRY FOR NEW OPENINGS AS REQUIRED FOR THE INSTALLATION OF NEW LINTELS.
 5. REMOVE DOORS, FRAMES AND HARDWARE INCLUDING SIDELIGHTS, TRANSOMS AND THRESHOLDS WHERE DOORS ARE SHOWN DASHED, UNLESS OTHERWISE INDICATED.
 6. REMOVE PORTIONS OF ALL SUSPENDED CEILINGS FOR THE INSTALLATION OF NEW WORK TO BE DONE ABOVE CEILINGS, UNLESS OTHERWISE INDICATED. SAVE USABLE COMPONENTS FOR REINSTALLATION WHERE CEILINGS ARE NOT BEING REPLACED.
 7. REMOVE ALL CHALK, MARKER AND TACK BOARDS, SHELVING AND OTHER EQUIPMENT ON WALLS TO BE REMOVED OR FURRED.
 8. REMOVE CONCRETE SLABS AND FILLS AS REQUIRED FOR INSTALLATION OF NEW MECHANICAL, ELECTRICAL AND PLUMBING SERVICES. SEE MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS.
 9. ANY/ALL PENETRATIONS, OPENINGS, IMPERFECTIONS OR OTHER DAMAGE RESULTING FROM THE REMOVAL OF COMPONENTS AND STRUCTURES AS INDICATED OR REQUIRED TO COMPLETE THE SCOPE OF WORK SHALL BE PATCHED/REPAIRED IN KIND UNLESS SPECIFICALLY NOTED OTHERWISE. REFER TO THE PROJECT MANUAL FOR RELEVANT MATERIAL SECTIONS INCLUDING STANDARDS AND RELATED REQUIREMENTS.
 10. COORDINATE MODIFICATION, REMOVAL, AND REINSTALLATION OF EXISTING ACT AND ASSOCIATED HARDWARE / CEILING FIXTURES WITH SPRINKLER DWGS.

LAVALLEE
BRENSINGER
ARCHITECTS
Boston | Manchester | Portland
155 Dow Street, Suite 400, Manchester, NH 03101
603.622.5450
www.LBPA.com



SMCC

HEALTH SCIENCE
CENTER

BGS NUM: 3809

79 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE

CONTENT: SECOND FLOOR DEMOLITION PLAN	
DRAWN BY:	MOL
PROJECT NO:	25-062-00
DATE:	05/08/2026
REVISED:	
SCALE:	As indicated
AD1.2	
Project Phase CONSTRUCTION DOCUMENTS	
COPYRIGHT © 2026 BY LAVALLEE BRENSINGER PLLC. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

SYMBOLS LEGEND

DETAIL / SECTION NUMBER	1	DETAIL TITLE	
DRAWING	A1.3	ELEVATION	
ELEVATION NUMBER	1	SECTION DETAIL	
DRAWING WHERE SHOWN	A101	BUILDING SECTION	
DETAIL NUMBER	1	WALL SECTION	
DRAWING WHERE SHOWN	A101	PLAN DETAIL	
SECTION NUMBER	1	ROOM NAME AND NUMBER	
DRAWING WHERE SHOWN	A101	DOOR NUMBER	
DETAIL NUMBER	1	PARTITION TYPE	
DRAWING WHERE SHOWN	A101	INDICATES ALIGNMENT BETWEEN ADJACENT PARTITION FINISHES	
REVISION		WORK POINT, CONTROL POINT, OR DATUM POINT	
INDICATES BARRIER FREE ACCESS. ITEM DESIGNATED TRUS MUST COMPLY WITH LATEST EDITION STATE BARRIER FREE CODE AND FEDERAL ADA LEGISLATION.		NOT IN SCOPE OF WORK	
MATERIAL DESIGNATION: XX XX XX - XXXXXX (X) XXXX		ADDITIONAL MATERIAL TEXT	
		REFER TO STRUCTURAL(S), MECHANICAL(M), ELECTRICAL(E)	
		MATERIAL NAME	
		REFERENCE SPECIFICATIONS NUMBER	

GRAPHICS LEGEND

GRAVEL	NEW CONSTRUCTION
LOAM / EARTH	EXISTING CONSTRUCTION TO REMAIN
STRUCTURAL FILL	EXISTING CONSTRUCTION TO BE REMOVED
CMU PARTITION	
CONCRETE	EXISTING DOOR TO REMAIN
STEEL	
ALUMINUM	NEW DOOR AND FRAME
BRICK	
GWB	NEW COLUMN GRID INDICATORS
GWB SHEATHING	EXISTING COLUMN GRID INDICATORS
PLYWOOD	
WOOD BLOCKING	SPRAY FOAM INSULATION
FINISH WOOD	THERMAL OR ACOUSTIC FIBERGLASS INSULATION, UNO.
RIGID INSULATION	SPRAYED-ON FIREPROOFING

CEILING LEGEND

2' x 4' ACT	TYPE 01 (X-XX" AFF)	CEILING TYPE
2' x 2' ACT		CEILING HEIGHT

NOTE: SEE MECHANICAL, ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION.
NOTE: SEE RATING PLANS FOR LOCATIONS OF RATED CEILING.

DOOR CLEARANCES

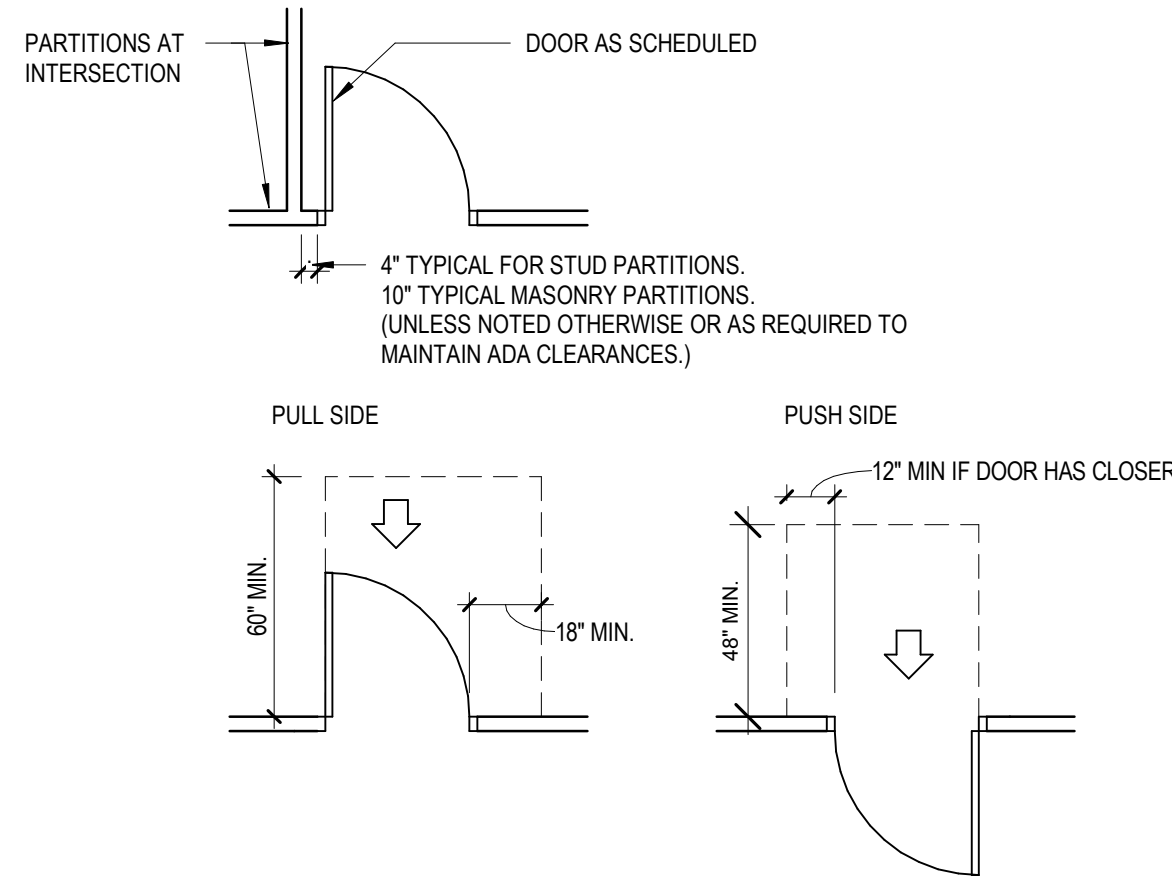



TABLE OF ABBREVIATIONS

THE FOLLOWING TABLE OF ABBREVIATIONS IS PROVIDED FOR THE CONVENIENCE OF THE CONTRACTOR. IT IS NOT INTENDED TO SERVE AS A COMPLETE LIST OF ALL ABBREVIATIONS TO BE FOUND IN THE CONTRACT DOCUMENTS. SHOULD THE CONTRACTOR REQUIRE ANY CLARIFICATION OR INTERPRETATION HEREOF, HE SHALL PROMPTLY SO NOTIFY THE ARCHITECT.


AND	ANGLE	HORIZ	HORIZONTAL
INCL	INCLUDE (ING)	INCL	INCLUDE (ING)
AT	AT	ID	INSIDE DIAMETER
CL	CENTER LINE	IG	INSULATED GLAZING
DEG	DEGREES	INSUL	INSULATION
FEET	FEET	IWB	INTERACTIVE WHITE BOARD
INCHES	INCHES	INT	INTERIOR
INVERT	INVERT	INV	INVERT
JAN	JANITOR	JT	JOINT
KD	KILN DRIED / KNOCK DOWN	KD	KILN DRIED / KNOCK DOWN
KITCHEN	KITCHEN	KITCHEN	KITCHEN
KNOCK OUT	KNOCK OUT	KO	KNOCK OUT
LAV	LAVATORY	LAV	LAVATORY
LH	LEFT HAND	LH	LEFT HAND
LW	LENGTH x WIDTH x HEIGHT	LW	LENGTH x WIDTH x HEIGHT
LF	LINEAR FEET	LF	LINEAR FEET
MFR	MANUFACTURER	MFR	MANUFACTURER
MB	MARKER BOARD	MB	MARKER BOARD
MAS	MASONRY	MAS	MASONRY
MO	MASONRY OPENING	MO	MASONRY OPENING
MAX	MAXIMUM	MAX	MAXIMUM
MECH	MECHANICAL	MECH	MECHANICAL
MC	MEDICINE CABINET	MC	MEDICINE CABINET
MED	MEDIUM	MED	MEDIUM
MTU	METAL	MTU	METAL
MS	METAL SURFACE	MS	METAL SURFACE
MIN	MINIMUM	MIN	MINIMUM
MISC	MISCELLANEOUS	MISC	MISCELLANEOUS
MR	MOISTURE RESISTANT	MR	MOISTURE RESISTANT
MLDG	MOLDING	MLDG	MOLDING
N	NATURAL	N	NATURAL
NS	NATURAL STONE	NS	NATURAL STONE
NRC	NOISE REDUCTION COEFFICIENT	NRC	NOISE REDUCTION COEFFICIENT
NA	NOT APPLICABLE	NA	NOT APPLICABLE
NTS	NOT TO SCALE	NTS	NOT TO SCALE
NIC	NOT IN CONTRACT	NIC	NOT IN CONTRACT
NO	NUMBER	NO	NUMBER
OC	ON CENTER	OC	ON CENTER
OPNG	OPENING	OPNG	OPENING
OPP	OPPOSITE	OPP	OPPOSITE
OD	OUTSIDE DIAMETER	OD	OUTSIDE DIAMETER
OIO	OUTSIDE TO OUTSIDE	OIO	OUTSIDE TO OUTSIDE
OA	OVERALL	OA	OVERALL
OH	OVERHEAD	OH	OVERHEAD
OFOI	OWNER FURNISHED OWNER INSTALLED	OFOI	OWNER FURNISHED OWNER INSTALLED
OFCI	OWNER FURNISHED CONTRACTOR INSTALLED	OFCI	OWNER FURNISHED CONTRACTOR INSTALLED
P	PAINT	P	PAINT
PTD	PAINTED	PTD	PAINTED
PT	PAINTED SURFACE	PT	PAINTED SURFACE
PR	PAIR	PR	PAIR
PART	PARTITION	PART	PARTITION
PTM	PATCH TO MATCH	PTM	PATCH TO MATCH
PVMT	PAVEMENT	PVMT	PAVEMENT
PERF	PERFORATED	PERF	PERFORATED
PERM	PERIMETER	PERM	PERIMETER
PLAS	PLASTIC	PLAS	PLASTIC
PLAMPL	PLASTIC LAMINATE	PLAMPL	PLASTIC LAMINATE
PL	PLATE	PL	PLATE
PLUMB	PLUMBING	PLUMB	PLUMBING
PLYWD	PLYWOOD	PLYWD	PLYWOOD
PVC	POLY VINYL CHLORIDE	PVC	POLY VINYL CHLORIDE
PREFIN	PREFINISHED	PREFIN	PREFINISHED
PT	PRESSURE TREATED	PT	PRESSURE TREATED
RAD	RADIUS	RAD	RADIUS
REF	REFERENCE	REF	REFERENCE
REFRIG	REFRIGERATOR	REFRIG	REFRIGERATOR
REIN	REINFORCE	REIN	REINFORCE
REQD	REQUIRED	REQD	REQUIRED
RF	RESILIENT FLOORING	RF	RESILIENT FLOORING
RP	RESIN PANEL	RP	RESIN PANEL
REV	REVERSE	REV	REVERSE
RH	RIGHT HAND	RH	RIGHT HAND
RD	ROOF DRAIN	RD	ROOF DRAIN
RM	ROOM	RM	ROOM
RO	ROUGH OPENING	RO	ROUGH OPENING
SC	SEALED CONCRETE	SC	SEALED CONCRETE
SHT	SHEET	SHT	SHEET
SIM	SIMILAR	SIM	SIMILAR
SS	SOLID SURFACE	SS	SOLID SURFACE
STC	SOUND TRANSMISSION COEFFICIENT	STC	SOUND TRANSMISSION COEFFICIENT
SP	SPECIALTY PAINT	SP	SPECIALTY PAINT
SPEC	SPECIFICATIONS / SPECIFIED	SPEC	SPECIFICATIONS / SPECIFIED
SQ	SQUARE	SQ	SQUARE
SF	SQUARE FEET	SF	SQUARE FEET
S/S	STAINLESS STEEL	S/S	STAINLESS STEEL
STD	STANDARD	STD	STANDARD
STL	STEEL	STL	STEEL
ST	STONE TILE	ST	STONE TILE
STOR	STORAGE	STOR	STORAGE
STRUCT	STRUCTURAL / STRUCTURE	STRUCT	STRUCTURAL / STRUCTURE
SUSP	SUSPENDED	SUSP	SUSPENDED
SYM	SYMMETRICAL	SYM	SYMMETRICAL
TWP	TACKABLE WALL PANEL	TWP	TACKABLE WALL PANEL
TB	TACKBOARD	TB	TACKBOARD
TEL	TELEPHONE	TEL	TELEPHONE
TV	TELEVISION	TV	TELEVISION
TEMP	TEMPORARY	TEMP	TEMPORARY
THK	THICKNESS	THK	THICKNESS
TD	TILE DECORATIVE	TD	TILE DECORATIVE
TE	TILE EDGE	TE	TILE EDGE
TSD	TO BE DETERMINED	TSD	TO BE DETERMINED
TP	TOILET PAPER	TP	TOILET PAPER
T&G	TONGUE AND GROOVE	T&G	TONGUE AND GROOVE
T&B	TOP AND BOTTOM	T&B	TOP AND BOTTOM
TO	TOP OF	TO	TOP OF
TU	TOUCH UP	TU	TOUCH UP
TS	TRANSITION STRIP	TS	TRANSITION STRIP
TYP	TYPICAL	TYP	TYPICAL
UC	UNDERCUT	UC	UNDERCUT
UNO	UNLESS NOTED OTHERWISE	UNO	UNLESS NOTED OTHERWISE
VB	VAPOR BARRIER	VB	VAPOR BARRIER
VS	VERIFIED SURFACE	VS	VERIFIED SURFACE
VFY	VERIFY	VFY	VERIFY
VF	VERIFY IN FIELD	VF	VERIFY IN FIELD
VERT	VERTICAL	VERT	VERTICAL
VCT	VINYL COMPOSITE TILE	VCT	VINYL COMPOSITE TILE
VWC	VINYL WALLCOVERING	VWC	VINYL WALLCOVERING
WNB	WALL BASE	WNB	WALL BASE
WC	WALL COVERING	WC	WALL COVERING
WPP	WALL PROTECTION PANEL	WPP	WALL PROTECTION PANEL
WC	WATER CLOSE	WC	WATER CLOSE
WP	WATER PROOF	WP	WATER PROOF
WWF	WELDED WIRE FABRIC	WWF	WELDED WIRE FABRIC
WT	WINDOW TREATMENT	WT	WINDOW TREATMENT
W	WITH	W	WITH
W/O	WITHOUT	W/O	WITHOUT
WD	WOOD	WD	WOOD

GENERAL NOTES

- ALL DIMENSIONS ARE TO FACE OF MASONRY OR FACE OF STUD, UNO.
- ALL OPENINGS IN MASONRY CONSTRUCTION ARE DIMENSIONED TO THE FACE OF MASONRY.
- ALL DIMENSIONS TO EXISTING WALLS ARE TO FACE OF FINISH.
- ALL ARCHITECTURE INTERIOR SHEET DIMENSIONS ARE TO FACE OF FINISH, UNO.
- ALL SPLAYS SHOWN ON PLANS ARE 45° UNO.
- REFERENCE CODE ANALYSIS KEY PLAN AND SPECIFICATIONS FOR EXTENT OF FIREPROOFING.
- ALL EXPOSED MECHANICAL AND ELECTRICAL SERVICES IN AREAS WITHOUT CEILINGS SHALL BE CAREFULLY COORDINATED AND ORGANIZED SO AS TO PROVIDE A NEAT AND ORDERLY APPEARANCE. SERVICES SHALL BE RUN IN STRAIGHT LINES PARALLEL OR PERPENDICULAR TO EXPOSED STRUCTURE. ALL SERVICES SHALL BE RUN WITHIN OR BETWEEN EXPOSED STRUCTURE TO THE EXTENT POSSIBLE. LAYOUTS FOR PROPOSED SERVICES SHALL BE REVIEWED WITH THE ARCHITECT PRIOR TO PROCEEDING WITH THE WORK.
- THE CONTRACTOR SHALL BE FULLY RESPONSIBLE FOR VERIFYING DIMENSIONS. ALL DISCREPANCIES BETWEEN ANTICIPATED AND ACTUAL CONDITIONS SHALL BE PROMPTLY BROUGHT TO THE ARCHITECT'S ATTENTION.
- ACCEPTABLE INSTALLATION: FULLY ENGINEERED STAMPED DRAWINGS NOT ACCEPTABLE ACTIONS WITH SPECIAL CONDITIONS AS CALLED FOR IN THE SPECIFICATIONS OR 21-16 SECTION 1-04 SUBMITTALS.

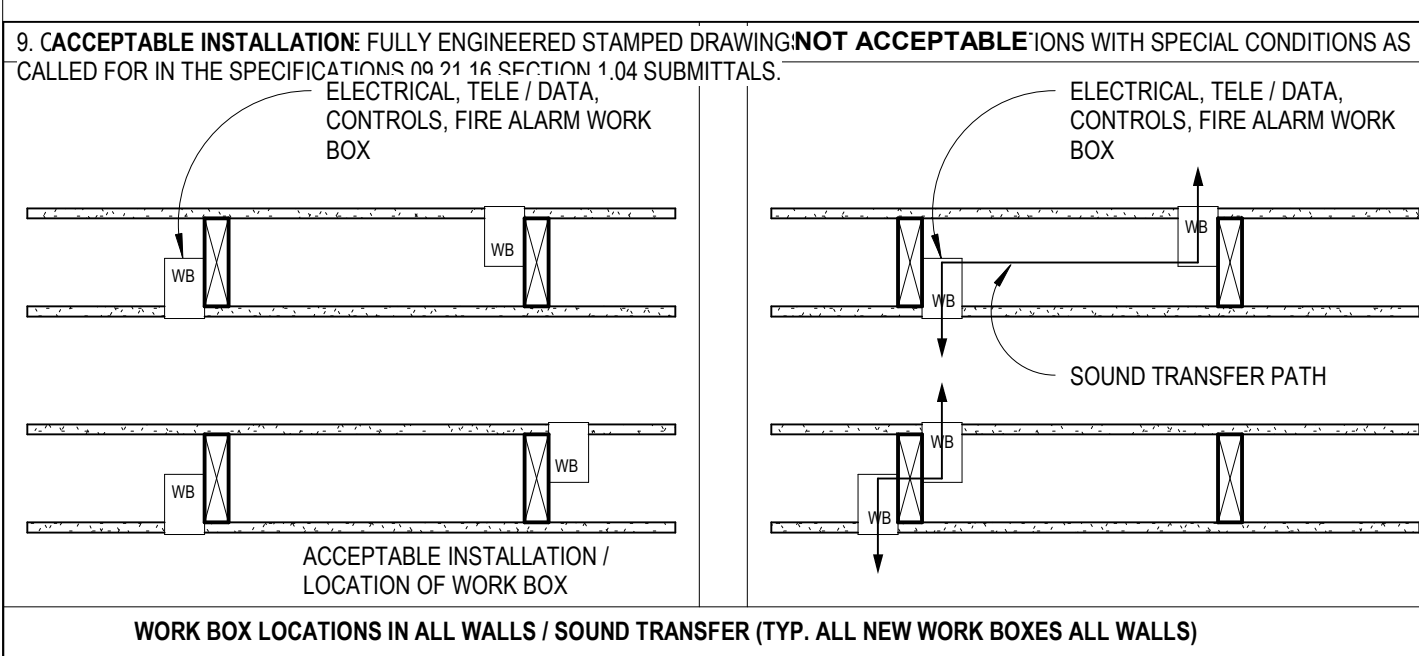


GENERAL PARTITION NOTES & KEYING LEGEND

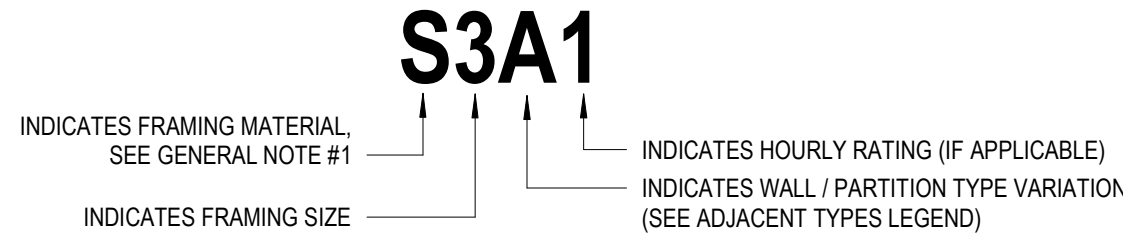


GENERAL NOTES


- FRAMING MATERIAL TYPES:
S: STEEL STUD, SF: STEEL STUD FURRING, SD: STEED STUD DOUBLE, W: WOOD STUD, WF: WOOD STUD FURRING, WD: WOOD STUD DOUBLE, M: MASONRY
- AT ALL ROOMS SCHEDULED TO RECEIVE 09 30 00 - CERAMIC WALL TILE, USE TILE BACKER BOARD IN LIEU OF GWB BEHIND TILE.
- AT MASONRY PARTITIONS, SEE STRUCTURAL DRAWINGS FOR DETAILS OF PARTITION TOP DEFLECTION CLIPS WHICH PROVIDE LATERAL BRACING.
- ACOUSTICAL CONSTRUCTION: SEAL ALL CRACKS, JOINTS, AND VOIDS IN ACOUSTICAL CONSTRUCTION AIR TIGHT. SEALING SHALL INCLUDE:
a. SEALING BOTTOM EDGES OF GYPSUM BOARD TO FLOOR BEHIND BASE AT BOTH SIDES OF PARTITIONS.
b. SEALING TOP AND SIDE EDGES OF GYPSUM BOARD AT BOTH SIDES OF WALLS ABUTTING OTHER CONSTRUCTION.
c. SEALING TOP-OF-WALL TO DECK FLUTES.
d. SEALING ALL WALL PENETRATIONS INCLUDING ELECTRICAL BOXES, PIPES, CONDUITS, DUCTS, BEAMS, JOISTS, ETC.
- AT PARTITION INFILL LOCATIONS, INFILL TO MATCH ADJACENT MATERIALS AND FIRE RESISTANCE RATING.

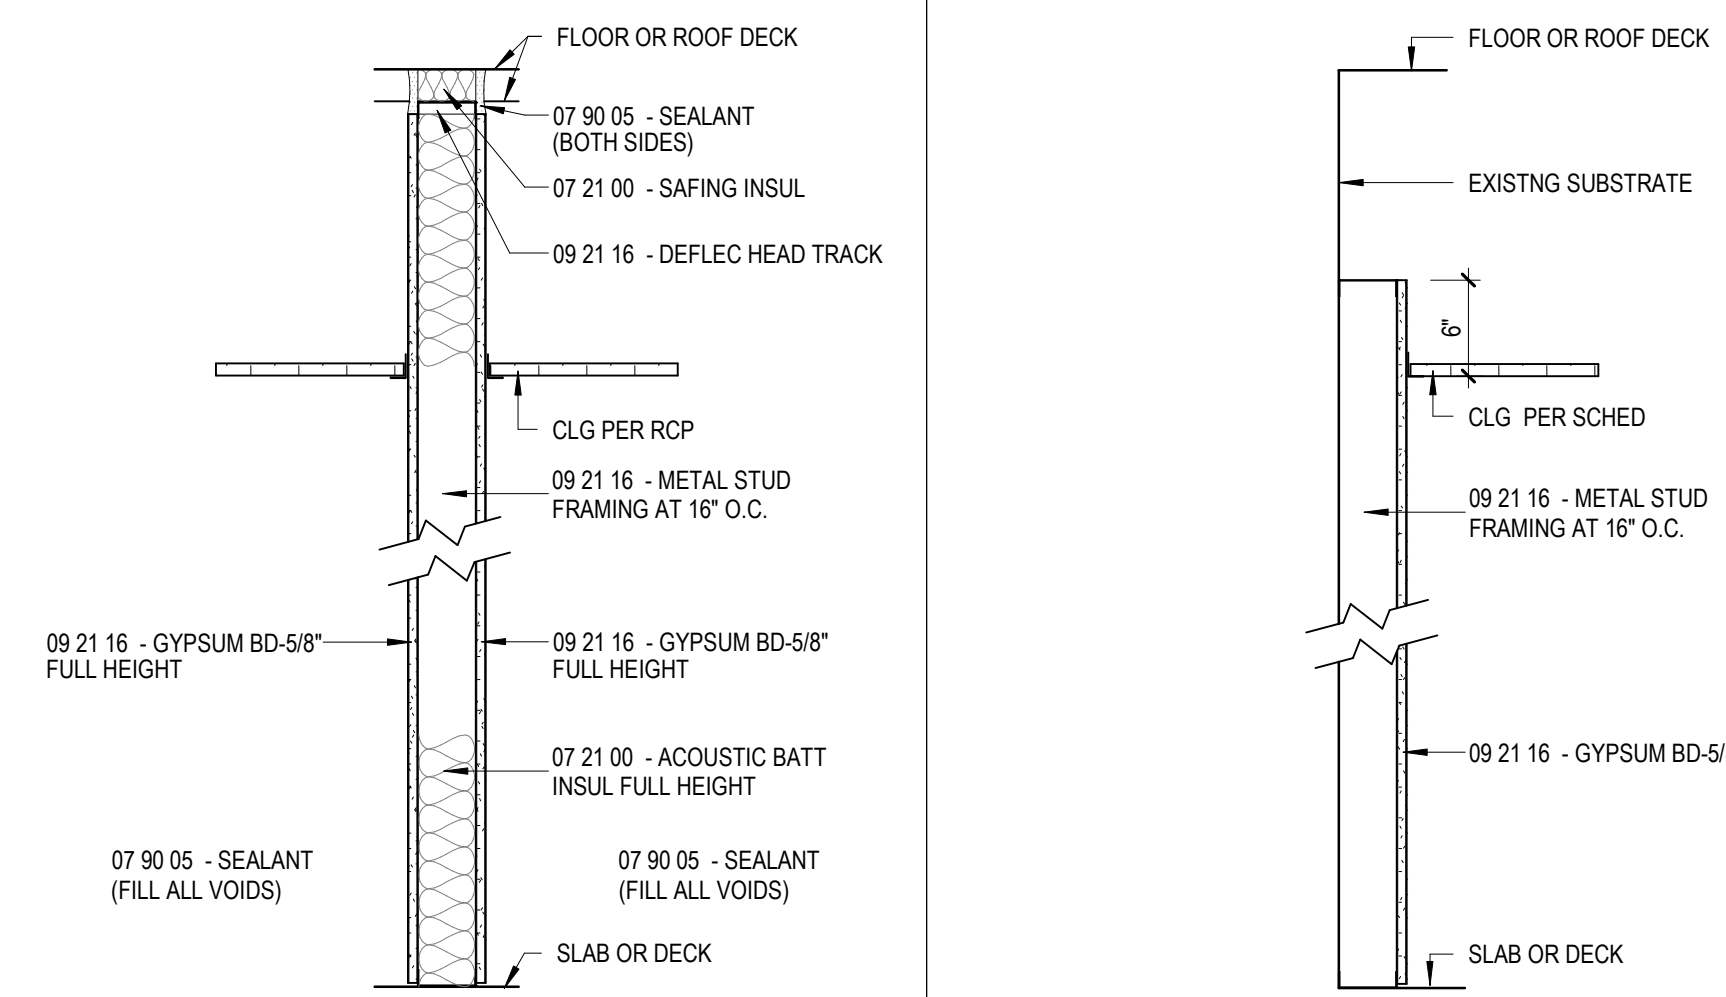

TAG	STUD SIZE	CODE/SPEC REFERENCE	STC RATING	REMARKS	TAG	STUD SIZE	CODE/SPEC REFERENCE	STC RATING	REMARKS
S3A	3 5/8"	ACOUSTIC/ SMOKE	49		SF7F	7/8"			REPLACE STUDS WITH FURRING CHANNELS INSTALLED @ 16\"/>
S3A1	3 5/8"	1HR - ULF U419	49	REPLACE 07 90 05 - SEALANT WITH 07 84 00 - FIRESTOPPING	SF1F	1 5/8"			STUDS TIGHT TO EXISTING SUBSTRATE
S6A	6"	ACOUSTIC/ SMOKE	49		SF2F	2 1/2"			STUDS TIGHT TO EXISTING SUBSTRATE
S6A1	6"	1HR - ULF U419	49	REPLACE 07 90 05 - SEALANT WITH 07 84 00 - FIRESTOPPING	SF3F	3 5/8"			STUDS TIGHT TO EXISTING SUBSTRATE
S8A	8"	ACOUSTIC/ SMOKE	49		SF6F	6"			STUDS TIGHT TO EXISTING SUBSTRATE
S8A1	8"	1HR - ULF U419	49	REPLACE 07 90 05 - SEALANT WITH 07 84 00 - FIRESTOPPING	SF8F	8"			STUDS TIGHT TO EXISTING SUBSTRATE

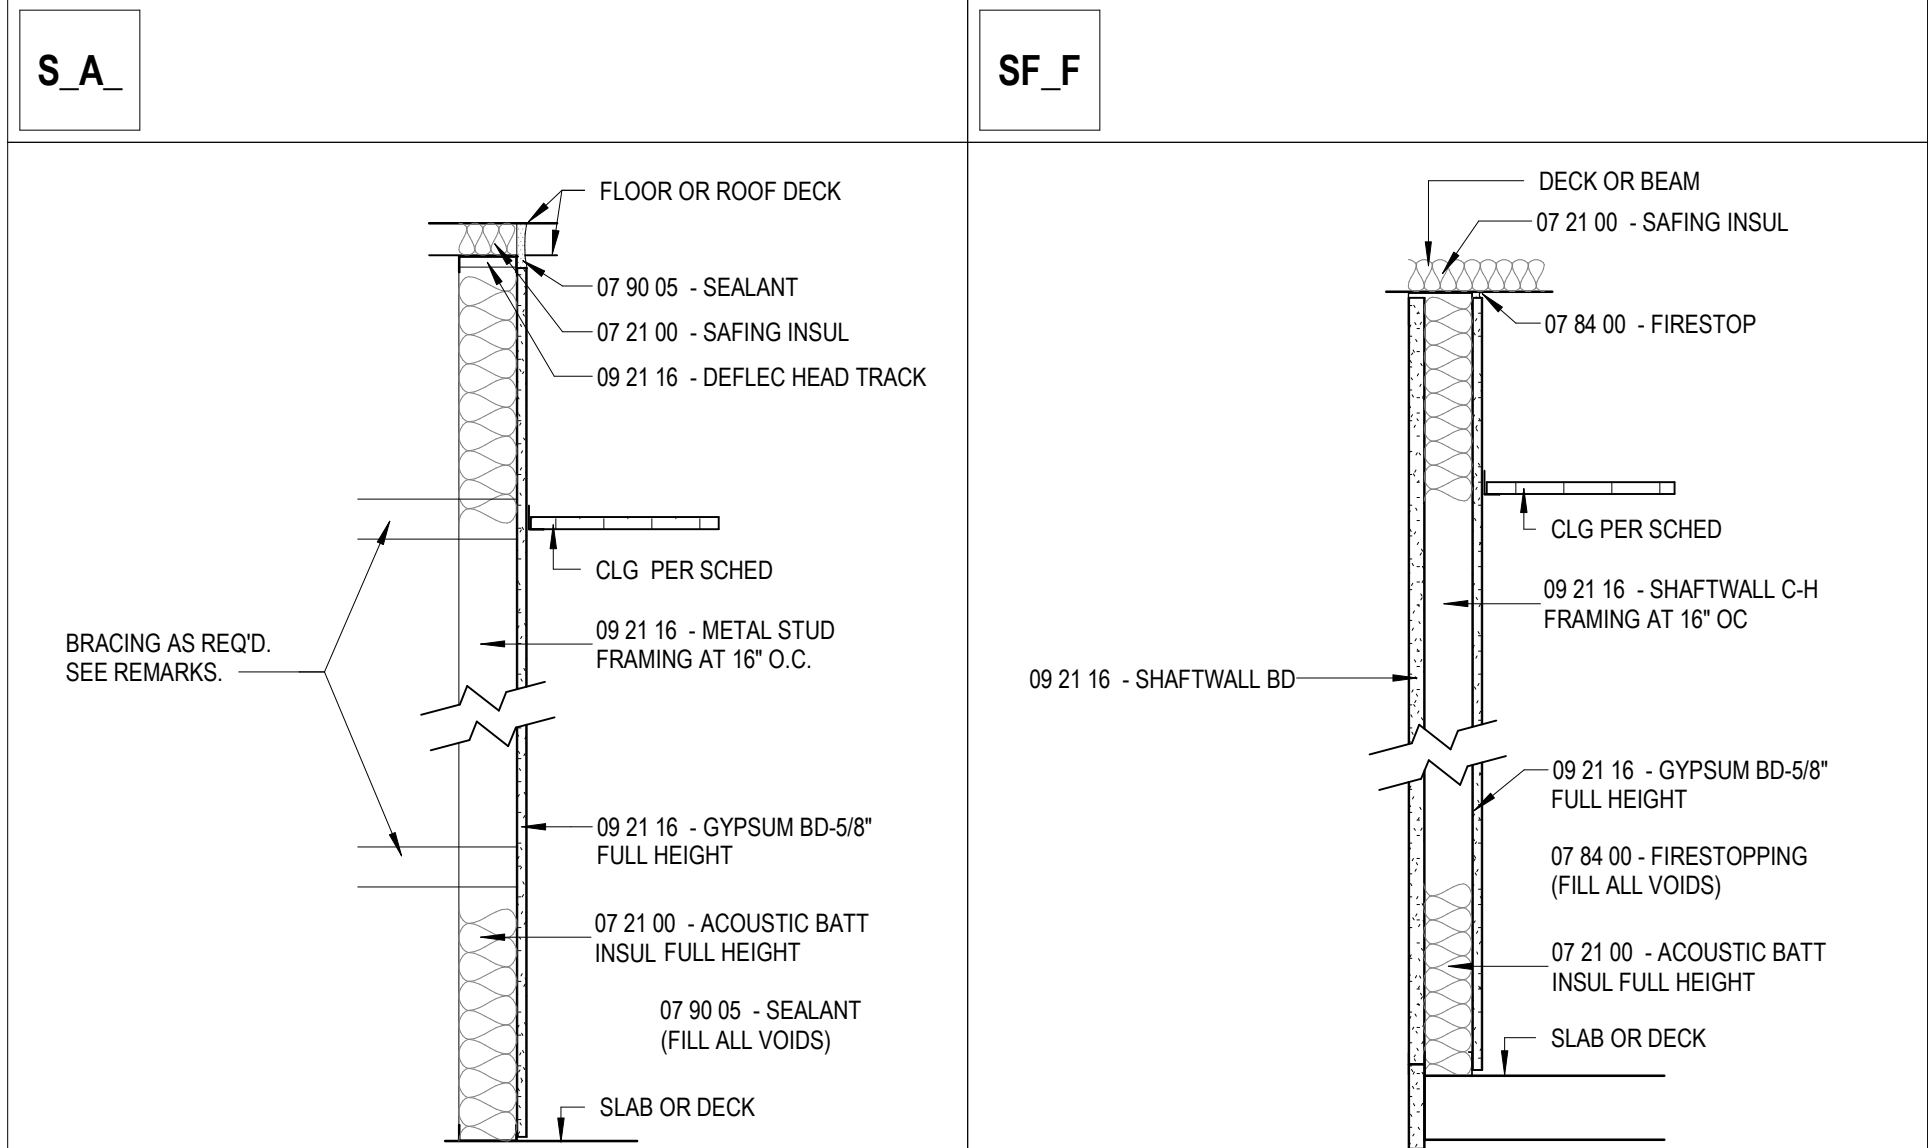


TAG	STUD SIZE	CODE/SPEC REFERENCE	STC RATING	REMARKS	TAG	STUD SIZE	CODE/SPEC REFERENCE	STC RATING	REMARKS
SF2A	2 1/2"	ACOUSTIC/ SMOKE	-	BRACE AT MID-POINT AND CEILING LINE	S2S1	2 1/2"	1HR - ULF U417		
SF3A	3 5/8"	ACOUSTIC/ SMOKE	-		S4S1	4"	1HR - ULF U417		
SF6A	6"	ACOUSTIC/ SMOKE	-		S6S1	6"	1HR - ULF U417		
SF8A	8"	ACOUSTIC/ SMOKE	-						

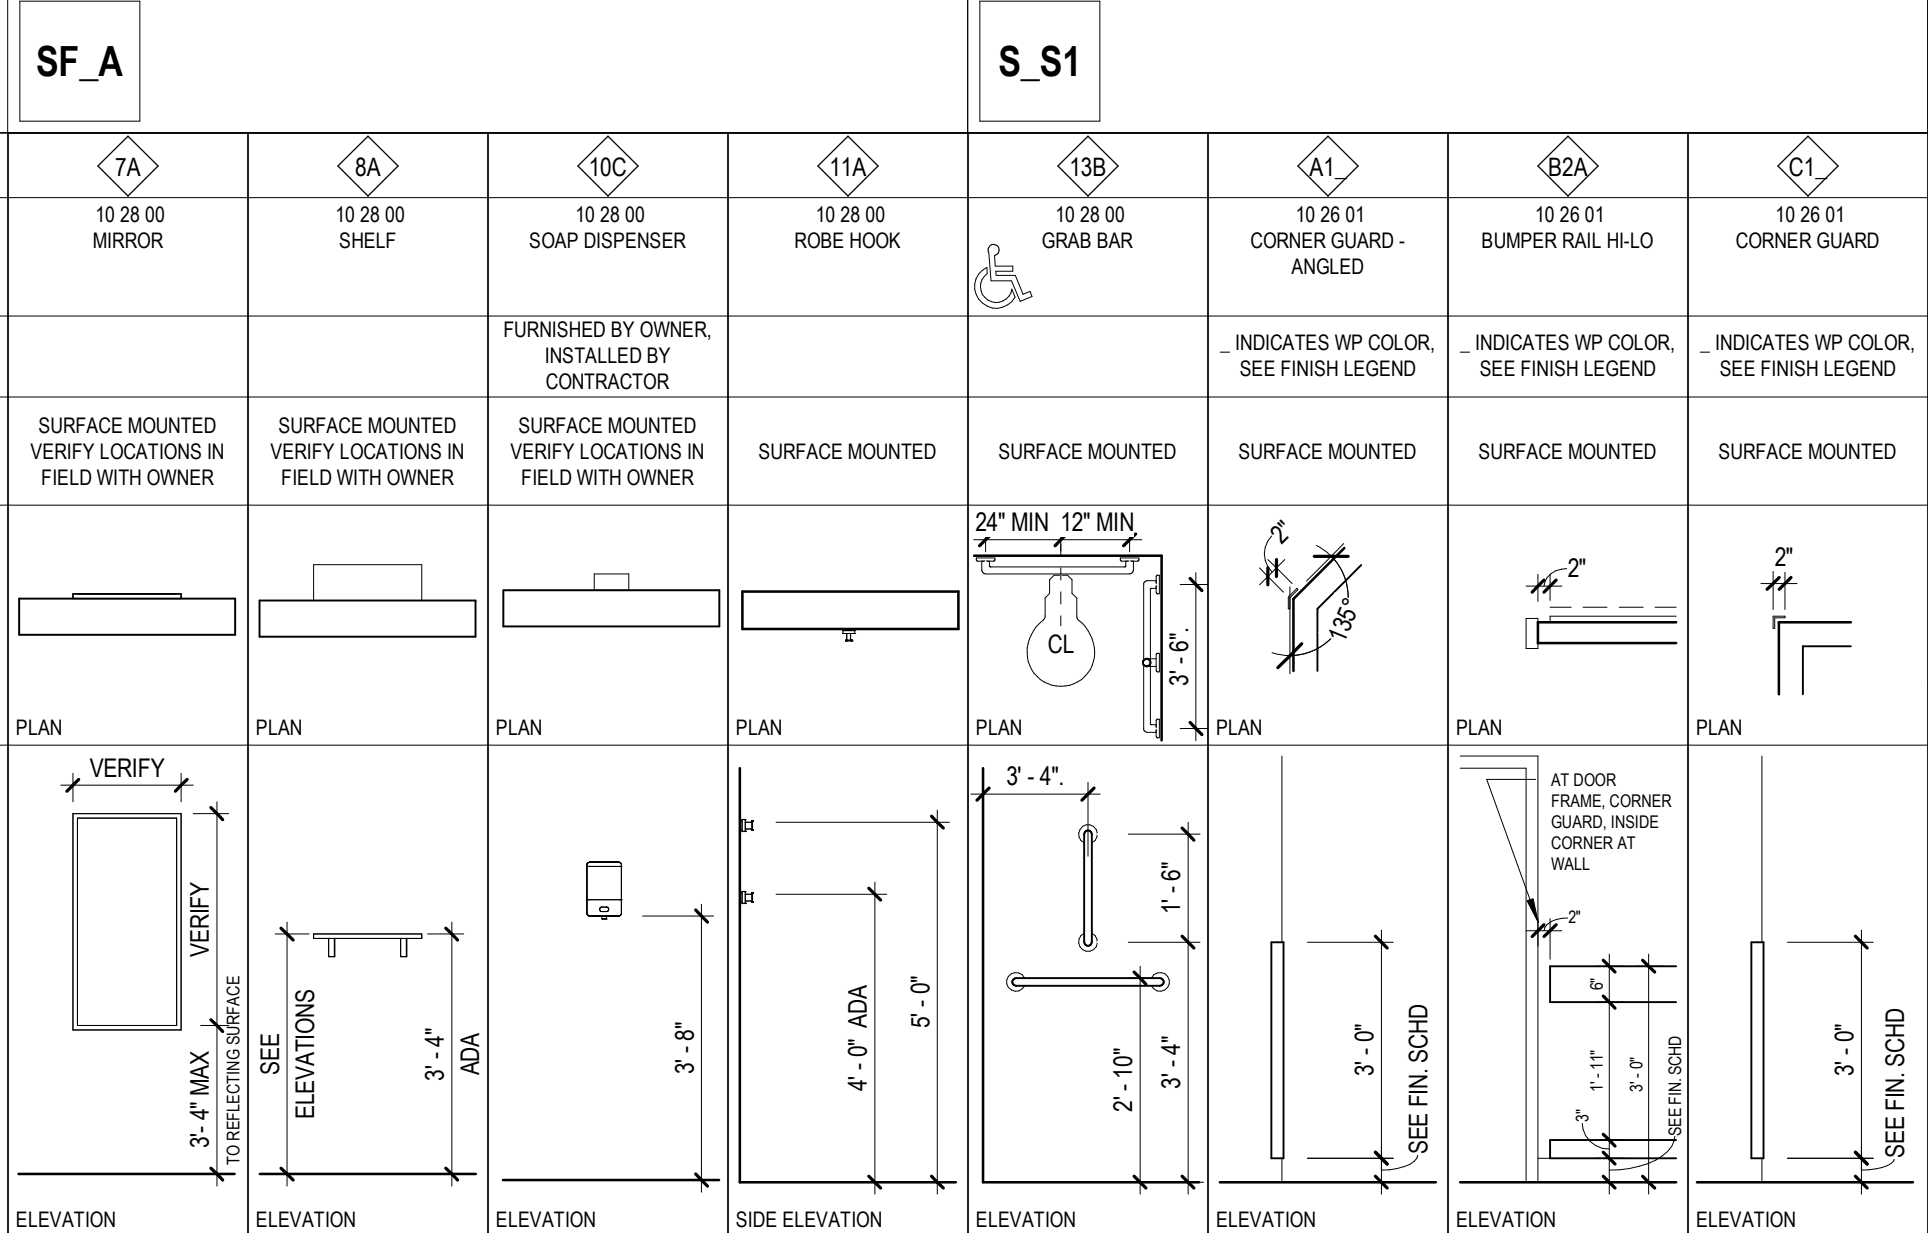

1B	2C	6B	7A	8A	10C	11A	18B	A1	B2A	C1
10 28 00 TOILET PAPER DISPENSER	10 28 00 PAPER TOWEL DISPENSER	10 28 00 NAPKIN RECEPTACLE	10 28 00 MIRROR	10 28 00 SHELF	10 28 00 SOAP DISPENSER	10 28 00 ROBE HOOK	10 28 00 GRAB BAR	10 26 01 CORNER GUARD - ANGLED	10 26 01 BUMPER RAIL H/L/O	10 26 01 CORNER GUARD
FURNISHED BY OWNER, INSTALLED BY CONTRACTOR	FURNISHED BY OWNER, INSTALLED BY CONTRACTOR	SEMI-RECESS MOUNTED VERIFY LOCATIONS IN FIELD WITH OWNER	SURFACE MOUNTED VERIFY LOCATIONS IN FIELD WITH OWNER	SURFACE MOUNTED VERIFY LOCATIONS IN FIELD WITH OWNER	SURFACE MOUNTED VERIFY LOCATIONS IN FIELD WITH OWNER	SURFACE MOUNTED	SURFACE MOUNTED	INDICATES WP COLOR, SEE FINISH LEGEND	INDICATES WP COLOR, SEE FINISH LEGEND	INDICATES WP COLOR, SEE FINISH LEGEND
RECESS MOUNTED VERIFY LOCATIONS IN FIELD WITH OWNER	SURFACE MOUNTED VERIFY LOCATIONS IN FIELD WITH OWNER	SEMI-RECESS MOUNTED VERIFY LOCATIONS IN FIELD WITH OWNER	SURFACE MOUNTED VERIFY LOCATIONS IN FIELD WITH OWNER	SURFACE MOUNTED VERIFY LOCATIONS IN FIELD WITH OWNER	SURFACE MOUNTED VERIFY LOCATIONS IN FIELD WITH OWNER	SURFACE MOUNTED	SURFACE MOUNTED	INDICATES WP COLOR, SEE FINISH LEGEND	INDICATES WP COLOR, SEE FINISH LEGEND	INDICATES WP COLOR, SEE FINISH LEGEND
PLAN	PLAN	PLAN	PLAN	PLAN	PLAN	PLAN	PLAN	PLAN	PLAN	PLAN
ELEVATION	ELEVATION	ELEVATION	ELEVATION	ELEVATION	ELEVATION	SIDE ELEVATION	ELEVATION	ELEVATION	ELEVATION	ELEVATION

62	64	W1	W1	71A	71B	71S	100A	100	105
10 44 00 FIRE EXTINGUISHER CABINET	10 26 01 FIRE EXTINGUISHER WITH MOUNTING BRACKET	10 26 01 WALL PROTECTION PANEL	10 26 01 WALL PROTECTION PANEL	10 11 01 MARKERBOARD	10 11 01 MARKERBOARD	10 11 01 MARKERBOARD	10 28 00 GLOVE DISPENSER	10 28 00 SHARPS CONTAINER	10 28 00 HAND SANITIZER
		INDICATES WP COLOR, SEE FINISH LEGEND	INDICATES WP COLOR, SEE FINISH LEGEND				FURNISHED BY OWNER, INSTALLED BY CONTRACTOR	FURNISHED BY OWNER, INSTALLED BY CONTRACTOR	FURNISHED BY OWNER, INSTALLED BY CONTRACTOR
SEMI-RECESS MOUNTED	SURFACE MOUNTED	SURFACE MOUNTED	SURFACE MOUNTED	SURFACE MOUNTED	SURFACE MOUNTED	SURFACE MOUNTED	SURFACE MOUNTED VERIFY LOCATIONS IN FIELD WITH OWNER	SURFACE MOUNTED	SURFACE MOUNTED
PLAN	PLAN	PLAN	PLAN	PLAN	PLAN	PLAN	PLAN	PLAN	PLAN
ELEVATION	ELEVATION	ELEVATION	ELEVATION	ELEVATION	ELEVATION	ELEVATION	ELEVATION	ELEVATION	SIDE ELEVATION



SMCC

HEALTH SCIENCE CENTER

BGS NUM: 3809

79 Ford Road, South Portland, Maine, 04106

NO.	DESCRIPTION	DATE

CONTENT: LEGENDS, SYMBOLS, NOTES, PARTITION TYPES	DRAWN BY: MOL
PROJECT NO: 25-062-00	DATE: 05/08/2026
REVISED:	SCALE: As indicated
A0.1	
Project Phase CONSTRUCTION DOCUMENTS	
COPYRIGHT © 2026 BY LAVALLEE BRENSINGER PLLC. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

FIREPROOFING PLAN LEGEND

GENERAL NOTES

1. DEFINITIONS
- A. PRIMARY STRUCTURAL FRAME SHALL INCLUDE ALL OF THE FOLLOWING MEMBERS:
- a. THE COLUMNS.
 - b. STRUCTURAL MEMBERS HAVING DIRECT CONNECTION TO THE COLUMNS, INCLUDING GIRDERS, BEAMS, TRUSSES AND SPANDRELS.
 - c. MEMBERS OF THE FLOOR CONSTRUCTION AND ROOF CONSTRUCTION HAVING DIRECT CONNECTION TO THE COLUMNS.
 - d. BRACING MEMBERS THAT ARE ESSENTIAL TO THE VERTICAL STABILITY OF THE PRIMARY STRUCTURAL FRAME UNDER GRAVITY LOADING SHALL BE CONSIDERED PART OF THE PRIMARY STRUCTURAL FRAME WHETHER OR NOT THE BRACING MEMBER CARRIES GRAVITY LOADS.
- B. SECONDARY MEMBERS INCLUDE THE FOLLOWING:
- a. STRUCTURAL MEMBERS NOT HAVING DIRECT CONNECTIONS TO THE COLUMNS.
 - b. MEMBERS OF THE FLOOR CONSTRUCTION AND ROOF CONSTRUCTION NOT HAVING DIRECT CONNECTIONS TO THE COLUMNS.
 - c. BRACING MEMBERS OTHER THAN THOSE THAT ARE PART OF THE PRIMARY STRUCTURAL FRAME.
2. SEE SPECIFICATION SECTIONS FOR FIREPROOFING REQUIREMENTS, MATERIALS AND UL ASSEMBLIES.
- A. SECTION 07 51 00 - APPLIED FIREPROOFING: SPRAY-APPLIED FIREPROOFING.


RATED PRIMARY STRUCTURAL BEAM ASSEMBLIES

NOTE: SECONDARY STRUCTURE IS NOT HIGHLIGHTED WITH THE LINWORK BELOW, BUT SHALL BE FIREPROOFING BASED ON UL ASSEMBLY AND FLOORCEILING AND ROOFCEILING ASSEMBLIES LISTED ABOVE.


SPRAY APPLIED FIREPROOFING, BEAM BELOW:
1 HOUR RATED

RATED PRIMARY STRUCTURAL COLUMN ASSEMBLIES


SPRAY APPLIED FIREPROOFING, COLUMN, SECOND
FLOOR DOWN TO GROUND FLOOR, TYP. -1 HOUR
RATED

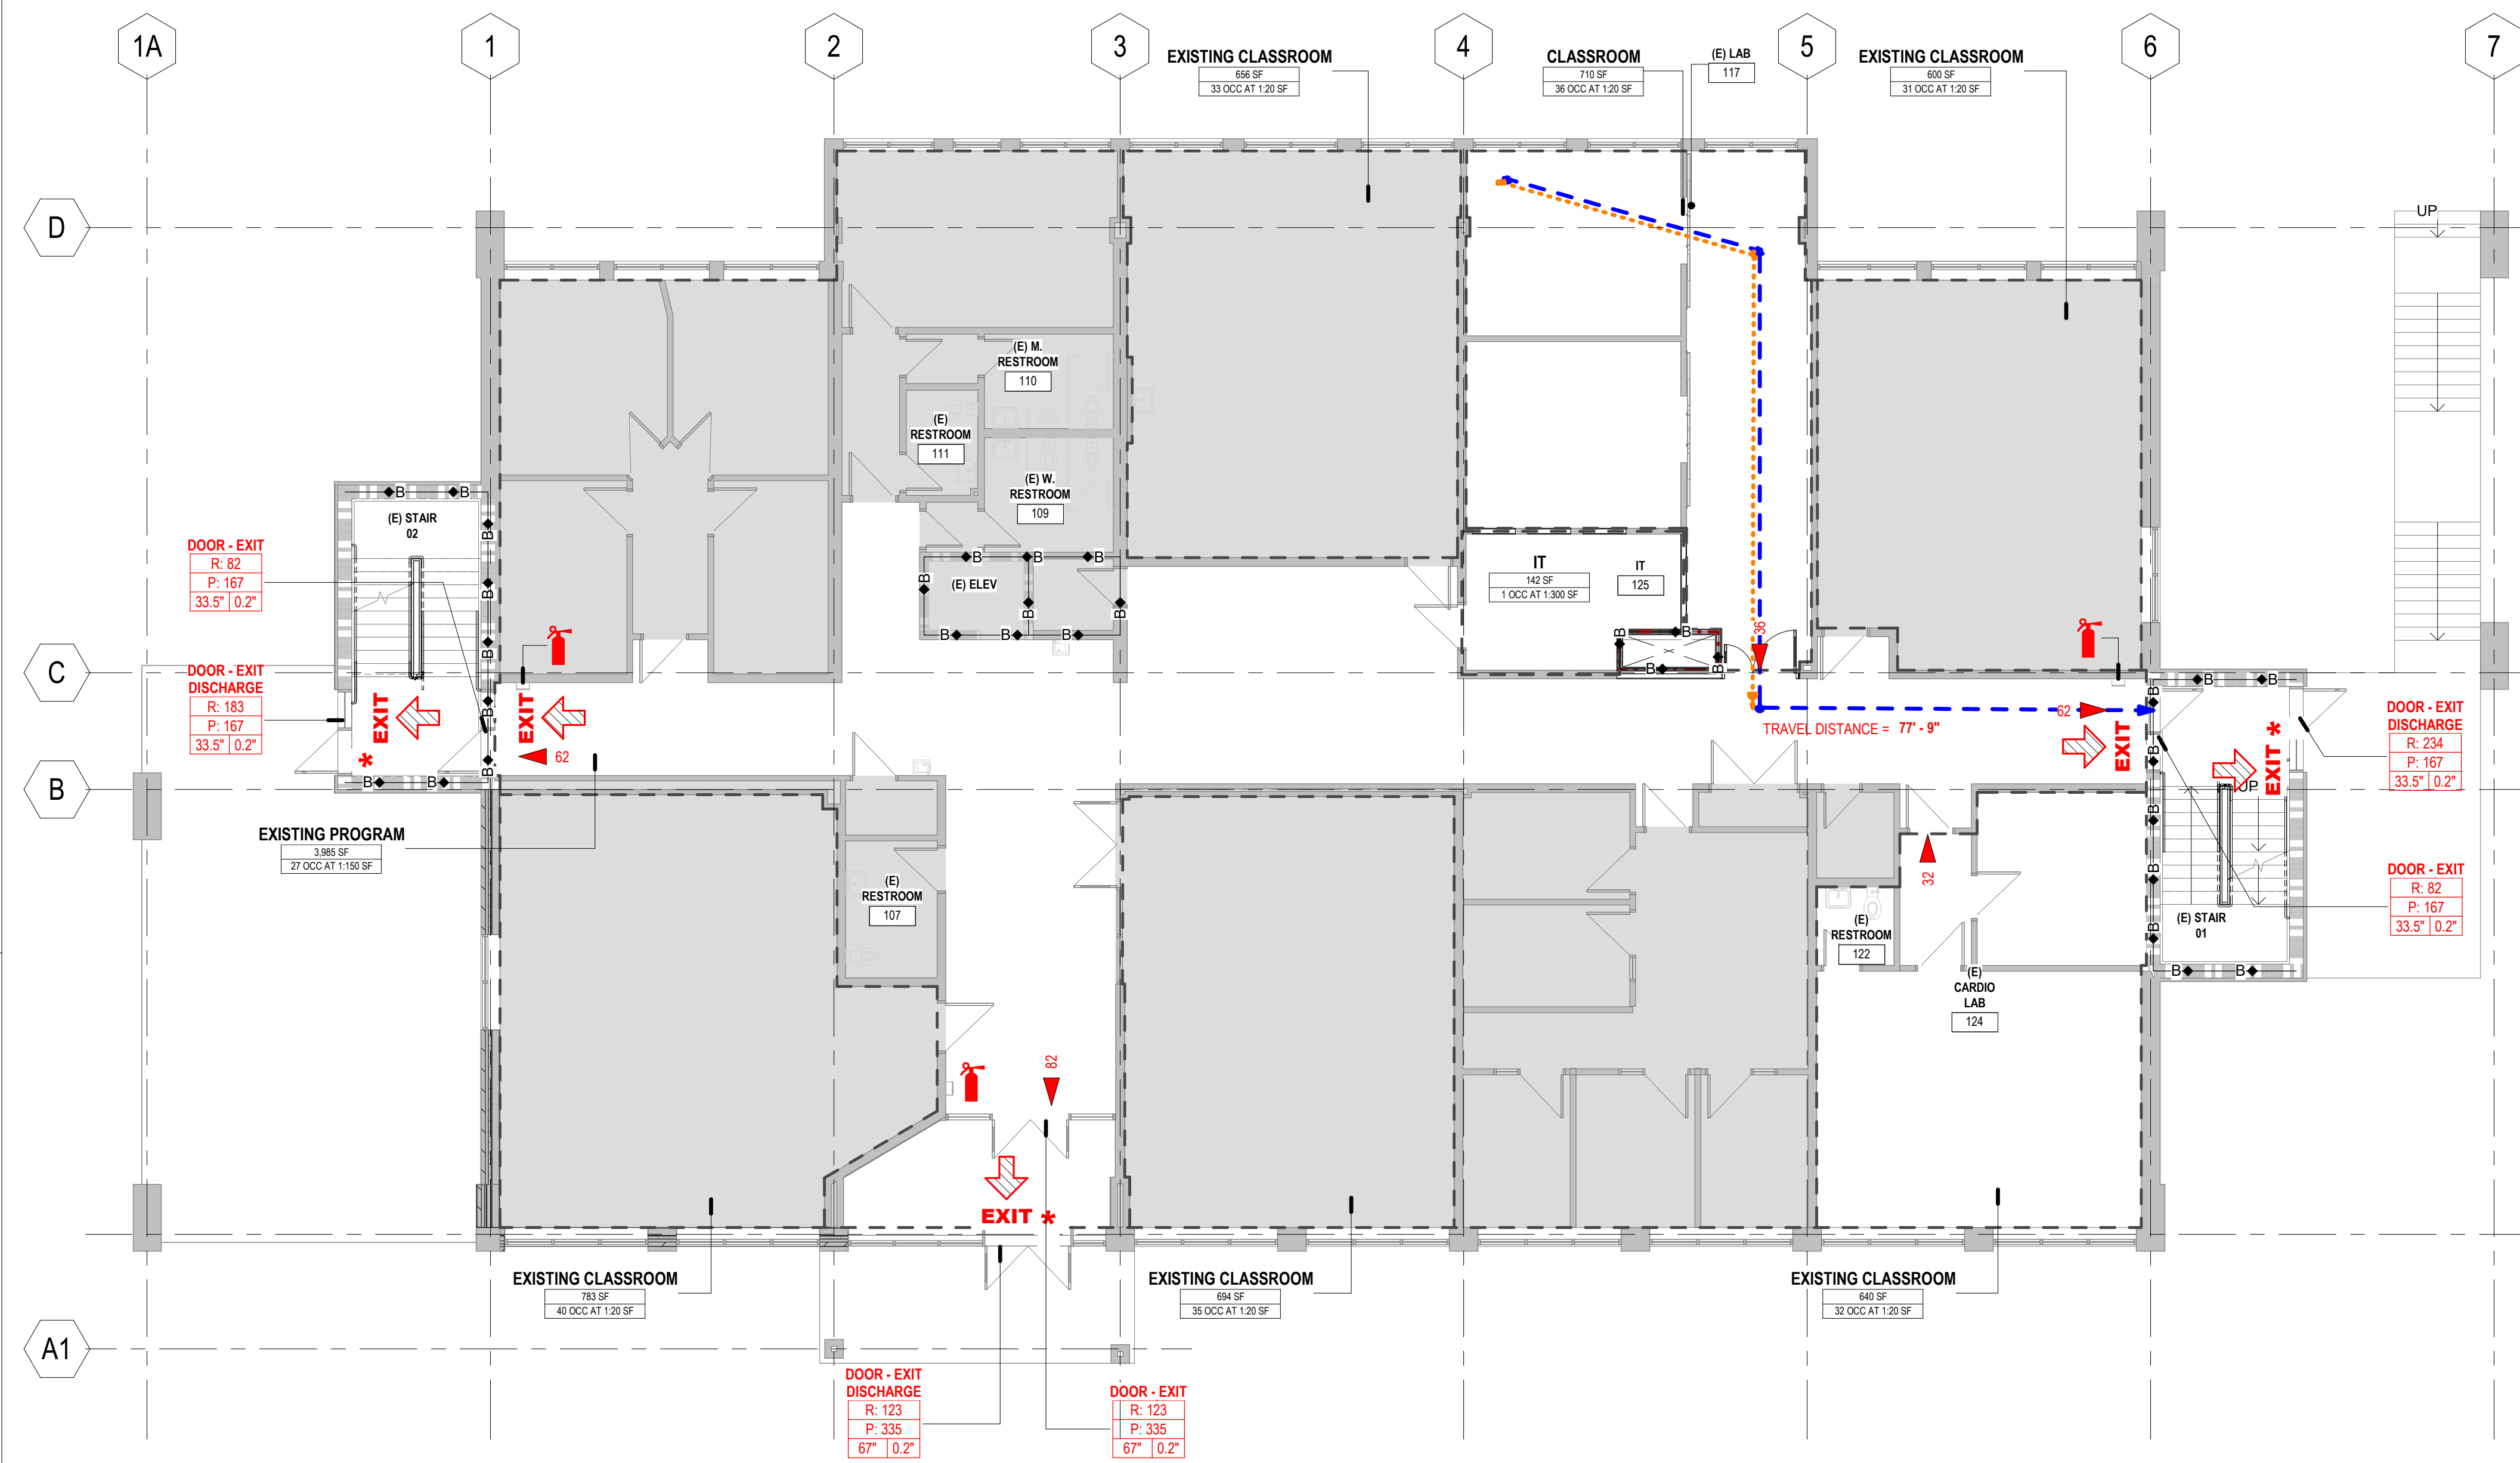


E4 FIRST FLOOR - LIFE SAFETY PLAN
1/8" = 1'-0"

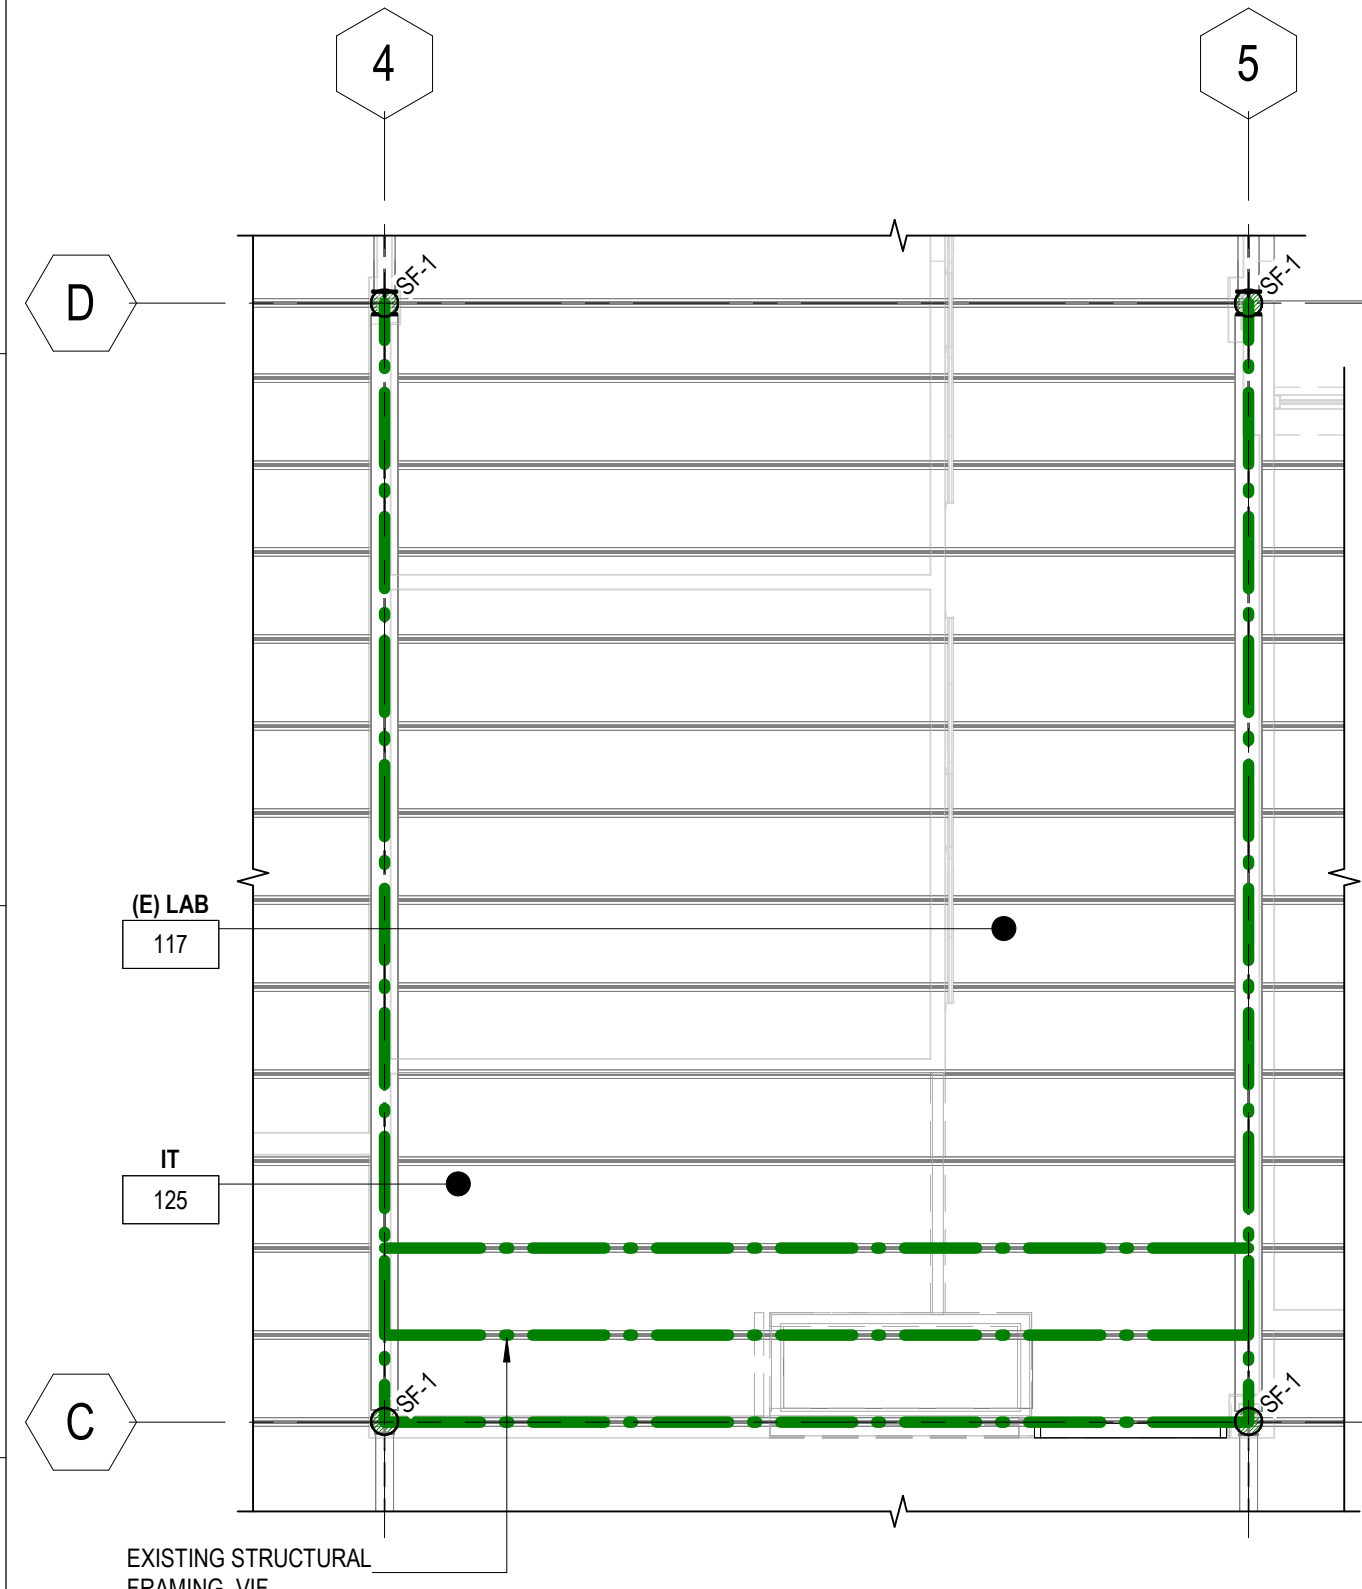

G1 (E) SECOND FLOOR FRAMING - FIREPROOFING PLAN
3/16" = 1'-0"

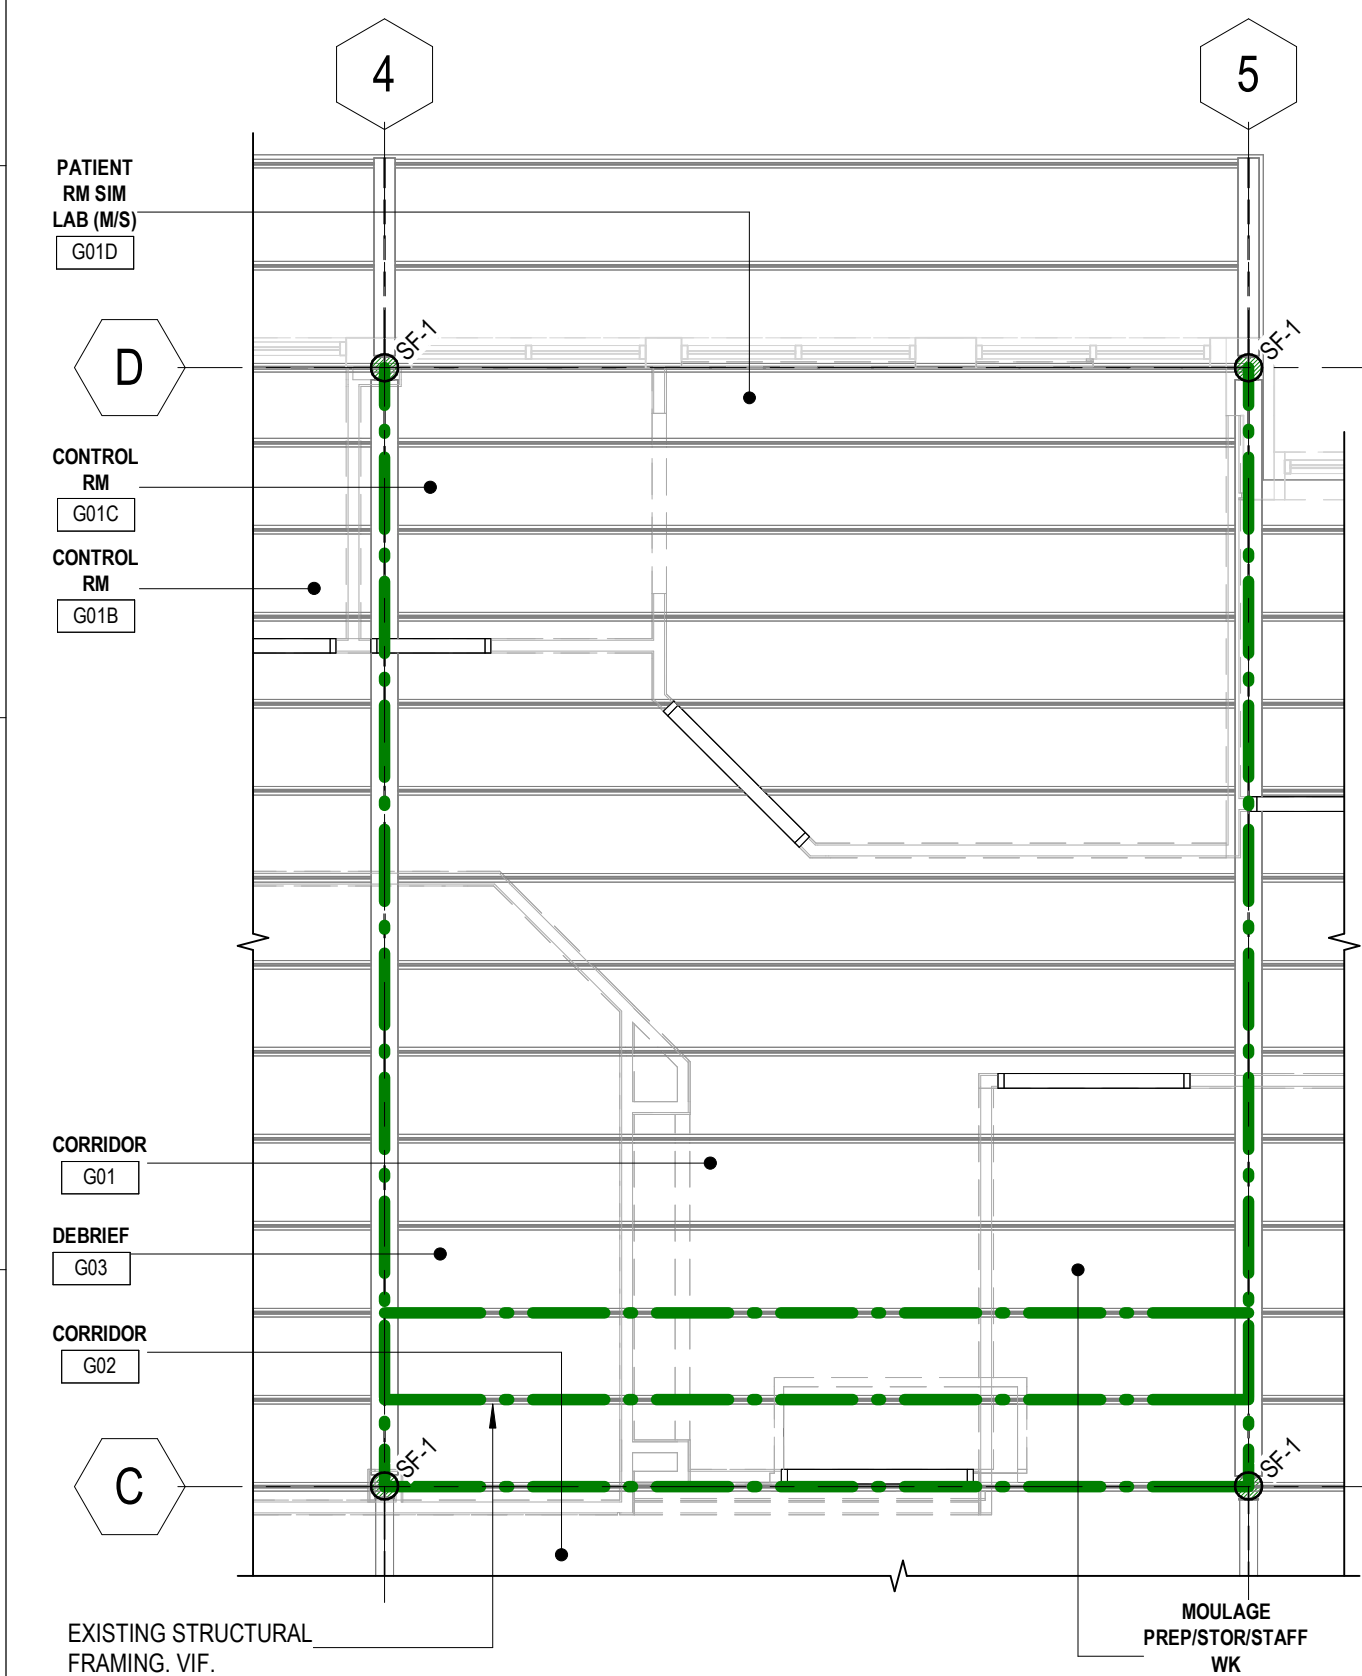

J1 (E) FIRST FLOOR FRAMING - FIREPROOFING PLAN
3/16" = 1'-0"

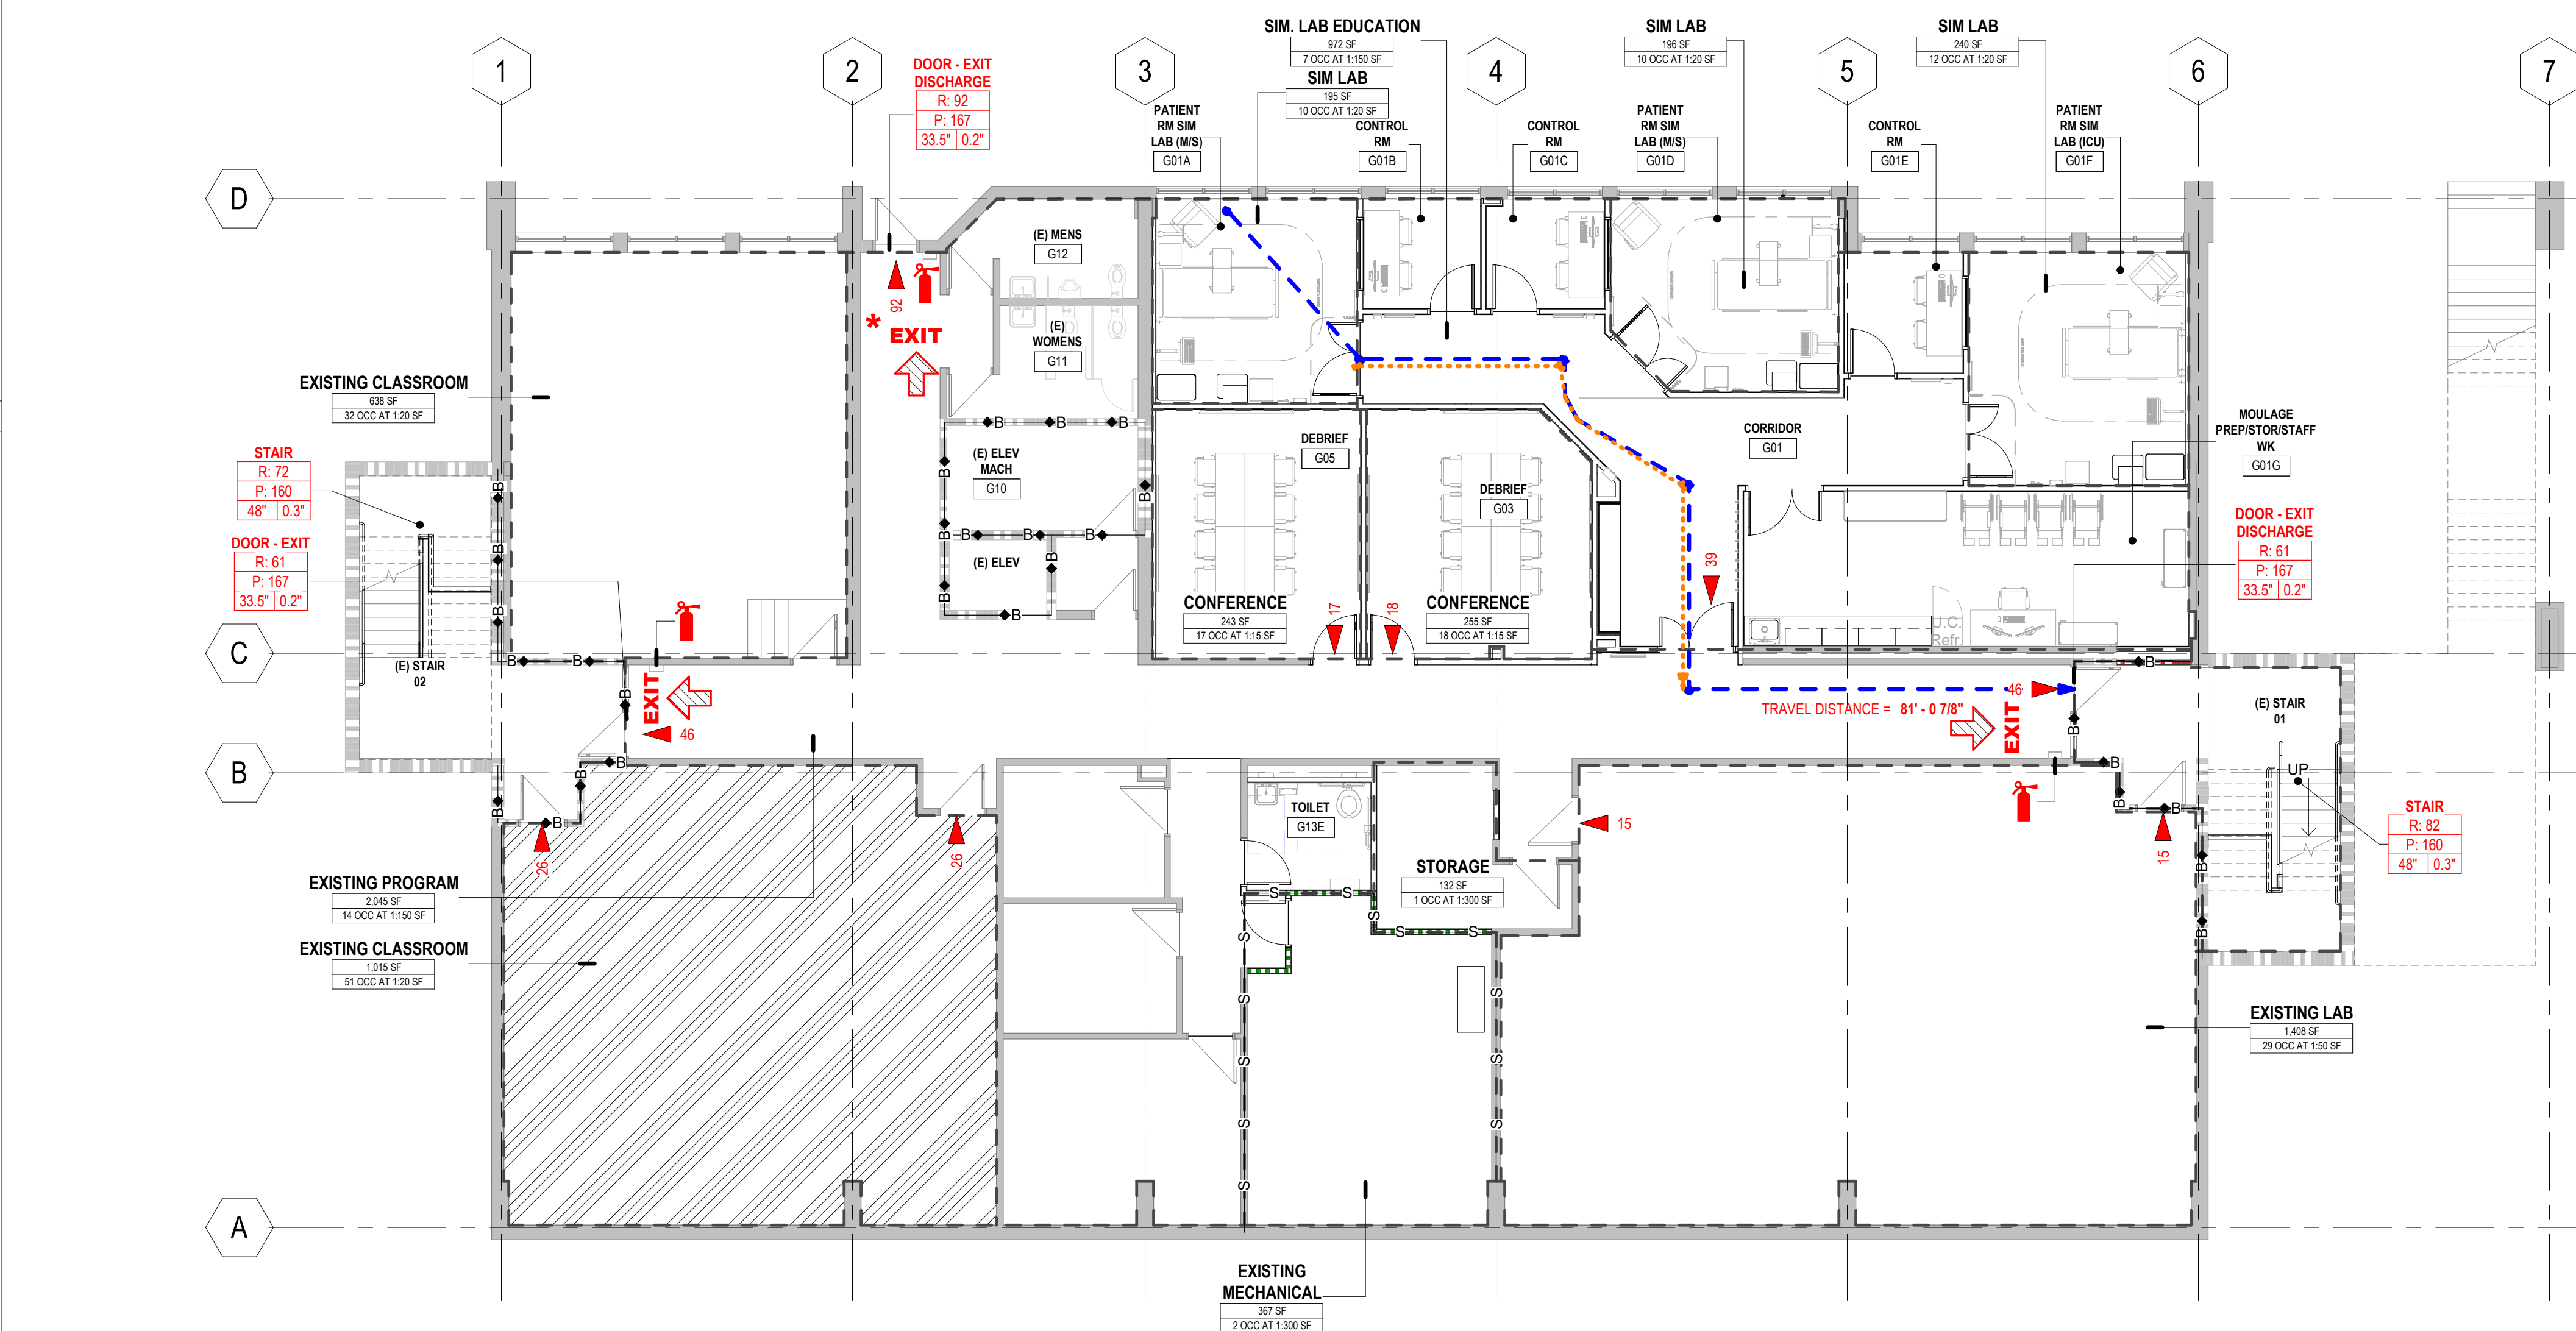

J4 GROUND FLOOR - LIFE SAFETY PLAN
1/8" = 1'-0"

GRAPHICS LEGEND

OCCUPANCY

- B - BUSINESS
IBC 304
NFPA 101 CHPT 38
- A - 3 - ASSEMBLY
IBC 303.4
NFPA 101 CHPT 12

WORK AREA
BOUNDARY

WORK SCOPE

FRONTAGE

- AP - AP - AP - ACCESSIBLE PERIMETER
- NAP - NAP - NAP - NON-ACCESSIBLE PERIMETER

PROPOSED FIRE RATED CONSTRUCTION

*NOTE: PROPOSED FIRE RATED CONSTRUCTION TO BE MODIFIED IN THIS PROJECT IS INDICATED WITH THE COLOR HATCHES BELOW. THIS PLAN IS INTENDED TO BE VIEW IN COLOR FORMAT.

CODE PLAN GRAPHIC

- IBC NON-RATED SMOKE PARTITION (710)
NFPA NON-FIRE RATED BARRIER TO SMOKE
(8.4.3.3.266)
- 1 HR FIRE BARRIER
(NFPA 101 8.3 & 3.3.31.1 / IBC 707)

EXISTING FIRE RATED CONSTRUCTION

*NOTE: EXISTING FIRE RATED CONSTRUCTION NOT MODIFIED IN THIS PROJECT IS INDICATED WITH THE SAME HATCHES ABOVE IN GRAYSCALE. EXISTING CONDITIONS ARE BASED ON EXISTING DOCUMENTATION PROVIDED TO THE ARCHITECT BY THE OWNER. ACTUAL CONDITIONS HAVE NOT BEEN COMPLETELY SURVEYED BY THE ARCHITECT FOR THE PURPOSE OF THESE DRAWINGS. CONTRACTOR TO NOTIFY ARCHITECT IF CONDITIONS ARE UNCOVERED IN THE FIELD THAT DO NOT COMPLY WITH THE RATINGS IDENTIFIED ON THESE DRAWINGS.

MEANS OF EGRESS

- AREA TAG
- NAME
- AREA
- OCCUPANT LOAD RATIO
- NUMBER OF OCCUPANTS
- EGRESS CAPACITY TAG
- COMPONENT TYPE
- REQUIRED CAPACITY
- PROVIDED CAPACITY
- WIDTH PER OCCUPANT
- COMPONENT WIDTH
- 49
- DIRECTION OF EGRESS AND OCCUPANT LOAD
- EXIT
- EXIT DISCHARGE
- EXIT *
- HORIZONTAL EXIT
- SMOKE COMPARTMENT EXIT
- EXIT STAIR

PATH OF TRAVEL

- TRAVEL DISTANCE PATH
- DEAD END
- COMMON PATH OF TRAVEL

OTHER

- FIRE EXTINGUISHER
- EXISTING CONSTRUCTION
- NEW CONSTRUCTION


SEE DOOR SCHEDULE FOR DOOR ASSEMBLY FIRE-RATINGS.

LAVALLEE
BRENSINGER

ARCHITECTS

Boston | Manchester | Portland

155 Dow Street, Suite 400, Manchester, NH 03101
603.622.5450
www.LBPA.com



SMCC

HEALTH SCIENCE
CENTER

BGS NUM: 3809

79 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE

CONTENT: CODE ANALYSIS TEXT, SYMBOLS AND RATINGS	
DRAWN BY:	MOL
PROJECT NO:	25-062-00
DATE:	05/08/2026
REVISED:	
SCALE:	As indicated
A0.2A	
Project Phase CONSTRUCTION DOCUMENTS	
COPYRIGHT © 2026 BY LAVALLEE BRENSINGER PLLC. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

SEE DOOR SCHEDULE FOR DOOR ASSEMBLY FIRE-RATINGS


79 Ford Road, South Portland, Maine,
04106

CONTENT:	
CODE ANALYSIS TEXT, SYMBOLS AND RATINGS	
DRAWN BY:	MOL
PROJECT NO:	25-062-00
DATE:	05/08/2026
REVISED:	
SCALE:	As indicated
A0.2B	
Project Phase	
CONSTRUCTION DOCUMENTS	
COPYRIGHT © 2026 BY LAVALETTE BRENSINGER PLLC. ALL RIGHTS RESERVED NO REPRODUCTION WITHOUT PERMISSION.	

OCCUPANCIES & LOADS	
IBC EXISTING OCCUPANCY GROUP CLASSIFICATIONS	MIXED USE (NON-SEPARATED); B (BUSINESS), A-3 (ASSEMBLY) WITH ACCESSORY OCCUPANCY S-2 (STORAGE)
PROPOSED GROUPS	NO CHANGE
NFPA 101 EXISTING OCCUPANCY TYPES	MIXED USE (NON-SEPARATED); B (BUSINESS), A (ASSEMBLY) WITH ACCESSORY OCCUPANCY S-2 (STORAGE)
PROPOSED TYPES	NO CHANGE
IBC ALLOWABLE HEIGHT & AREA ANALYSIS	NO CHANGE TO HEIGHT AND AREA
MEANS OF EGRESS	
DOORS	7.2.1 DOOR LEAF 36" MIN
CORRIDORS	14.2.3.2 MIN WIDTH OF 6 FEET WIDE, <100 OCCUPANTS, 44 INCH WIDE
STAIRS	IBC 1017.2: 44 INCH MIN
CAPACITY OF EGRESS	HORIZONTAL ELEMENTS: 0.27 PERSON, STAIRS: 0.37 PERSON, CORRIDORS: 44 INCH MIN FOR >50.
EGRESS ARRANGEMENT	BUSINESS:
	DEAD END (B): 50 FEET (38.2.5.2)
	COMMON PATH OF TRAVEL (B): 100 FEET (38.2.5.3.2)
	TRAVEL DISTANCE TO EXIT (B): 300 FEET (38.2.6.2)
	ASSEMBLY:
	DEAD END (B): 20 FEET (12.2.5.1.3)
	COMMON PATH OF TRAVEL (B): 75 FEET (12.2.5.1.2)
	TRAVEL DISTANCE TO EXIT (B): 250 FEET (12.2.6.2)
	REMTENESS: 1/3 DISTANCE BETWEEN EXITS
FIRE RESISTIVE CONSTRUCTION REQUIREMENTS	
CONSTRUCTION TYPE	CONSTRUCTION CLASSIFICATION: IBC TYPE IIB NFPA TYPE II(0000)
SEPARATION OF OCCUPANCIES HAZARDOUS AREA PROTECTION	BUILDING ELEMENT FIRE RESISTIVE RATING REQUIREMENTS:
	PRIMARY STRUCTURAL FRAME: 0 HRS
	STRUCTURAL ELEMENTS SUPPORTING FIRE BARRIERS ARE RATED TO BE EQUIVALENT TO FIRE BARRIER RATING
	BEARING WALLS, EXTERIOR: 0 HRS
	BEARING WALLS, INTERIOR: 0 HRS
	NONBEARING WALLS & PARTITIONS - EXTERIOR: 0 HRS
	NONBEARING WALLS & PARTITIONS - INTERIOR: 0 HRS
	FLOOR CONSTRUCTION & SECONDARY MEMBERS: 0 HRS
	ROOF CONSTRUCTION & SECONDARY MEMBERS: 0 HRS
	ROOF COVERING CLASSIFICATION: CLASS C MIN (706.6)
SHAFT ENCLOSURE HAZARDOUS AREA PROTECTION	IBC 508.3.3 NON-SEPARATED OCCUPANCIES: NO SEPARATION REQUIRED
	NFPA 8 & 7 38.3.2
	STORAGE ROOMS & BOLER ROOMS: 1HR OR SPRINKLER & SMOKE PARTITIONS
	IBC 713.4
	3 ST., 1 HR FIRE BARRIERS
	IBC 713.4
	3 ST., 1 HR FIRE BARRIERS
	CORRIDORS
	NFPA
	12.3.6 ASSEMBLY: 0 HR W/ SPRINKLERS
INTERIOR FINISH	38.3.6 BUSINESS: 0 HR W/ SPRINKLER
	INTERIOR FINISH, WALLS & FLOORS: IBC 803.13 & NFPA A10.2.2
	ASSEMBLY OCCUPANCIES - EXITS: B CORRIDORS, B ROOMS C
	OTHER OCCUPANCIES - EXITS: B CORRIDORS, C ROOMS C
	INTERIOR FINISH, FLOORS (IBC 804.2 & NFPA A10.2.2)
	ASSEMBLY OCC - CRITICAL RADIANT FLUX (ASTM E648 OR NFPA 253) - CLASS II
	OTHER OCC - CRITICAL RADIANT FLUX (ASTM E648 OR NFPA 253) - CLASS II
	INTERIOR FINISH, FLOORS (IBC 804.2 & NFPA A10.2.2)
	ASSEMBLY OCC - CRITICAL RADIANT FLUX (ASTM E648 OR NFPA 253) - CLASS II
	OTHER OCC - CRITICAL RADIANT FLUX (ASTM E648 OR NFPA 253) - CLASS II





WINDOW TYPES

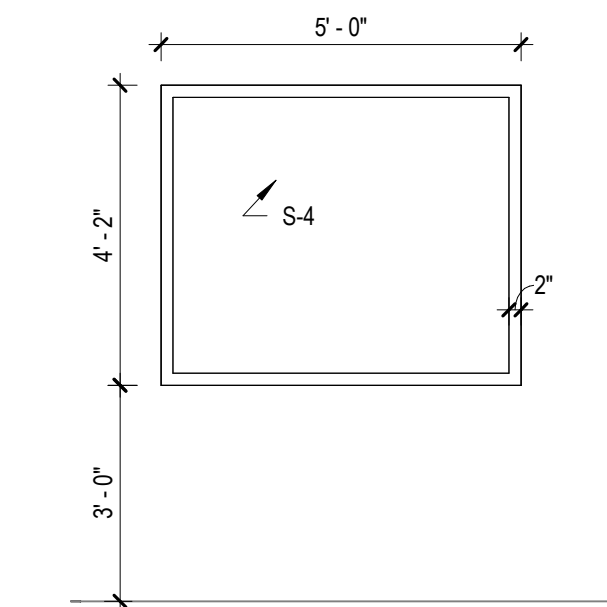

08 11 13 - HM FRAME
08 80 00 - ONE-WAY GLASS

A CONTROL ROOM WINDOW
ONE WAY GLASS

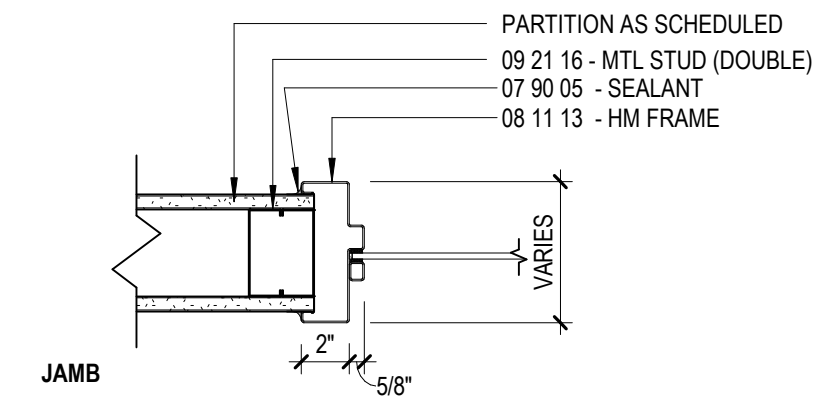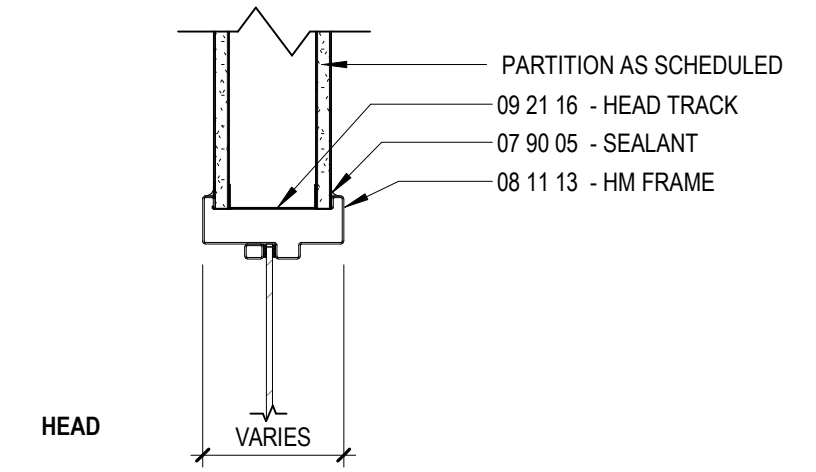

ALUM FRAME, HEAD /JAMB DETAIL at METAL STUD
E6
A0.3A 1 1/2" ± 1'-0"

DOOR & FRAME SCHEDULE w Room Names - 25-062-00

MARK	FROM ROOM		TO ROOM		DOOR			FRAME		DOOR AND FRAME FIRE RATING	HARDWARE SET	COMMENTS		
	No.	NAME	No.	NAME	SIZE			MATL	TYPE				MATL	TYPE
					WD	HT	THK							
BASEMENT														
G01	G02	CORRIDOR	G01	CORRIDOR	5'-0"	7'-0"	1 3/4"	HMS-1	FG2	HM	1	-	7.0	
G01A	G01	CORRIDOR	G01A	PATIENT RM SIM LAB (MS)	5'-0"	7'-0"	1 3/4"	HMS-1	FG2	HM	1	-	7.0	
G01B	G01	CORRIDOR	G01B	CONTROL RM	3'-0"	7'-0"	1 3/4"	HM	F	HM	1	-	8.0	
G01C	G01	CORRIDOR	G01C	CONTROL RM	3'-0"	7'-0"	1 3/4"	HM	F	HM	1	-	8.0	
G01D	G01	CORRIDOR	G01D	PATIENT RM SIM LAB (MS)	5'-0"	7'-0"	1 3/4"	HMS-1	FG2	HM	1	-	7.0	
G01E	G01	CORRIDOR	G01E	CONTROL RM	3'-0"	7'-0"	1 3/4"	HM	F	HM	1	-	8.0	
G01F	G01	CORRIDOR	G01F	PATIENT RM SIM LAB (ICU)	5'-0"	7'-0"	1 3/4"	HMS-1	FG2	HM	1	-	7.0	
G01G	G01	CORRIDOR	G01G	MOULAGE PREP/STOR/STAFF WK	5'-0"	7'-0"	1 3/4"	HMS-1	FG2	HM	1	-	7.0	
G03	G02	CORRIDOR	G03	DEBRIEF	3'-0"	7'-0"	1 3/4"	HMS-1	N1	HM	1	-	8.0	
G05	G02	CORRIDOR	G05	DEBRIEF	3'-0"	7'-0"	1 3/4"	HMS-1	N1	HM	1	-	8.0	
G13E	G13D	HALLWAY	G13E	TOILET	3'-0"	7'-0"	1 3/4"	HM	F	HM	1	-	9.0	
G14	G02	CORRIDOR	G13C	STORAGE	3'-0"	6'-8"	1 3/4"	HM(E)	F	HM(E)	(E)	-	2.0	UPGRADE HARDWARE / LOCK SETS FOR ADA COMPLIANCE
G15	G13D	HALLWAY	G15	MECHANICAL	3'-0"	7'-0"	1 3/4"	HM	F	HM	1	-	6.0	
G18	G02	CORRIDOR	G18	(E) NURSING LAB	3'-0"	6'-8"	1 3/4"	HM(E)	F	HM(E)	(E)	-	3.0	UPGRADE HARDWARE / LOCK SETS FOR ADA COMPLIANCE
G18A	G02	CORRIDOR	G18	(E) NURSING LAB	3'-0"	6'-8"	1 3/4"	HM(E)	F	HM(E)	(E)	-	3.0	UPGRADE HARDWARE / LOCK SETS FOR ADA COMPLIANCE
S010	G02	CORRIDOR	G02	CORRIDOR	3'-0"	7'-0"	1 3/4"	HM(E)S-2	N	HM(E)	(E)	60 MIN	1.0	UPGRADE HARDWARE / LOCK SETS FOR ADA COMPLIANCE. EXISTING DOOR / SIDELITE WIRE GLASS TO BE COVERED GLAZING FILM TYPE F-1
S020	G02	CORRIDOR	G02	CORRIDOR	3'-0"	7'-0"	1 3/4"	HM(E)S-2	N	HM(E)	(E)	60 MIN	1.0	UPGRADE HARDWARE / LOCK SETS FOR ADA COMPLIANCE. EXISTING DOOR / SIDELITE WIRE GLASS TO BE COVERED GLAZING FILM TYPE F-1
LEVEL 1														
I17A	102	(E) CORRIDOR	I17	(E) LAB	5'-0"	7'-0"	1 3/4"	HM(E)L	FG2	HM	1	-	7.0	
I24	102	(E) CORRIDOR	I24	(E) CARDIO LAB	3'-0"	6'-8"	1 3/4"	HM(E)	F	HM(E)	(E)	-	3.0	UPGRADE HARDWARE / LOCK SETS FOR ADA COMPLIANCE
S011A	14	(E) STAIR 01	102	(E) CORRIDOR	3'-0"	7'-2"	1 3/4"	HM(E)S-2	N	HM(E)	(E)	60 MIN	1.0	UPGRADE HARDWARE / LOCK SETS FOR ADA COMPLIANCE. EXISTING DOOR / SIDELITE WIRE GLASS TO BE COVERED GLAZING FILM TYPE F-1
S021A	13	(E) STAIR 02	102	(E) CORRIDOR	3'-0"	7'-2"	1 3/4"	HM(E)S-2	N	HM(E)	(E)	60 MIN	1.0	UPGRADE HARDWARE / LOCK SETS FOR ADA COMPLIANCE. EXISTING DOOR / SIDELITE WIRE GLASS TO BE COVERED GLAZING FILM TYPE F-1
LEVEL 2														
Z16	202	(E) CORRIDOR	Z16	COMPUTER LAB	3'-0"	7'-0"	1 3/4"	HMS-1	N1	HM	1	-	4.0	
Z16A	14	(E) STAIR 01	Z16	COMPUTER LAB	3'-0"	6'-8"	1 3/4"	HMS-2	N	HM(E)	(E)	60 MIN	5.0	PROVIDE NEW DOOR PANEL AND FIXED TRANSOM IN EXISTING FRAME, MATCH DOOR PANEL SIZE
Z21	202	(E) CORRIDOR	Z21	RADIATION TECHNOLOGY SIMULATION LAB	3'-0"	6'-8"	1 3/4"	HM(E)(GL)(E)	F	HM(E)	(E)	-	3.0	
S012	202	(E) CORRIDOR	14	(E) STAIR 01	3'-0"	7'-2"	1 3/4"	HM(E)S-2	F	HM(E)	(E)	60 MIN	1.0	UPGRADE HARDWARE / LOCK SETS FOR ADA COMPLIANCE. EXISTING DOOR / SIDELITE WIRE GLASS TO BE COVERED GLAZING FILM TYPE F-1
S022	202	(E) CORRIDOR	13	(E) STAIR 02	3'-0"	7'-2"	1 3/4"	HM(E)S-2	F	HM(E)	(E)	60 MIN	1.0	UPGRADE HARDWARE / LOCK SETS FOR ADA COMPLIANCE. EXISTING DOOR / SIDELITE WIRE GLASS TO BE COVERED GLAZING FILM TYPE F-1

GLAZING LEGEND


08 80 00 INTERIOR GLAZING TYPES:
S-1 1/4" SAFETY GLASS, CLEAR
S-2 FIRE RATED GLASS (FIRE PROTECTIVE)
S-4 1/4" TWO-WAY MIRROR GLASS

GLAZING NOTES


- SEE SPECIFICATION FOR MORE INFORMATION
- ALL INTERIOR GLAZING IS TYPE S-1, U.N.O
- REFER TO SPECS FOR SAFETY GLAZING LOCATIONS

HM FRAME GENERAL NOTES


- WHEN INTERIOR LITES ARE LOCATED ADJACENT TO DOOR PANEL, WHEN VIEWED FROM THE CORRIDOR SIDE, FACE OF GLAZING SHALL ALIGN FLUSH WITH FACE OF DOOR.
- SEE FLOOR PLANS FOR DIRECTION OF DOOR SWING.

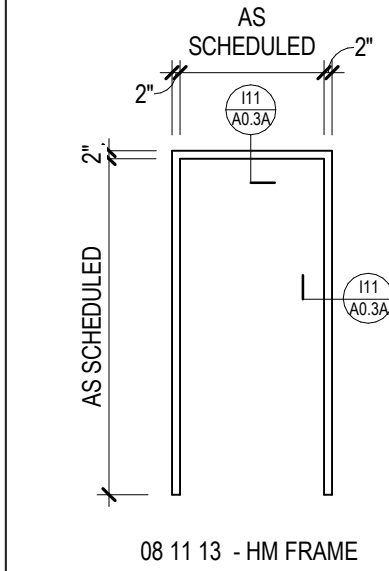


1 FRAME TYPE 1
1/4" ± 1'-0"

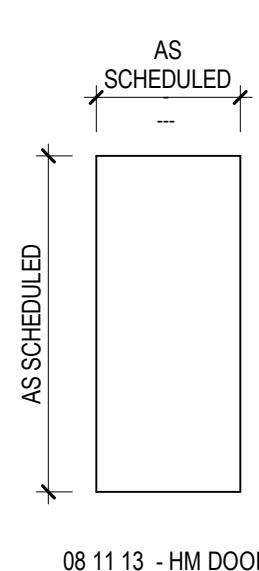


F FLUSH
1/4" ± 1'-0"

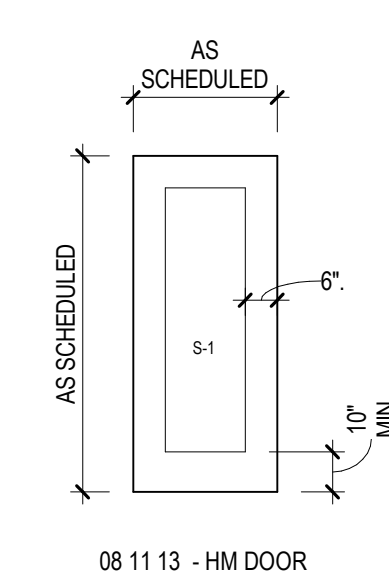

FG FULL GLASS
1/4" ± 1'-0"

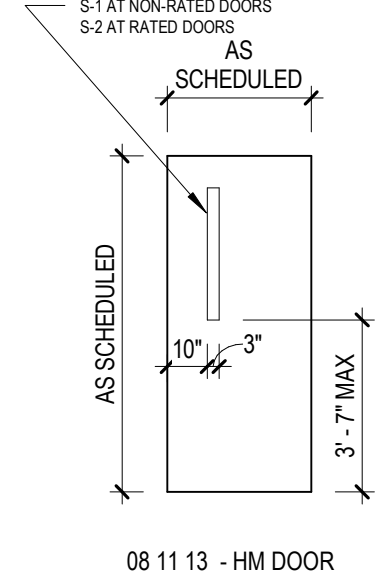


N NARROW LITE
1/4" ± 1'-0"

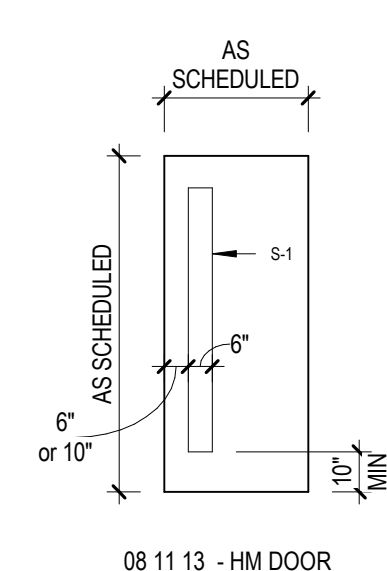



N1 NARROW LITE
1/4" ± 1'-0"

FRAME TYPES
1/4" ± 1'-0"

DOOR TYPES
1/4" ± 1'-0"

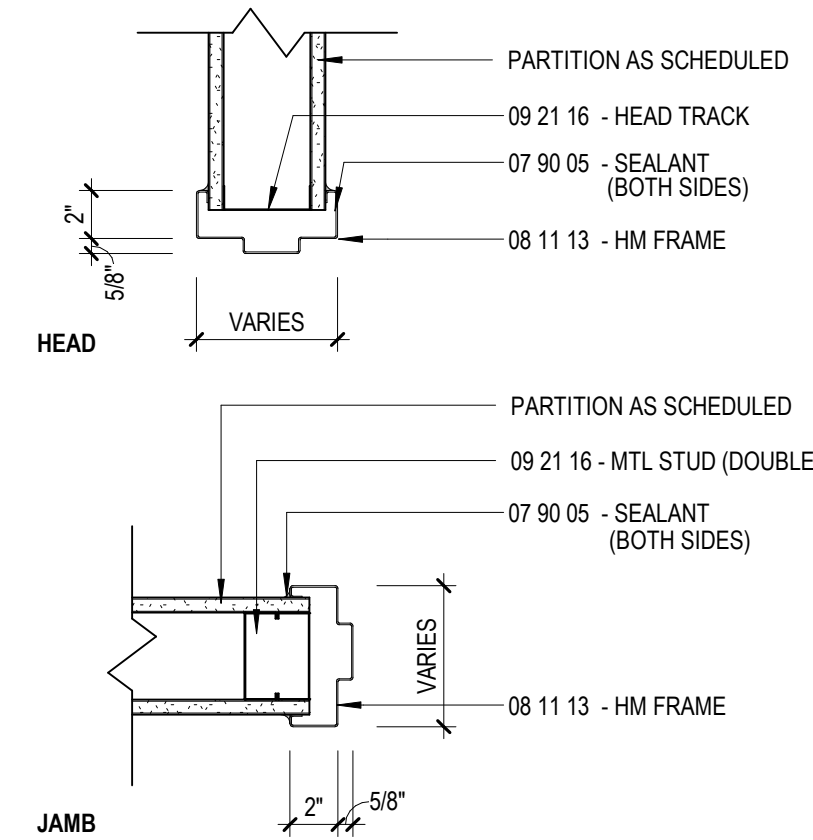

HM FRAME HEAD /JAMB DETAILS at METAL STUD
I11
A0.3A 1 1/2" ± 1'-0"




SMCC

HEALTH SCIENCE
CENTER


BGS NUM: 3809

79 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE




CONTENT: DOOR / WINDOW SCHEDULE	
DRAWN BY:	MOL
PROJECT NO:	25-062-00
DATE:	05/08/2026
REVISED:	
SCALE:	As indicated
A0.3A	
Project Phase CONSTRUCTION DOCUMENTS	
COPYRIGHT © 2026 BY LAVALLEE BRENSINGER PLLC. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	



GENERAL NOTES

1. ALL DIMENSIONS ARE TO FACE OF STUD. UNO.
2. ALL DIMENSIONS TO EXISTING WALL ARE TO FACE OF FINISH.
3. ALL SPLAYS SHOWN ON PLANS ARE 45° UNO.
4. REFERENCE CODE ANALYSIS PLANS AND SPECIFICATIONS FOR EXTENT OF FIREPROOFING.
5. ALL EXPOSED MECHANICAL AND ELECTRICAL SERVICES IN AREAS WITHOUT CEILINGS SHALL BE CAREFULLY COORDINATED AND ORGANIZED SO AS TO PROVIDE A NEAT AND ORDERLY APPEARANCE. SERVICES SHALL BE RUN IN STRAIGHT LINES PARALLEL OR PERPENDICULAR TO EXPOSED STRUCTURE. ALL SERVICES SHALL BE RUN WITHIN OR BETWEEN EXPOSED STRUCTURE TO THE EXTENT POSSIBLE. LAYOUTS FOR PROPOSED SERVICES SHALL BE REVIEWED WITH THE ARCHITECT PRIOR TO PROCEEDING WITH THE WORK.
6. THE CONTRACTOR SHALL BE FULLY RESPONSIBLE FOR VERIFYING DIMENSIONS. ALL DISCREPANCIES BETWEEN ANTICIPATED AND ACTUAL CONDITIONS SHALL BE PROMPTLY BROUGHT TO THE ARCHITECT'S ATTENTION.

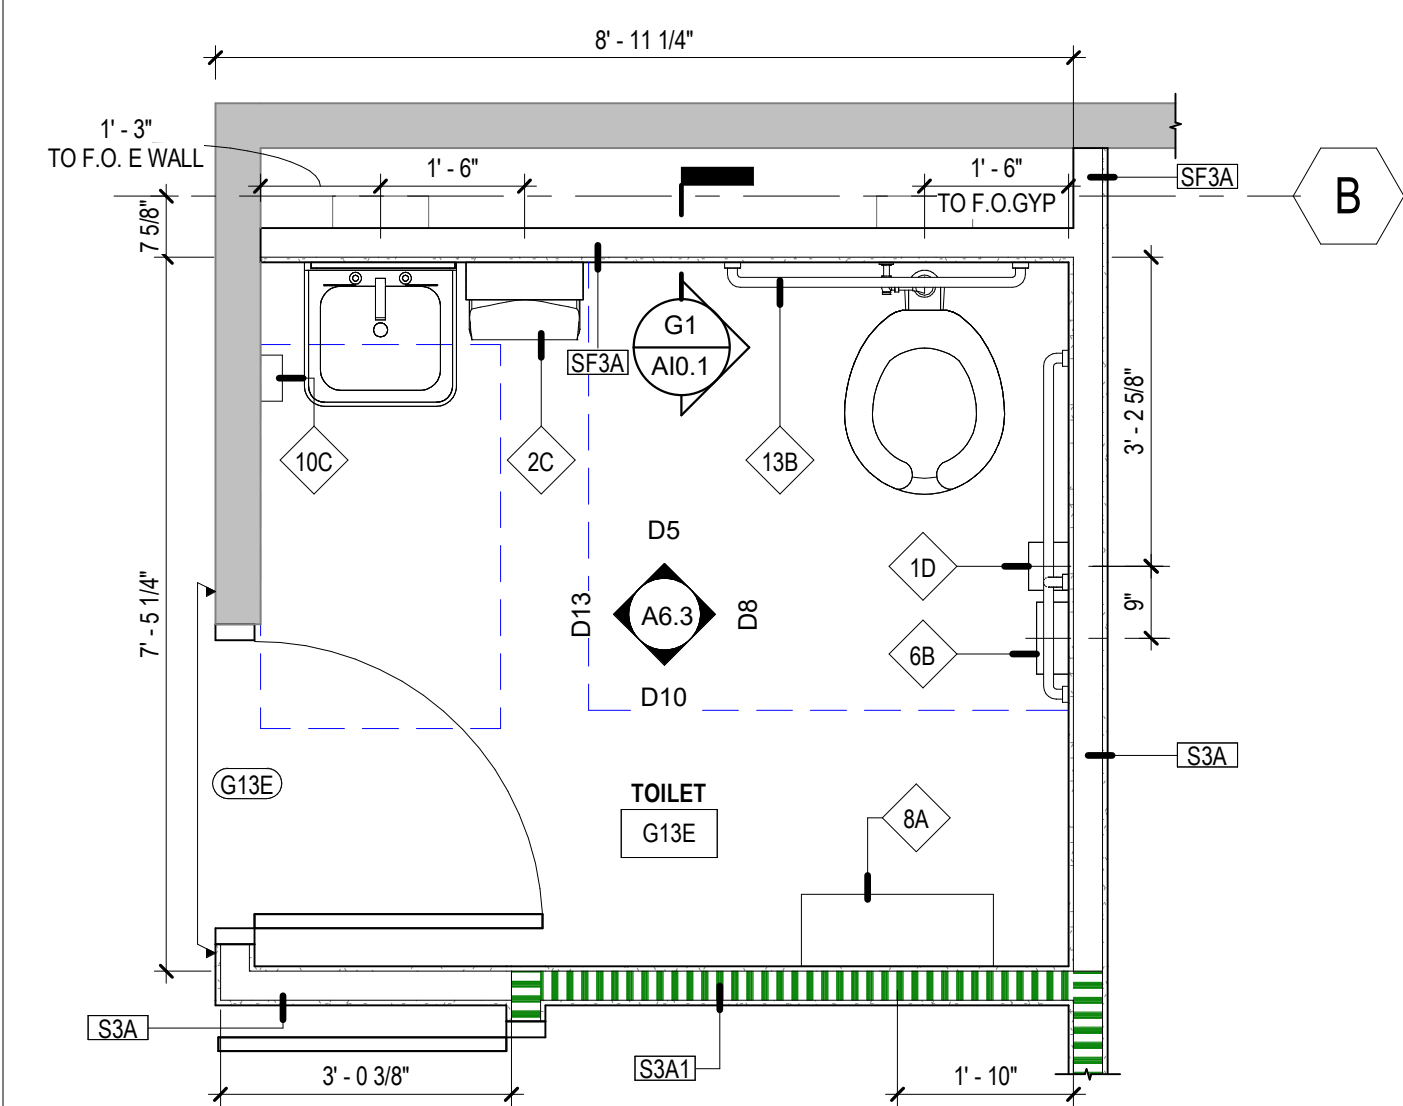

D10 ENLARGED PLAN - TOILET G13E
A1.0 1/2" = 1'-0"

SMCC


HEALTH SCIENCE
CENTER

BGS NUM: 3809

79 Ford Road, South Portland, Maine,
04106


NO.	DESCRIPTION	DATE

CONTENT: GROUND FLOOR PLAN	
DRAWN BY:	MOL
PROJECT NO:	25-062-00
DATE:	05/08/2026
REVISED:	
SCALE:	As indicated
A1.0	
Project Phase CONSTRUCTION DOCUMENTS	
COPYRIGHT © 2026 BY LAVALLEE BRENSINGER PLLC. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	




6. THE CONTRACTOR SHALL BE FULLY RESPONSIBLE FOR VERIFYING DIMENSIONS. ALL DISCREPANCIES BETWEEN ANTICIPATED AND ACTUAL CONDITIONS SHALL BE PROMPTLY BROUGHT TO THE ARCHITECT'S ATTENTION.

COPYRIGHT © 2026 BY LAVALLEE BRENSINGER PLLC.
ALL RIGHTS RESERVED.
NO REPRODUCTION WITHOUT PERMISSION.

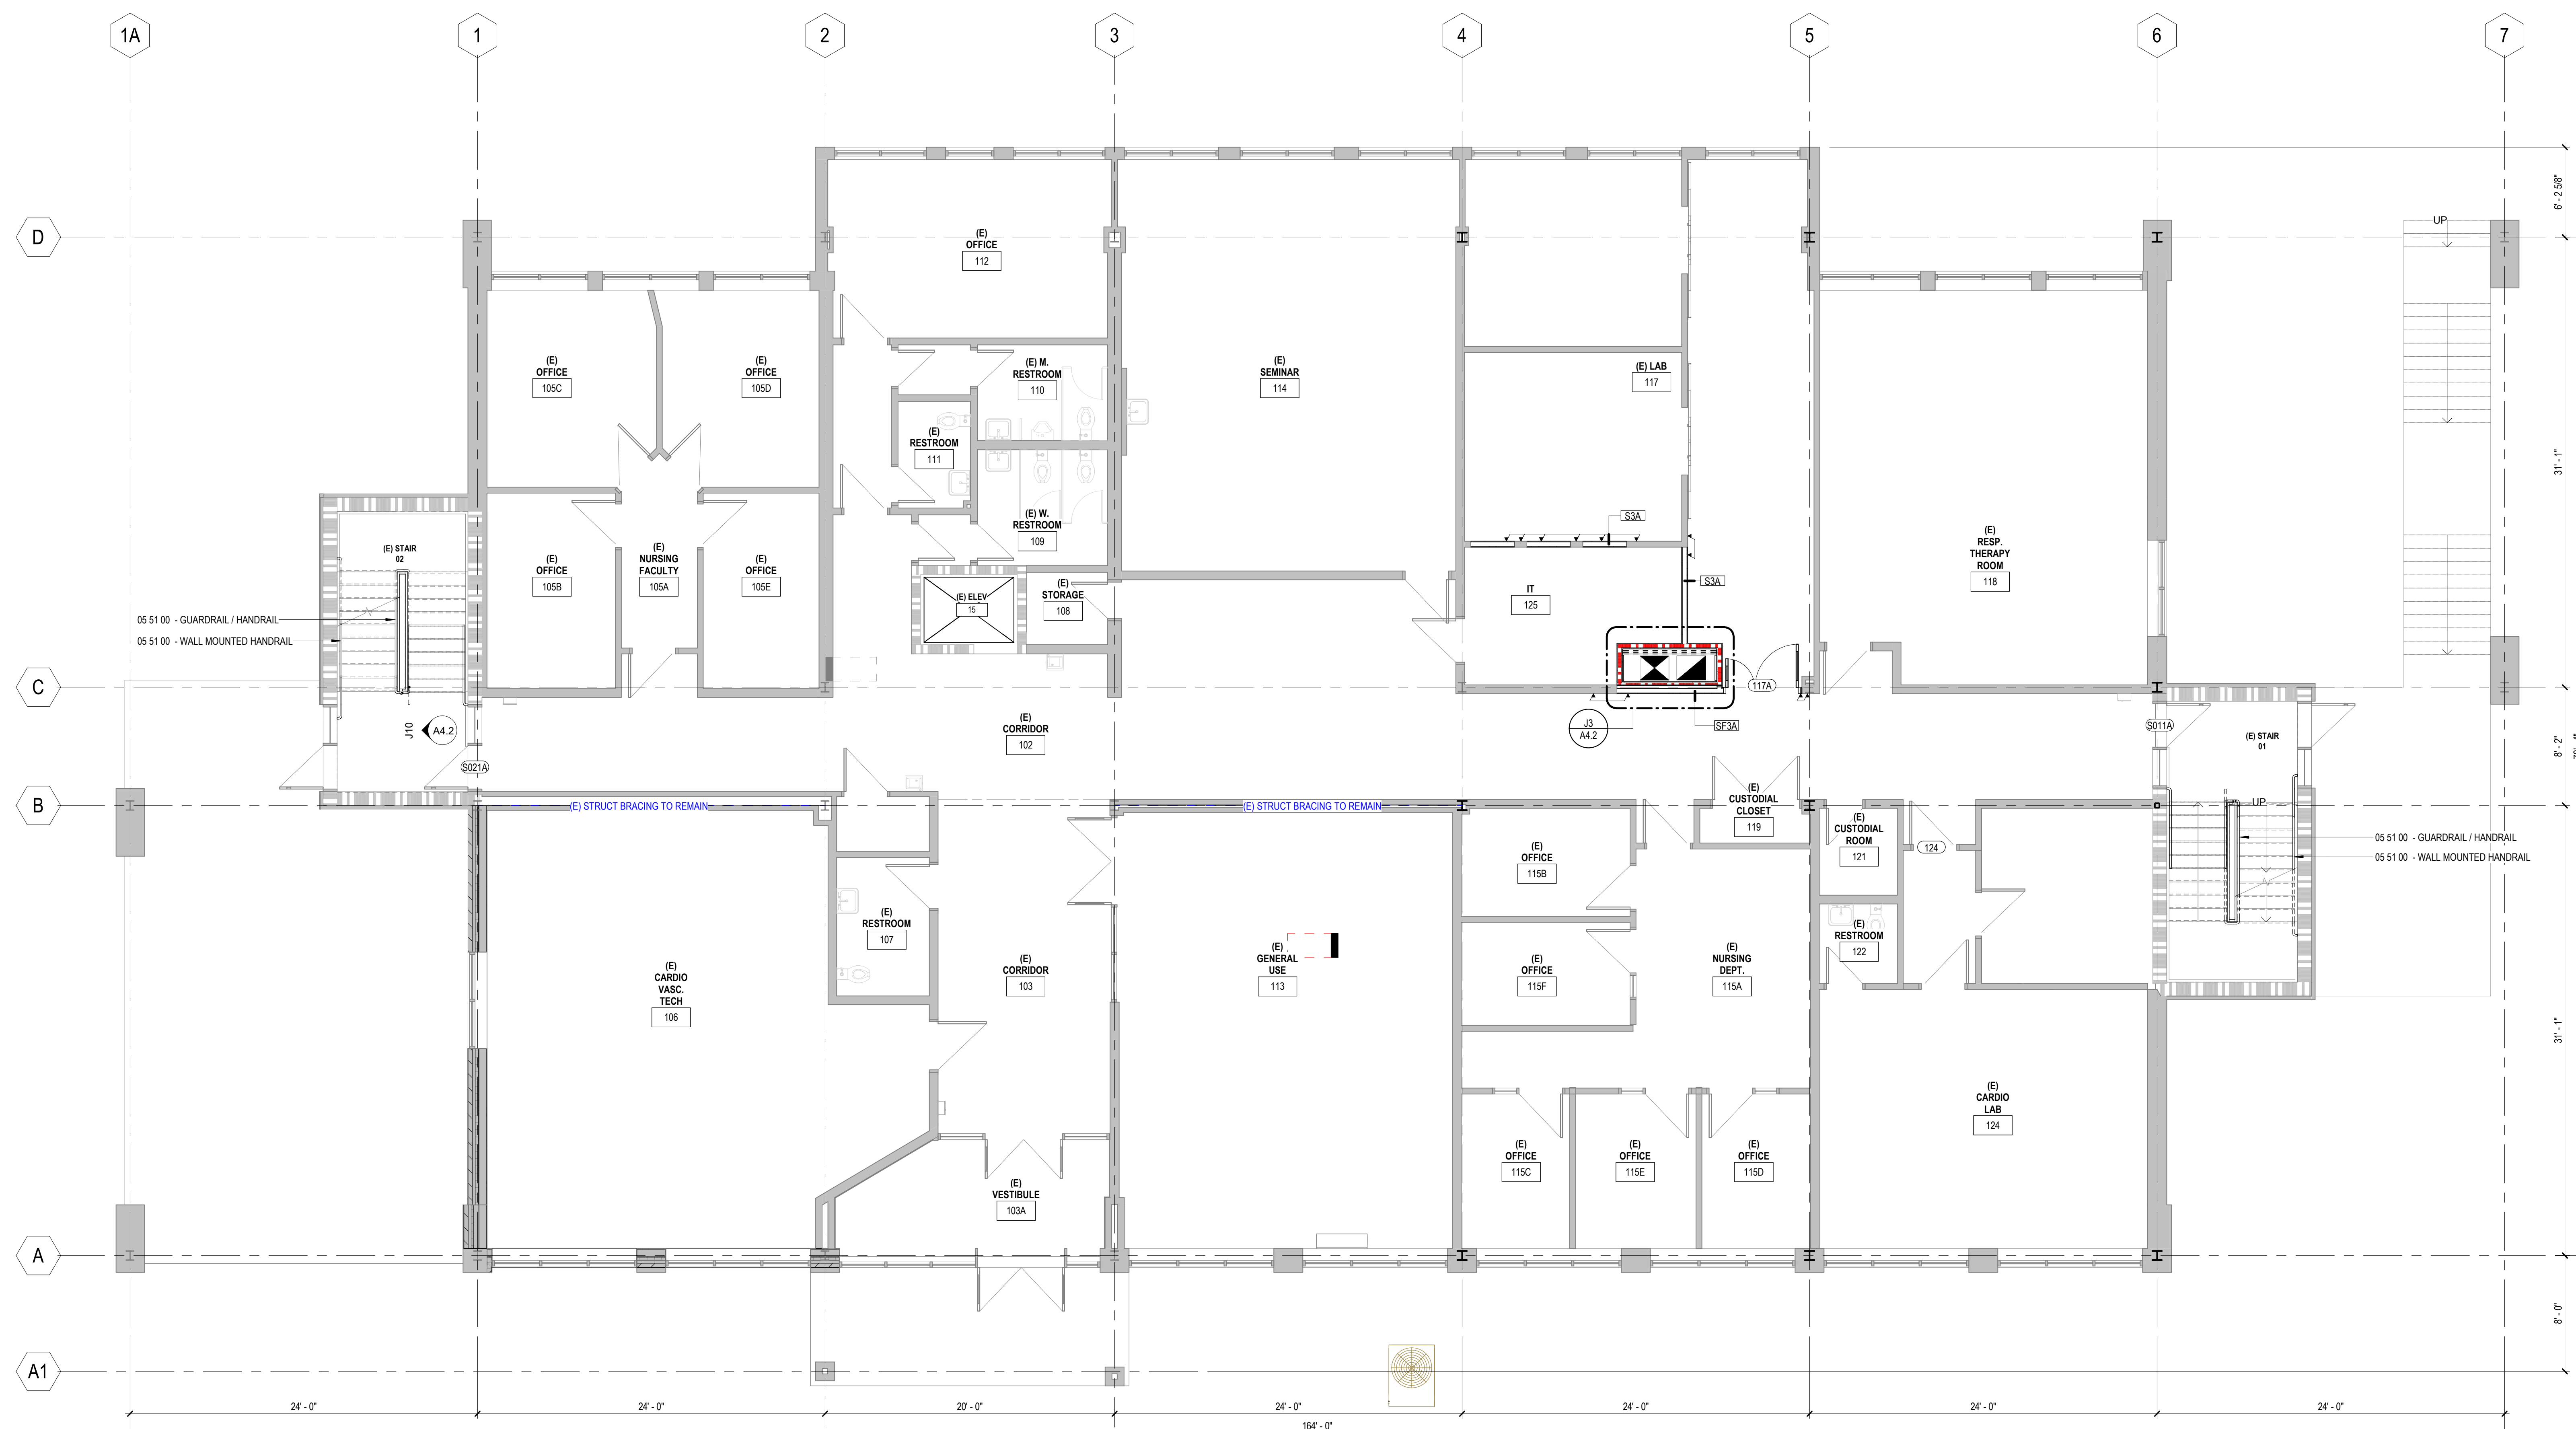

J1	FIRST FLOOR - PLAN - CONSTRUCTION
A1.1	3/16" = 1'-0"



**HEALTH SCIENCE
CENTER**


BGS NUM: 3809

79 Ford Road, South Portland, Maine,
04106



[illegible]

FOR ADDITIONAL INFORMATION, REFER TO PROJECT MANUAL.	CONTENT:	
	SECOND FLOOR PLAN	
	DRAWN BY:	MO
	PROJECT NO:	25-062-0
	DATE:	05/08/2020
	REVISED:	
	SCALE:	As indicated
A1.2		
Project Phase		
CONSTRUCTION DOCUMENTS		
COPYRIGHT © 2020 BY LAVALETTE BRENSINGER P.L.L.C. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.		


6. THE CONTRACTOR SHALL BE FULLY RESPONSIBLE FOR VERIFYING DIMENSIONS. ALL DISCREPANCIES BETWEEN ANTICIPATED AND ACTUAL CONDITIONS SHALL BE PROMPTLY BROUGHT TO THE ARCHITECT'S ATTENTION.

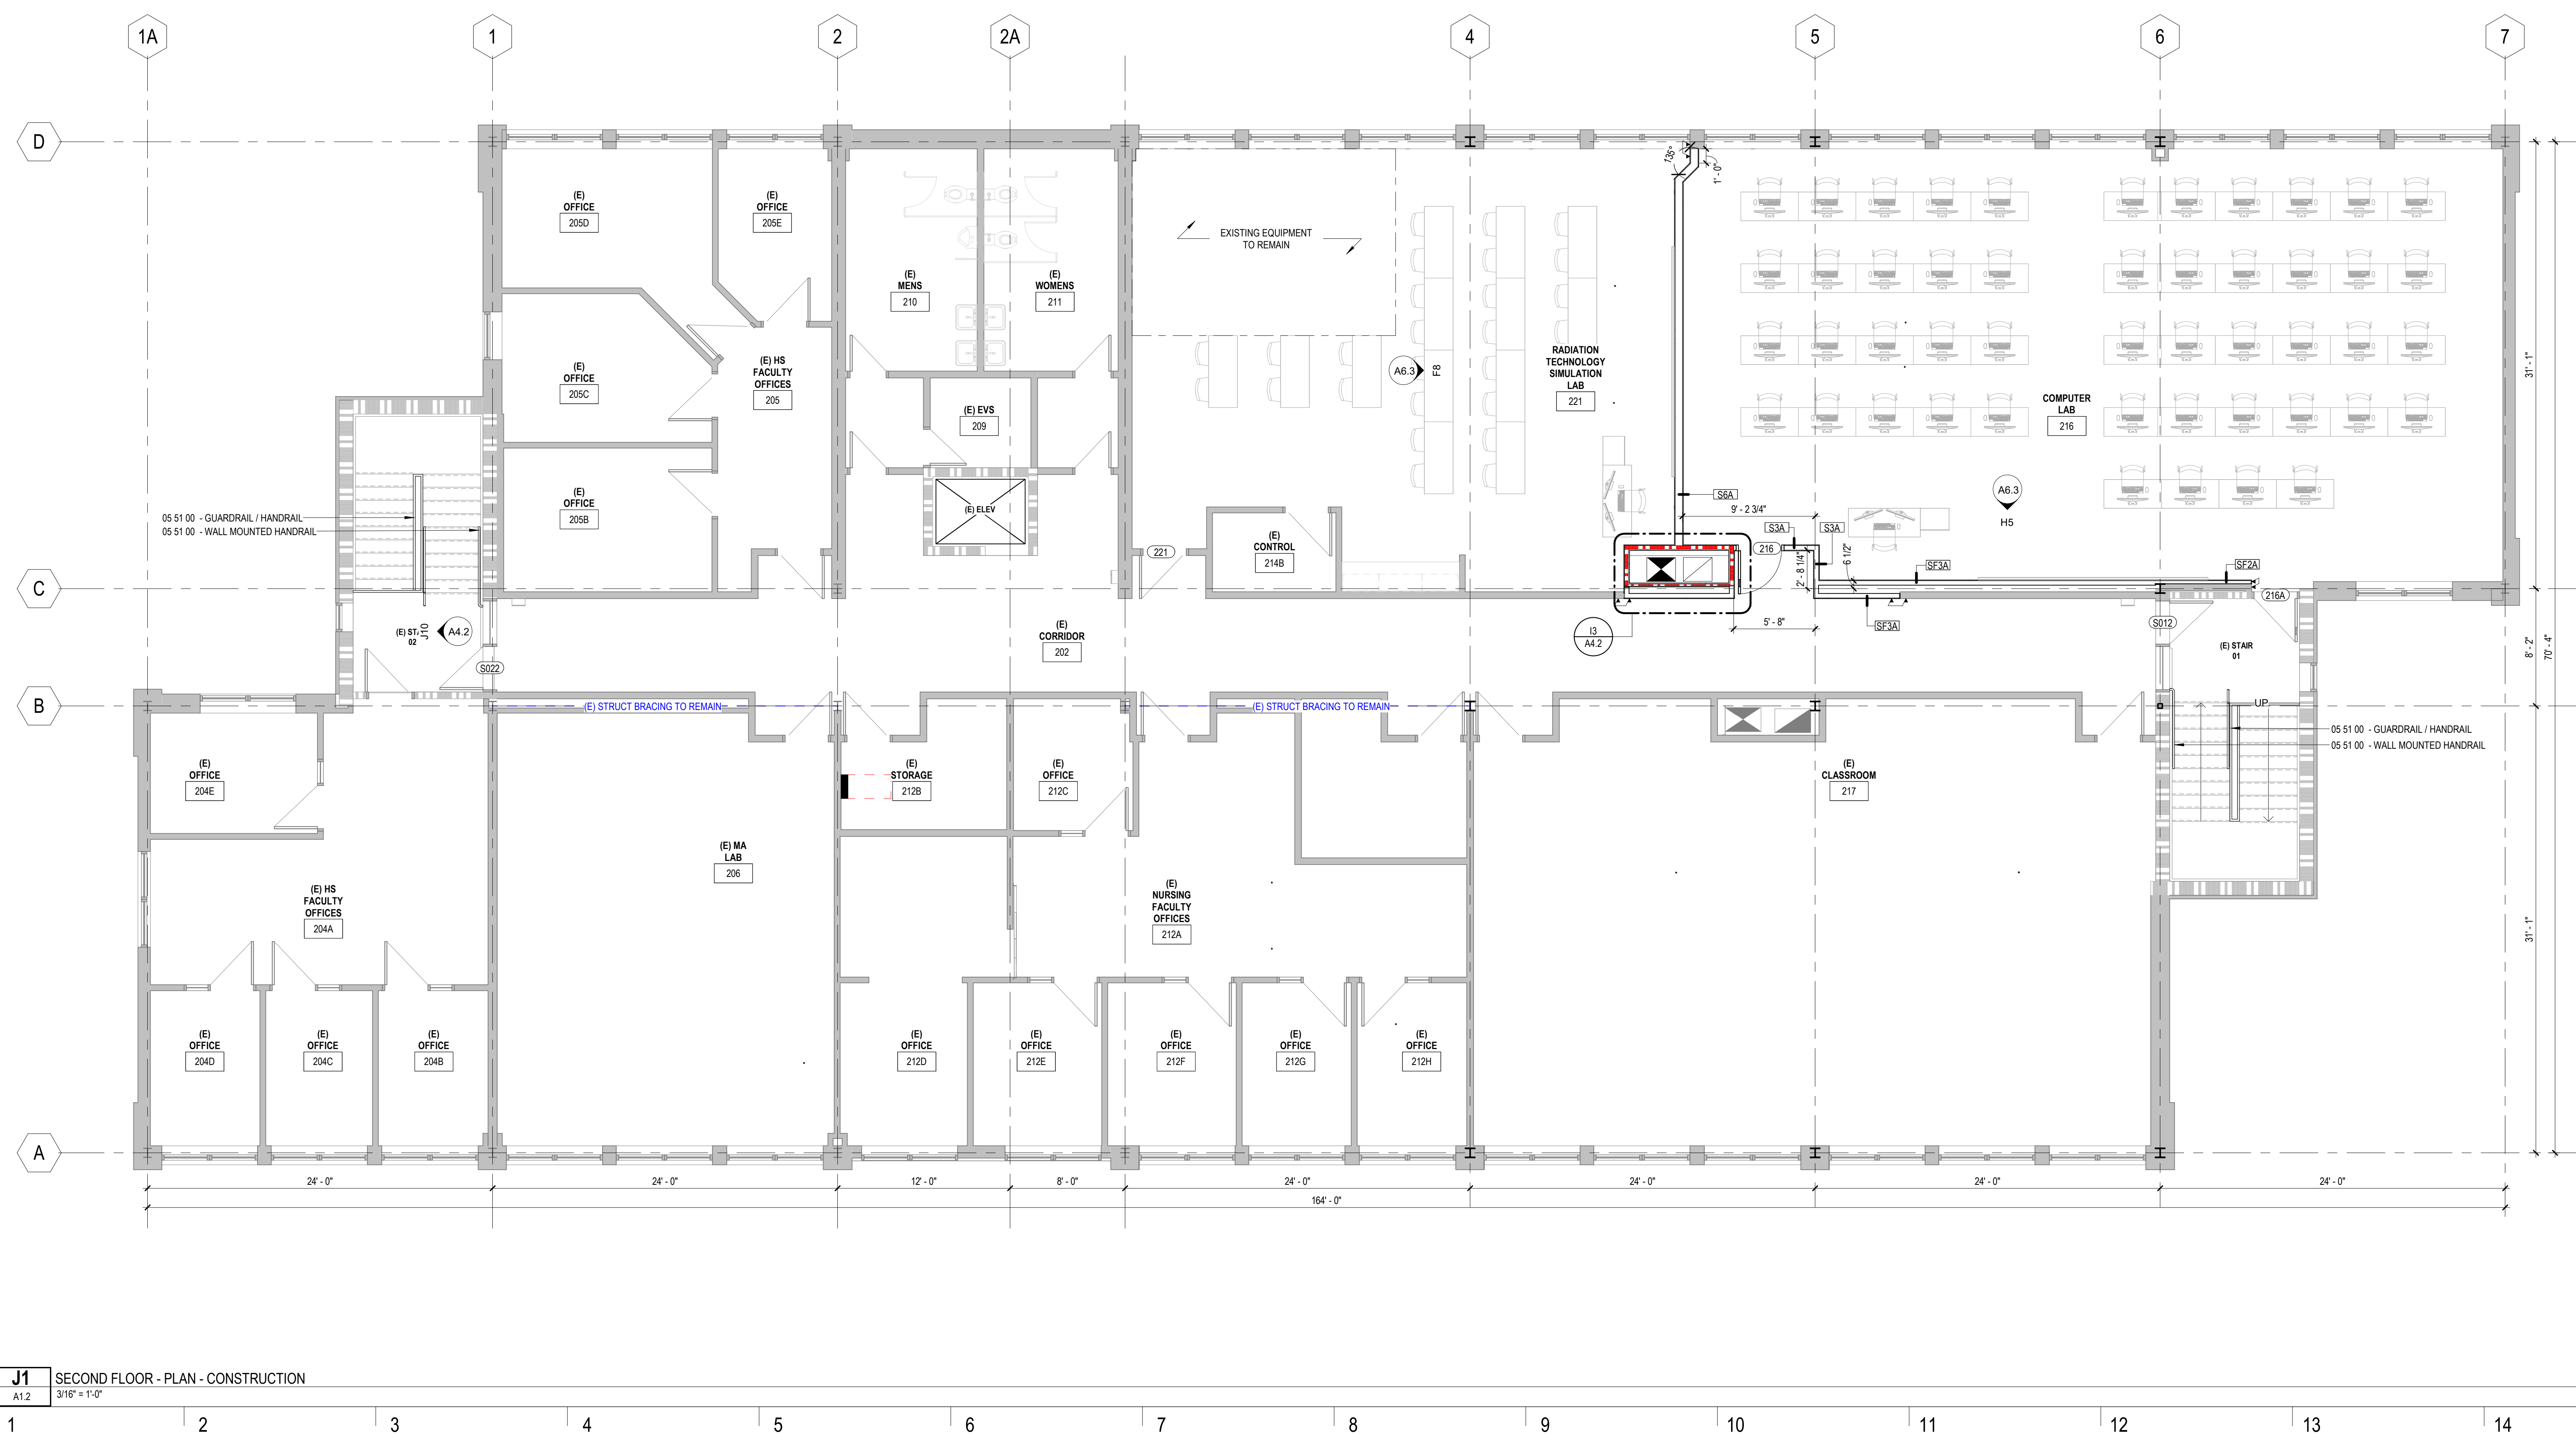

J1	SECOND FLOOR - PLAN - CONSTRUCTION
A1.2	3/16" = 1'-0"

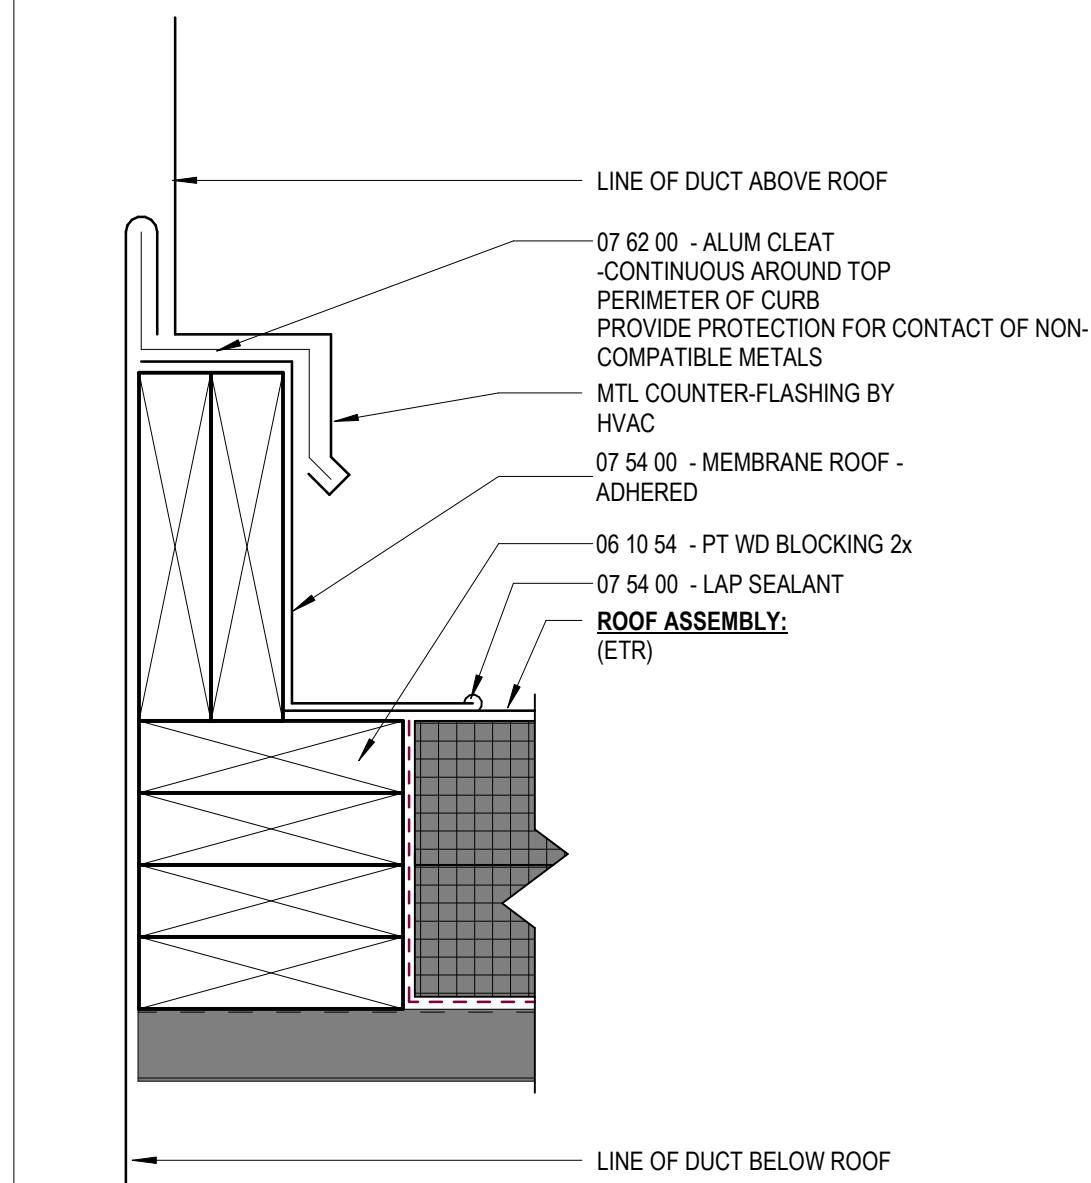

C12 ROOF DETAIL @ DUCT PENETRATION
A1.3 3" = 1'-0"

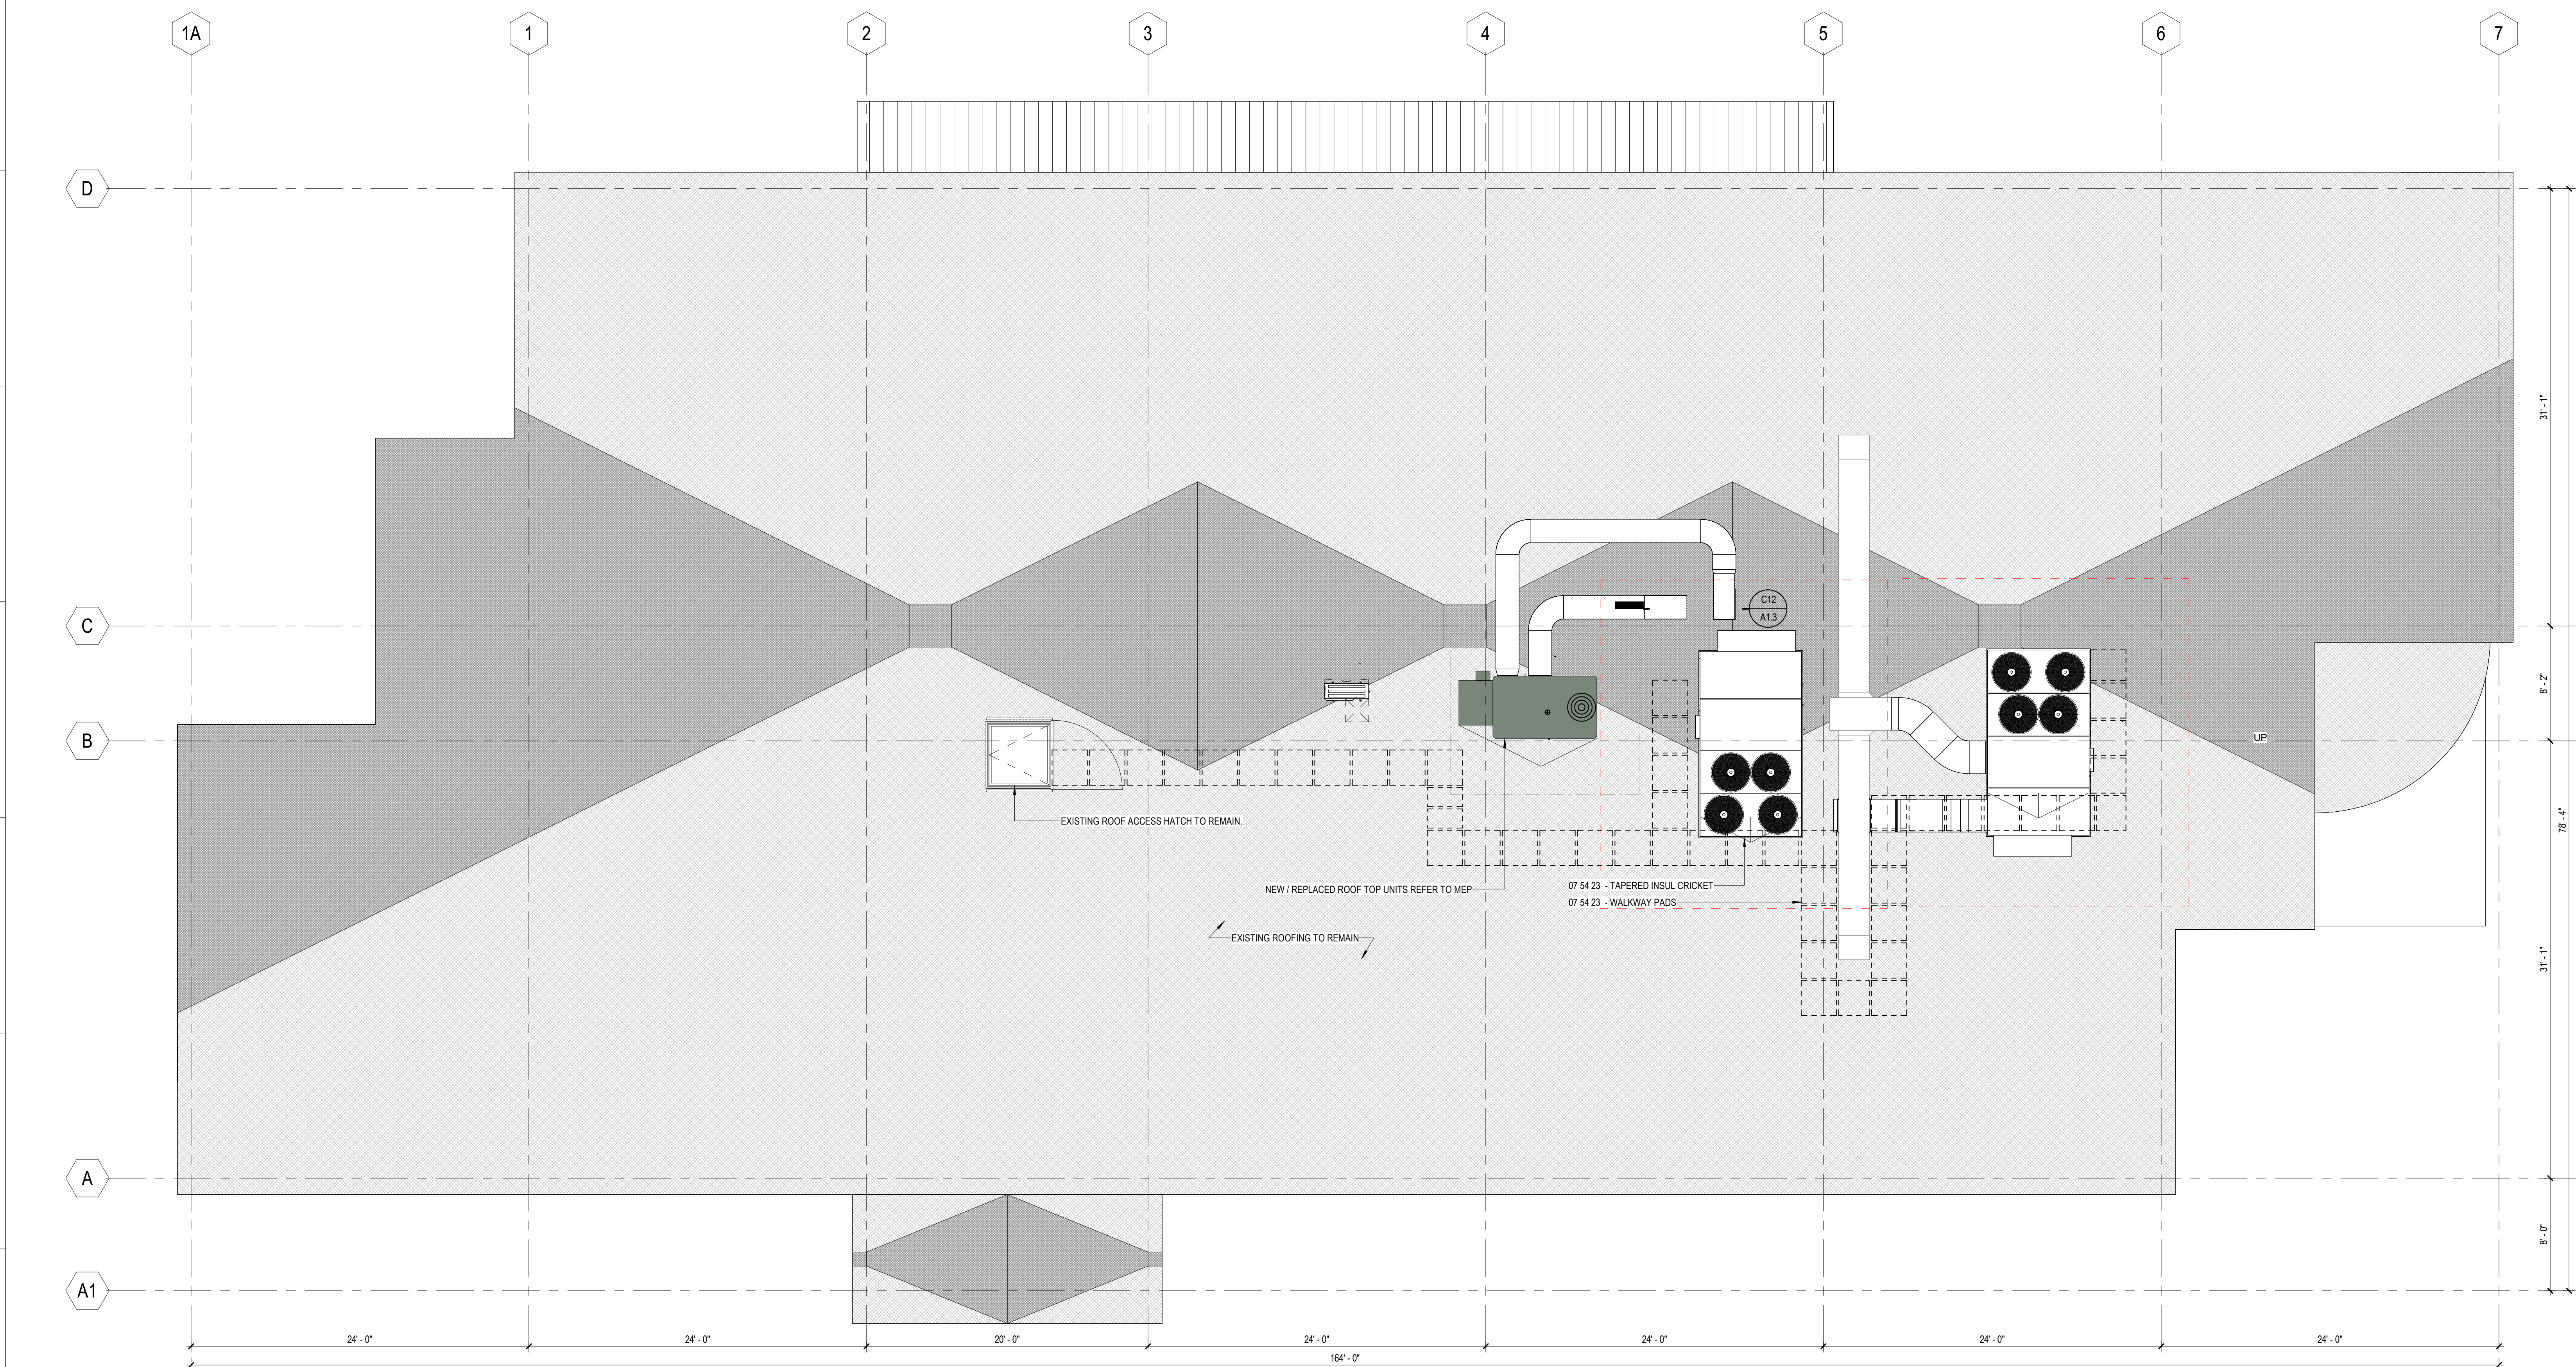

J1 ROOF - PLAN
A1.3 3/16" = 1'-0"


SMCC

HEALTH SCIENCE
CENTER

BGS NUM: 3809

79 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE
-----	-------------	------



CONTENT:
ROOF PLAN

DRAWN BY: MOL

PROJECT NO: 25-062-00

DATE: 05/08/2026



REVISED:


SCALE: As indicated

A1.3


Project Phase
CONSTRUCTION DOCUMENTS

COPYRIGHT © 2026 BY LAVALLEE BRENSINGER PLLC.
ALL RIGHTS RESERVED.
NO REPRODUCTION WITHOUT PERMISSION.

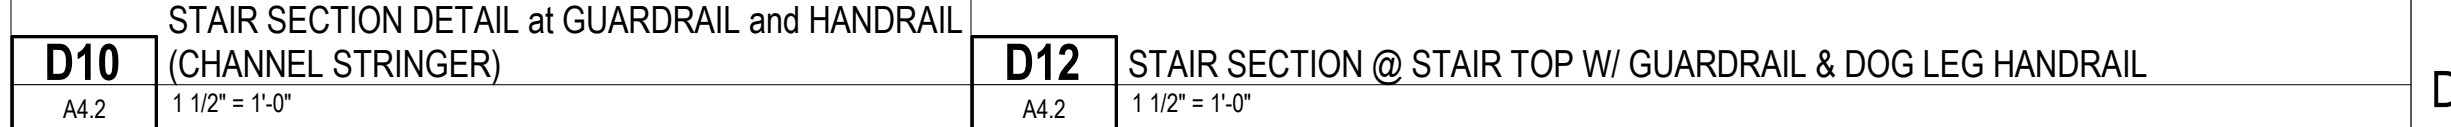





B1 INTERIOR ELEVATION
A6.1 3/8" = 1'-0"

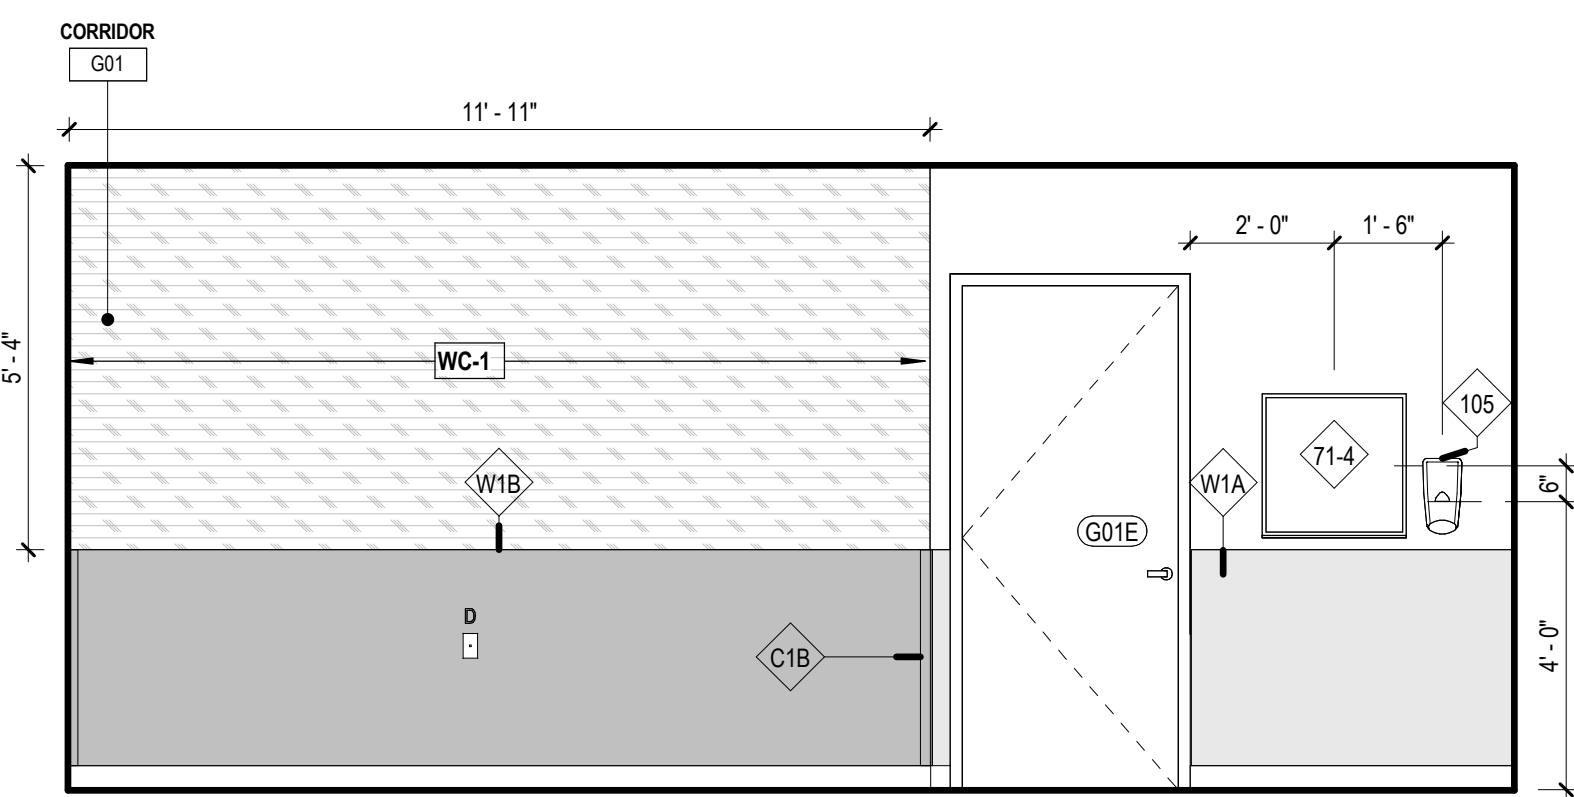


B6 INTERIOR ELEVATION
A6.1 3/8" = 1'-0"

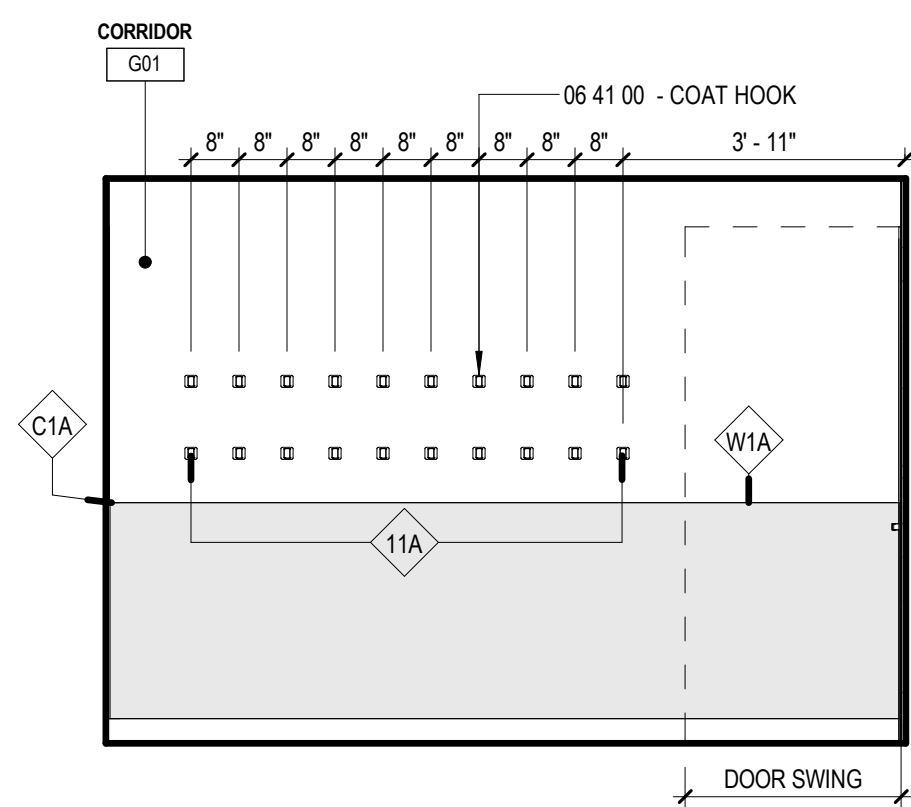


B10 INTERIOR ELEVATION
A6.1 3/8" = 1'-0"

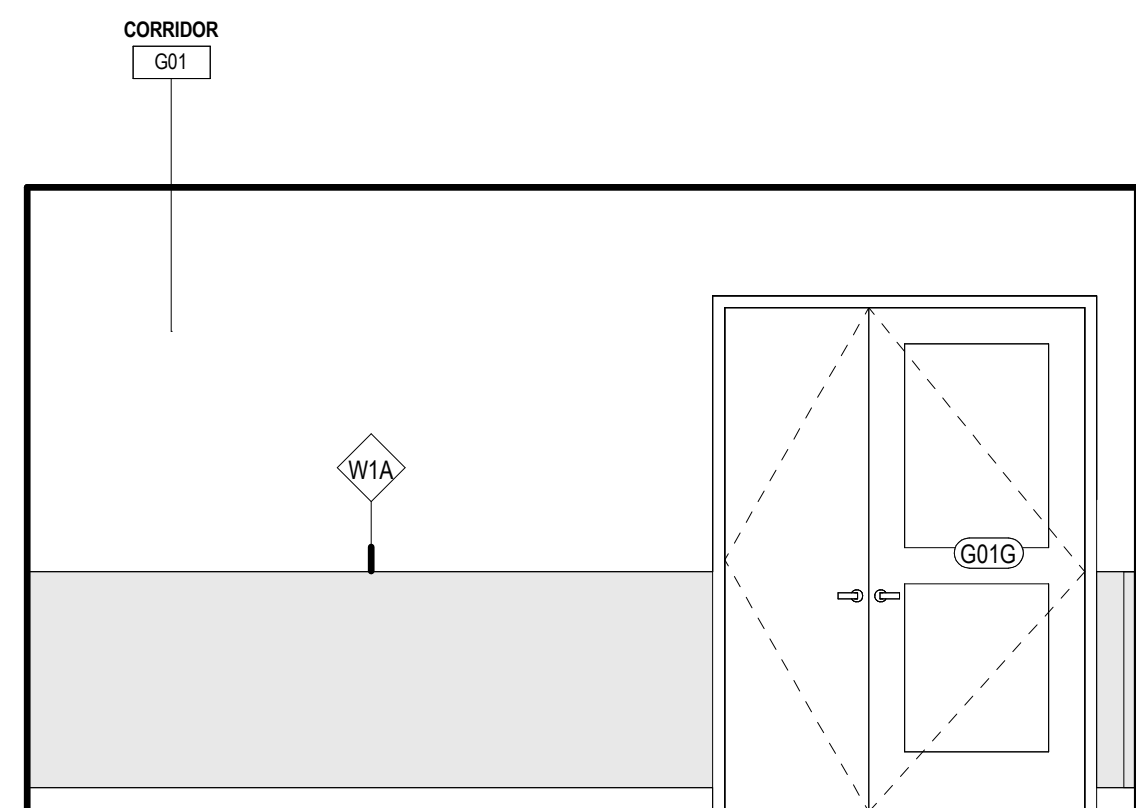


D1 INTERIOR ELEVATION
A6.1 3/8" = 1'-0"

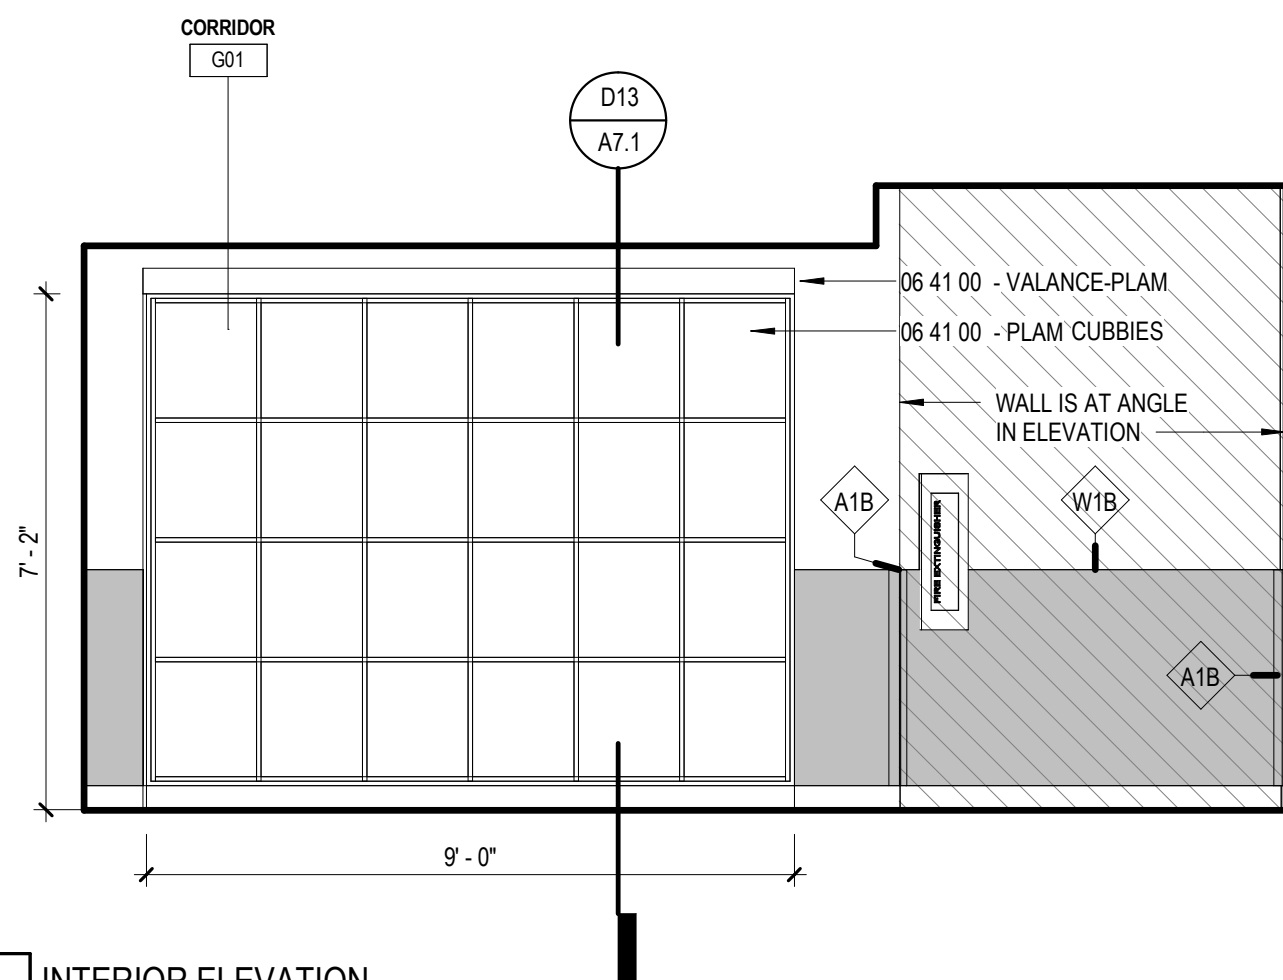


D5 INTERIOR ELEVATION
A6.1 3/8" = 1'-0"

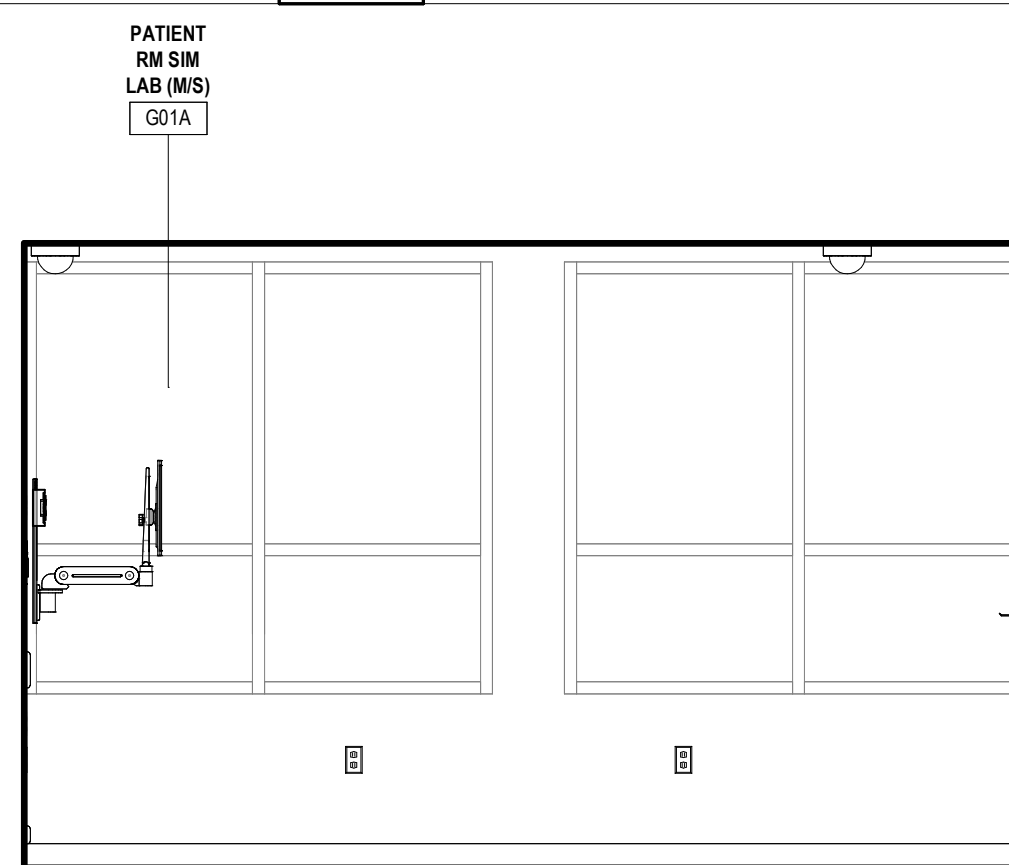


D8 INTERIOR ELEVATION
A6.1 3/8" = 1'-0"

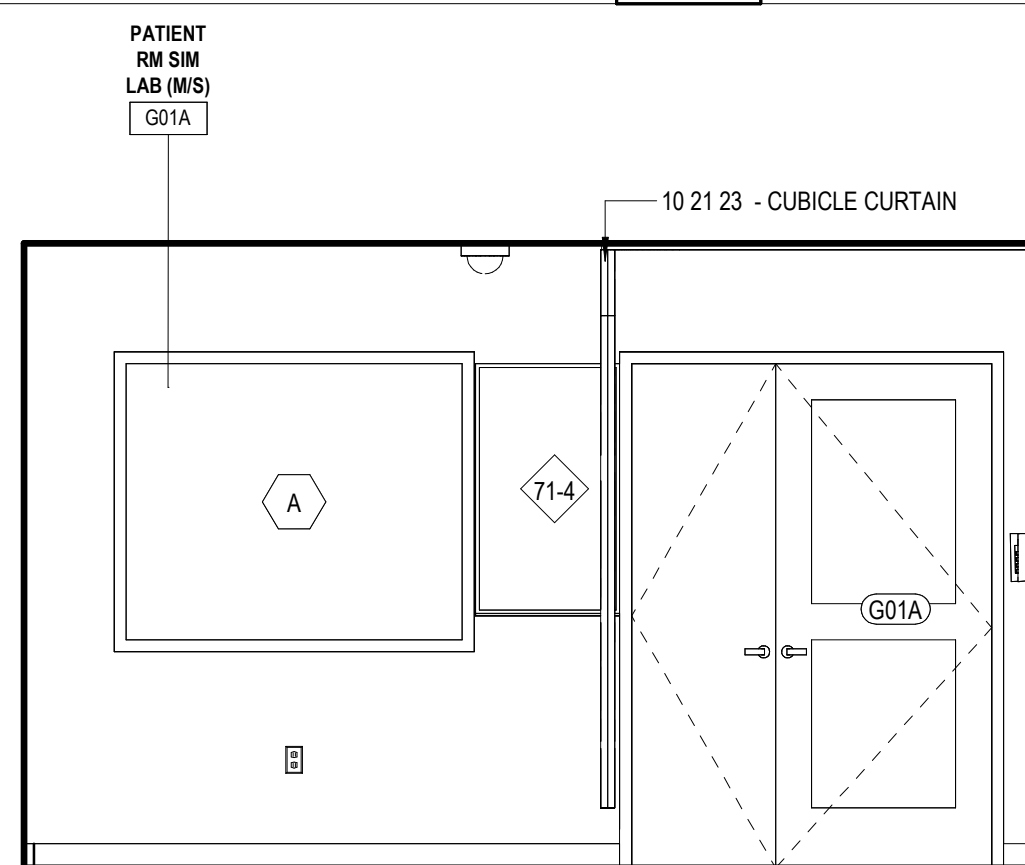


D12 INTERIOR ELEVATION
A6.1 3/8" = 1'-0"

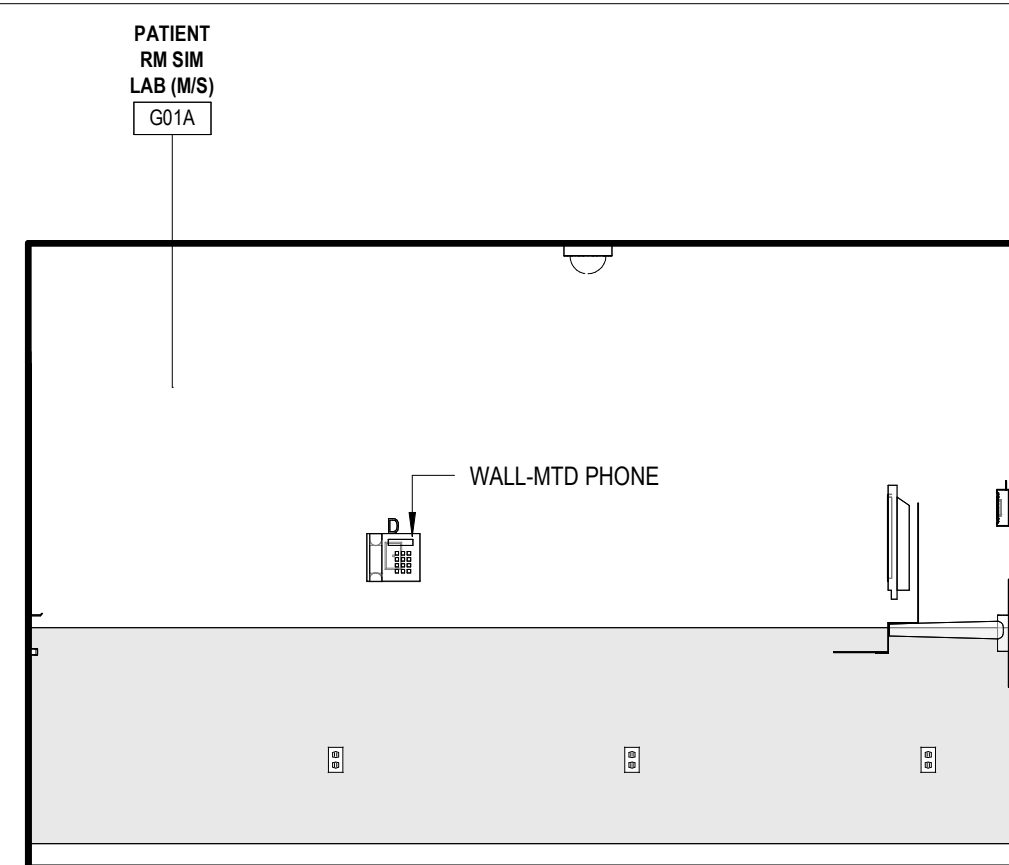


F1 INTERIOR ELEVATION
A6.1 3/8" = 1'-0"

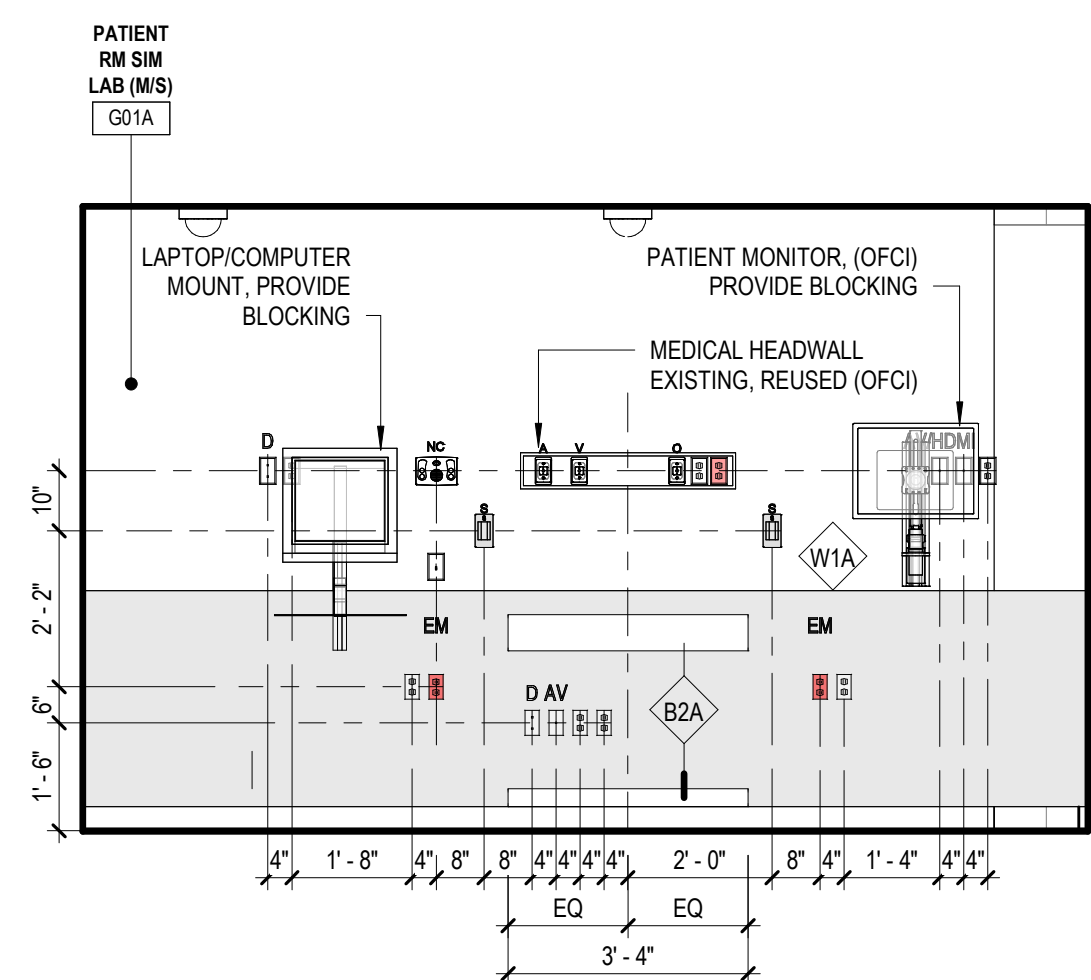


F4 INTERIOR ELEVATION
A6.1 3/8" = 1'-0"

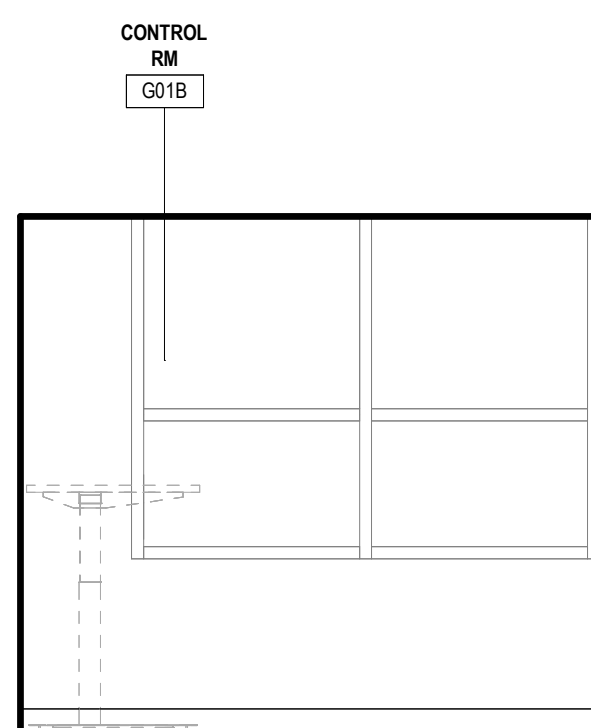


F8 INTERIOR ELEVATION
A6.1 3/8" = 1'-0"

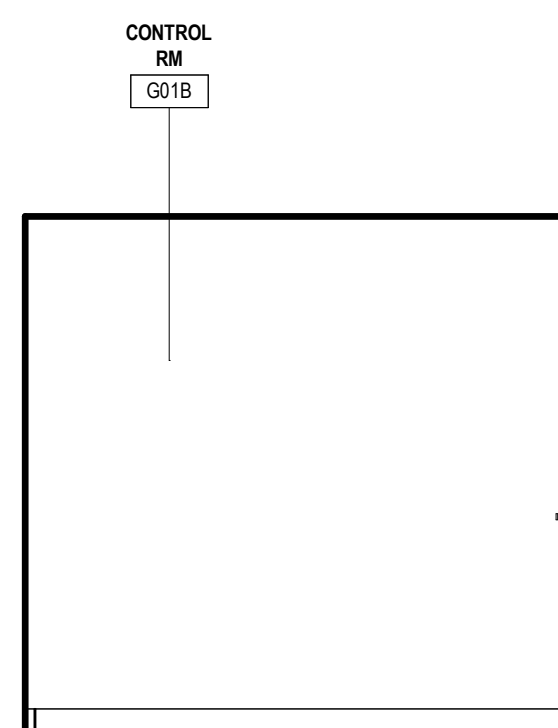


F12 INTERIOR ELEVATION
A6.1 3/8" = 1'-0"

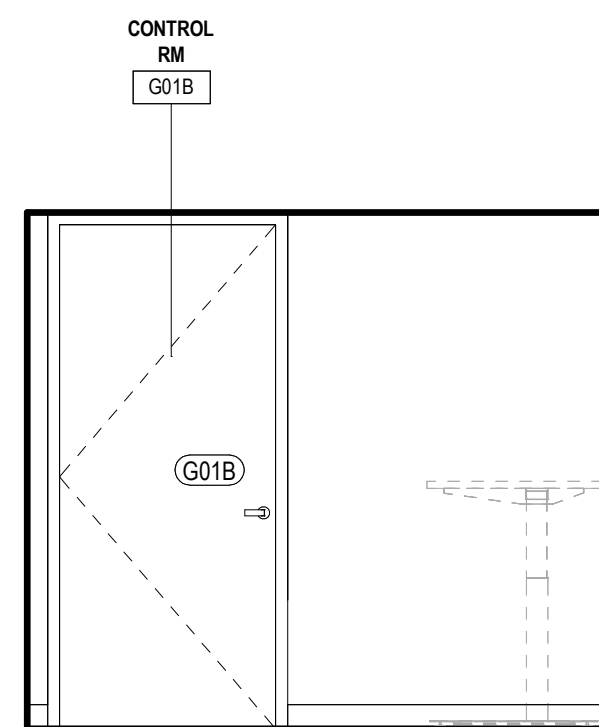


H1 INTERIOR ELEVATION
A6.1 3/8" = 1'-0"

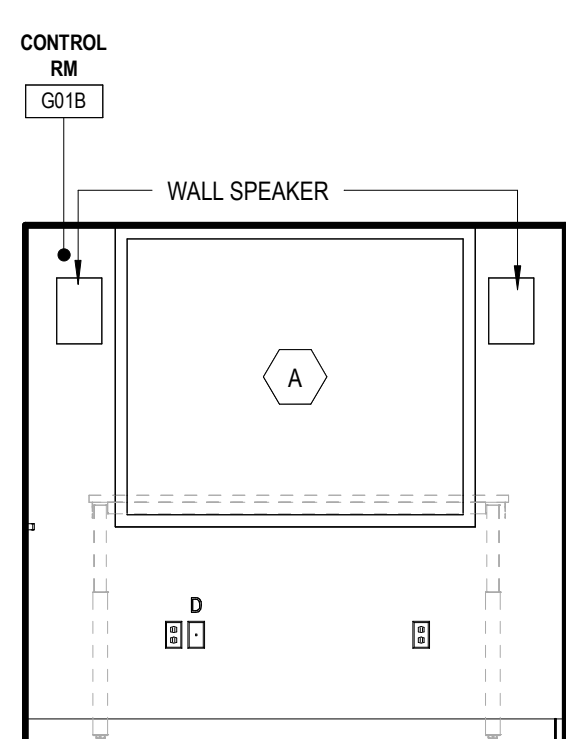


H4 INTERIOR ELEVATION
A6.1 3/8" = 1'-0"

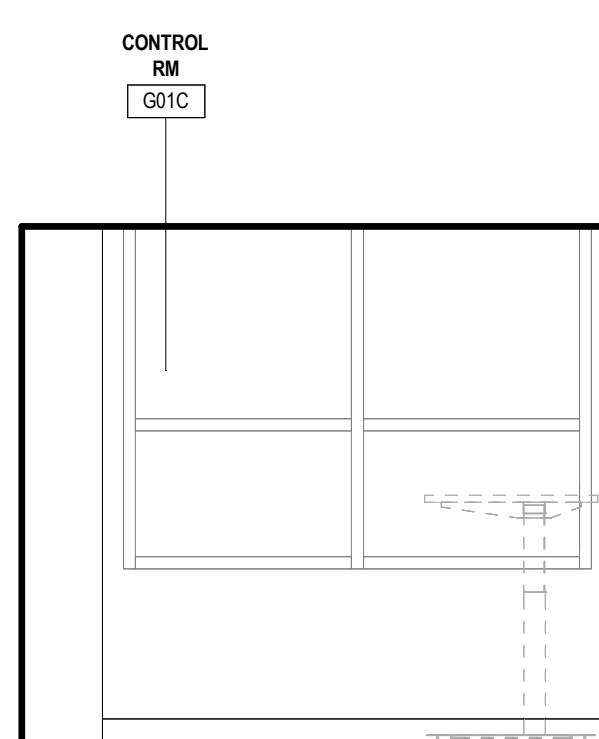


H7 INTERIOR ELEVATION
A6.1 3/8" = 1'-0"

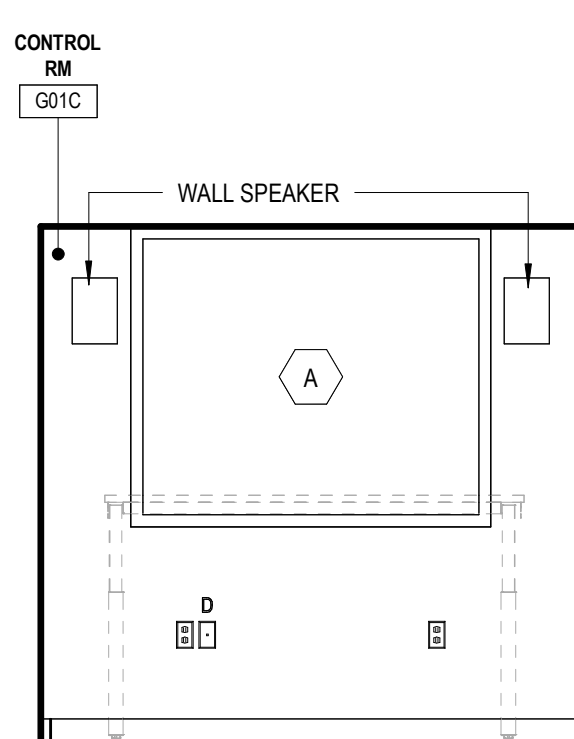


H10 INTERIOR ELEVATION
A6.1 3/8" = 1'-0"

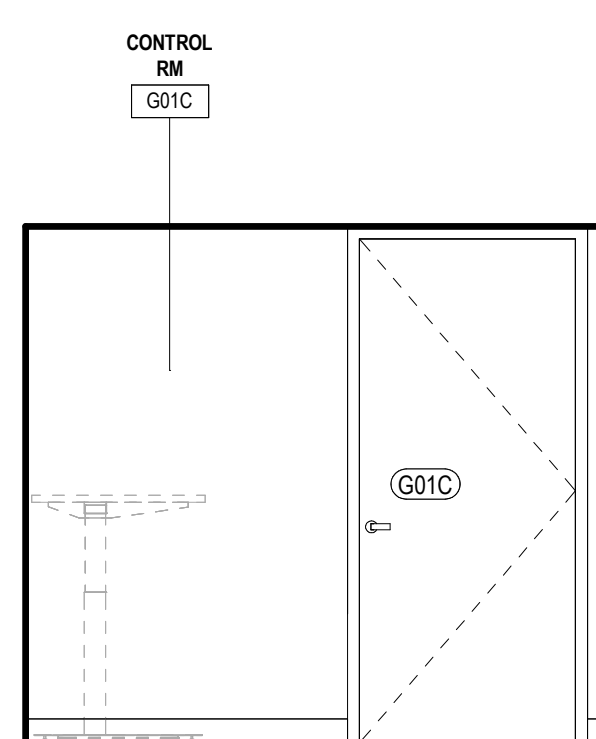


H13 INTERIOR ELEVATION
A6.1 3/8" = 1'-0"

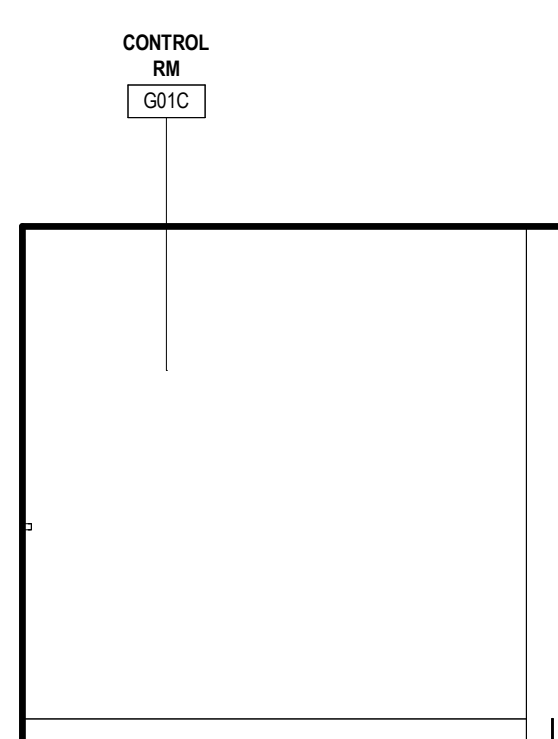


J1 INTERIOR ELEVATION
A6.1 3/8" = 1'-0"

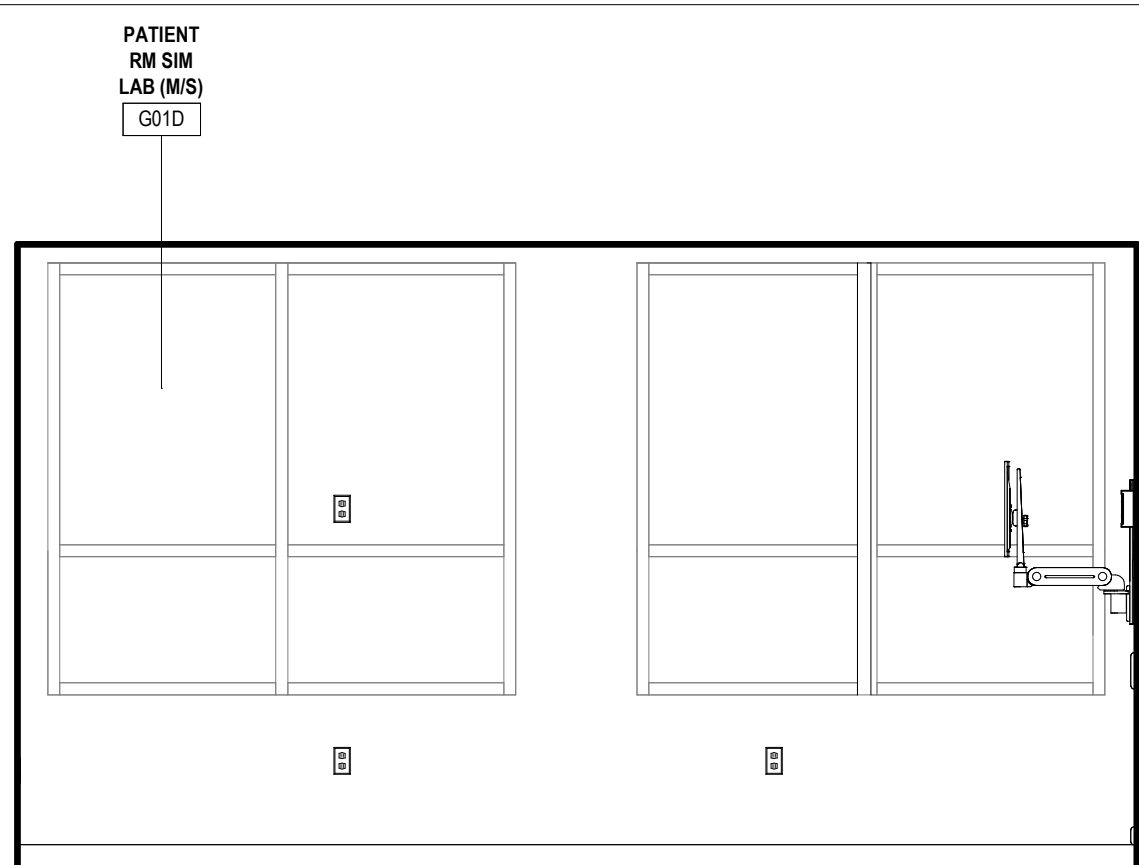


J4 INTERIOR ELEVATION
A6.1 3/8" = 1'-0"

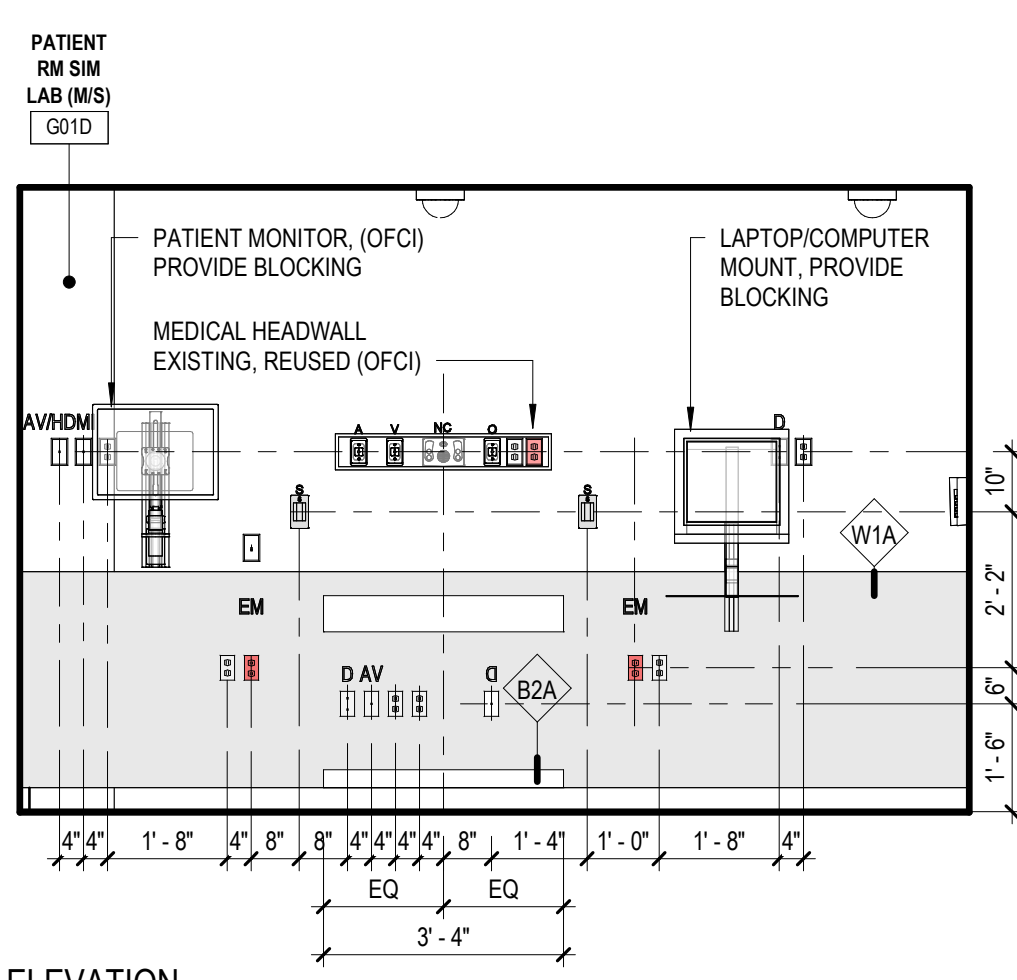

J7 INTERIOR ELEVATION
A6.1 3/8" = 1'-0"

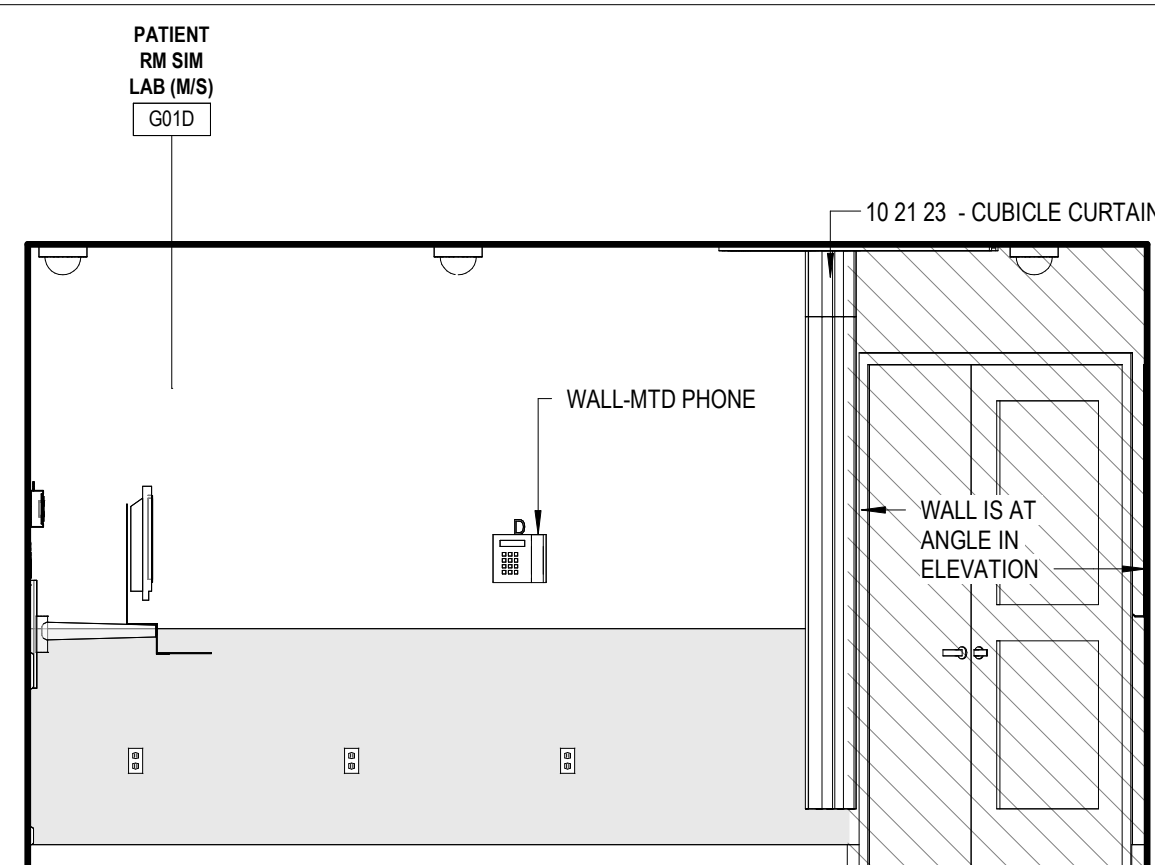

J11 INTERIOR ELEVATION
A6.1 3/8" = 1'-0"

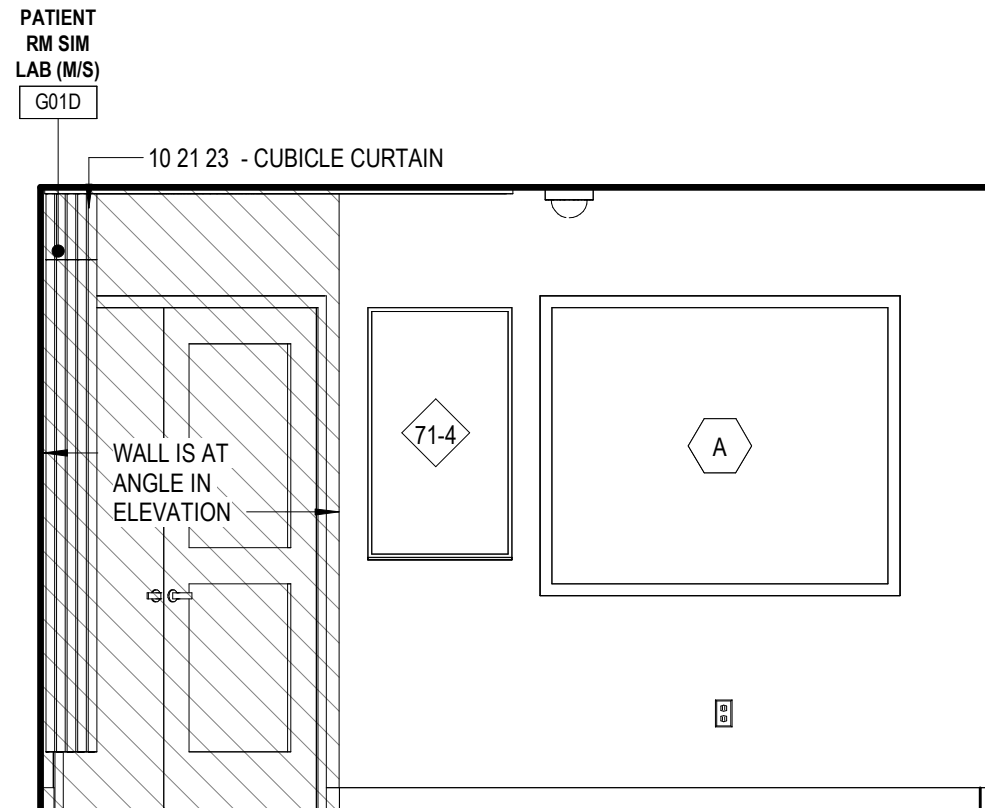


SMCC

HEALTH SCIENCE
CENTER

BGS NUM: 3809



79 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE



CONTENT: INTERIOR ELEVATION	
DRAWN BY:	RJB
PROJECT NO:	25-062-00
DATE:	05/08/2026
REVISED:	
SCALE:	3/8" = 1'-0"
A6.1	
Project Phase	
CONSTRUCTION DOCUMENTS	
COPYRIGHT © 2026 BY LAVALLEE BRENSINGER PLLC. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

FOR ADDITIONAL INFORMATION, REFER TO PROJECT MANUAL.




SMCC

**HEALTH SCIENCE
CENTER**


BGS NUM: 3809

79 Ford Road, South Portland, Maine,
04106


NO.	DESCRIPTION	DATE




CONTENT: INTERIOR ELEVATION	
DRAWN BY:	RJB
PROJECT NO:	25-062-00
DATE:	05/08/2026
REVISED:	
SCALE:	3/8" = 1'-0"
A6.3	
Project Phase CONSTRUCTION DOCUMENTS	
COPYRIGHT © 2026 BY LAVALLEE BRENSINGER PLLC. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

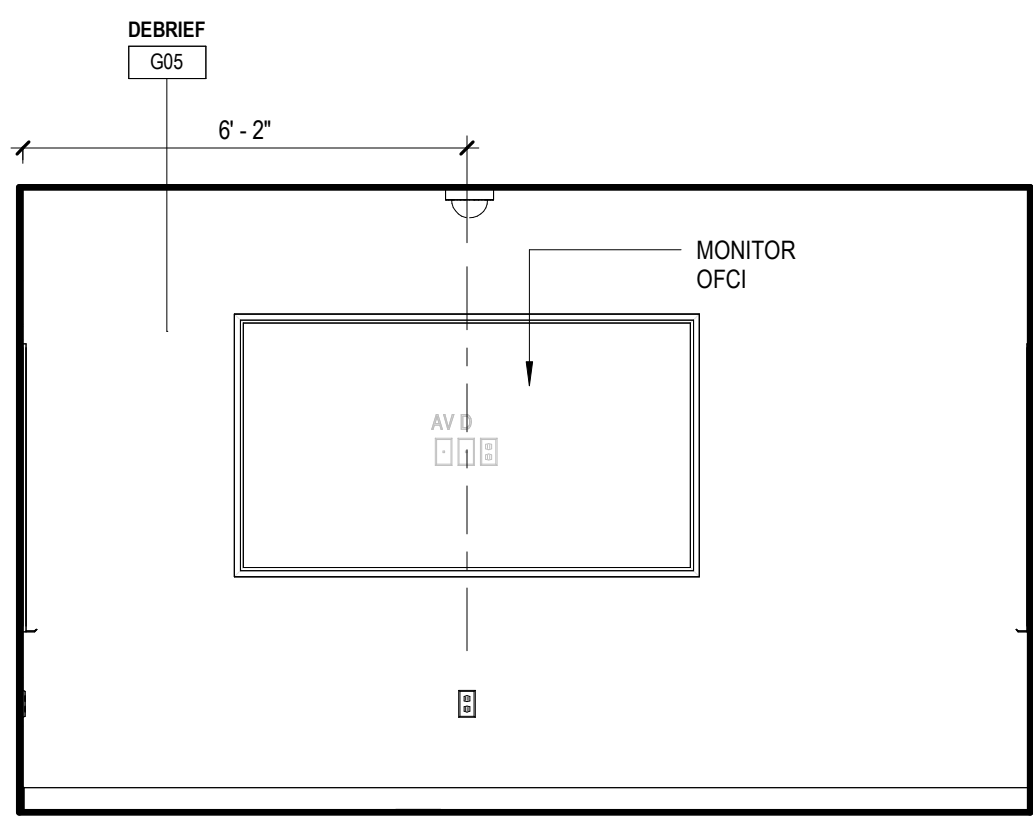


B1 INTERIOR ELEVATION
A6.3 3/8" = 1'-0"

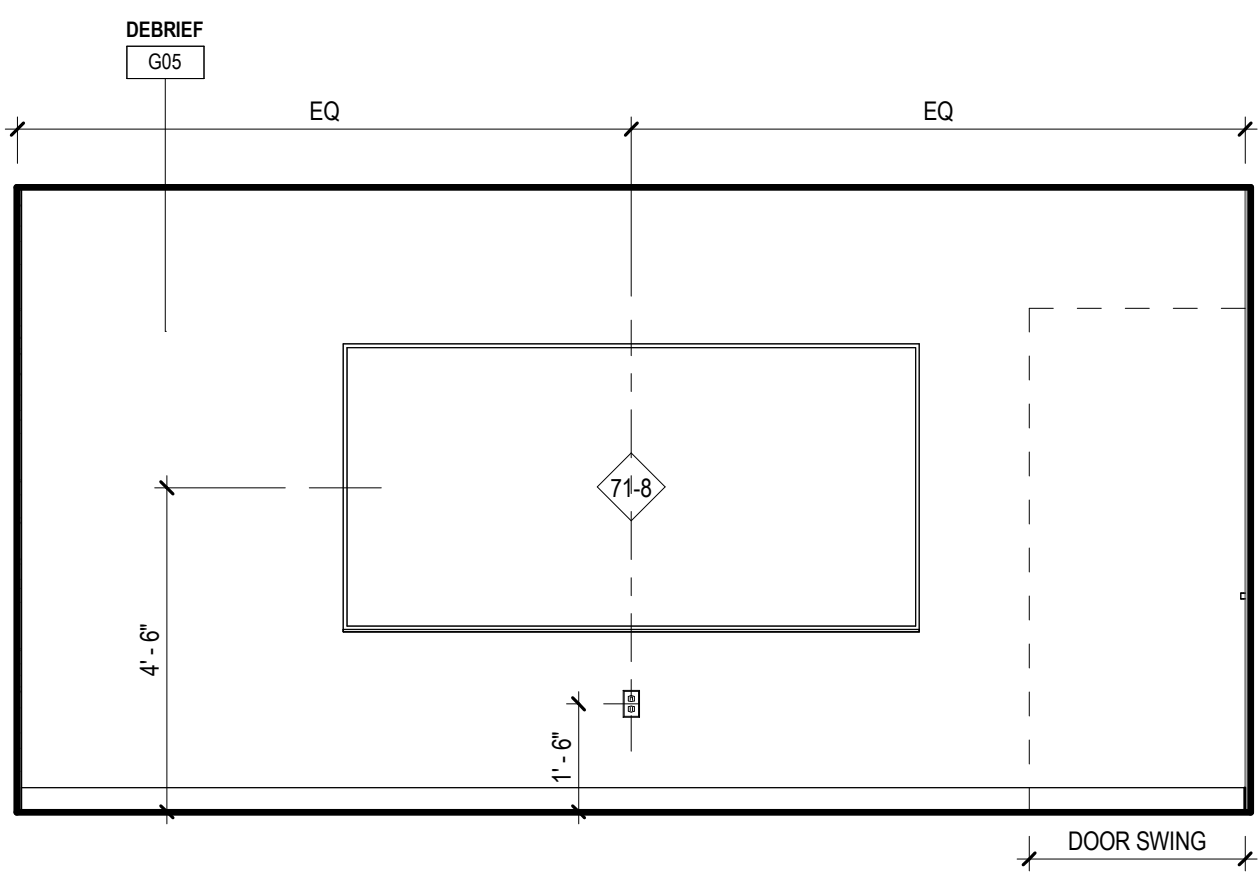


B5 INTERIOR ELEVATION
A6.3 3/8" = 1'-0"

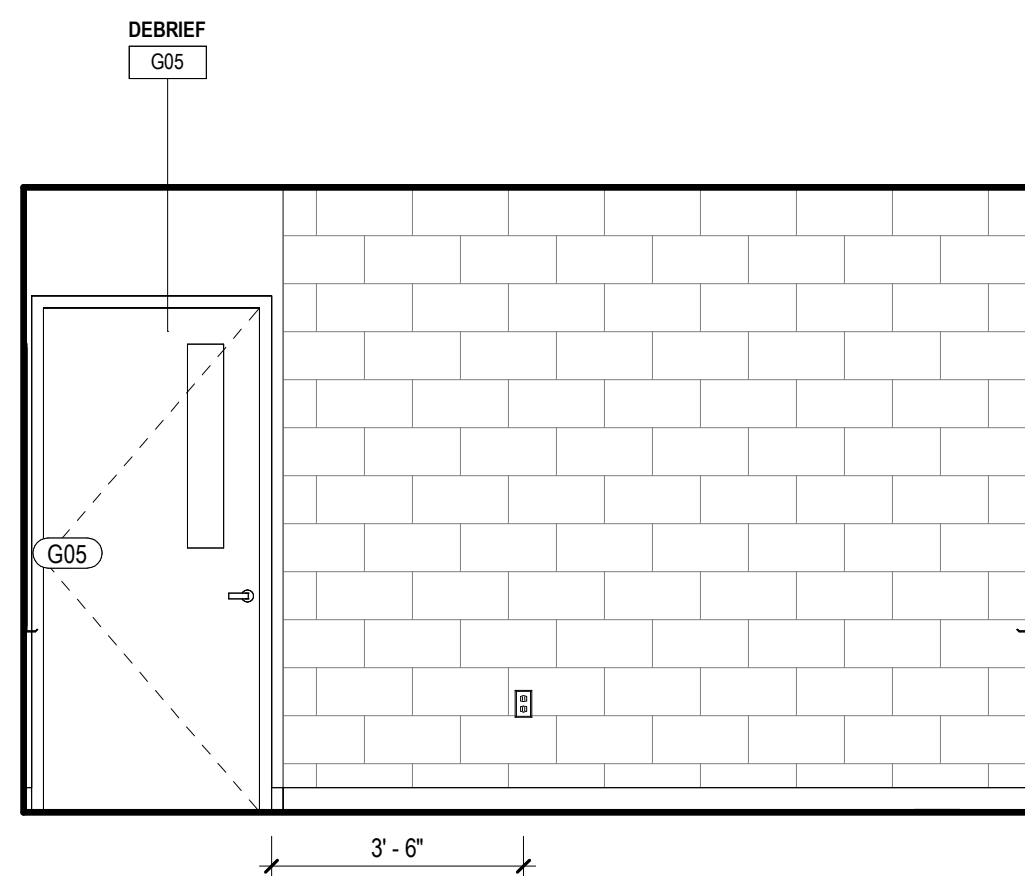


B9 INTERIOR ELEVATION
A6.3 3/8" = 1'-0"

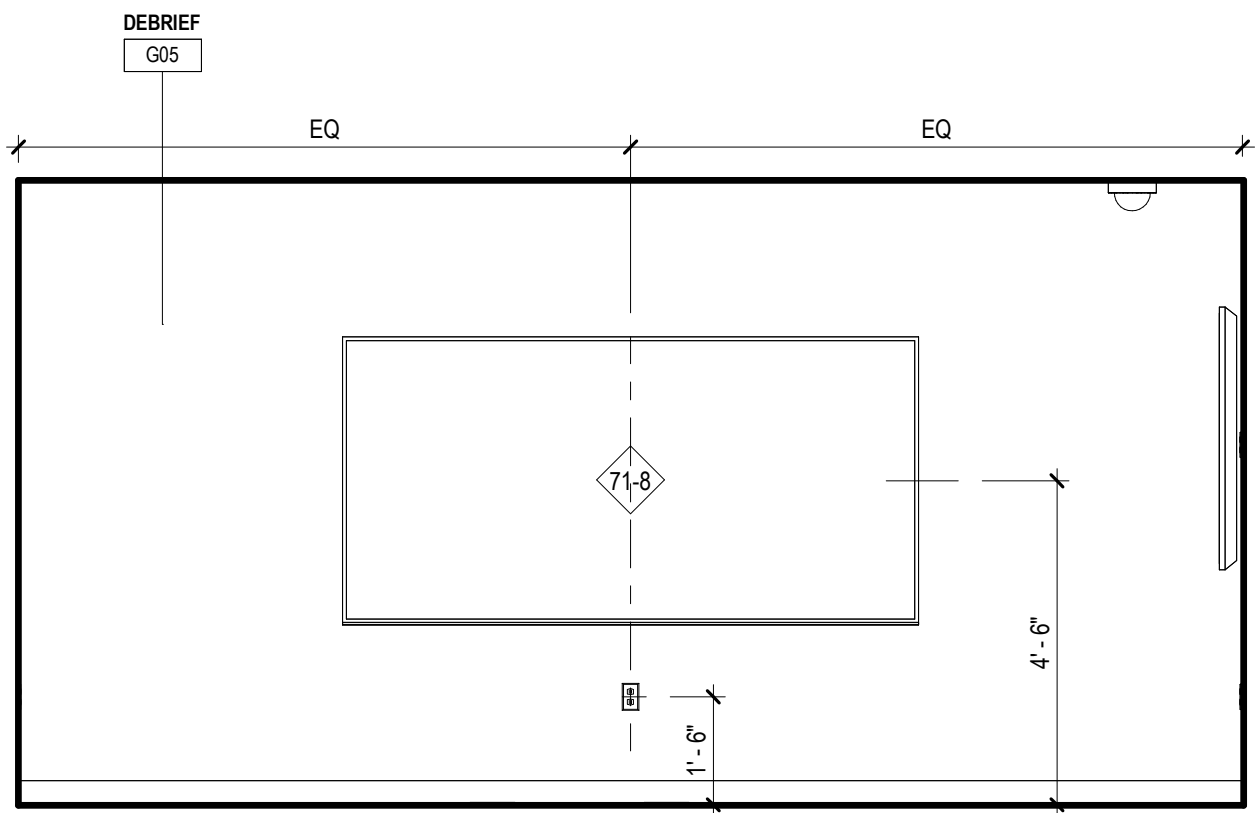


D1 INTERIOR ELEVATION
A6.3 3/8" = 1'-0"

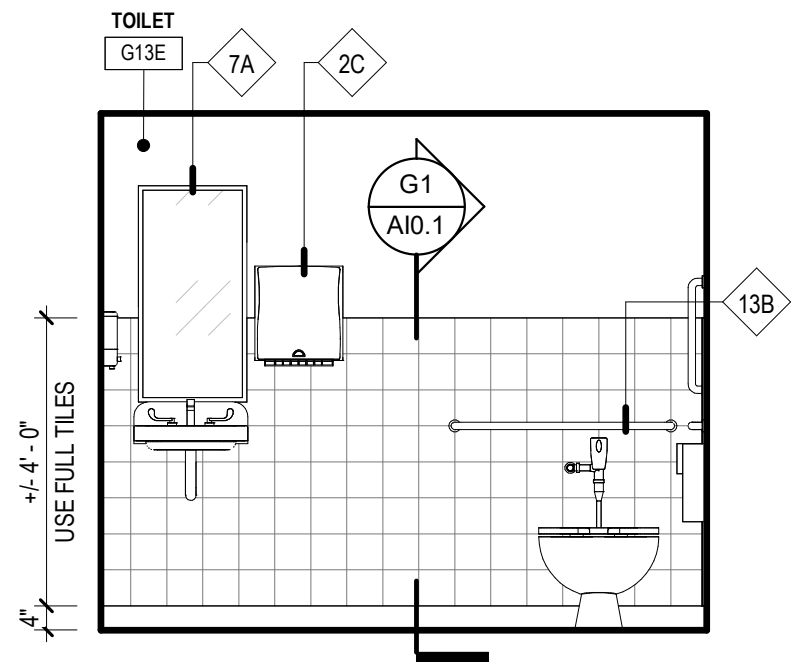


D5 INTERIOR ELEVATION
A6.3 3/8" = 1'-0"

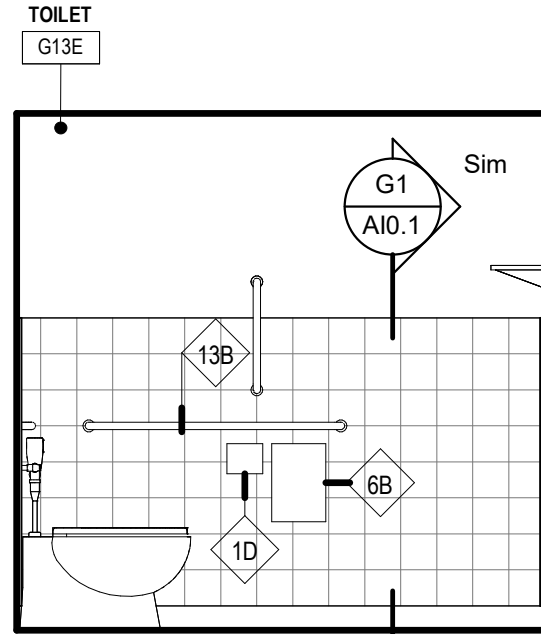


D8 INTERIOR ELEVATION
A6.3 3/8" = 1'-0"

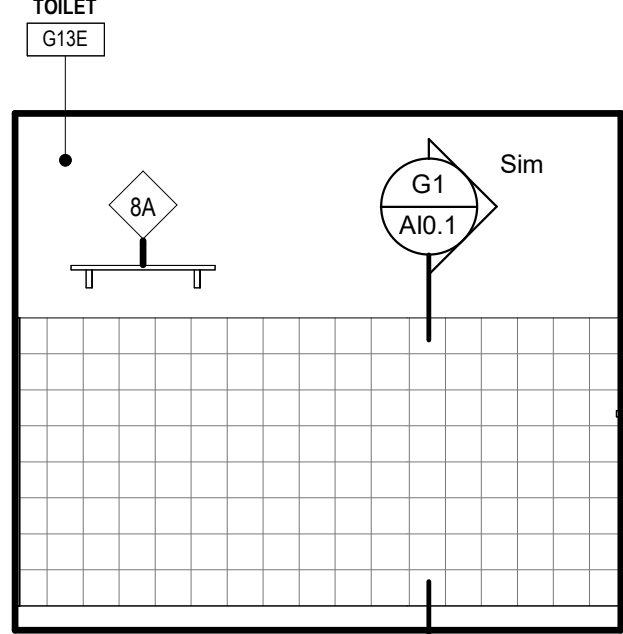


D10 INTERIOR ELEVATION
A6.3 3/8" = 1'-0"

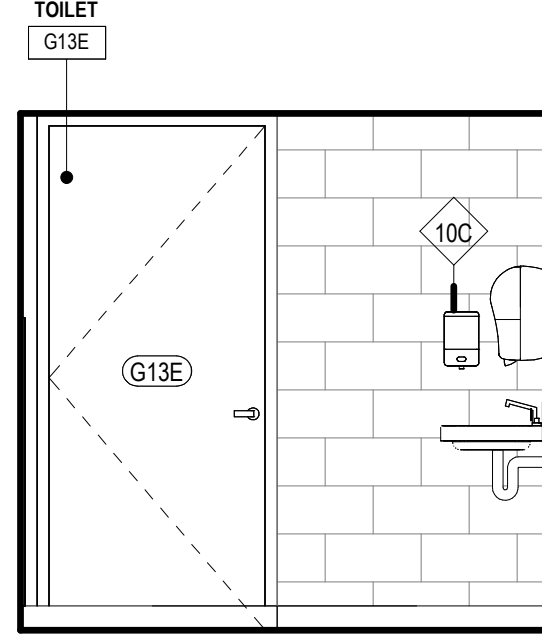

D13 INTERIOR ELEVATION
A6.3 3/8" = 1'-0"



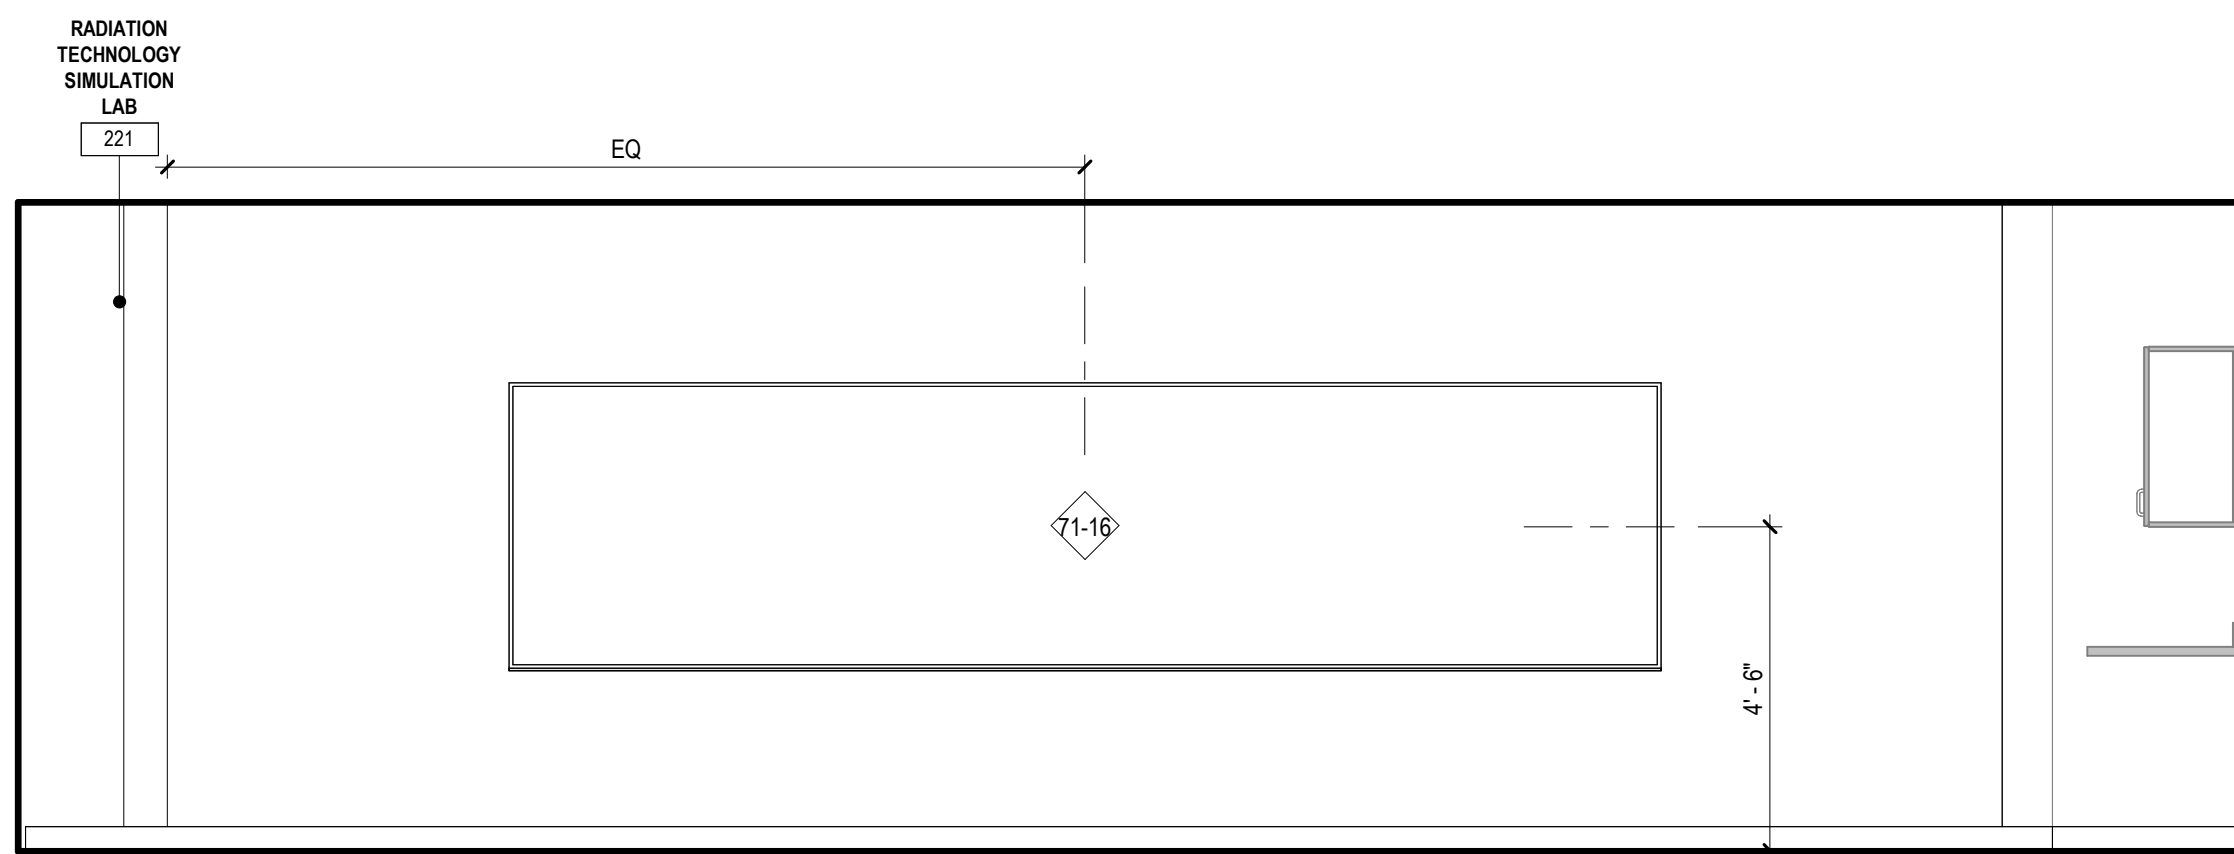


F8 INTERIOR ELEVATION
A6.3 3/8" = 1'-0"

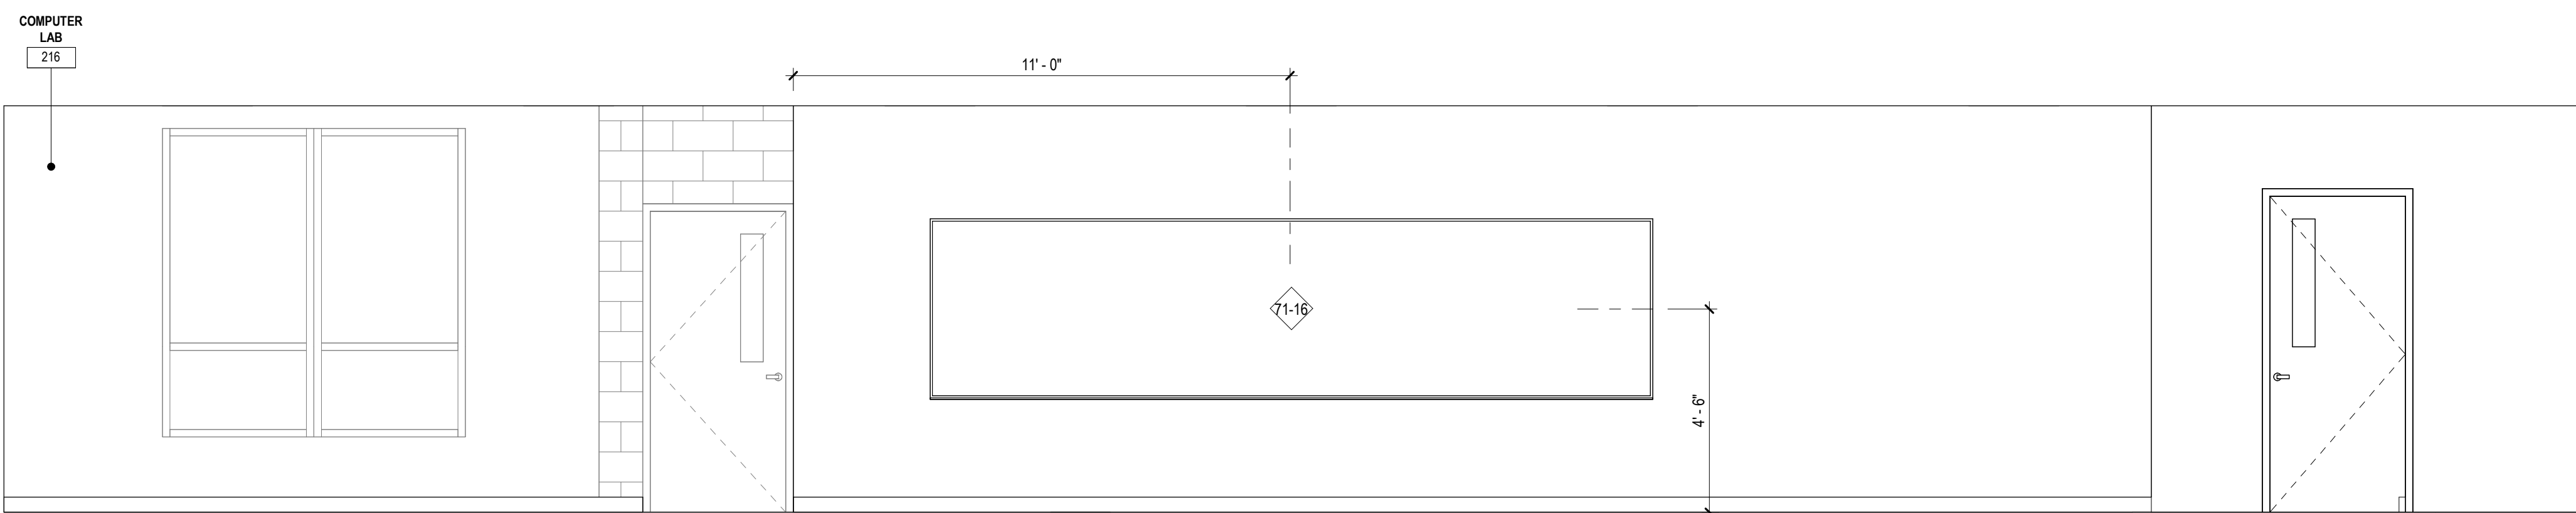

H5 INTERIOR ELEVATION
A6.3 3/8" = 1'-0"

5/8/2026 3:43:33 PM Autodesk Docs: /25-062-00/SMCC/HS Ch Reno/25-062-00_S/MCC_V05.rvt

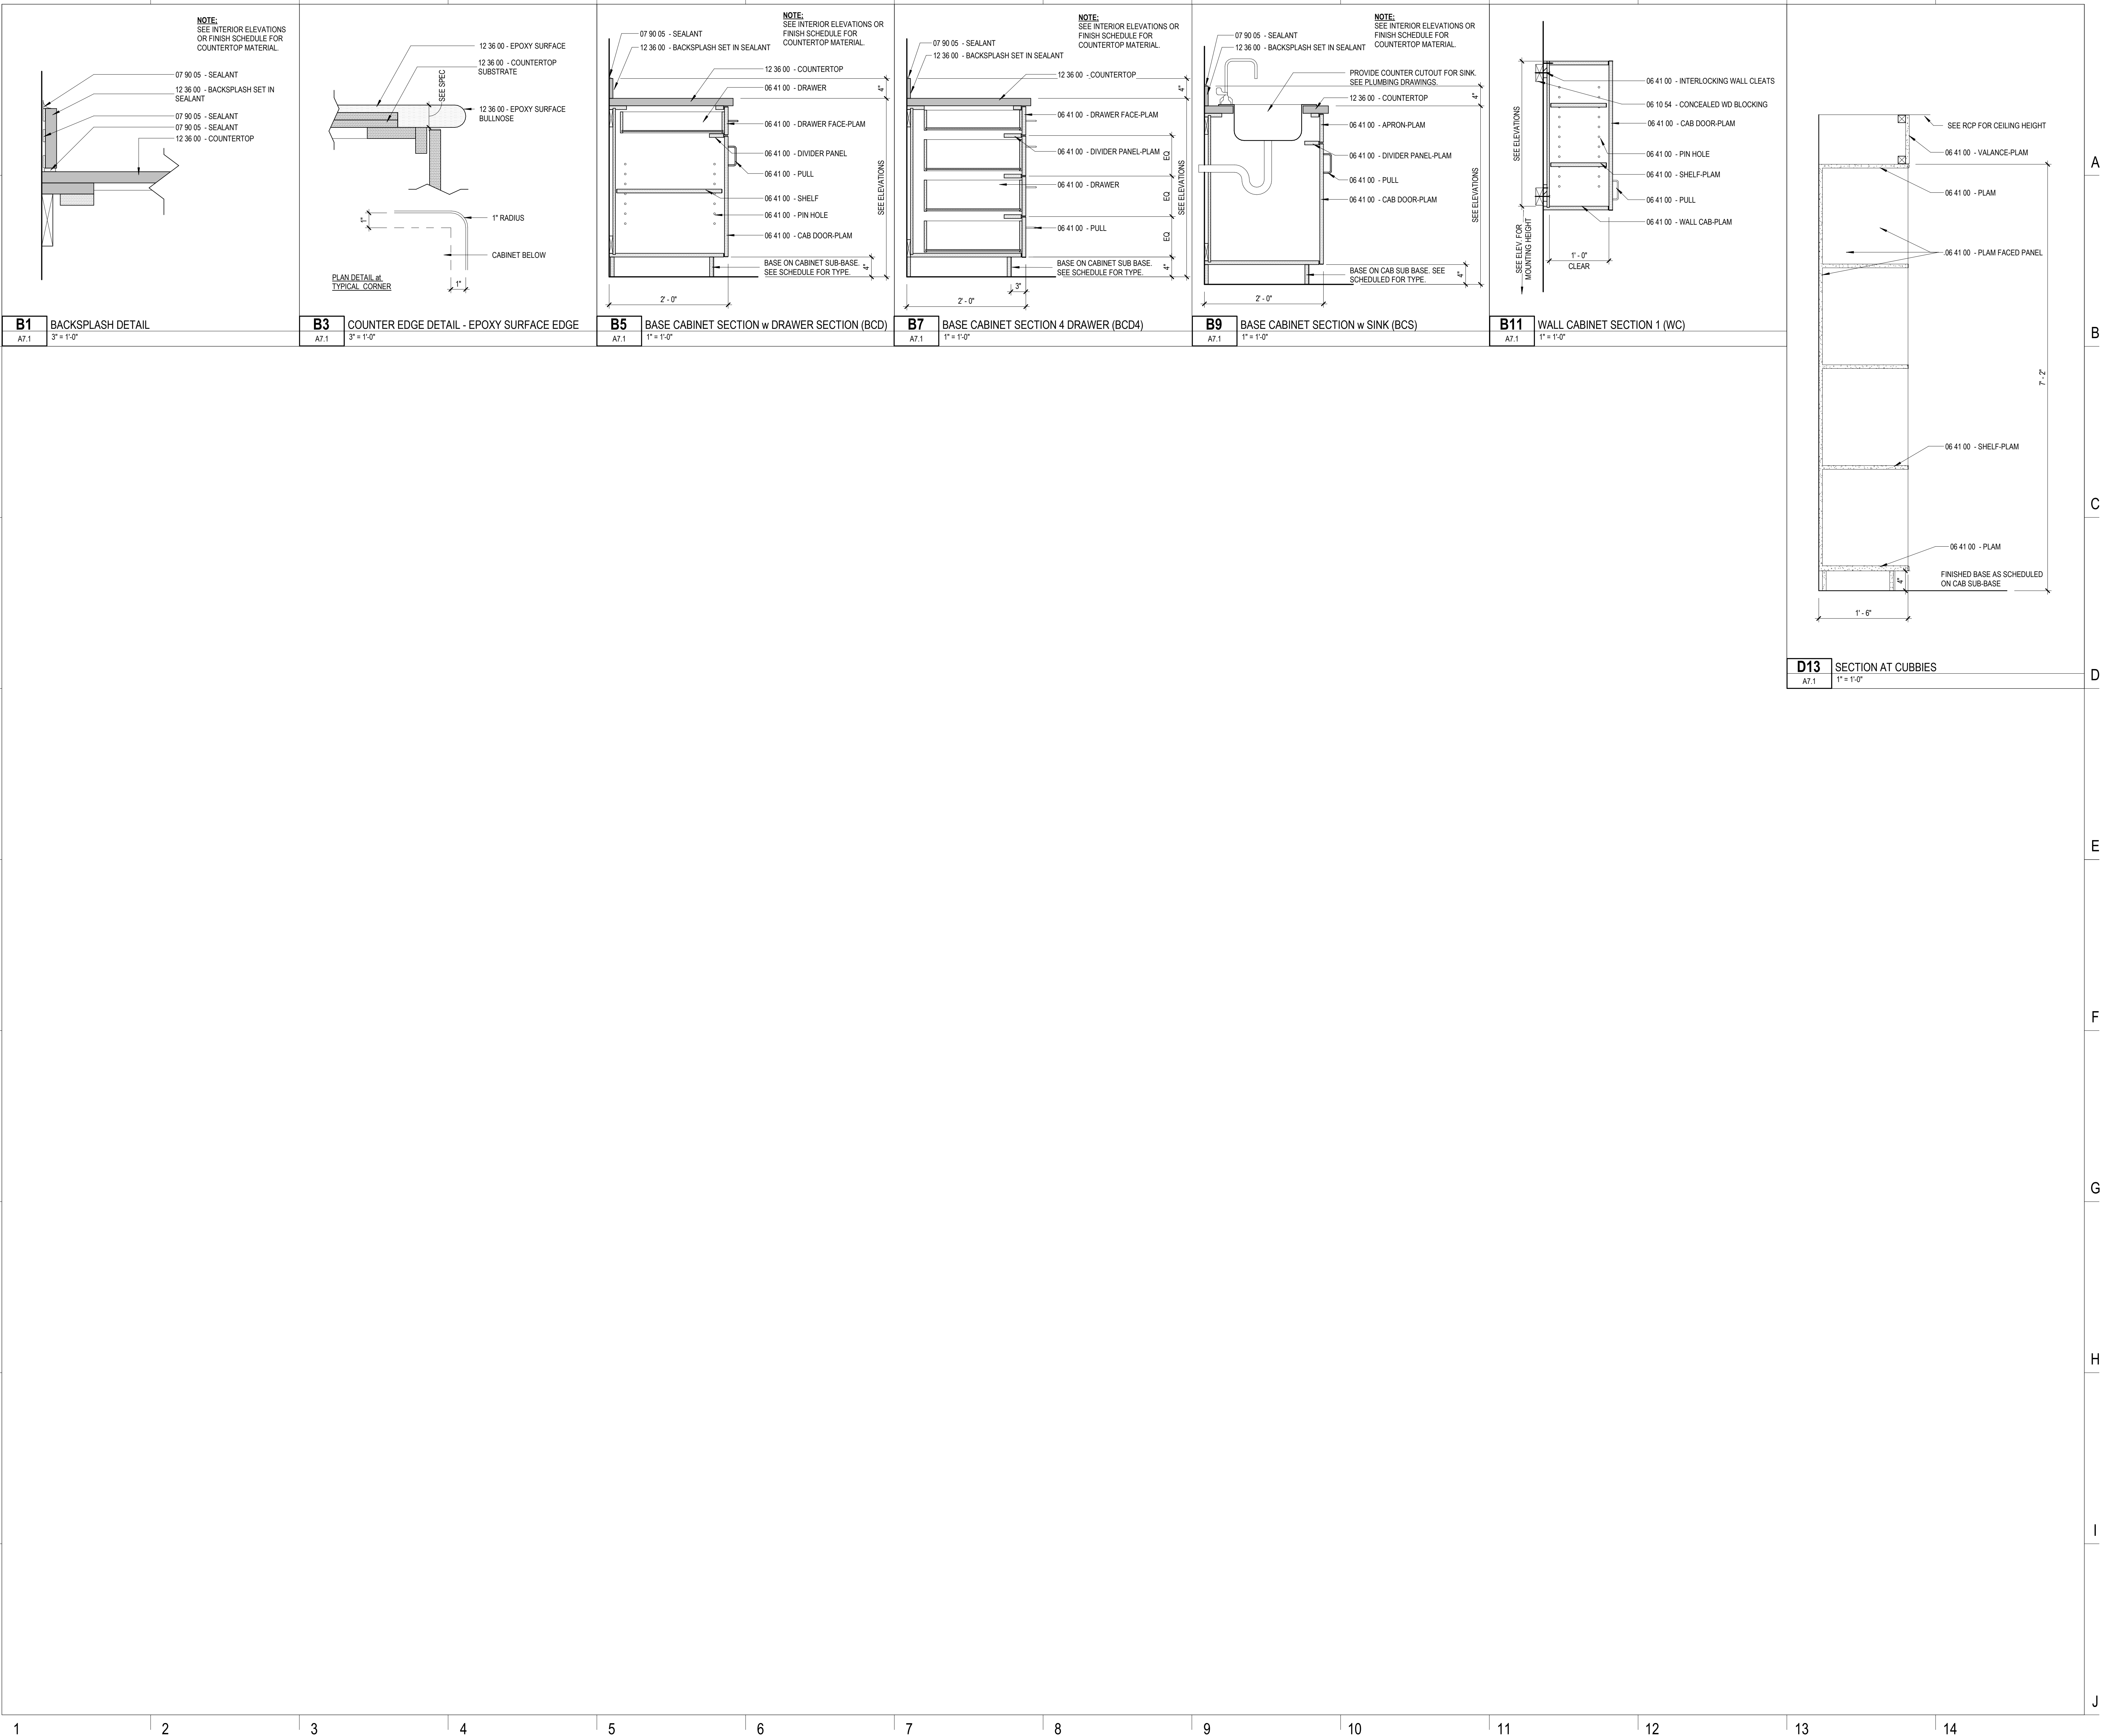

SMCC

**HEALTH SCIENCE
CENTER**

BGS NUM: 3809

79 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE




CONTENT: MILLWORK DETAILS	
DRAWN BY:	RJB
PROJECT NO:	25-062-00
DATE:	05/08/2026
REVISED:	
SCALE:	As indicated
A7.1	
Project Phase CONSTRUCTION DOCUMENTS	
COPYRIGHT © 2026 BY LAVALLEE BRENSINGER PLLC. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

9/18/2026 2:23:41 PM Autodesk Docs: /25-062-00/SMCC-JHS Or Reno25-062-00_SMAPC_125.rvt


B1
A8.0

RCP ACT to ACT with AXIOM TRIM
1 1/2" = 1'-0"

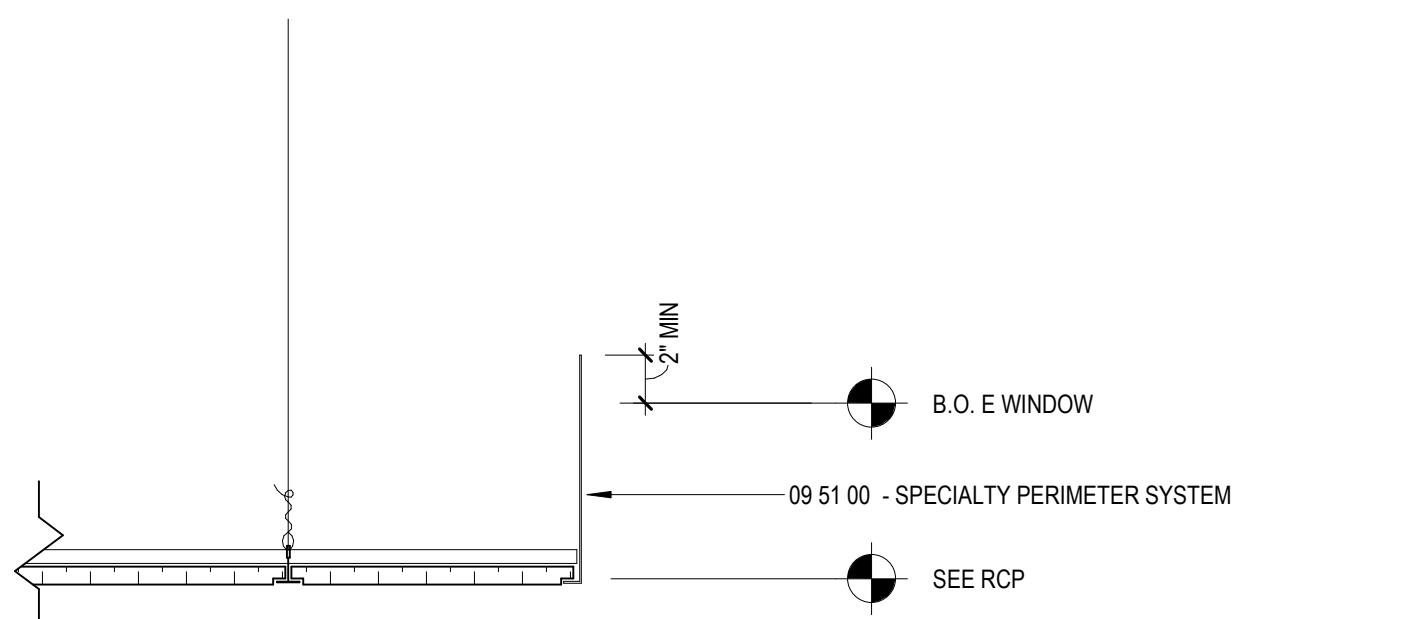

C1
A8.0

RCP ACT to ACT with AXIOM @ EXTERIOR
1 1/2" = 1'-0"



C5
A8.0

RCP ACT/ GWB SOFFIT at WALL with L MOLDING
1 1/2" = 1'-0"



CEILING LEGEND	
00 09 51 - ACoustICAL CEILING TILE	
ACT-1	TYPE: 2 x 2 CEILING TILE MANUF: ARMSTRONG SERIES: ULTIMA SQUARE LAY-IN WIDTH/SIZE: 2' x 2', 15/16" GRID COLOR: WHITE, GRID TO MATCH
ACT-2	TYPE: 2 x 4 CEILING TILE MANUF: ARMSTRONG SERIES: OPTIMA SQUARE LAY-IN WIDTH/SIZE: 2' x 4', 15/16" GRID COLOR: WHITE, GRID TO MATCH

CEILING DEVICE LEGEND	
	2X2 RECESSED LIGHT FIXTURE
	4X RECESSED LINEAR FIXTURE
	SUSPENDED LINEAR UTILITY FIXTURE
	2X4 RECESSED LIGHT FIXTURE
	2X4 RECESSED LIGHT FIXTURE, ETR
	RECESSED DOWNLIGHT LIGHT FIXTURE
	EXIT SIGN
	CUBICLE CURTAIN TRACK
	CAMERA S. SECURITY
	AV: AUDIO VISUAL
	SMOKE DETECTOR
	AV SPEAKER
	WIRELESS ACCESS POINT
	MICROPHONE
	SPRINKLER HEAD
	HVAC SUPPLY DIFFUSER
	HVAC RETURN GRILLE
	HVAC EXHAUST GRILLE
AREA OF NEW SPRINKLER AND DUCT WORK SCOPE ONLY. CEILING WORK LIMITED TO REPLACEMENT OF TILE AND GRID WHERE DAMAGED BY NEW SPRINKLER AND DUCT INSTALLATION. MATCH EXISTING TILE AND GRID	

HEALTH SCIENCE CENTER

BGS NUM: 3809

79 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE
-----	-------------	------

CONTENT:
GROUND FLOOR REFLECTED CEILING
PLAN

DRAWN BY: MOL, RJR

PROJECT NO: 25-062-00

DATE: 05/08/2026

REVISED:

SCALE: As indicated


A8.0



Project Phase
CONSTRUCTION DOCUMENTS

COPYRIGHT © 2026 BY LAVALLEE BRENSINGER PLLC.
ALL RIGHTS RESERVED.
NO REPRODUCTION WITHOUT PERMISSION.

J1
A8.0

GROUND FLOOR - REFLECTED CEILING PLAN
3/16" = 1'-0"

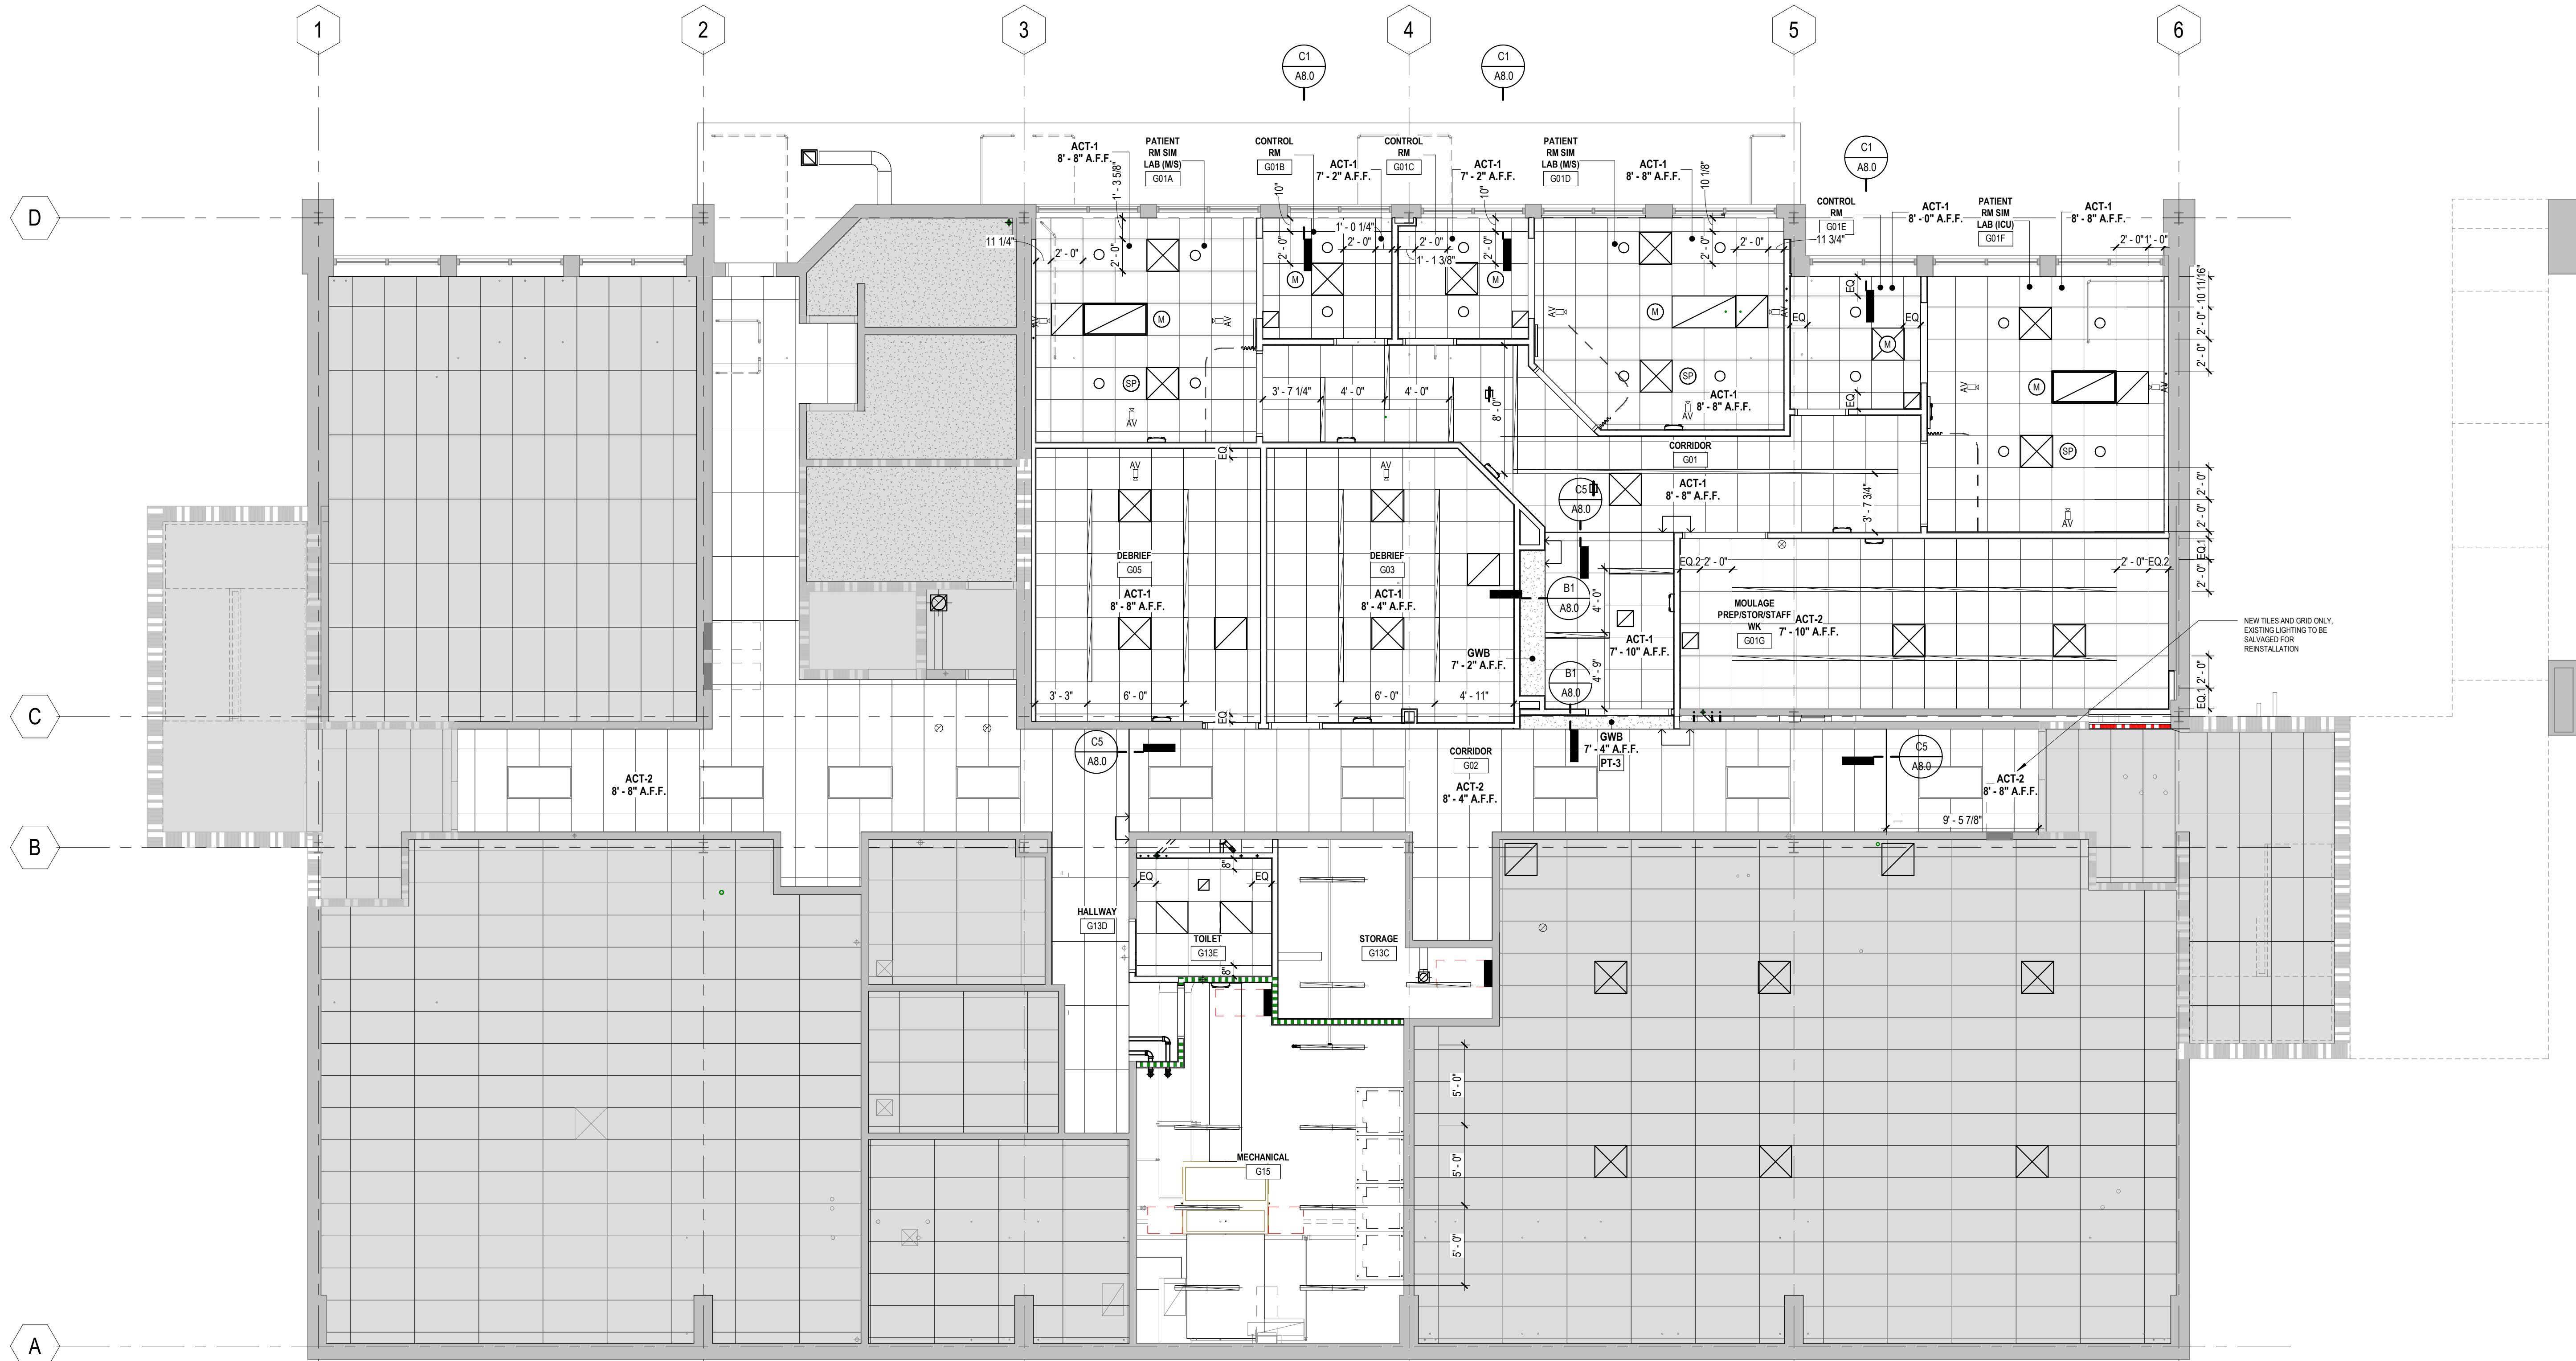



**HEALTH SCIENCE
CENTER**

BGS NUM: 3809






79 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE



CONTENT: FIRST FLOOR REFLECTED CEILING PLAN	
DRAWN BY:	MOL, RJB
PROJECT NO:	25-062-00
DATE:	05/08/2026
REVISED:	
SCALE:	As indicated
A8.1	
Project Phase CONSTRUCTION DOCUMENTS	
COPYRIGHT © 2026 BY LAVALLEE BRENSINGER PLLC. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

CEILING LEGEND		
00 09 51. ACOUSTICAL CEILING TILE		
ACT-1	TYPE: MANUF: SERIES: WIDTH/SIZE: COLOR:	2 x 2 CEILING TILE ARMSTRONG ULTIMA SQUARE LAY-IN 2' x 2', 15/16" GRID WHITE, GRID TO MATCH
ACT-2	TYPE: MANUF: SERIES: WIDTH/SIZE: COLOR:	2 x 4 CEILING TILE ARMSTRONG OPTIMA SQUARE LAY-IN 2' x 4', 15/16" GRID WHITE, GRID TO MATCH



CEILING DEVICE LEGEND			
	2X2 RECESSED LIGHT FIXTURE		SMOKE DETECTOR
	4X RECESSED LINEAR FIXTURE		AV SPEAKER
	SUSPENDED LINEAR UTILITY FIXTURE		WIRELESS ACCESS POINT
			MICROPHONE
			SPRINKLER HEAD
	2X4 RECESSED LIGHT FIXTURE		
	2X4 RECESSED LIGHT FIXTURE, ETR		HVAC SUPPLY DIFFUSER
	RECESSED DOWNLIGHT LIGHT FIXTURE		HVAC RETURN GRILLE
	EXIT SIGN		HVAC EXHAUST GRILLE
	CUBICLE CURTAIN TRACK		
	CAMERA S: SECURITY		
	AV: AUDIO VISUAL		
	AREA OF NEW SPRINKLER AND DUCT WORK SCOPE ONLY: CEILING WORK LIMITED TO REPLACEMENT OF TILE AND GRID WHERE DAMAGED BY NEW SPRINKLER AND DUCT INSTALLATION. MATCH EXISTING TILE AND GRID		




5/8/2026 3:43:41 PM Autodesk Docs: /25-062-00/SMCC-HS-Cor-Renov-05-062-00_SMCC_125.rvt



CEILING LEGEND		
00 09 51 ACOUSTICAL CEILING TILE		
ACT-1	TYPE: MANUF: SERIES: WIDTH/SIZE: COLOR:	2 x 2 CEILING TILE ARMSTRONG ULTIMA SQUARE LAY-IN 2' x 2' 15/16" GRID WHITE, GRID TO MATCH
ACT-2	TYPE: MANUF: SERIES: WIDTH/SIZE: COLOR:	2 x 4 CEILING TILE ARMSTRONG OPTIMA SQUARE LAY-IN 2' x 4' 15/16" GRID WHITE, GRID TO MATCH

CEILING DEVICE LEGEND			
	2X2 RECESSED LIGHT FIXTURE		SMOKE DETECTOR
	4X RECESSED LINEAR FIXTURE		A/V SPEAKER
	SUSPENDED LINEAR UTILITY FIXTURE		WIRELESS ACCESS POINT
			MICROPHONE
			SPRINKLER HEAD
	2X4 RECESSED LIGHT FIXTURE		
	2X4 RECESSED LIGHT FIXTURE, ETR		HVAC SUPPLY DIFFUSER
	RECESSED DOWNLIGHT LIGHT FIXTURE		HVAC RETURN GRILLE
	EXIT SIGN		HVAC EXHAUST GRILLE
	CUBICLE CURTAIN TRACK		
	CAMERA S. SECURITY		
	AV: AUDIO VISUAL		
AREA OF NEW SPRINKLER AND DUCT WORK SCOPE ONLY: CEILING WORK LIMITED TO REPLACEMENT OF TILE AND GRID WHERE DAMAGED BY NEW SPRINKLER AND DUCT INSTALLATION, MATCH EXISTING TILE AND GRID			




SMCC

HEALTH SCIENCE CENTER

BGS NUM: 3809

79 Ford Road, South Portland, Maine, 04106

NO.	DESCRIPTION	DATE




CONTENT: SECOND FLOOR REFLECTED CEILING PLAN	
DRAWN BY:	MOL, RJB
PROJECT NO:	25-062-00
DATE:	05/08/2026
REVISED:	
SCALE:	As indicated
A8.2	
Project Phase CONSTRUCTION DOCUMENTS	
COPYRIGHT © 2026 BY LAVALLEE BRENSINGER PLLC. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

Autodesk Docs: 025-062-00 SMCC-HS Or Reno025-062-00_SINOC_025.rvt



5/8/2026 3:43:46 PM

FINISH SCHEDULE									
ROOM #	ROOM NAME	FLOORING	WALL BASE	WALLS	WALL PROTECTION	COUNTERTOPS	CASEWORK / MILLWORK	TEXTILES	COMMENTS
BASEMENT									
G01	CORRIDOR	RF-1, RF-2	RB-1	PT-1, PT-2, WC-1	W1A, W1B	-	PL-1	-	
G01A	PATIENT RM SIM LAB (M/S)	RF-2	RB-1	PT-1, PT-2	W1A	-	-	CC-1	
G01B	CONTROL RM	FC-1	RB-1	PT-1, PT-2	-	-	-	-	
G01C	CONTROL RM	FC-1	RB-1	PT-1, PT-2	-	-	-	-	
G01D	PATIENT RM SIM LAB (M/S)	RF-2	RB-1	PT-1, PT-2	W1A	-	-	CC-1	
G01E	CONTROL RM	FC-1	RB-1	PT-1, PT-2	-	-	-	-	
G01F	PATIENT RM SIM LAB (ICU)	RF-2	RB-1	PT-1, PT-2	W1A	-	-	CC-1	
G01G	MOULAGE PREP/STOR/STAFF WK	RF-1	RB-1	PT-1	W3A	SS-1	PL-1	-	
G02	CORRIDOR	ETR, RF-3	ETR, RB-1	ETR, PT-1, PT-3	-	-	-	-	NEW PAINT AND WALL BASE AT AFFECTED WALLS ONLY
G03	DEBRIEF	RF-5	RB-1	PT-1, PT-2	-	-	-	-	
G05	DEBRIEF	RF-5	RB-1	PT-1, PT-2	-	-	-	-	
G13C	STORAGE	ETR	ETR, RB-1	ETR, PT-1	-	-	-	-	
G13D	HALLWAY	RF-4	RB-1	PT-1	-	-	-	-	
G13E	TOILET	TC-1	TC-2	PT-1, TC-2	-	-	-	-	
G15	MECHANICAL	ETR	ETR, RB-1	ETR, PT-1	-	-	-	-	
LEVEL 1									
125	IT	ETR, RF-4	RB-1	ETR, PT-1	-	-	-	-	NEW PAINT AT AFFECTED WALLS ONLY
LEVEL 2									
216	COMPUTER LAB	ETR, RF-4	ETR, RB-1	ETR, PT-1	-	-	-	-	NEW PAINT AND WALL BASE AT AFFECTED WALLS ONLY
221	RADIATION TECHNOLOGY SIMULATION LAB	ETR	ETR, RB-1	ETR, PT-1	-	-	-	-	NEW PAINT AND WALL BASE AT AFFECTED WALLS ONLY

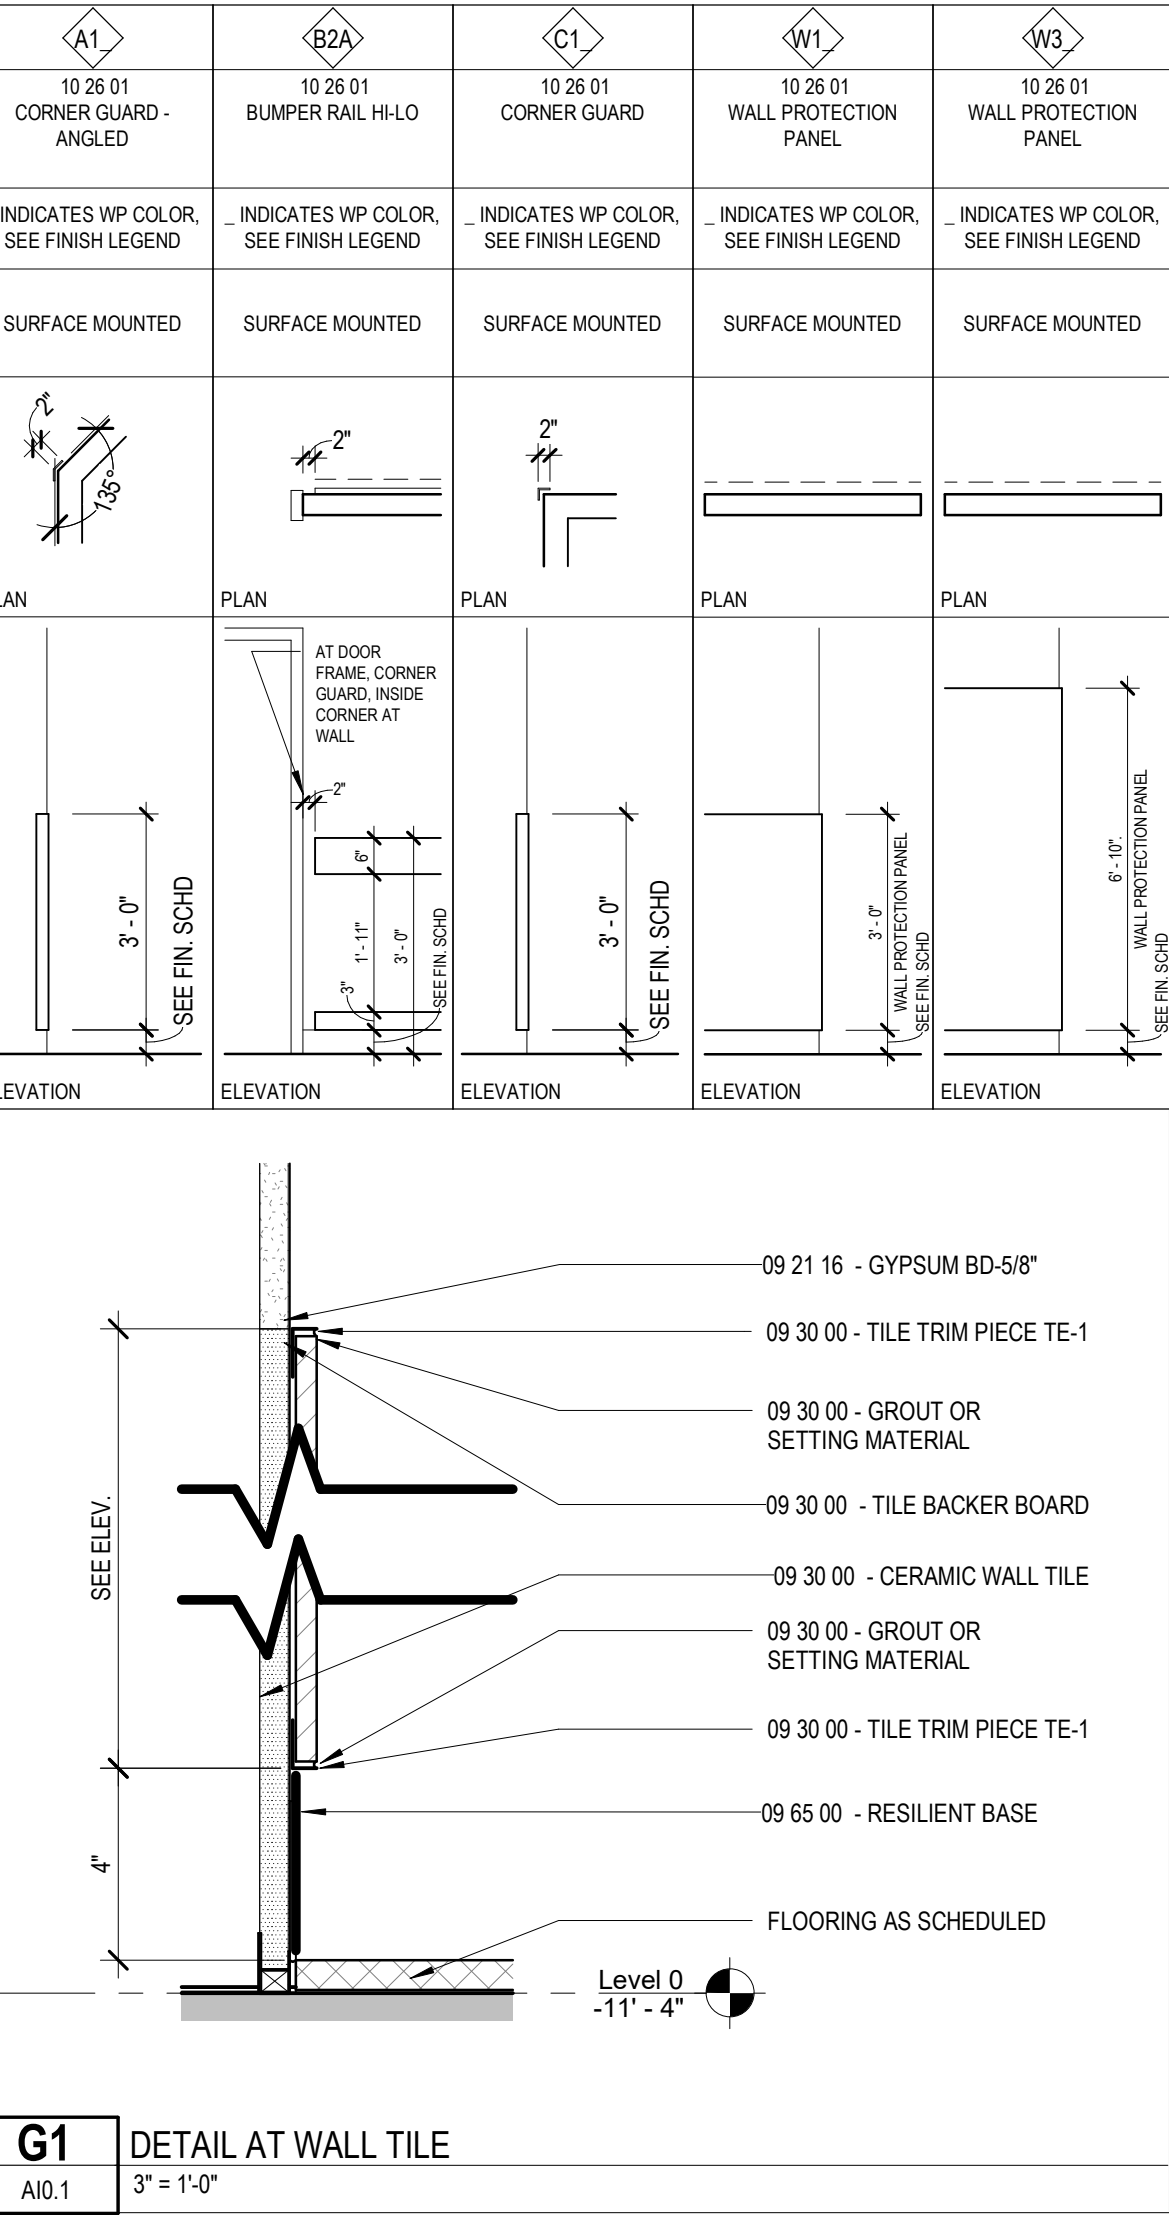

G1 DETAIL AT WALL TILE
A10.1 3" = 1'-0"

FINISH LEGEND		
09 65 00 RESILIENT FLOORING	09 91 23 INTERIOR PAINTING	09 95 00 WALL BASE (RESILIENT)
RESILIENT FLOORING GENERAL NOTES: 1. HATCH PATTERNS ARE ONLY SHOWN ON FLOOR FINISH PLANS WHEN MULTIPLE FLOORING TYPES ARE USED. ALL OTHER FLOORING INFORMATION WILL BE NOTED ON FINISH SCHEDULE. REFER TO FLOOR FINISH PLANS FOR FLOOR PATTERNS. 2. REFERENCE 09 65 00 RESILIENT FLOORING TRANSITIONS / STAIR NOSINGS AS NEEDED. 3. ALL FINISHED FLOORING SHALL EXTEND BENEATH CASEWORK, MILLWORK, AND PLUMBING FIXTURES U.N.O. 4. ALL SHEET FLOORING SEAMS SHALL BE WELDED WITH MATCHING WELD COLORS. 5. STAIRS: CALL OUT MATERIALS FOR TREAD, RISER, RAILING, LANDING, NOSING (IF APPLICABLE).	PAINT GENERAL NOTES: 1. SEE FINISH SCHEDULE FOR ALL GENERAL WALL PAINT & COATINGS. REFER TO WALL FINISH PLANS FOR ACCENT WALL LOCATIONS. 2. REFER TO SPECIFICATION FOR PAINT/COATING FINISHES U.N.O BELOW. 3. HM DOOR FRAMES AND WINDOW FRAMES ARE TO BE PTD PT-4 U.N.O ON DRAWINGS OR SCHEDULE. *** TRANSITIONS SHALL OCCUR ON THE INSIDES OF THE DOOR STOP. *** 4. ALL EXPOSED STEEL COMPONENTS ARE TO BE PAINTED. 5. CEILING PAINT: - ALL GWB CEILINGS AND SOFFITS SHALL BE PAINTED PT-0 UNLESS NOTED OTHERWISE ON THE REFLECTED CEILING PLAN.	RB-1 TYPE: RUBBER BASE SERIES: ROPPE HEIGHT: PINNACLE COLOR: BLACK 06 20 00 / 06 41 00 / 12 36 00 PLASTIC LAMINATE / SOLID SURFACE MILLWORK GENERAL NOTES: 1. WINDOW SILLS TO REMAIN, SAND AND SEAL WITHIN SCOPE OF WORK AREA 06 20 00 / 06 41 00 / 12 36 00 PLASTIC LAMINATE PL-1 TYPE: PLASTIC LAMINATE MANUF: PANOLAM EDGE: PIONITE SUGAR MAPLE II VINYL EDGEBAND TO MATCH 12 36 00 LAB SURFACE SS-1 TYPE: EPOXY MANUF: DURCON COLOR: GRAPHITE 12 24 00 WINDOW TREATMENT WT-1 TYPE: ROLLER SHADES MANUF: DRAPER SERIES: TBD COLOR: 1% NOTE: WHERE INDICATED ON INTERIOR FINISH PLANS WT-2 TYPE: ROLLER SHADES - RM DARKENING MANUF: DRAPER SERIES: TBD COLOR: 0% NOTE: AT CONTROL ROOMS 10 21 23 CUBICLE CURTAINS CC-1 TYPE: CUBICLE CURTAIN MANUF: INPRO SERIES: EZE-SWAP COLOR: FABRIC SHIELD BY PANAZ TBD TO BE DETERMINED PTM PATCH TO MATCH ETR EXISTING TO REMAIN SC SEALED CONCRETE (FLOORING)
09 65 00 RESILIENT FLOORING	09 91 23 INTERIOR PAINTING	09 95 00 WALL BASE (RESILIENT)
RF-1 TYPE: RESILIENT SHEET SERIES: MANNINGTON BIOSPEC MD WIDTH: 6' - 0" COLOR: LUNAR ROCK	PT-0 TYPE: TYP. CEILING PAINT MANUF: SHERWIN WILLIAMS COLOR: CEILING WHITE	
RF-2 TYPE: RESILIENT SHEET SERIES: MANNINGTON BIOSPEC MD WIDTH: 6' - 0" COLOR: NIAGARA BLUE	PT-1 TYPE: GENERAL WALL PAINT MANUF: SHERWIN WILLIAMS COLOR: SHELL WHITE	
RF-3 TYPE: VINYL COMPOSITION TILE SERIES: ARMSTRONG IMPERIAL TEXTURE SIZE: 12" X 12" COLOR: GENTIAN BLUE	PT-2 TYPE: ACCENT PAINT MANUF: SHERWIN WILLIAMS COLOR: TAKE FIVE	
RF-4 TYPE: VINYL COMPOSITION TILE SERIES: ARMSTRONG IMPERIAL TEXTURE SIZE: 12" X 12" COLOR: 51836 IMPERIAL WHITE	PT-3 TYPE: PAINT MANUF: SHERWIN WILLIAMS COLOR: TBD, MATCH SMCC DARK BLUE	
RF-5 TYPE: LUXURY VINYL TILE SERIES: TARKETT D LATTITUDE WOOD SIZE: 6" X 48" COLOR: ASH	PT-4 TYPE: TRIM PAINT MANUF: SHERWIN WILLIAMS COLOR: TRICORN BLACK	
09 30 00 TILE CERAMIC / PORCELAIN	09 72 00 WALL COVERING	
CERAMIC / PORCELAIN FLOORING GENERAL NOTES: 1. HATCH PATTERNS ARE ONLY SHOWN ON FLOOR FINISH PLANS WHEN MULTIPLE FLOORING TYPES ARE USED. ALL OTHER FLOORING INFORMATION WILL BE NOTED ON FINISH SCHEDULE. REFER TO FLOOR FINISH PLANS FOR FLOOR PATTERNS. 2. COORDINATE WITH 09 30 00 TILE EDGE/ FLOORING TRANSITION PRODUCTS. 3. STAIRS: CALL OUT MATERIALS FOR TREAD, RISER, RAILING, LANDING, NOSING (IF APPLICABLE).	WC-1 TYPE: VINYL WALL COVERING MANUF: LEVEL SERIES: RAINDROPS COLOR: ICE NOTE: -	
09 30 00 TILE CERAMIC / PORCELAIN	10 26 00 WALL PROTECTION	
TC-1 TYPE: TILE CERAMIC MANUF: CROSSVILLE SERIES: STONE FICTION SIZE: 12" X 24" COLOR: TRAVERTINE SILVER EXT INSTALL: 1/3 RUNNING BOND GROUT: TO BE SELECTED	WALL PROTECTION GENERAL NOTES: 1. REFER TO LEGEND AND WALL FINISH PLANS FOR WALL PROTECTION TYPOLOCATIONS. 2. WALL PROTECTION IS NOTED ON AI SCHEDULE FOR COLOR ONLY AND SHOULD BE COORDINATED WITH ELEVATIONS/ WALL FINISH PLANS PRIOR TO ORDERING. 3. SEE WALL FINISH PLANS FOR CORNER GUARD AND BUMPER RAIL LOCATIONS/ TYPES. MATERIAL DESIGNATION: DESIGNATES COLOR (FIN. LEGEND) DESIGNATES HEIGHT (SEE AI SERIES PLANS) DESIGNATES TYPE	
TC-2 TYPE: CERAMIC TILE MANUF: DAL TILE SERIES: COLOR WHEEL CLASSIC SIZE: 6" X 6" COLOR: SEA BREEZE INSTALL: STACKED GROUT: TO BE SELECTED	10 26 00 WALL PROTECTION	
09 30 00 TILE EDGE/ FLOORING TRANSITION	W1A TYPE: WALL PROTECTION MANUF: INPRO SERIES: PALLADIUM THICKNESS: .060 COLOR: FEATHER	
TE-1 TYPE: TILE EDGE MANUF: SCHLUTER PROFILE: JOLLY FINISH: STAINLESS STEEL NOTE: CONFIRM BABAA COMPLIANCE	W1B TYPE: WALL PROTECTION MANUF: INPRO SERIES: PALLADIUM THICKNESS: .060 COLOR: CADET BLUE	
TE-2 TYPE: TILE EDGE MANUF: SCHLUTER PROFILE: RENOU FINISH: STAINLESS STEEL NOTE: CONFIRM BABAA COMPLIANCE	B1A TYPE: WALL BUMPER-HI MANUF: INPRO SERIES: 1600 WALL GUARD DETAIL: SEE ELEVATION FOR HEIGHT COLOR: FEATHER	
FT-1 TYPE: FLOORING TRANSITION MANUF: ROPPE PROFILE: EDGE PROTECTOR FINISH: TBD NOTE: -	TYPE: WALL BUMPER-LO MANUF: INPRO SERIES: 1400 WALL GUARD DETAIL: SEE ELEVATION FOR HEIGHT COLOR: FEATHER	
FT-2 TYPE: FLOORING TRANSITION MANUF: ROPPE PROFILE: ROLLING TRAFFIC TRANSITION FINISH: TBD NOTE: -	C1A TYPE: CORNER GUARD 90 MANUF: INPRO SERIES: 160 HIGH-IMPACT CORNER GUARD COLOR: FEATHER	
09 68 13 FLOORING CARPET (TILE)	C1B TYPE: CORNER GUARD 90 MANUF: INPRO SERIES: 160 HIGH-IMPACT CORNER GUARD COLOR: CADET BLUE	
CARPET FLOORING GENERAL NOTES: 1. HATCH PATTERNS ARE ONLY SHOWN ON AI PLANS WHEN MULTIPLE FLOORING TYPES ARE USED. ALL OTHER FLOORING INFORMATION WILL BE NOTED ON FINISH SCHEDULE. REFER TO AI FLOOR PLAN DRAWINGS FOR FLOOR PATTERNS. 2. REFERENCE 09 65 00 RESILIENT FLOORING TRANSITIONS / STAIR NOSINGS AS NEEDED.	A1B TYPE: CORNER GUARD 135 MANUF: INPRO SERIES: 130 HIGH-IMPACT CORNER GUARD COLOR: CADET BLUE	
09 68 13 FLOORING CARPET (TILE)		
FC-1 TYPE: CARPET TILE MANUF: INTERFACE SERIES: COME AND GO COLOR: OPEN ROAD, NAVY INSTALL: MONOLITHIC		

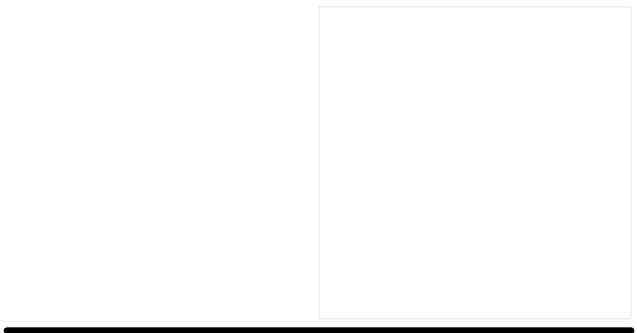



BGS NUM: 3809

79 Ford Road, South Portland, Maine, 04106

NO.	DESCRIPTION	DATE

CONTENT:	
GENERAL NOTES, LEGENDS, ROOM FINISH SCHEDULES	
DRAWN BY:	RJB
PROJECT NO:	25-062-00
DATE:	05/08/2026
REVISED:	
SCALE:	As indicated
A10.1	
Project Phase	
CONSTRUCTION DOCUMENTS	
COPYRIGHT © 2026 BY LAVALLEE BRENSINGER PLLC. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	




SMCC

HEALTH SCIENCE
CENTER

BGS NUM: 3809

79 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE




CONTENT: INTERIOR FINISH PLAN - GROUND FLOOR	
DRAWN BY:	RJB
PROJECT NO:	25-062-00
DATE:	05/08/2026
REVISED:	
SCALE:	As indicated
A11.0	
Project Phase CONSTRUCTION DOCUMENTS	
COPYRIGHT © 2026 BY LAVALLEE BRENSINGER PLLC. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

A1	B2A	C1	W1	W3
10 26 01 CORNER GUARD - ANGLED	10 26 01 BUMPER RAIL H-L	10 26 01 CORNER GUARD	10 26 01 WALL PROTECTION PANEL	10 26 01 WALL PROTECTION PANEL
INDICATES WP COLOR. SEE FINISH LEGEND	INDICATES WP COLOR. SEE FINISH LEGEND	INDICATES WP COLOR. SEE FINISH LEGEND	INDICATES WP COLOR. SEE FINISH LEGEND	INDICATES WP COLOR. SEE FINISH LEGEND
SURFACE MOUNTED	SURFACE MOUNTED	SURFACE MOUNTED	SURFACE MOUNTED	SURFACE MOUNTED
PLAN	PLAN	PLAN	PLAN	PLAN
ELEVATION	ELEVATION	ELEVATION	ELEVATION	ELEVATION

FINISH PLAN KEY	
RF-1	
RF-2	
RF-3	
RF-4	
SEE FINISH SCHEDULE	
NOT IN SCOPE	
WALL FINISH EXTENTS	XX-X

FINISH PLAN GENERAL NOTES:
1. HATCH PATTERNS ARE ONLY SHOWN ON FLOOR FINISH PLANS WHERE MORE THAN ONE FLOORING OCCUR IN A SPACE. OR WHERE PATTERN DIRECTION CHANGES. ALL OTHER FLOORING IS INDICATED IN THE FINISH SCHEDULE.
WALL PROTECTION GENERAL NOTES:
1. REFER TO FINISH LEGEND AND WALL FINISH PLANS FOR WALL PROTECTION TYPLOCATIONS.
2. WALL PROTECTION IS NOTED ON AI SCHEDULE FOR COLOR ONLY AND SHOULD BE COORDINATED WITH ELEVATIONS/ WALL FINISH PLANS PRIOR TO ORDERING.
3. SEE WALL FINISH PLANS FOR CORNER GUARD AND BUMPER RAIL LOCATIONS/ TYPES.
MATERIAL DESIGNATION:
X X X DESIGNATES COLOR (FIN. LEGEND) DESIGNATES HEIGHT (SEE AI SERIES PLANS) DESIGNATES TYPE
PAINT GENERAL NOTES:
1. SEE FINISH SCHEDULE FOR ALL GENERAL WALL PAINT and COATINGS. REFER TO WALL FINISH PLANS FOR ACCENT WALL LOCATIONS.
2. REFER TO SPECIFICATION FOR PAINT/COATING FINISHES U.N.O BELOW.
3. HM DOOR FRAMES AND WINDOW FRAMES ARE TO BE PTD PT-4
CEILING PAINT:
- ALL GWB CEILINGS AND SOFFITS SHALL BE PAINTED PT-0 UNLESS NOTED OTHERWISE ON THE REFLECTED CEILING PLAN.
- REFER TO RCP FOR ALL NOTATIONS REGARDING ACCENT SOFFITS AND GWB CEILING PAINTS. ACCENT COLORS ARE NOTED WITHIN THE CEILING TAGS.
- PAINTED SOFFITS ARE TO RECEIVE PAINT ON ALL HORIZONTAL AND VERTICAL SIDES OF THE SOFFIT.

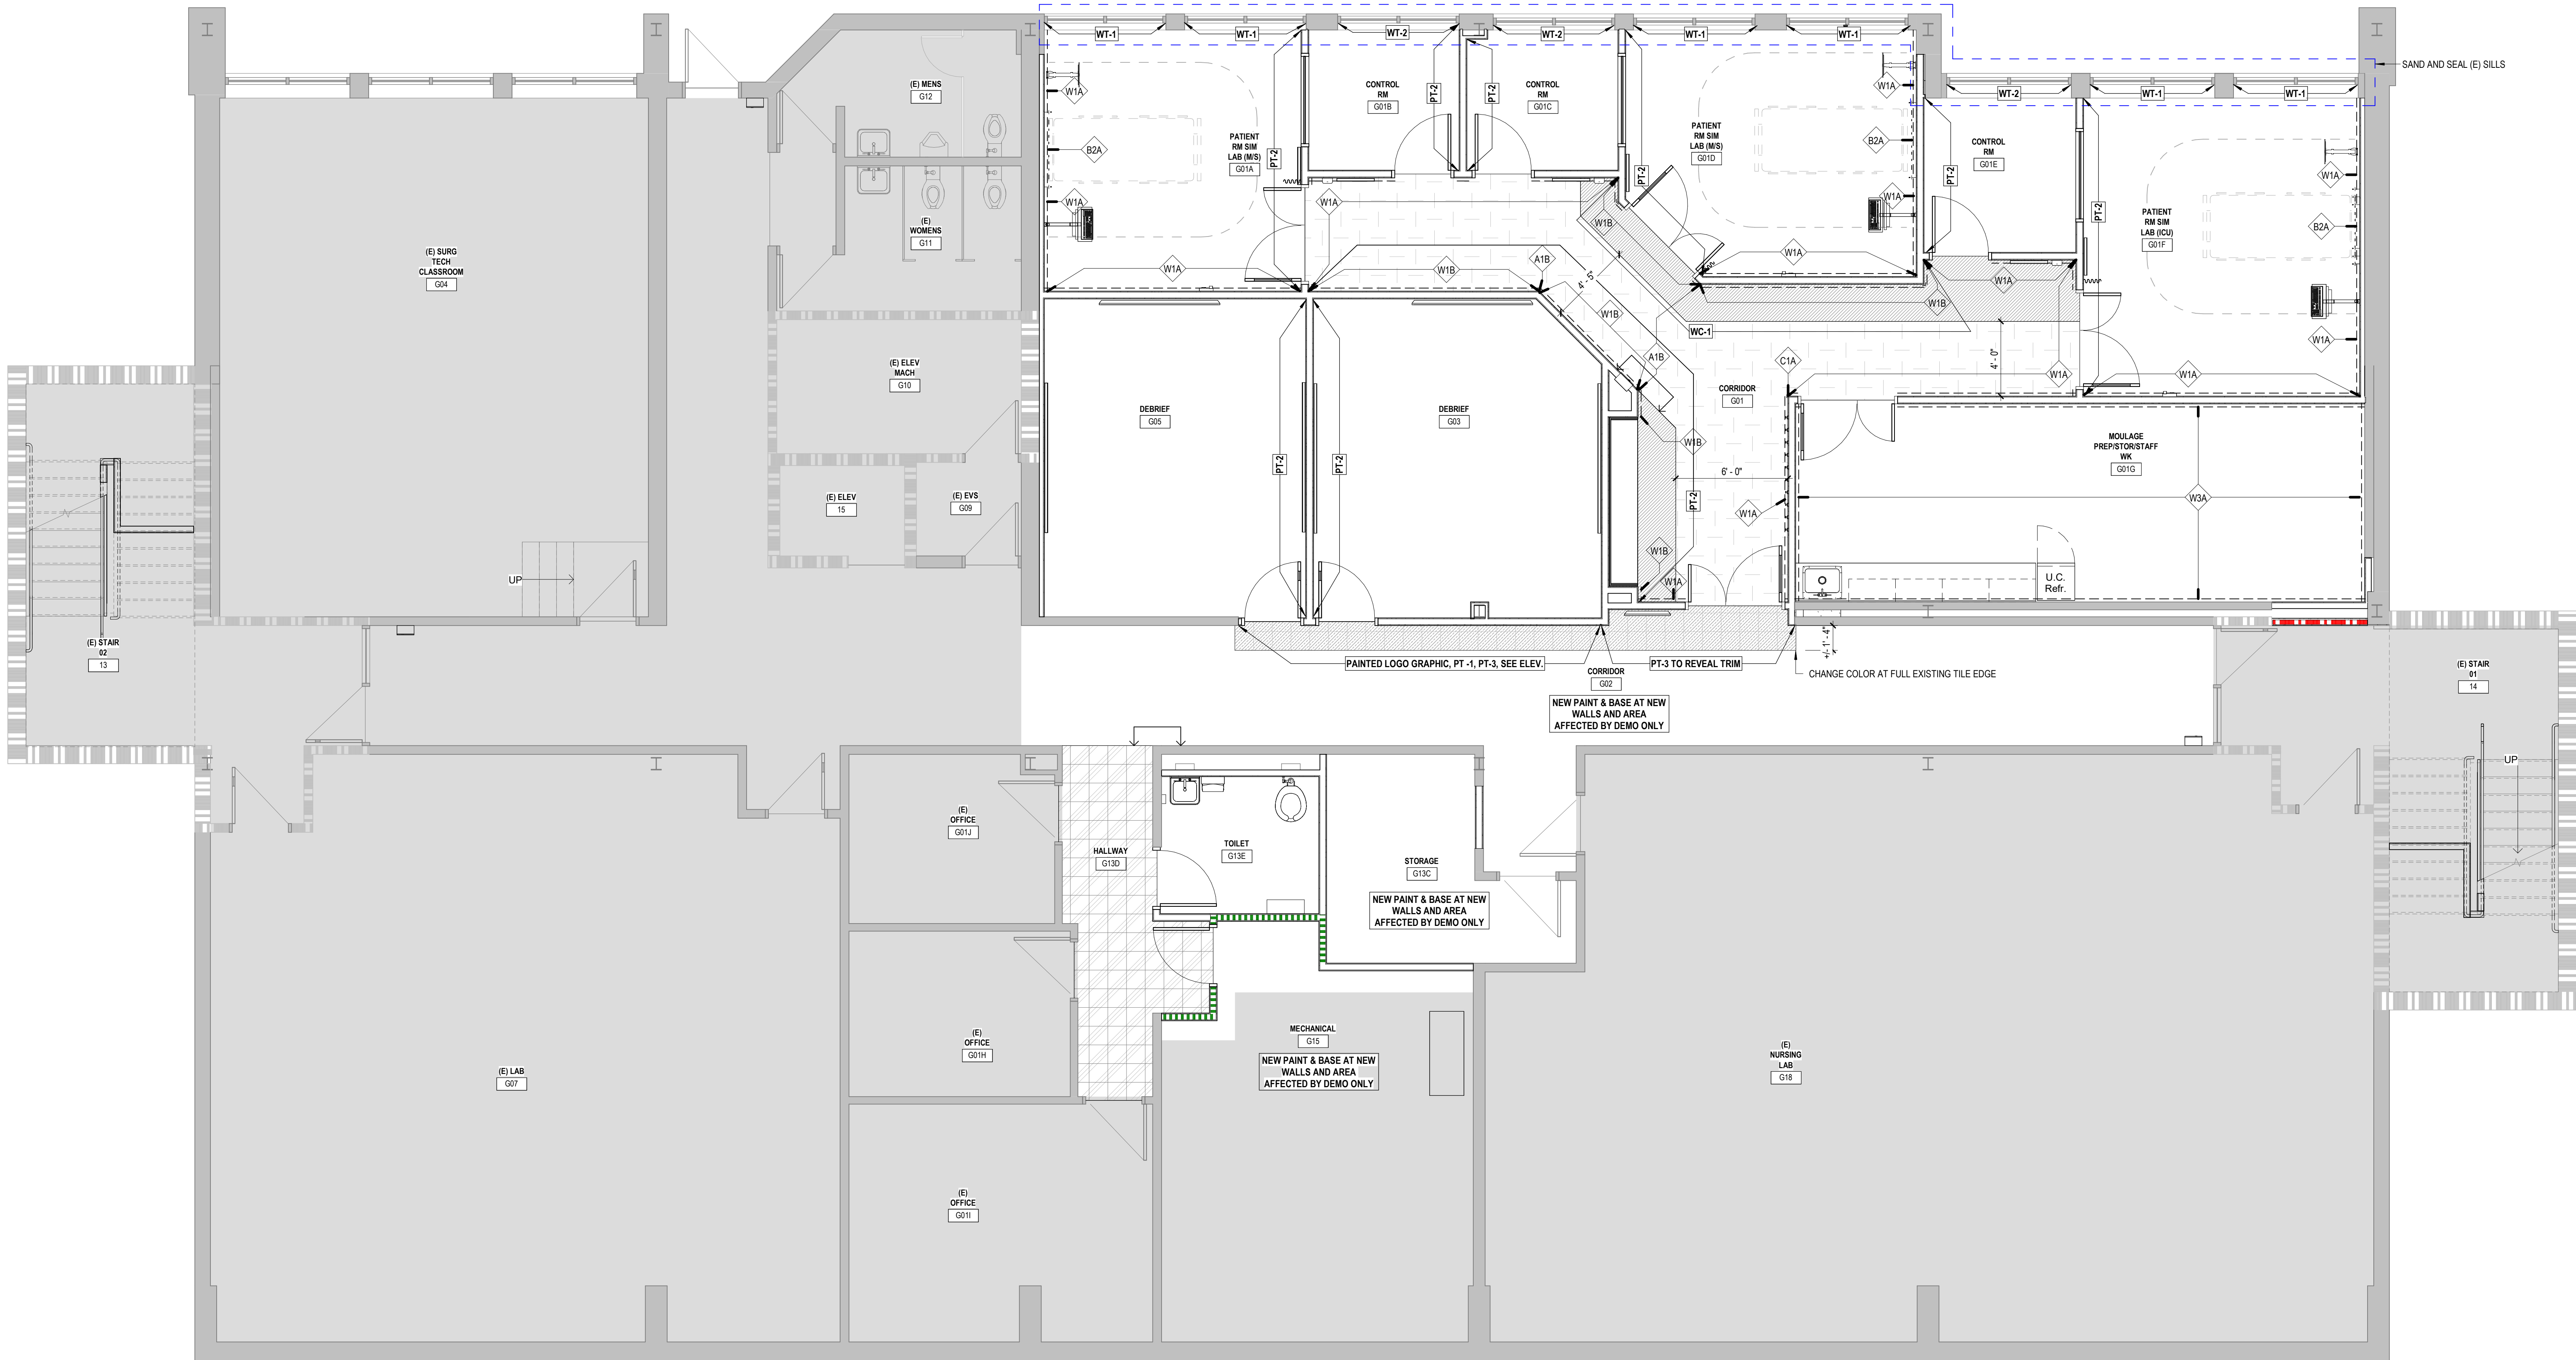

**HEALTH SCIENCE
CENTER**

BGS NUM: 3809

79 Ford Road, South Portland, Maine,
04106


[illegible]

CONTENT:	
INTERIOR FINISH PLAN - FIRST FLOOR	
DRAWN BY:	RJB
PROJECT NO:	25-062-00
DATE:	05/08/2026
REVISED:	
SCALE:	As indicated
A11.1	
Project Phase	
CONSTRUCTION DOCUMENTS	
COPYRIGHT © 2026 BY LAVALLÉE BRENSINGER PLLC. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

Autodesk Docs: 025-062-00 SMCC-HS Ch Reno25-062-00_SINOC_125.rvt

5/8/2026 3:43:36 PM

FINISH PLAN KEY

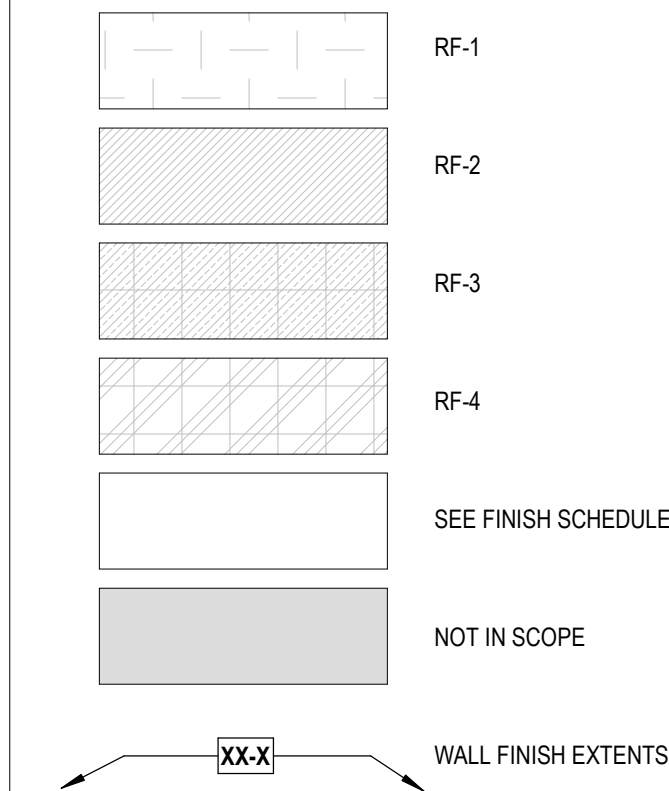


FINISH PLAN GENERAL NOTES:

1. HATCH PATTERNS ARE ONLY SHOWN ON FLOOR FINISH PLANS WHERE MORE THAN ONE FLOORING OCCUR IN A SPACE, OR WHERE PATTERN DIRECTION CHANGES. ALL OTHER FLOORING IS INDICATED IN THE FINISH SCHEDULE.

WALL PROTECTION GENERAL NOTES:


- REFER TO FINISH LEGEND AND WALL FINISH PLANS FOR WALL PROTECTION TYPE/LOCATIONS.
- WALL PROTECTION IS NOTED ON AI SCHEDULE FOR COLOR ONLY AND SHOULD BE COORDINATED WITH ELEVATIONS/ WALL FINISH PLANS PRIOR TO ORDERING.
- SEE WALL FINISH PLANS FOR CORNER GUARD AND BUMPER RAIL LOCATIONS/ TYPES.

MATERIAL DESIGNATION:

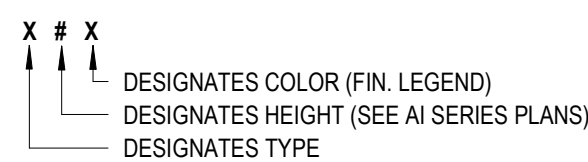

PAINT GENERAL NOTES:

- SEE FINISH SCHEDULE FOR ALL GENERAL WALL PAINT and COATINGS. REFER TO WALL FINISH PLANS FOR ACCENT WALL LOCATIONS.
- REFER TO SPECIFICATION FOR PAINT/COATING FINISHES U.N.O BELOW.
- HM DOOR FRAMES AND WINDOW FRAMES ARE TO BE PTD PT-4
- CEILING PAINT:**
 - ALL GWB CEILINGS AND SOFFITS SHALL BE PAINTED PT-0 UNLESS NOTED OTHERWISE ON THE REFLECTED CEILING PLAN.
 - REFER TO RCP FOR ALL NOTATIONS REGARDING ACCENT SOFFITS AND GWB CEILING PAINTS. ACCENT COLORS ARE NOTED WITHIN THE CEILING TAGS.
 - PAINTED SOFFITS ARE TO RECEIVE PAINT ON ALL HORIZONTAL AND VERTICAL SIDES OF THE SOFFIT.



SMCC

HEALTH SCIENCE
CENTER

BGS NUM: 3809

79 Ford Road, South Portland, Maine,
04106


NO.	DESCRIPTION	DATE



CONTENT:	INTERIOR FINISH PLAN - SECOND FLOOR
DRAWN BY:	RJB
PROJECT NO:	25-062-00
DATE:	05/08/2026
REVISED:	
SCALE:	As indicated
Project Phase	
CONSTRUCTION DOCUMENTS	
COPYRIGHT © 2026 BY LAVALLEE BRENSINGER PLLC.	
ALL RIGHTS RESERVED.	
NO REPRODUCTION WITHOUT PERMISSION.	



160 Veranda Street

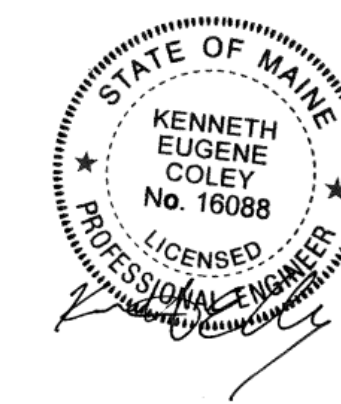


SMCC

**HEALTH SCIENCE
CENTER**

BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106

NO	DESCRIPTION	DATE
----	-------------	------



CONTENT:

FIRE PROTECTION - GROUND LEVEL

DRAWN BY: SCI

PROJECT NO: 25-062-00

DATE: 02/13/2028


REVISOR:

SCALE: 3/16" = 1'-0"

FP1.1

Project Phase
CONSTRUCTION DOCUMENTS 5-08-2026

COPYRIGHT © 2025 BY LAVALLÉE/BRENSINGER
PROFESSIONAL ASSOCIATION, ALL RIGHTS RESERVED.
NO REPRODUCTION WITHOUT PERMISSION.

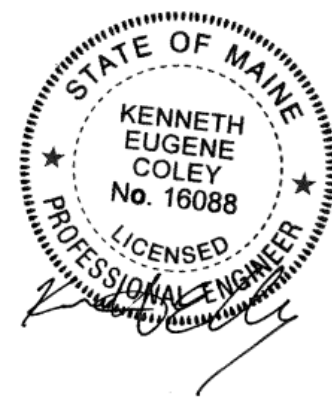


SMCC

HEALTH SCIENCE
CENTER

BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE



CONTENT:
FIRE PROTECTION - FIRST FLOOR

DRAWN BY: SCL

PROJECT NO: 25-062-00

DATE: 02/13/2026


REVISED:

SCALE: 3/16" = 1'-0"

FP1.2

Project Phase
CONSTRUCTION DOCUMENTS 5-08-2026

COPYRIGHT © 2025 BY LAVALLEE/BRENSINGER
PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED.
NO REPRODUCTION WITHOUT PERMISSION.

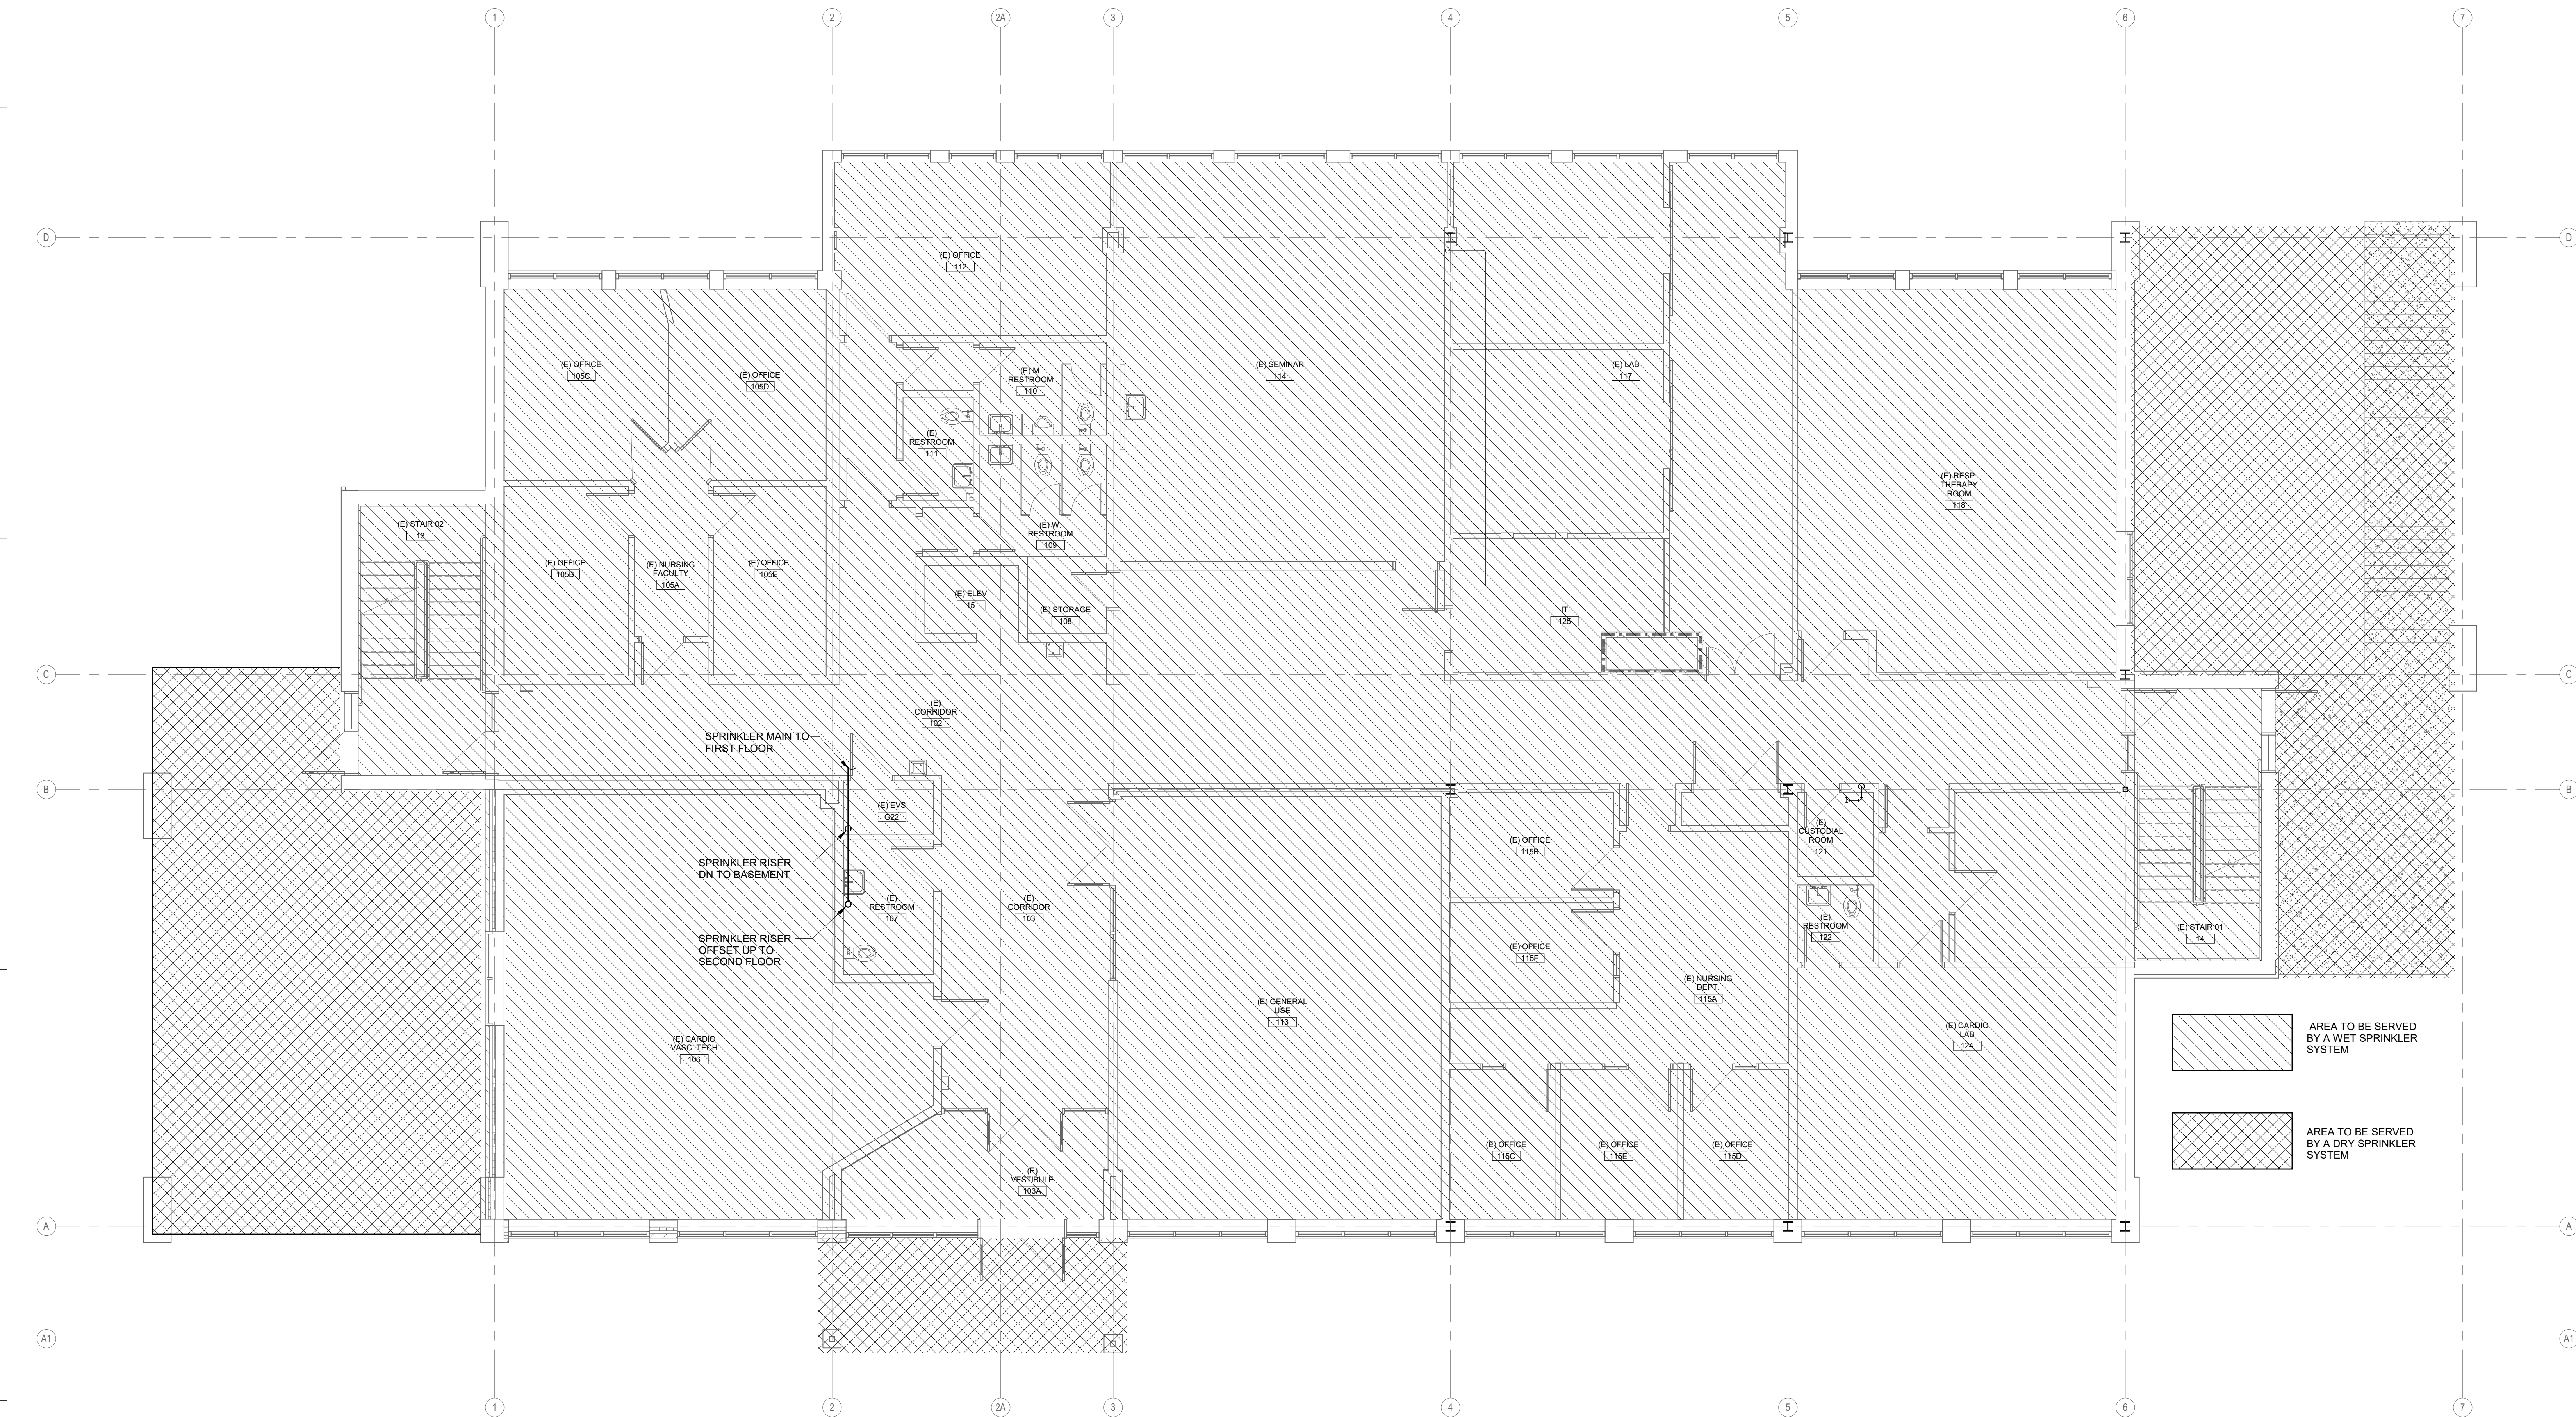




HEALTH SCIENCE
CENTER

BGS NUM: 3809


2 Ford Road, South Portland, Maine,
04106


NO.	DESCRIPTION	DATE



CONTENT:	FIRE PROTECTION - SECOND FLOOR
DRAWN BY:	SCL
PROJECT NO:	25-062-00
DATE:	02/13/2026
REVISED:	
SCALE:	3/16" = 1'-0"
Project Phase	CONSTRUCTION DOCUMENTS 5-08-2026
COPYRIGHT © 2025 BY LAVALLEE/BRENSINGER PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

FOR ADDITIONAL INFORMATION, REFER TO PROJECT MANUAL.

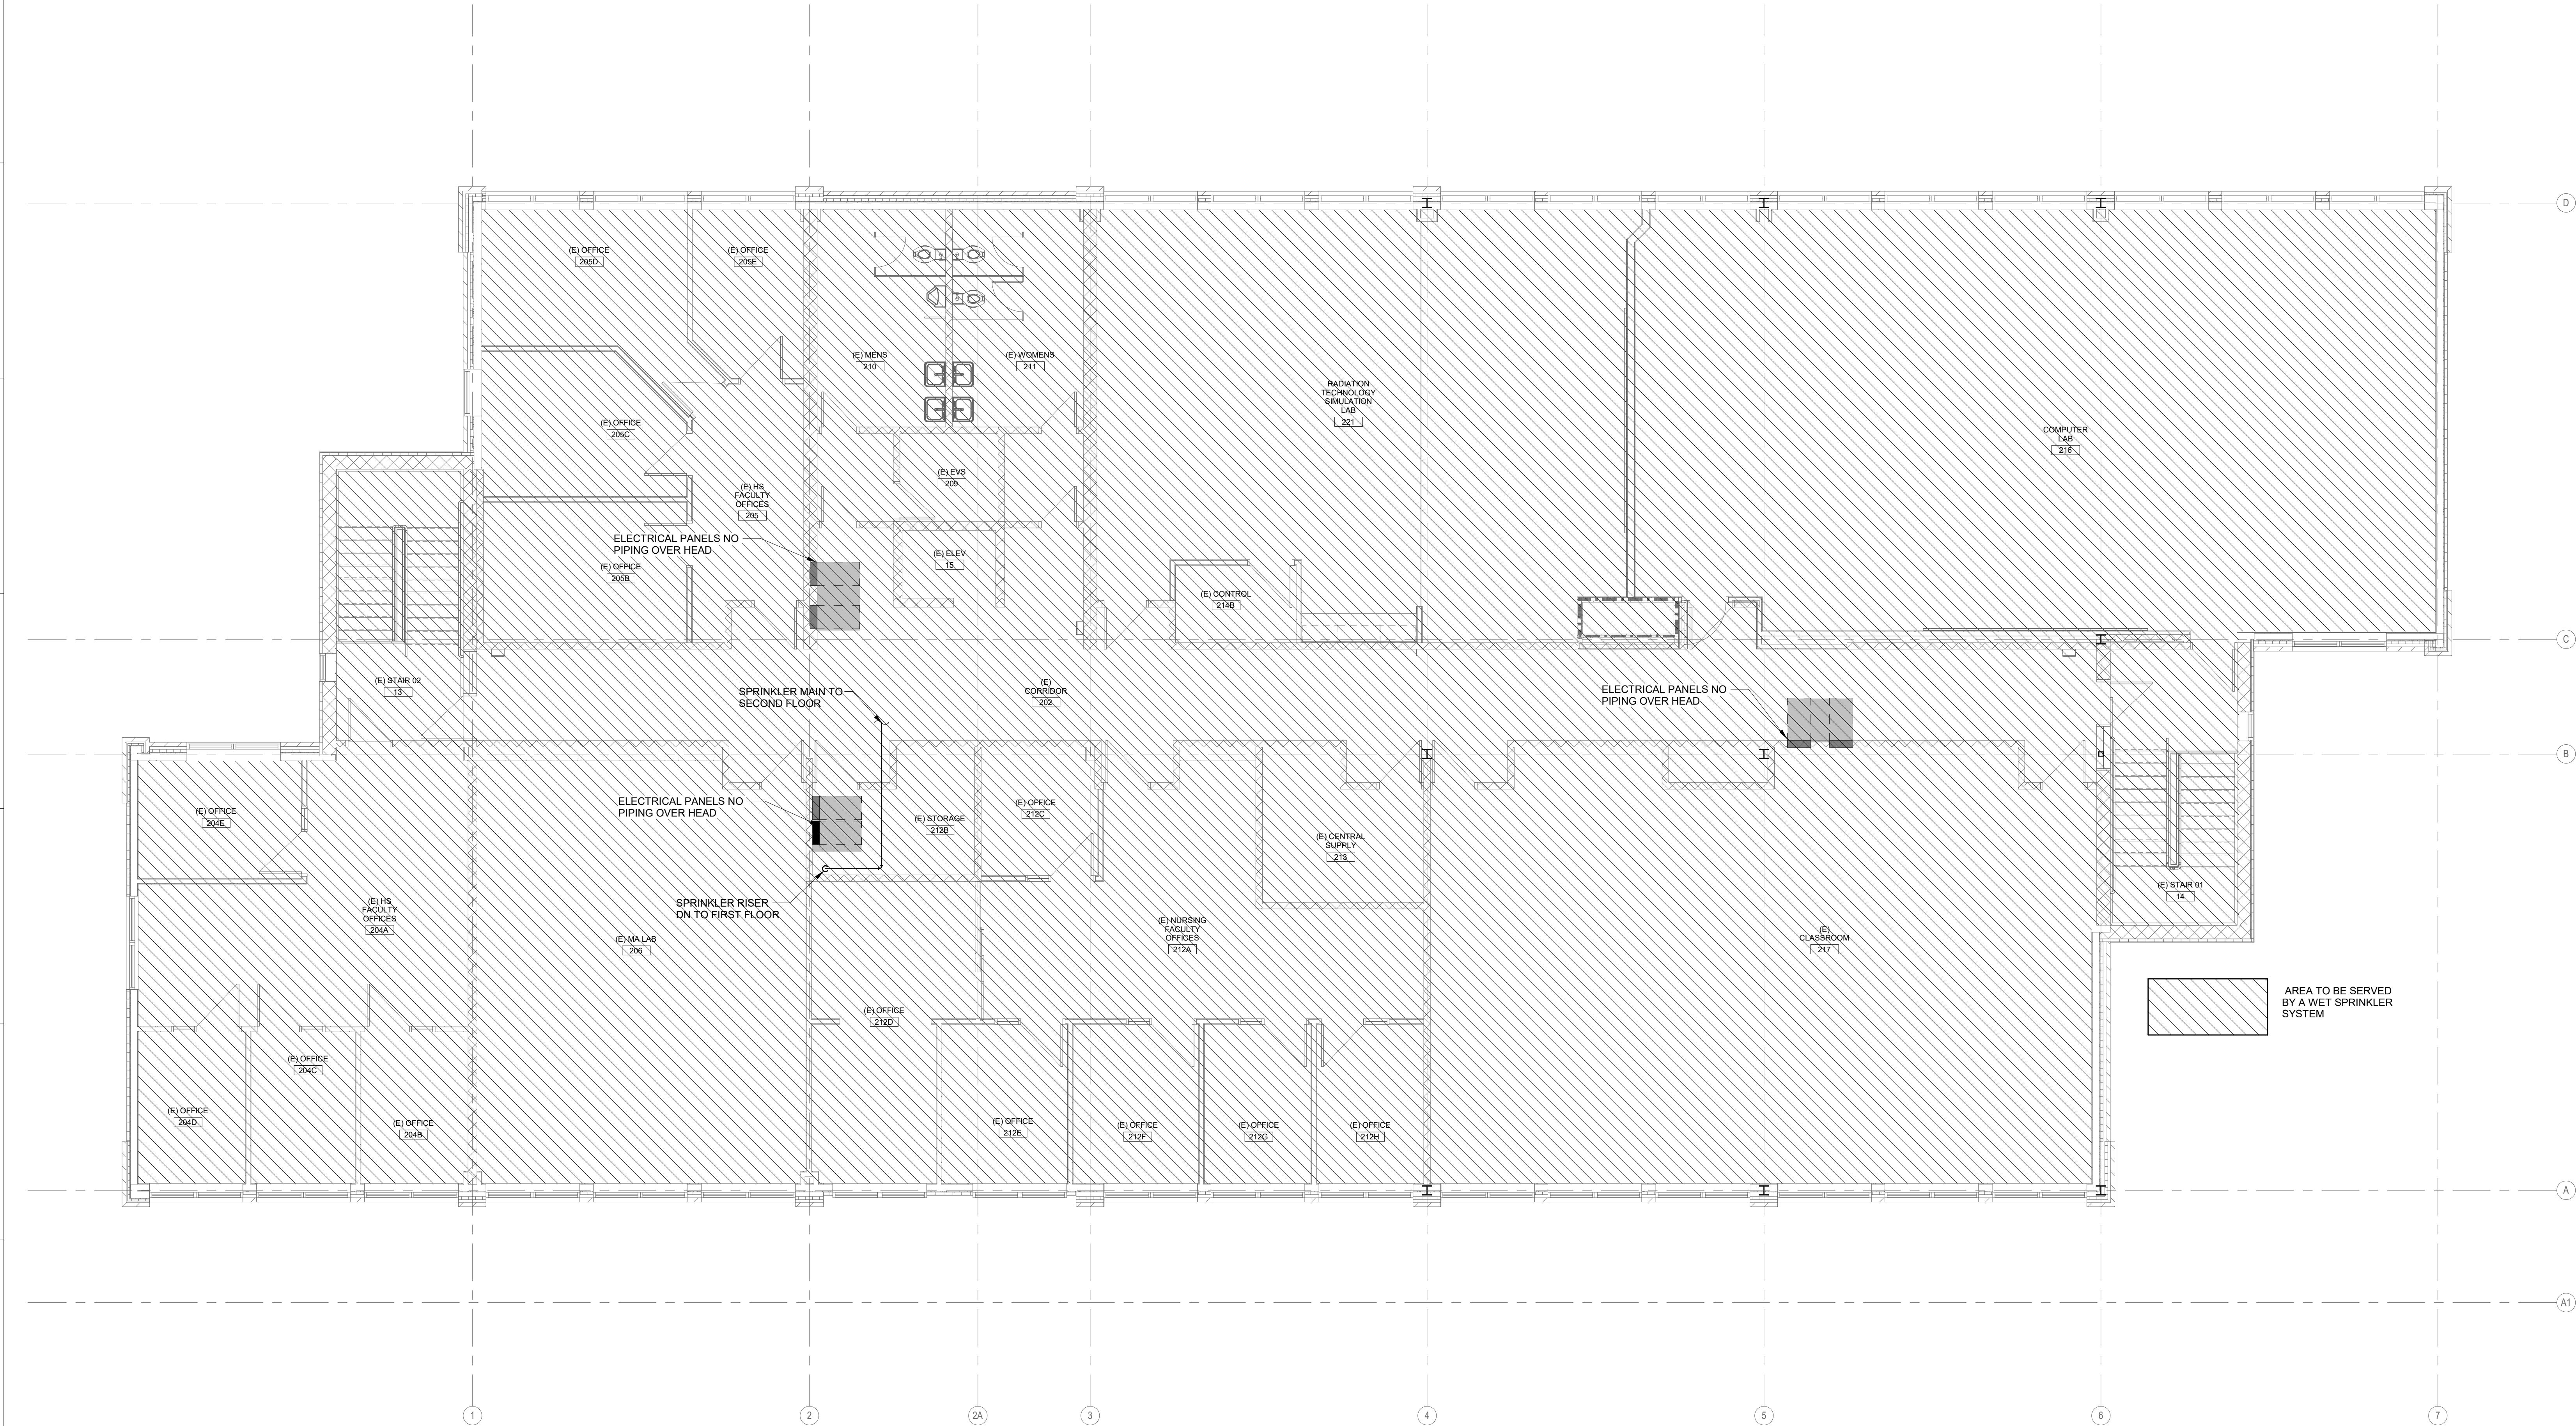

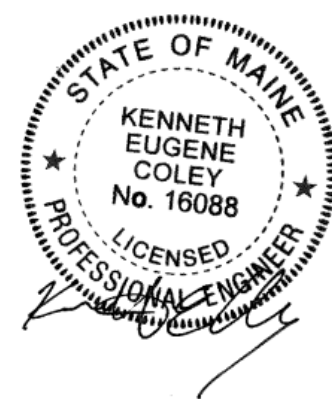

HEALTH SCIENCE
CENTER

BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE

CONTENT:
PLUMBING AND HVAC NOTES, LEGEND
AND ABBREVIATIONS

DRAWN BY: SCL

PROJECT NO: 25-062-00

DATE: 02/13/2025

REVISED:

SCALE: 1/2" = 1'-0"

P-000

Project Phase

CONSTRUCTION DOCUMENTS 5-08-2026

COPYRIGHT © 2025 BY LAVALLEE-BRENSINGER
PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED.
NO REPRODUCTION WITHOUT PERMISSION.

	PIPE ELBOW TURNED DN		GLOBE VALVE		STEAM TRAP - FLOAT & THERMOSTATIC INDICATED T.T.= THERMOSTATIC TRAP, B.T.= BUCKET TRAP		EXPANSION LOOP		CHANGE IN ELEVATION - UP, DOWN, RISE OR DROP		MOTORIZED DAMPER		REGISTER, GRILLE & DIFFUSER TAG DIFFUSER, REGISTER OR GRILLE No. QUANTITY CFM AIR FLOW
	PIPE ELBOW TURNED UP		LOCKABLE BALL VALVE		PUMP - POINT OF TRIANGLE INDICATES DIRECTION OF FLOW		EXPANSION LOOP (BRAIDED/MANUFACTURED)		SUPPLY DUCT TURNED UP / DN		FLEXIBLE CONNECTION		FINTUBE TAG FINTUBE No. LENGTH GPM
	PIPING TEE DOWN		PLUG VALVE		GAS SHUT-OFF VALVE		FLOOR DRAIN		RETURN DUCT TURNED UP / DN		TEMPERATURE SENSOR OR THERMOSTAT (AS SPECIFIED)		HUMIDISTAT OR HUMIDITY SENSOR (AS SPECIFIED)
	PIPING TEE UP		2-WAY CONTROL VALVE		HOSE END DRAIN VALVE w/ CAP		SHOCK ABSORBER - WATER HAMMER ARRESTOR		EXHAUST DUCT TURNED UP / DN		CARBON DIOXIDE SENSOR		CARBON MONOXIDE SENSOR
	PIPE RISER		LOCK & SHIELD VALVE		TEMPERATURE / PRESSURE TAP - PETE'S PLUG		FIRE DEPARTMENT - WALL MOUNTED CONNECTION		ROUND DUCT TURNED UP / DN		ACCESS PANEL		DUCT SMOKE DETECTOR
	45° ELBOW DOWN		CHECK VALVE		THERMOMETER w/ COCK		FIRE DEPARTMENT - FREESTANDING CONNECTION		MITERED DUCT ELBOW w/ TURNING VANES		ROOFTOP EXHAUST FAN		ROOFTOP SUPPLY FAN
	PIPING TO BE REMOVED		BALANCING VALVE - CIRCUIT SETTER		SOLENOID VALVE		FIRE DEPARTMENT - WATER GONG		RADIUS DUCT ELBOW		CEILING DIFFUSER - 4-WAY BLOW		CEILING DIFFUSER - 3-WAY BLOW
	CAPPED PIPING		AIR VENT - REFER TO SPECIFICATIONS		ORIFICE FLOWMETER		DUCTWORK - FIRST DIMENSION IS SIDE SHOWN IN INCHES S= SUPPLY, R= RETURN, E= EXHAUST AIR, O= OUTSIDE AIR F.O. = FLAT OVAL		DUCT / PIPE CAP- SINGLE / DOUBLE LINE		CEILING DIFFUSER - 2-WAY BLOW		CEILING DIFFUSER - CORNER BLOW
	CONCENTRIC REDUCER		STRAINER w/ BLOWDOWN VALVE AND CAP		DIFFERENTIAL PRESSURE TRANSMITTER		ACCOUTSICAL LINING (DUCT DIMENSION FOR NET FREE AREA)		VOLUME DAMPER		CEILING DIFFUSER - 2-WAY BLOW		CEILING RETURN GRILLE
	ECCENTRIC REDUCER		EXPANSION VALVE - AUTOMATIC		HUMIDIFIER - DUCT / AHU MOUNTED		DUCTWORK TO BE REMOVED		FIRE DAMPER		CEILING EXHAUST GRILLE		POINT OF CONNECTION - EXISTING TO NEW
	DIRECTION OF FLOW		RELIEF / SAFETY VALVE		FINNED TUBE BASEBOARD		SINGLE LINE DUCTWORK TO BE REMOVED		SMOKE DAMPER		DIRECTION OF AIR FLOW		DETAIL REFERENCE SYMBOL DETAIL No. SHEET DETAIL LOCATED ON
	PIPE PITCHES DOWN		PRESSURE GAUGE w/ COCK		HOSE BIBB / WALL HYDRANT		DUCT TRANSITION		FIRE AND SMOKE DAMPER		SECTION REFERENCE SYMBOL SECTION No. SHEET SECTION LOCATED ON		SECTION REFERENCE SYMBOL SECTION No. SHEET SECTION LOCATED ON
	PIPE GUIDE		SIGHT GLASS		FLOOR CLEANOUT		SQUARE TO ROUND DUCT TRANSITION		BACKDRAFT DAMPER				
	EXPANSION JOINT		FLOW SWITCH		FUSIBLE LINK VALVE		FLEX DUCT - DOUBLE LINE						
	PIPE ANCHOR		SELF-CONTAINED TEMPERATURE CONTROL VALVE w/ REMOTE SENSOR		WALL CLEANOUT		FLEX DUCT - SINGLE LINE						
	UNION				AQUASTAT								
	FLANGED CONNECTION												
	BACKFLOW PREVENTER												
	FLEXIBLE CONNECTION												
	SHUT-OFF / ISOLATION VALVE REFER TO SPECIFICATIONS												
	GATE VALVE												
	GATE VALVE - OUTSIDE SCREW & YOKE (OS&Y)												

E1 SYMBOLS LEGEND

NONE

	ACID WASTE		LIQUID NITROGEN
	AIR RELIEF		LIQUID OXYGEN
	BOILER BLOWDOWN		LIQUID PETROLEUM GAS
	CONDENSATE (HVAC DRAIN PAN)		LOW PRESSURE CONDENSATE
	COMPRESSED AIR		LOW PRESSURE STEAM
	CHILLED WATER RETURN		MEDICAL AIR
	CHILLED WATER SUPPLY		MEDIUM PRESSURE CONDENSATE
	COOLING TOWER RETURN		MEDIUM PRESSURE STEAM
	COOLING TOWER SUPPLY		MAKE-UP WATER
	CONDENSER WATER RETURN		NITROGEN
	CONDENSER WATER SUPPLY		NATURAL GAS
	DOMESTIC COLD WATER		NITROUS OXIDE
	DOMESTIC HOT WATER		NON-POTABLE WATER
	DOMESTIC HOT WATER RECIRC.		OXYGEN
	DRAIN		PUMPED CONDENSATE
	PUMP FORCE MAIN		PROCESS COLD WATER RETURN
	FUEL OIL FILL		PROCESS COLD WATER SUPPLY
	FUEL OIL RETURN		REFRIGERANT DISCHARGE
	FUEL OIL SUPPLY		REFRIGERANT LIQUID
	FUEL OIL TANK VENT		REFRIGERANT SUCTION
	FEEDWATER		REVERSE OSMOSIS WATER
	GLYCOL RETURN		RAIN WATER - ABOVE FLOOR
	GLYCOL SUPPLY		RAIN WATER - BELOW GRADE
	GREASE LADEN VENT		RAIN WATER OVERFLOW - ABOVE FLOOR
	GREASE LADEN WASTE		RAIN WATER OVERFLOW - BELOW GRADE
	GEO THERMAL WATER RETURN		SPRINKLER MAIN PIPING
	GEO THERMAL WATER SUPPLY		SOLAR WATER RETURN
	HUMIDIFICATION LINE		SOLAR WATER SUPPLY
	HYDROGEN GAS		TRAP PRIMER - ABOVE FLOOR
	HEAT/COOL RETURN		TRAP PRIMER - BELOW GRADE
	HEAT/COOL SUPPLY		TEMPERED WATER RETURN
	HEAT PUMP WATER RETURN		TEMPERED WATER SUPPLY
	HEAT PUMP WATER SUPPLY		SANITARY SOIL VENT - ABOVE FLOOR
	HIGH PRESSURE CONDENSATE		SANITARY SOIL VENT - BELOW GRADE
	HIGH PRESSURE STEAM		VACUUM (AIR)
	HIGH-TEMP HOT WATER RETURN		VACUUM CLEANING (HOUSE)
	HOT WATER RETURN		VACUUM PUMP DISCHARGE
	HOT WATER SUPPLY		SANITARY SOIL WASTE - ABOVE FLOOR
	INDUSTRIAL WASTE		SANITARY SOIL WASTE - BELOW GRADE
	INDIRECT WASTE		SANITARY WET VENT - ABOVE FLOOR
			SANITARY WET VENT - BELOW GRADE

AAV	AUTOMATIC AIR VENT	CJ	COPPER; CONDENSING UNIT
AC	ABOVE CEILING	CUH	CABINET UNIT HEATER
ACC	AIR COOLED CONDENSER	C.V.	CONTROL VALVE
ACU	AIR CONDITIONING UNIT	CW	COLD WATER; CLOCKWISE
ADA	AMERICANS WITH DISABILITIES ACT	DB	DRY BULB TEMPERATURE
AD	ACCESS DOOR	DC	DOUBLE CONTAINED
AE	ACID EXHAUST	DDC	DIRECT DIGITAL CONTROL
AW	ACID WASTE	DET	DETAIL
AFF; A.F.F.	ABOVE FINISHED FLOOR	DIA	DIAMETER
AHU	AIR HANDLING UNIT	DIC	DOWN IN CHASE
AP	ACCESS PANEL	DIW	DOWN IN WALL
APPROX.	APPROXIMATE; APPROXIMATELY	DN	DOWN
APMR	AS PER MFR'S RECOMMENDATIONS	DS	DOWNSPOUT
ATC	AUTOMATIC TEMPERATURE CONTROL	DT	DROP AND TRANSITION
AV	AIR VENT	DV	DRAIN VALVE
BC	BALANCING COCK	DWG	DRAWING
BDD	BACKDRAFT DAMPER	E	EXHAUST AIR
BG	BLAST GATE	EF	EXHAUST FAN
BF	BARRIER FREE	EG	EXHAUST GRILLE
BFP	BACKFLOW PREVENTER	ELEV	ELEVATION
BHP	BRAKE HORSEPOWER	ELONG	ELONGATE
BLDG	BUILDING	ENC	ENCLOSURE
BOD	BOTTOM OF DUCT	ER	EXHAUST REGISTER
B.T.U.; BTU	BRITISH THERMAL UNIT	ERU	ENERGY RECOVERY UNIT
CONV.	CONVECTOR	ESP	EXTERNAL STATIC PRESSURE
CCW	COUNTER CLOCKWISE	ET	EXPANSION TANK
CF	CAPPED FOR FUTURE	(E)	EXISTING
CFM	CUBIC FEET PER MINUTE	F&T	FLOAT AND THERMOSTATIC
CLG	CEILING	FBO	FURNISHED BY OTHERS
CO	CLEANOUT	FBP	FACE AND BYPASS
CM	CONSTRUCTION MANAGER	FC	FLEXIBLE CONNECTION
CNTR	COUNTER; COUNTER TOP	FCO	FLOOR CLEANOUT
CONN	CONNECT; CONNECTION	FD#	FLOOR DRAIN TAG
CONT.	CONTINUE; CONTINUATION	FD	FIRE DAMPER
COORD.	COORDINATE	FDC	FIRE DEPT. CONNECTION
CORR	CORRIDOR	FIN	FINISH
CR	CHEMICAL RESISTING	FL; FLR	FLOOR
CT	COOLING TOWER	FP	FROST/FREEZE PROOF
CTE	CONNECT TO EXISTING	FTG	FOOTING
CTR	CENTER	FTR	FINNED TUBE RADIATION
CTRLN	CENTERLINE	FS	FLOW SWITCH

J7 ABBREVIATIONS

NONE

J1 PIPING LINETYPE LEGEND

NONE




SMCC

HEALTH SCIENCE
CENTER

BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106


NO.	DESCRIPTION	DATE



DEMOLITION KEYED NOTES:

- EXISTING AIR COMPRESSOR TO BE RELOCATED.
REMOVE EXISTING ASSOCIATED CA PIPING.
- EXISTING COMPRESSED AIR DRYER TO BE RELOCATED.
REMOVE EXISTING ASSOCIATED CA PIPING.
- EXISTING 1"CA UP TO LEVEL ABOVE TO REMAIN.
- REMOVE EXISTING CA PIPING COMPLETE.

CONTENT:	PLUMBING DEMOLITION PLAN - GROUND LEVEL
DRAWN BY:	SCL
PROJECT NO:	25-062-00
DATE:	02/13/2026
REVISED:	
SCALE:	3/16" = 1'-0"
Project Phase	PD1.1
CONSTRUCTION DOCUMENTS 5-08-2026	
COPYRIGHT © 2025 BY LAVALLEE BRENSINGER PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

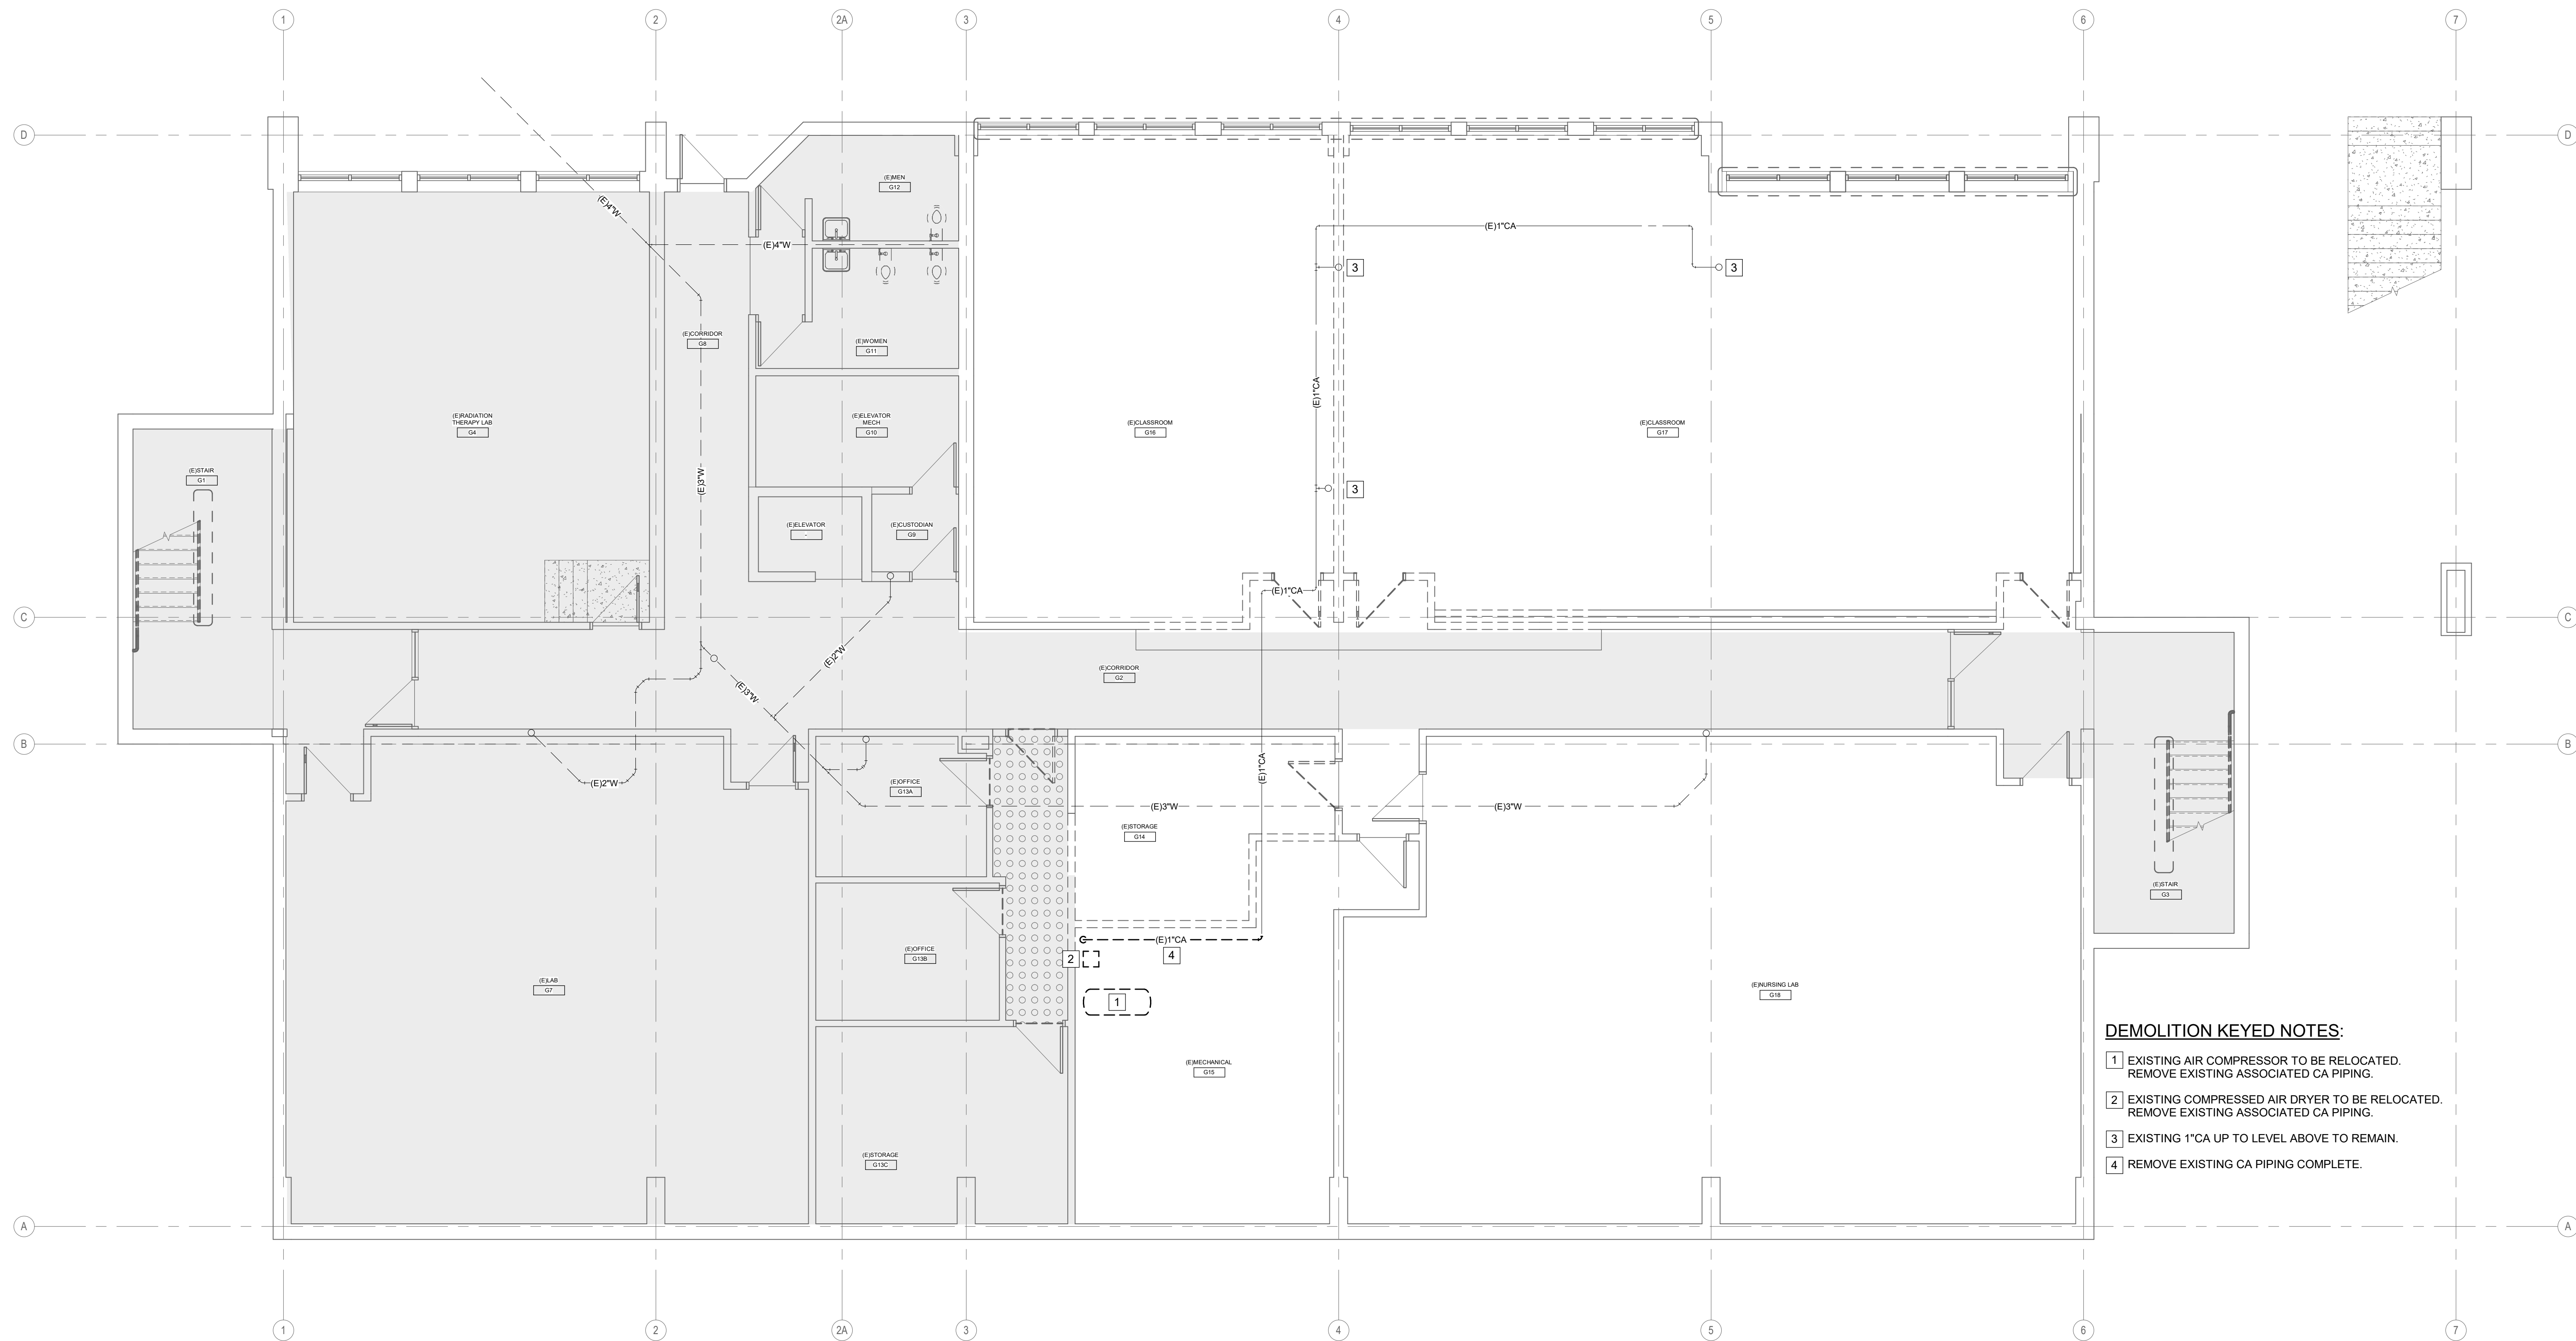






HEALTH SCIENCE
CENTER

BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE



CONTENT:
PLUMBING PLAN - FIRST FLOOR

DRAWN BY: SCL

PROJECT NO: 25-062-00

DATE: 02/13/2025

REVISED:

SCALE: 3/16" = 1'-0"

PL1.2

Project Phase
CONSTRUCTION DOCUMENTS 5-08-2026

COPYRIGHT © 2025 BY LAVALLEE-BRENSINGER
PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED.
NO REPRODUCTION WITHOUT PERMISSION.



J1 PLUMBING PLAN - FIRST FLOOR
3/16" = 1'-0"




**HEALTH SCIENCE
CENTER**


BGS NUM: 3809


2 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE



CONTENT: PLUMBING PLAN - SECOND FLOOR
DRAWN BY: SCL
PROJECT NO: 25-062-00
DATE: 02/13/2025
REVISED:
SCALE: 3/16" = 1'-0"
PL1.3
Project Phase CONSTRUCTION DOCUMENTS 5-08-2026
COPYRIGHT © 2025 BY LAVALLEE/BRENSINGER PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.

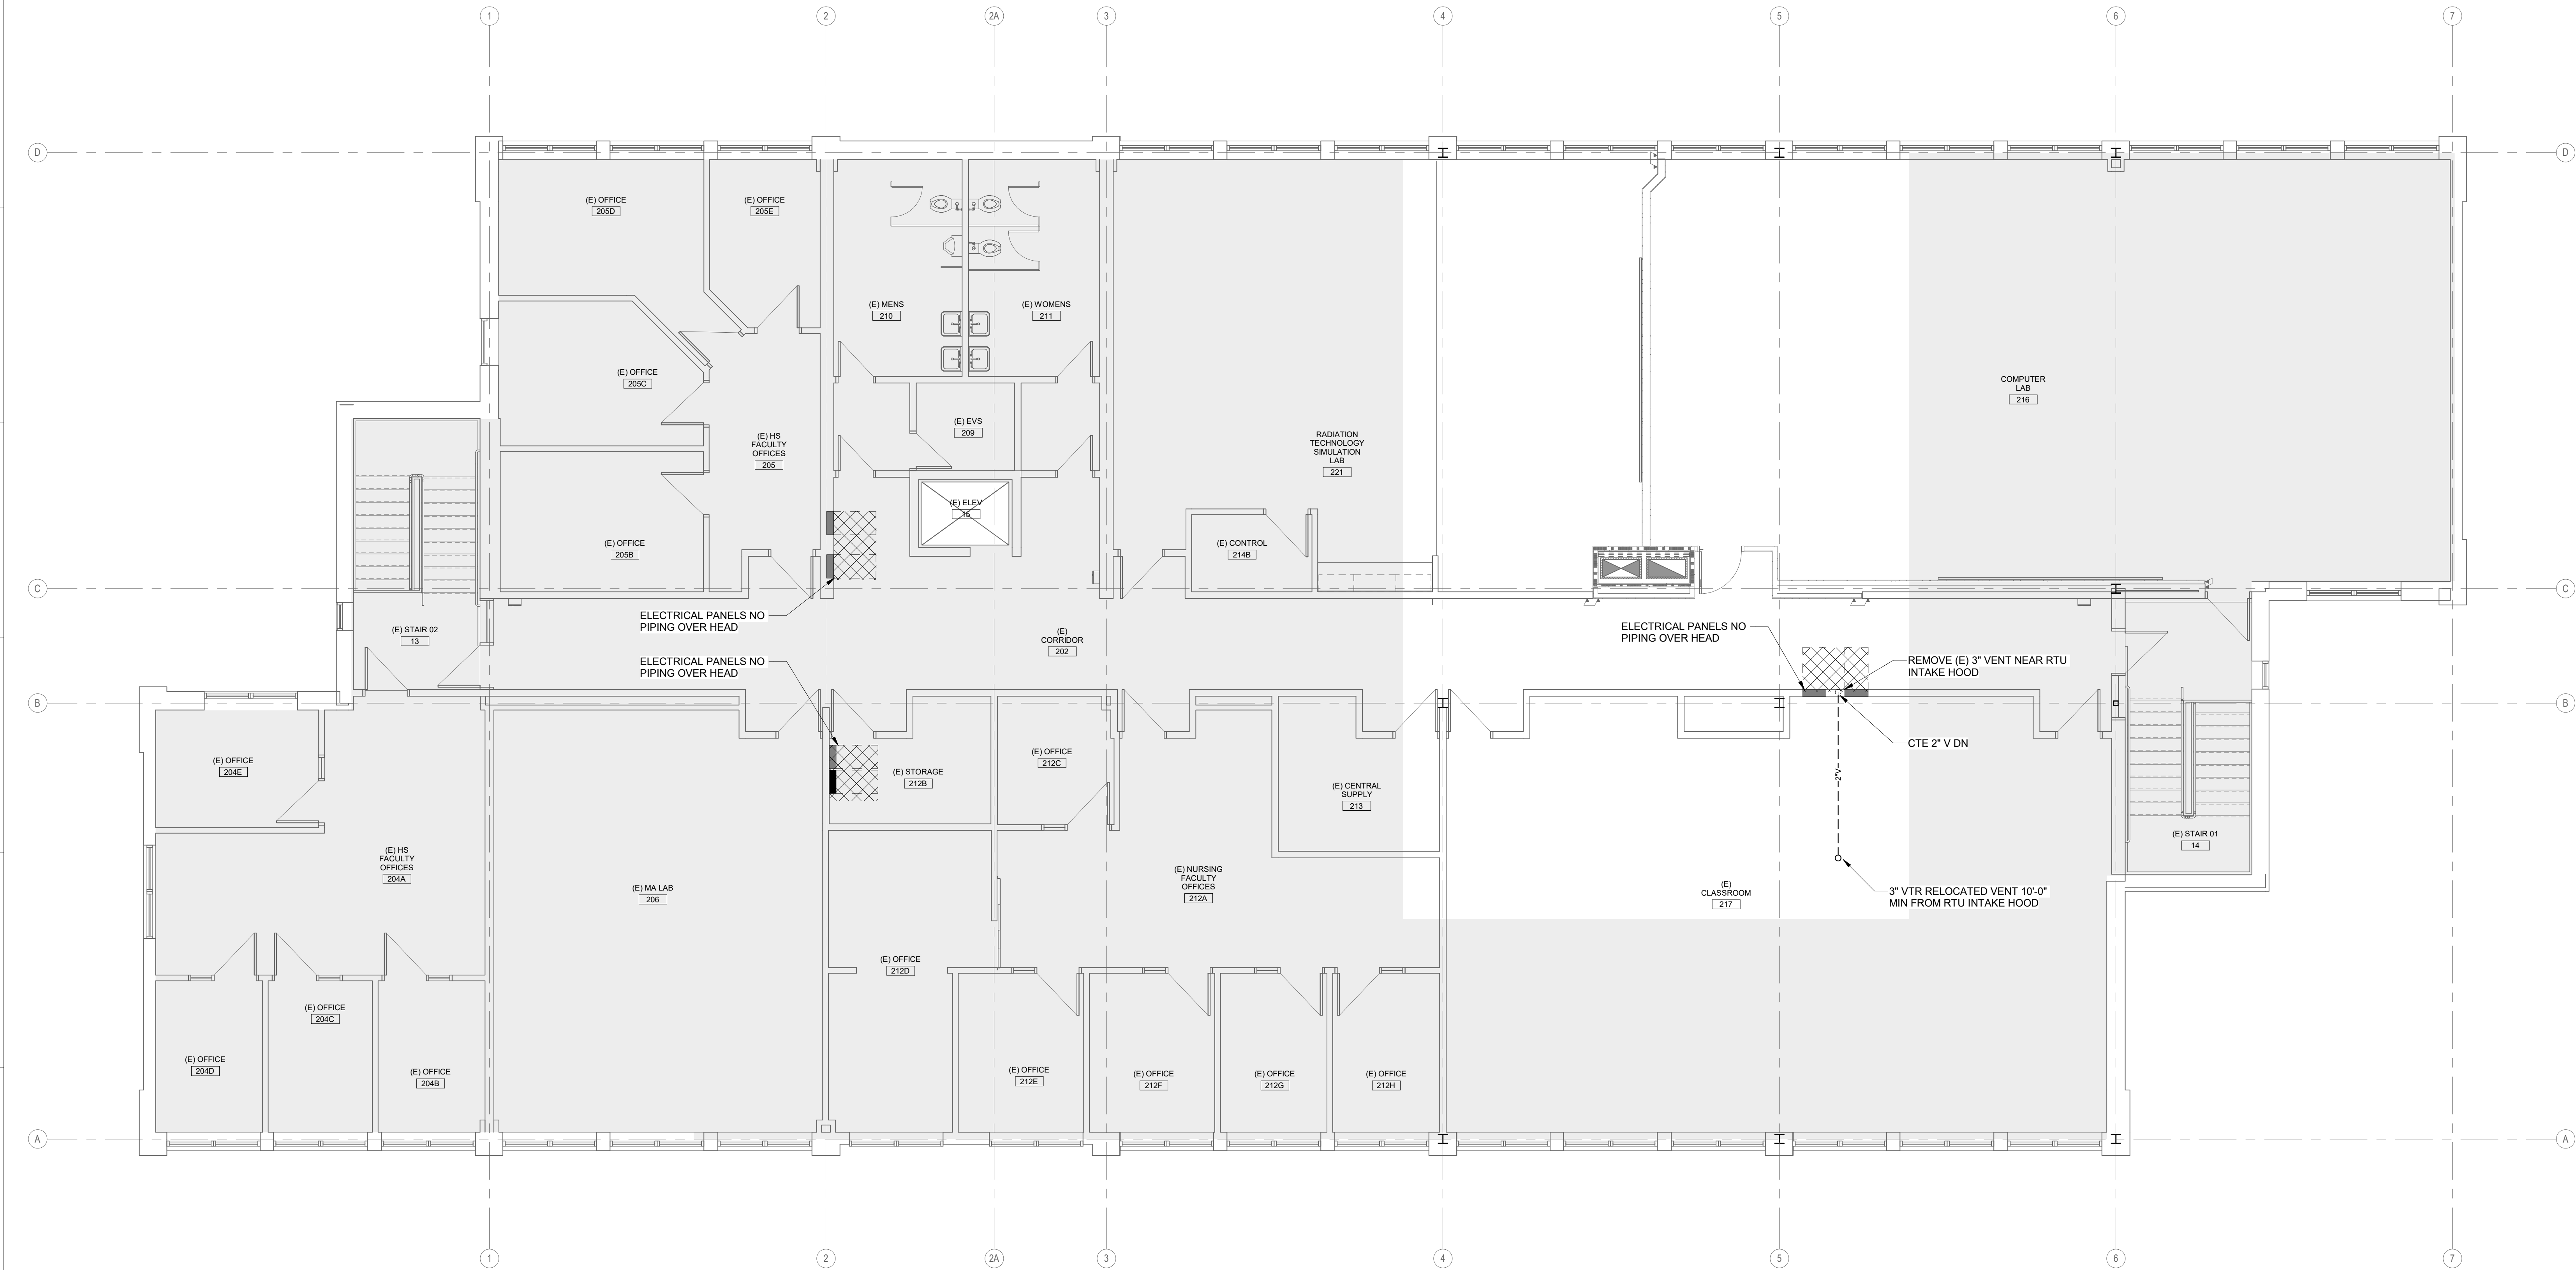

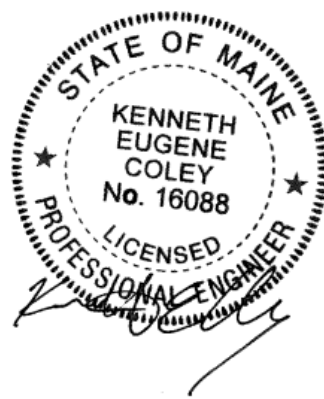


SMCC

HEALTH SCIENCE
CENTER

BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106


NO.	DESCRIPTION	DATE




CONTENT: MECHANICAL DEMOLITION PLAN - GROUND LEVEL
DRAWN BY: SCL
PROJECT NO: 25-062-00
DATE: 02/13/2025
REVISED:
SCALE: 3/16" = 1'-0"
MD1.0
Project Phase CONSTRUCTION DOCUMENTS 5-08-2026
COPYRIGHT © 2025 BY LAVALLEE-BRENSINGER PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.

DEMOLITION KEY NOTES:

- 1 REMOVE EXISTING DUCTWORK COMPLETE AS INDICATED ON DRAWINGS.
- 2 REMOVE EXISTING DIFFUSER/GRILLE COMPLETE WITH ASSOCIATED DUCTWORK.
- 3 REMOVE EXISTING THERMOSTAT COMPLETE.
- 4 REMOVE (E) FIN/TUBE COMPLETE, CAP HWS & R AT MAINS.

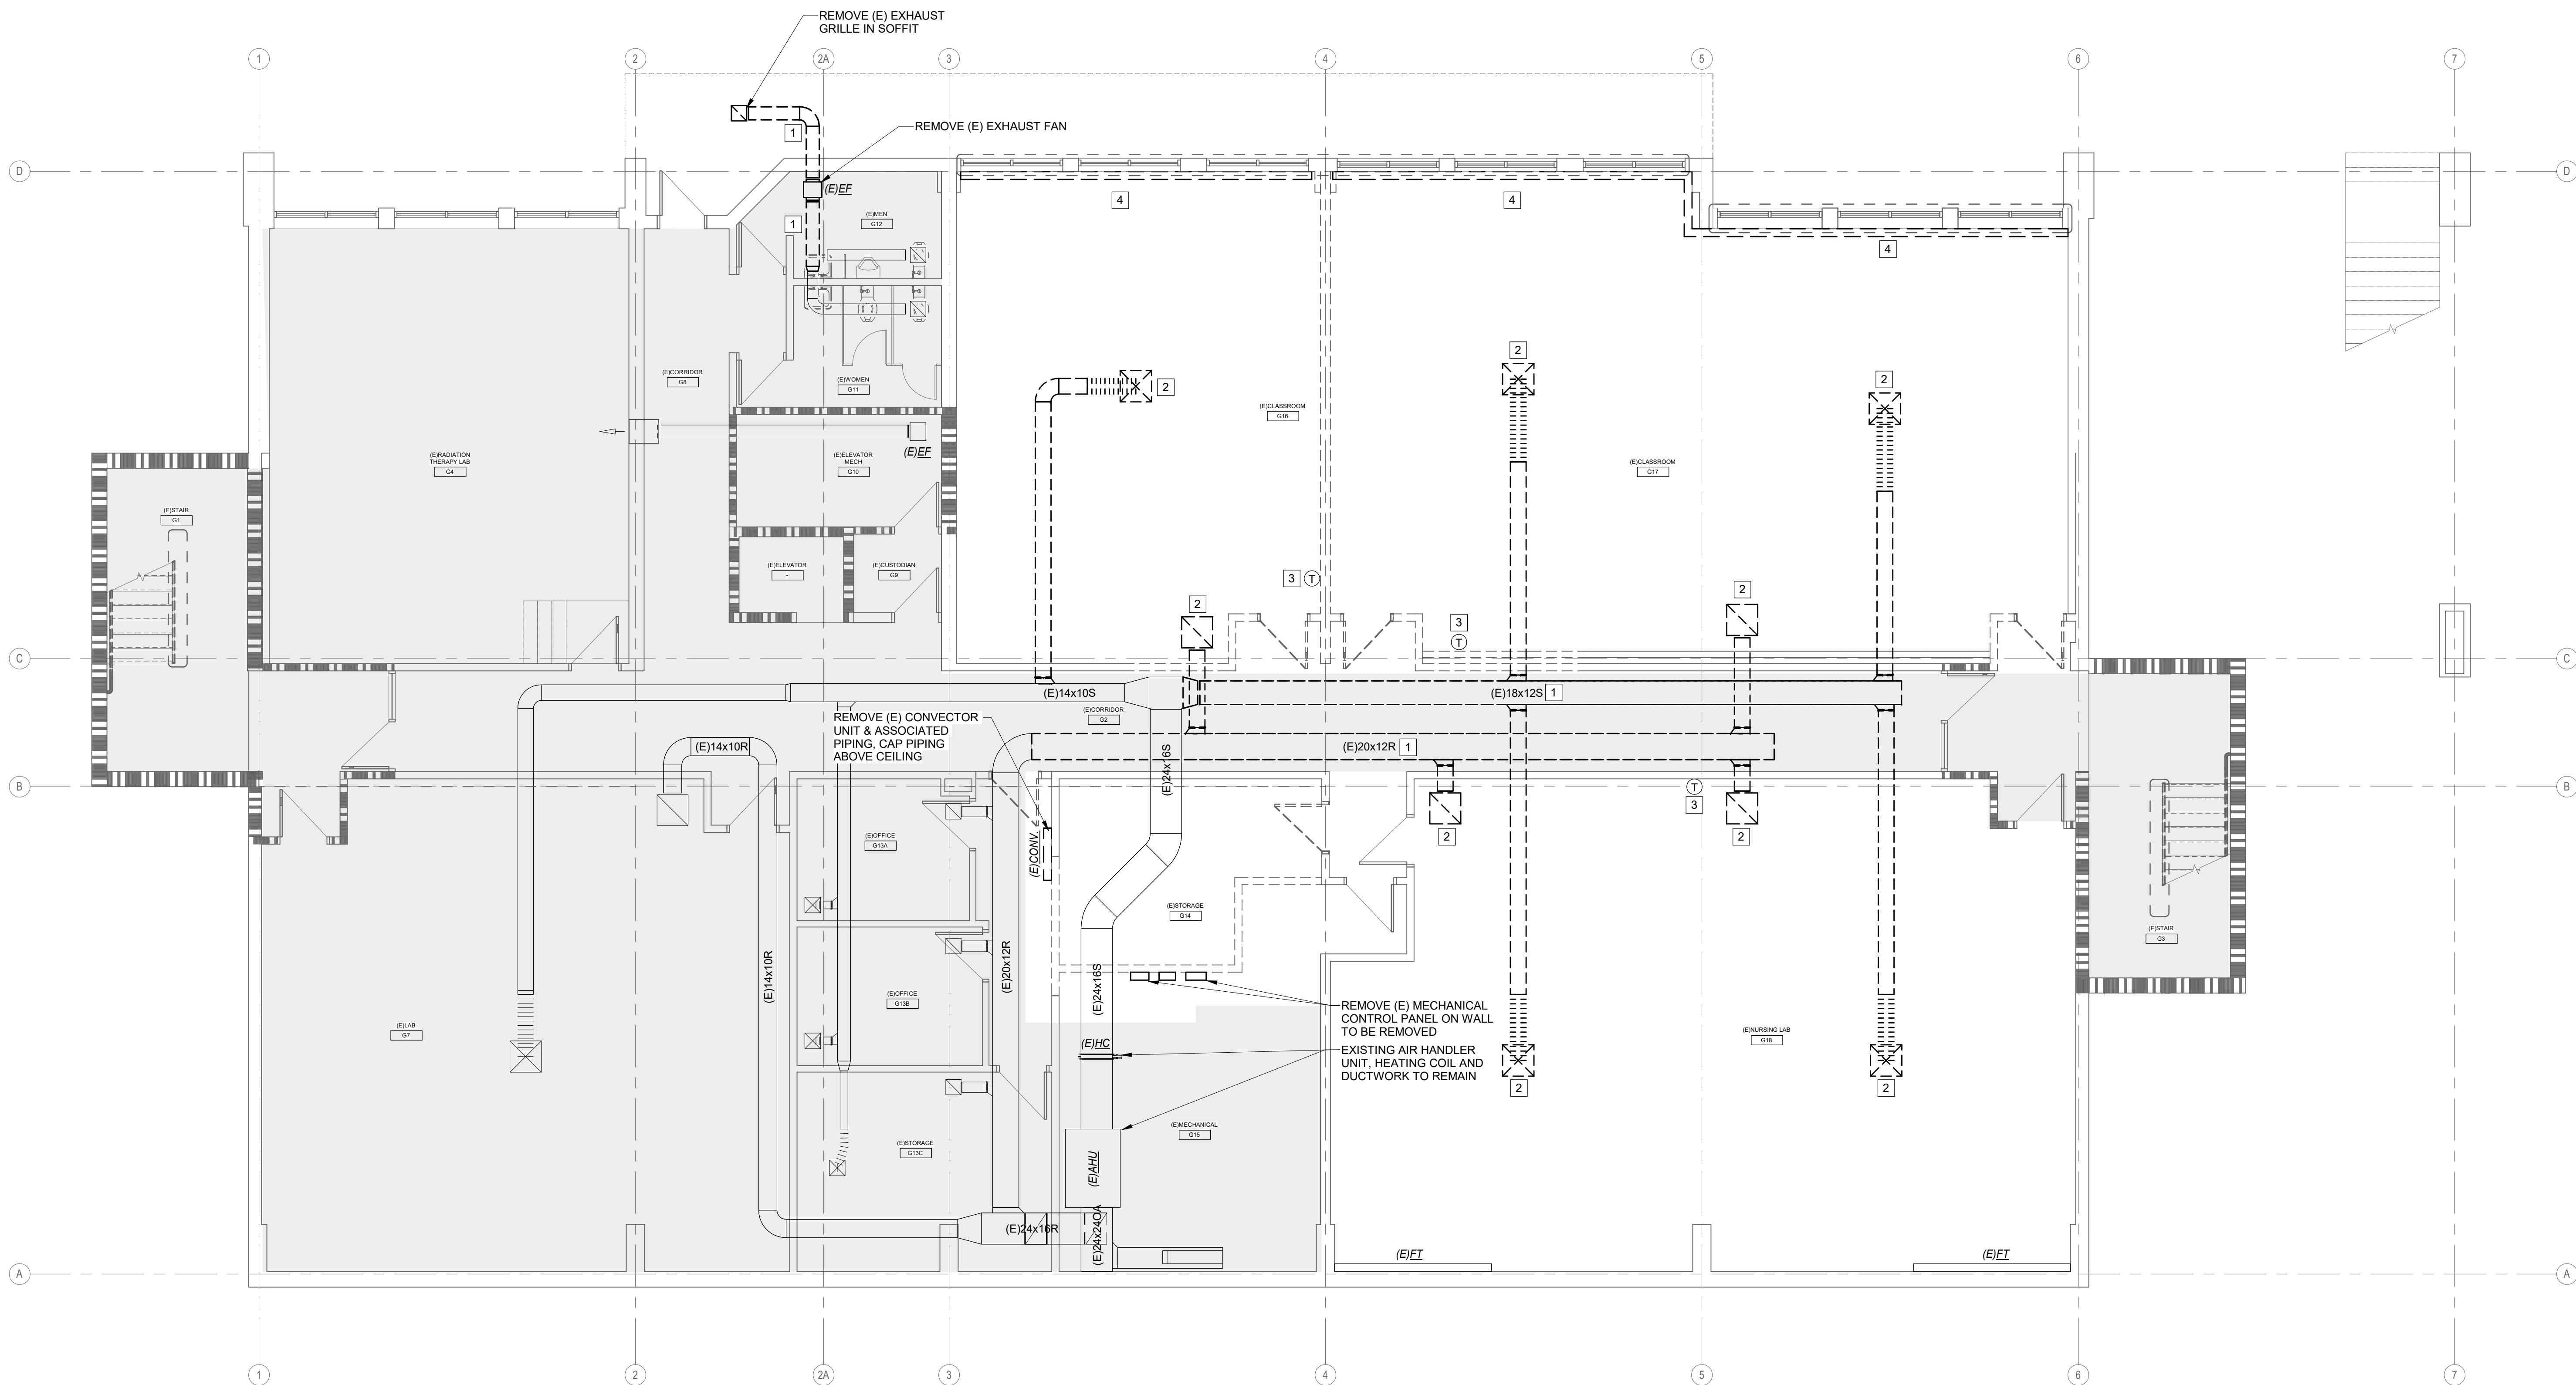

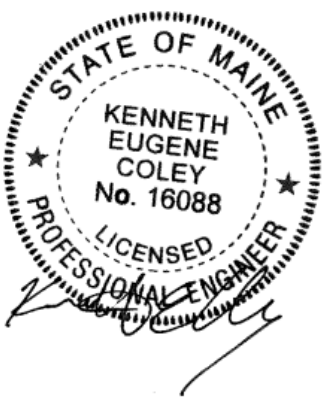


SMCC

HEALTH SCIENCE
CENTER

BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE



CONTENT:
MECHANICAL DEMOLITION PLAN - FIRST
FLOOR

DRAWN BY: SCL

PROJECT NO: 25-062-00

DATE: 02/13/2025

REVISED:

SCALE: 3/16" = 1'-0"


MD1.1

Project Phase
CONSTRUCTION DOCUMENTS 5-08-2026

COPYRIGHT © 2025 BY LAVALLEE/BRENSINGER
PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED.
NO REPRODUCTION WITHOUT PERMISSION.


DEMOLITION KEY NOTES:

- 1 REMOVE EXISTING DUCTWORK COMPLETE AS INDICATED ON DRAWINGS.
- 2 REMOVE EXISTING DIFFUSER/GRILLE COMPLETE WITH ASSOCIATED DUCTWORK.

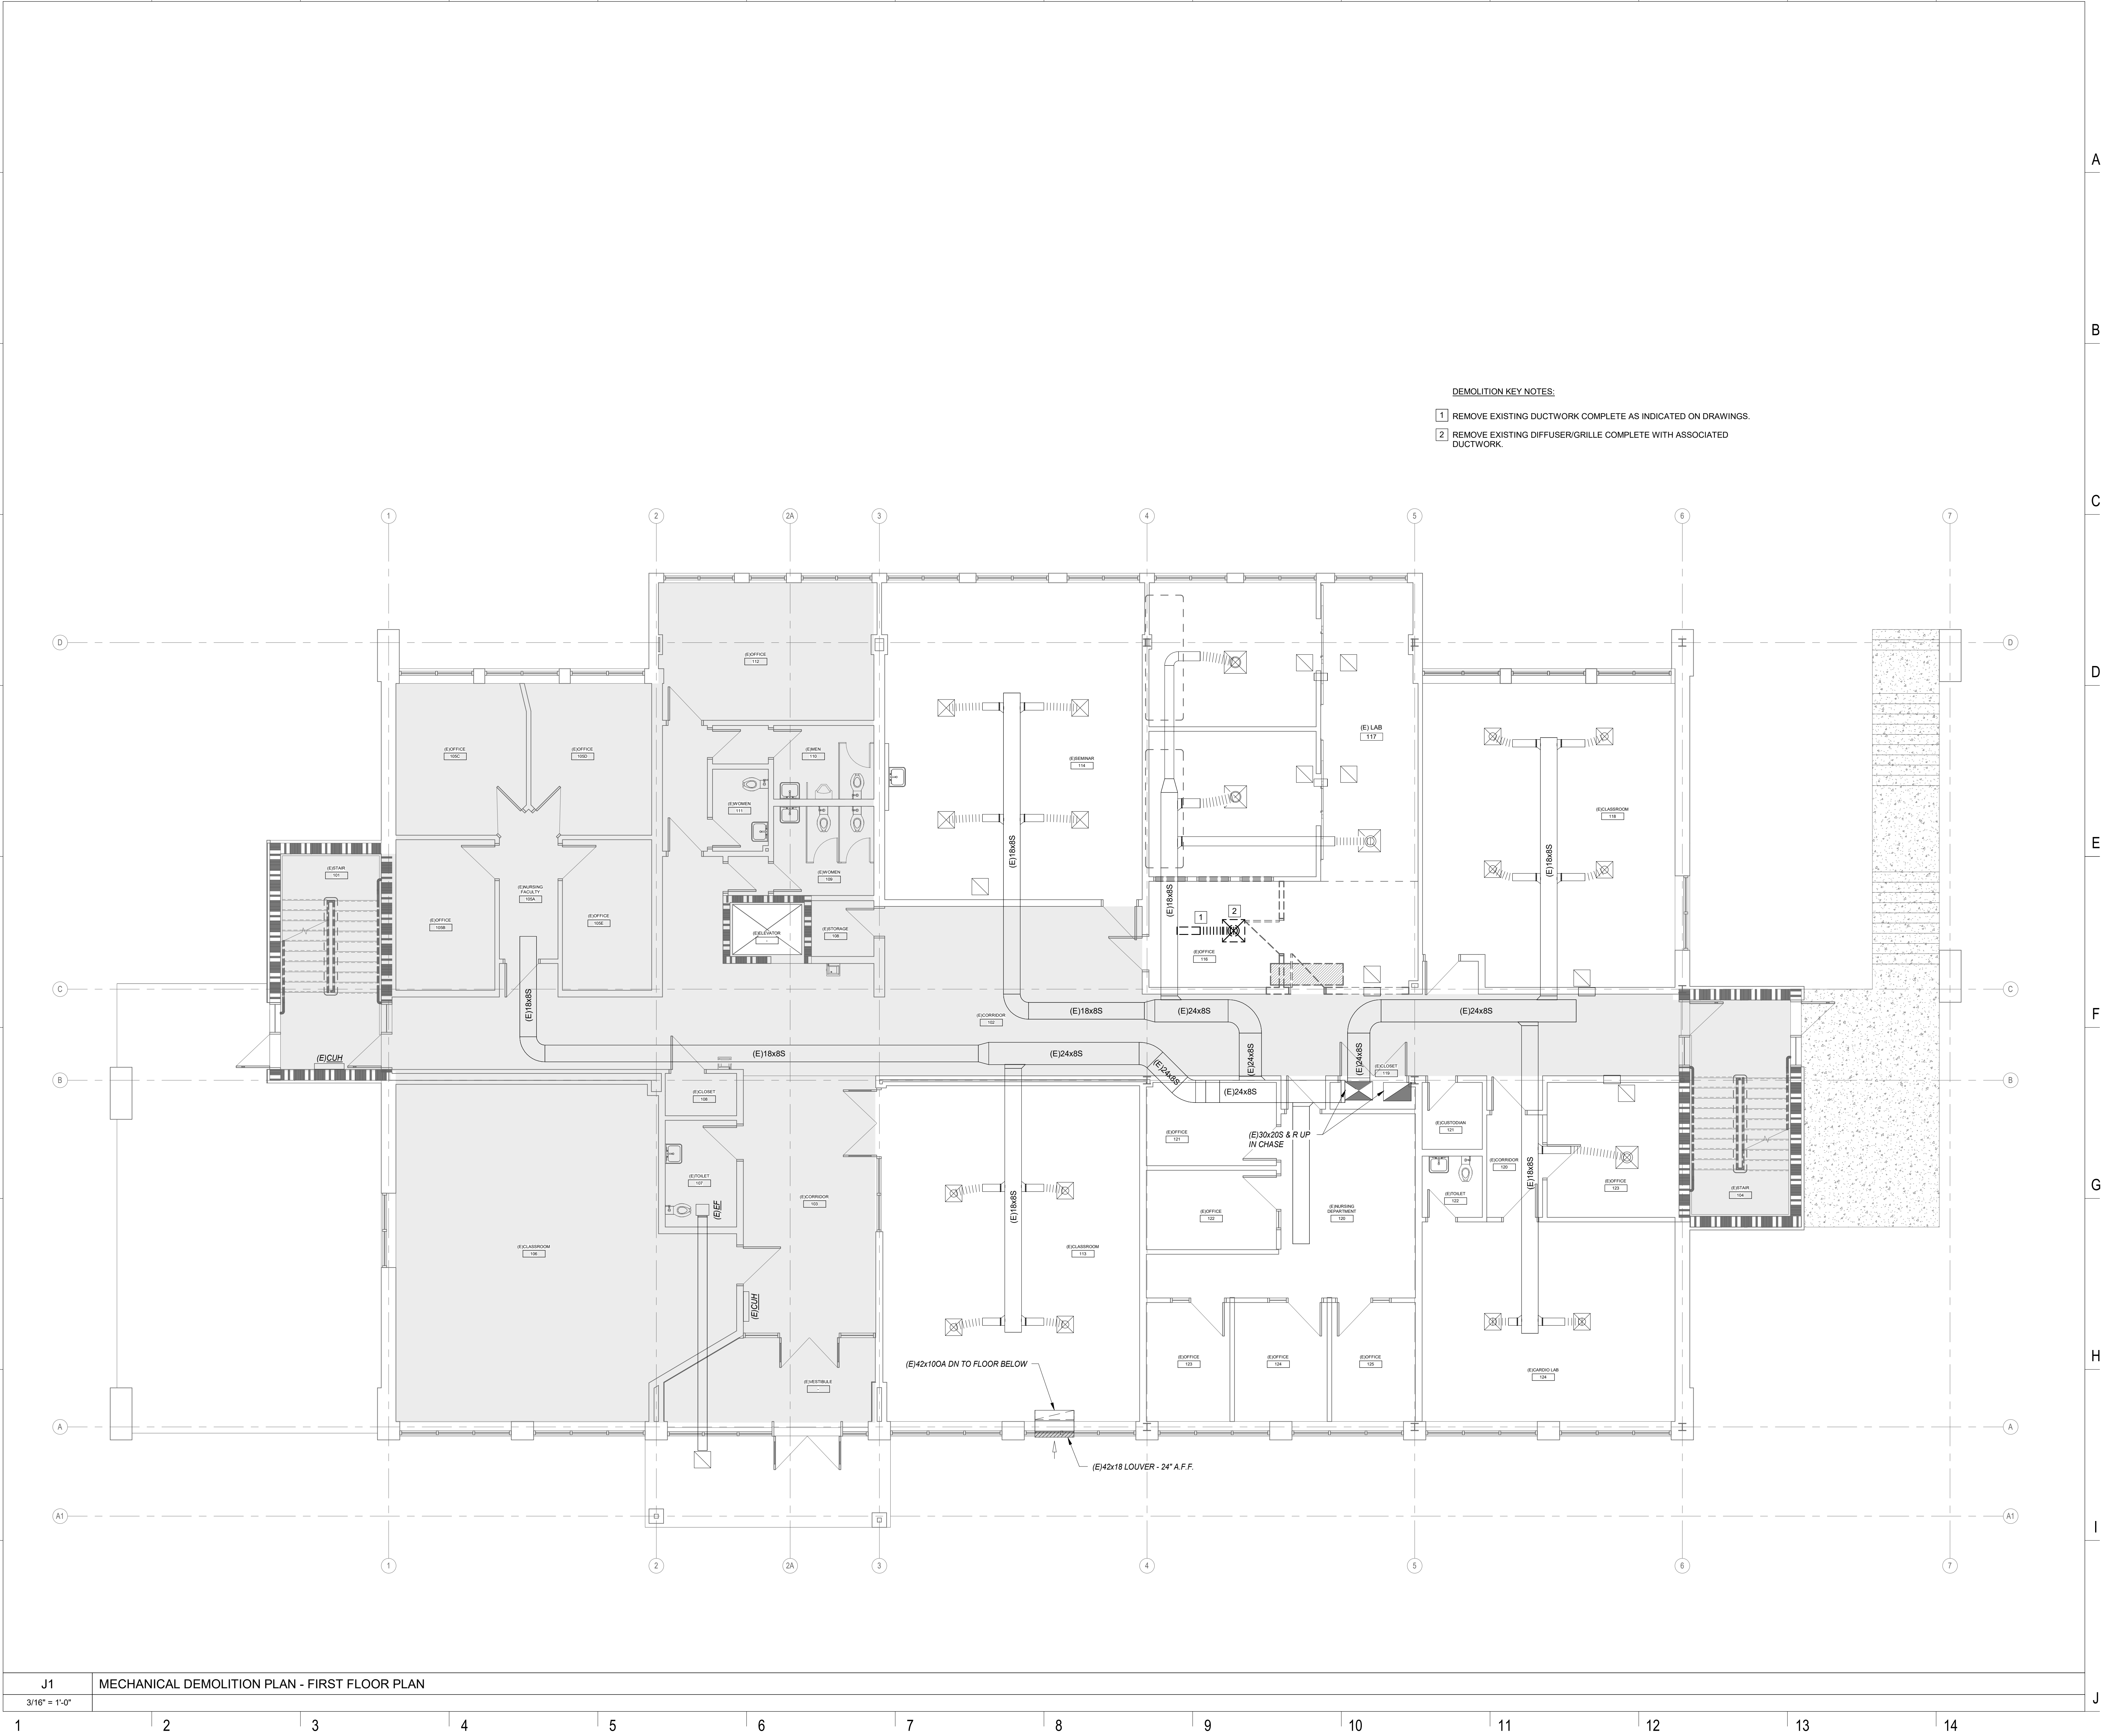

J1 MECHANICAL DEMOLITION PLAN - FIRST FLOOR PLAN

3/16" = 1'-0"

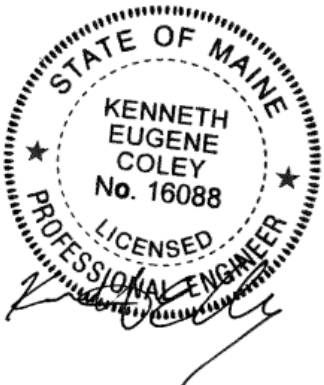


HEALTH SCIENCE
CENTER

BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE



CONTENT:
MECHANICAL DEMOLITION PLAN - SECOND FLOOR

DRAWN BY: SCL

PROJECT NO: 25-062-00

DATE: 02/13/2025

REVISED:

SCALE: 3/16" = 1'-0"


MD1.2

Project Phase
CONSTRUCTION DOCUMENTS 5-08-2026

COPYRIGHT © 2025 BY LAVALLEE-BRENSINGER
PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED.
NO REPRODUCTION WITHOUT PERMISSION.


DEMOLITION KEY NOTES:

- 1 REMOVE EXISTING VAV BOX COMPLETE WITH DUCTWORK AND CONTROLS.
- 2 REMOVE EXISTING DUCTWORK COMPLETE AS INDICATED ON DRAWINGS.
- 3 REMOVE EXISTING DIFFUSER/GRILLE COMPLETE WITH ASSOCIATED DUCTWORK.
- 4 REMOVE EXISTING THERMOSTAT COMPLETE.
- 5 REMOVE (E) FIN TUBE COMPLETE, CAP HWS & R AT MAINS.

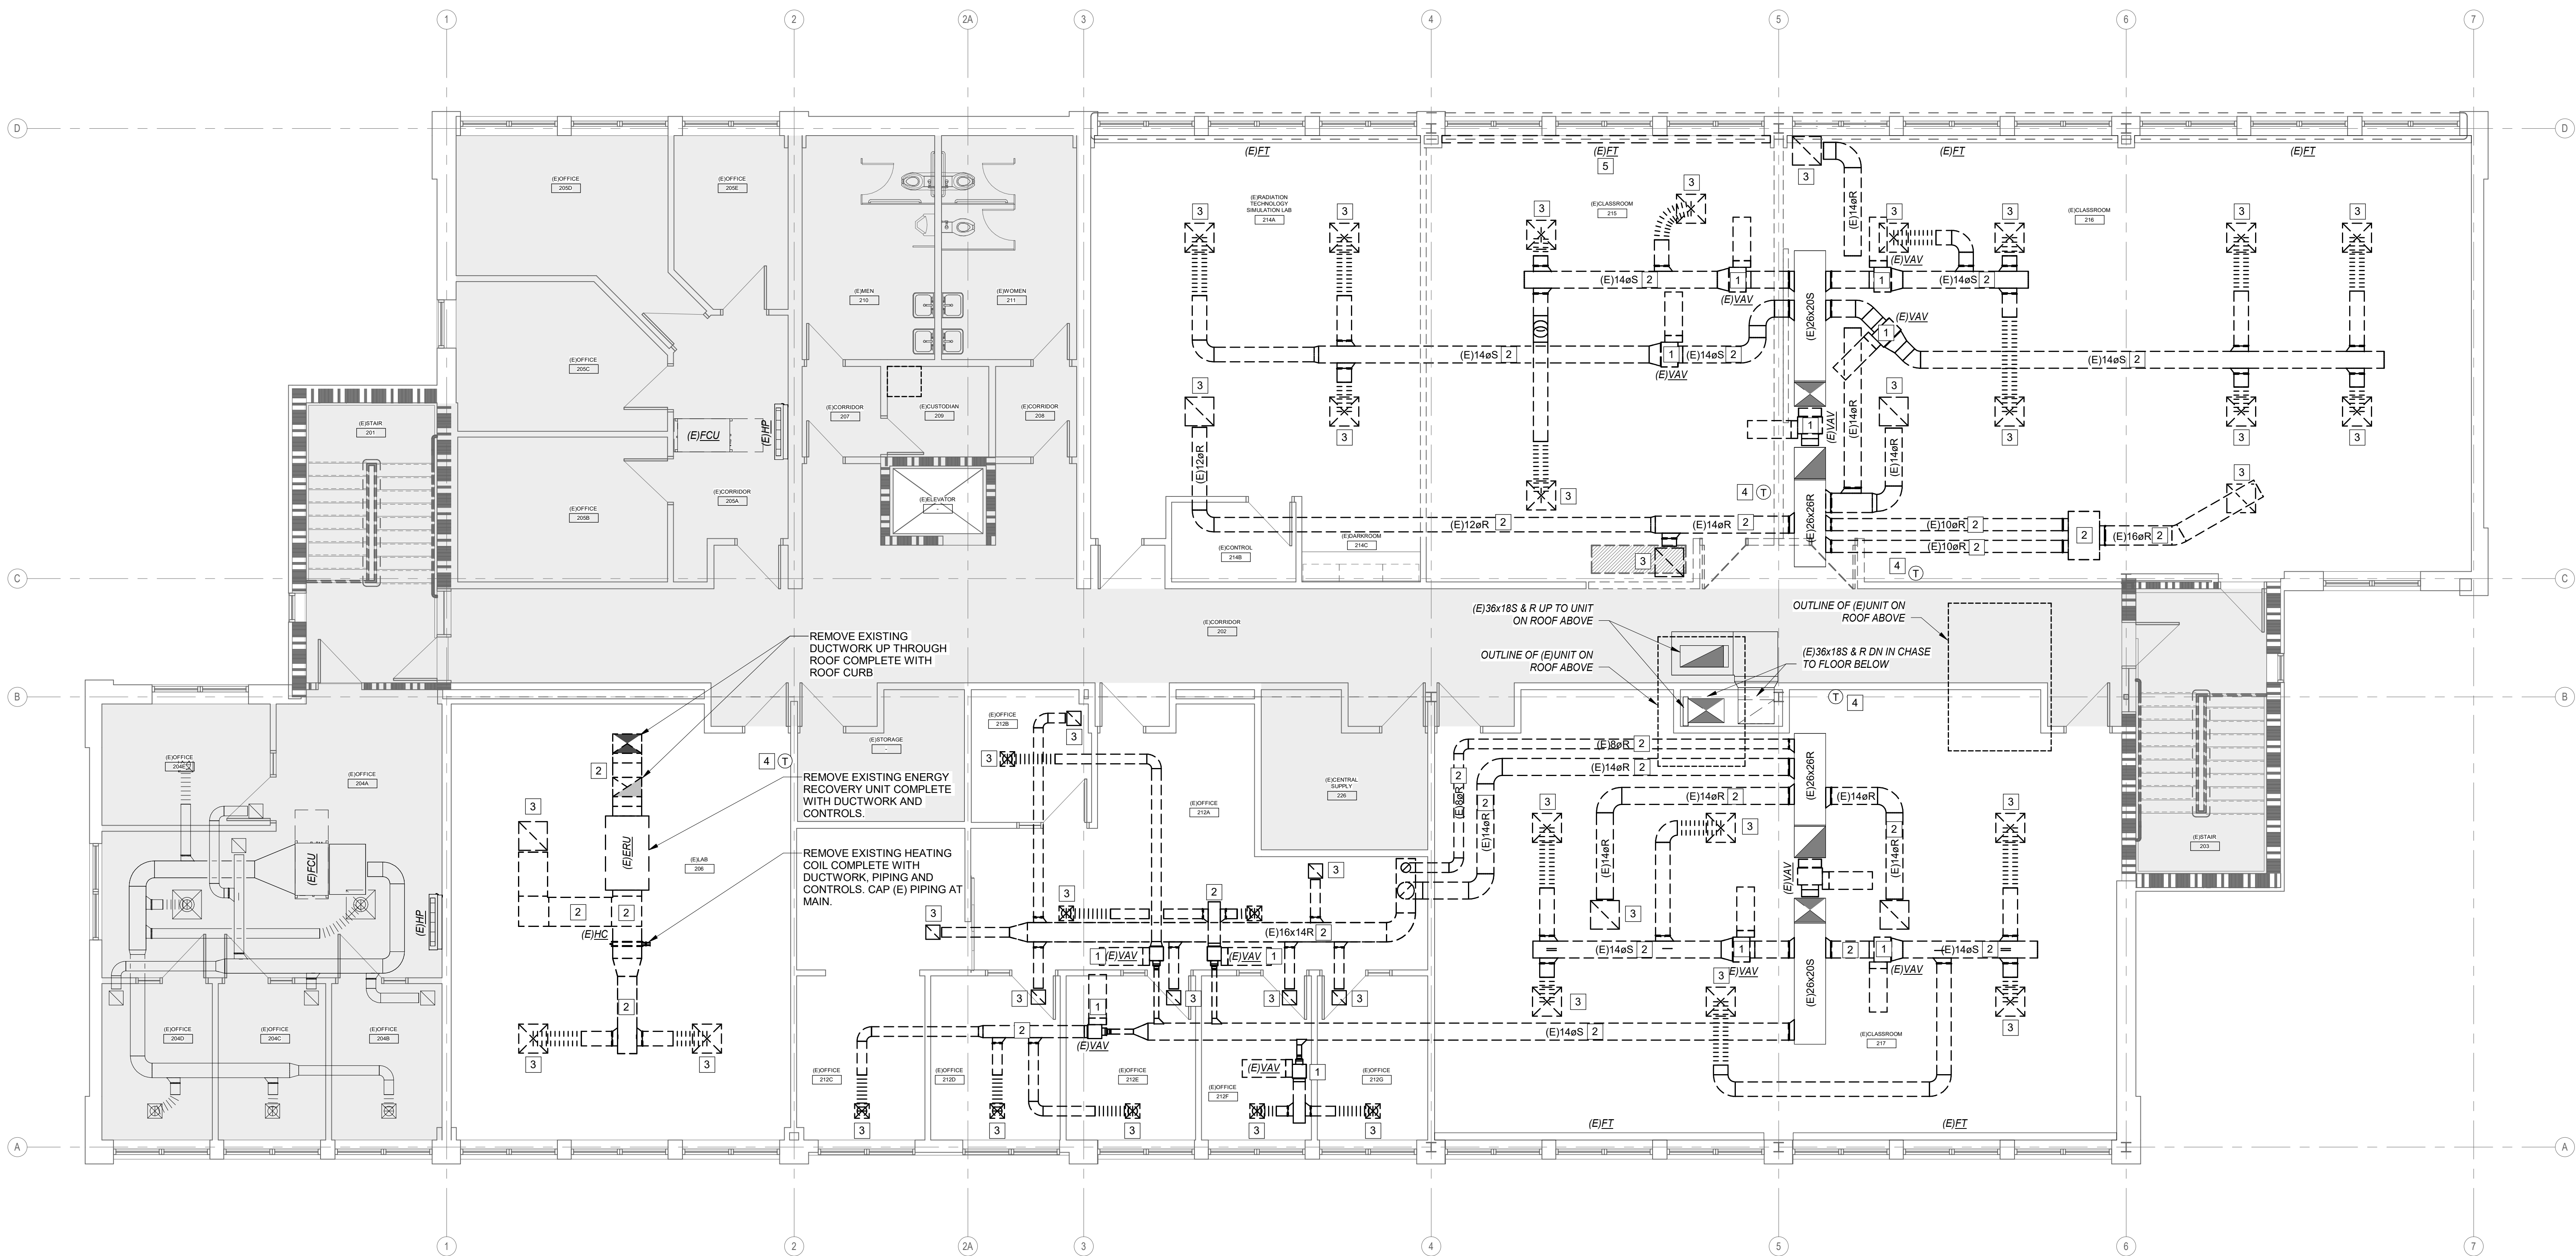

J1 MECHANICAL DEMOLITION PLAN - SECOND FLOOR

3/16" = 1'-0"

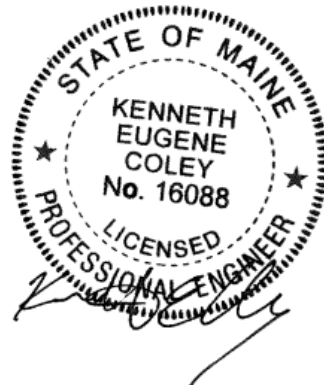


HEALTH SCIENCE
CENTER

BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE



CONTENT:
MECHANICAL DEMOLITION ROOF PLAN

DRAWN BY: Author

PROJECT NO: 25-062-00

DATE: 02/13/2026

REVISED:

SCALE: 3/16" = 1'-0"


MD1.3

Project Phase



CONSTRUCTION DOCUMENTS 5-08-2026

COPYRIGHT © 2025 BY LAVALLEE/BRENSINGER
PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED.
NO REPRODUCTION WITHOUT PERMISSION.

FOR ADDITIONAL INFORMATION, REFER TO PROJECT MANUAL.

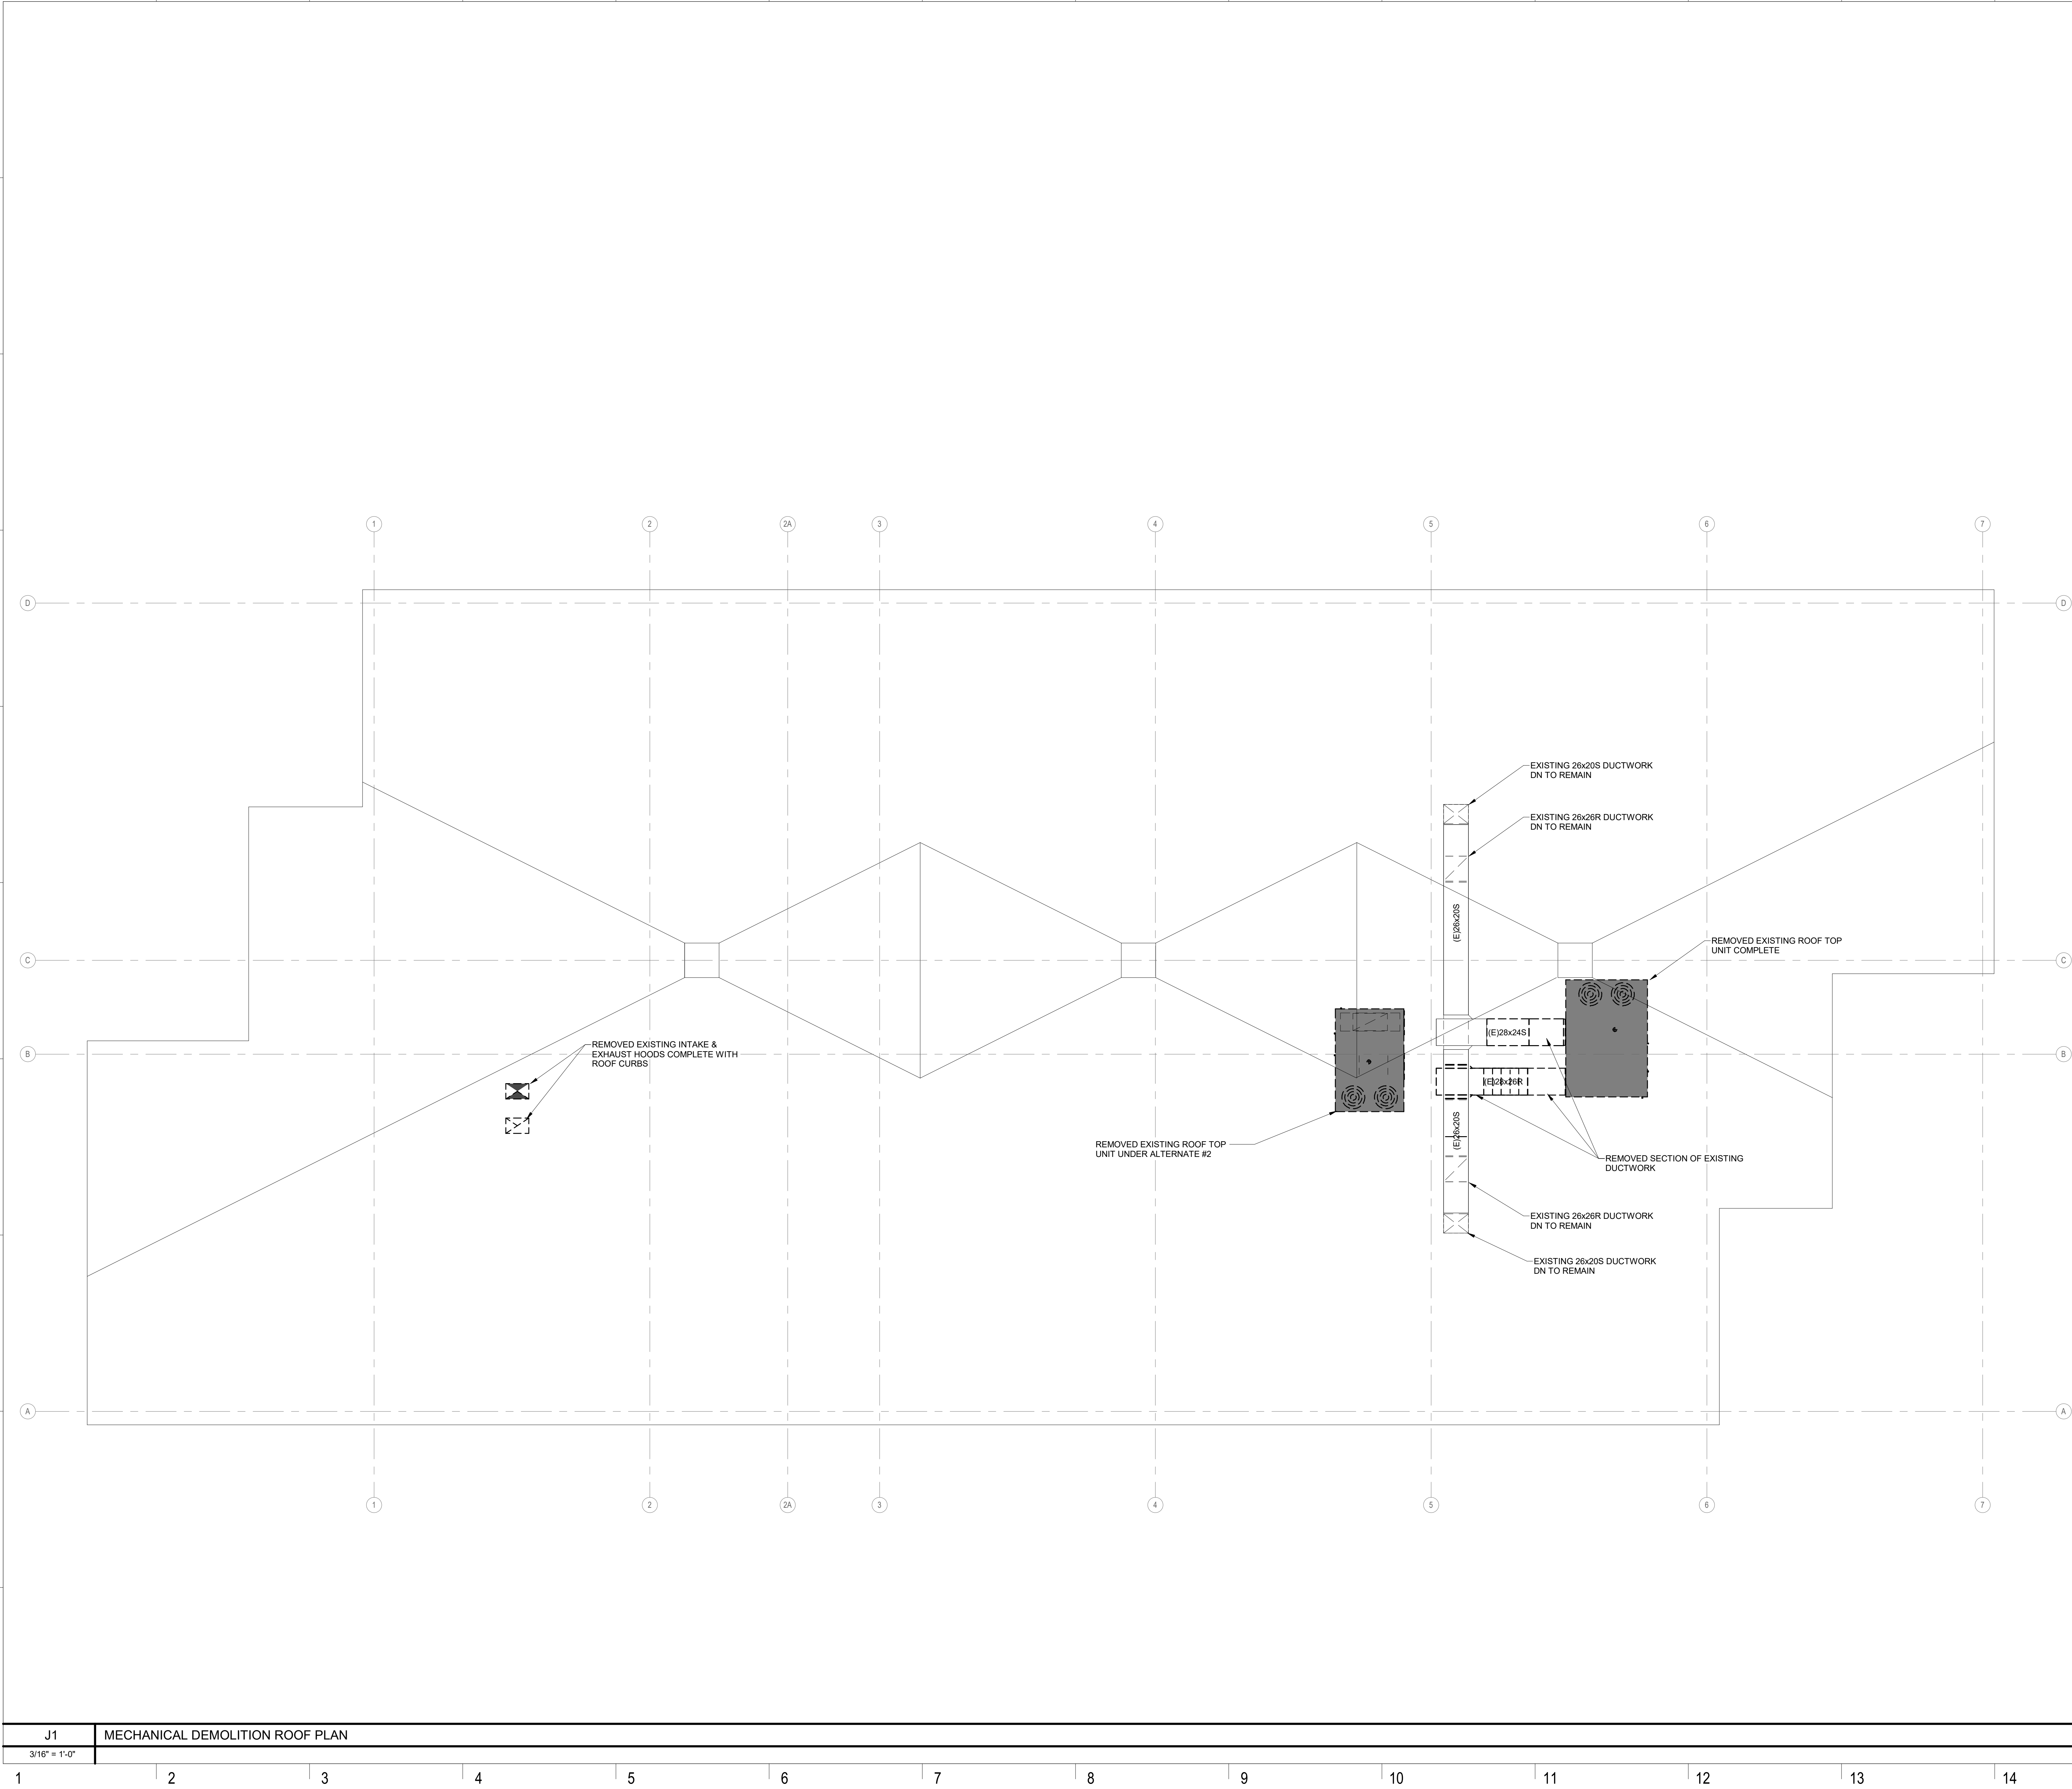

J1	MECHANICAL DEMOLITION ROOF PLAN
3/16" = 1'-0"	
1	2
3	4
5	6
7	8
9	10
11	12
13	14

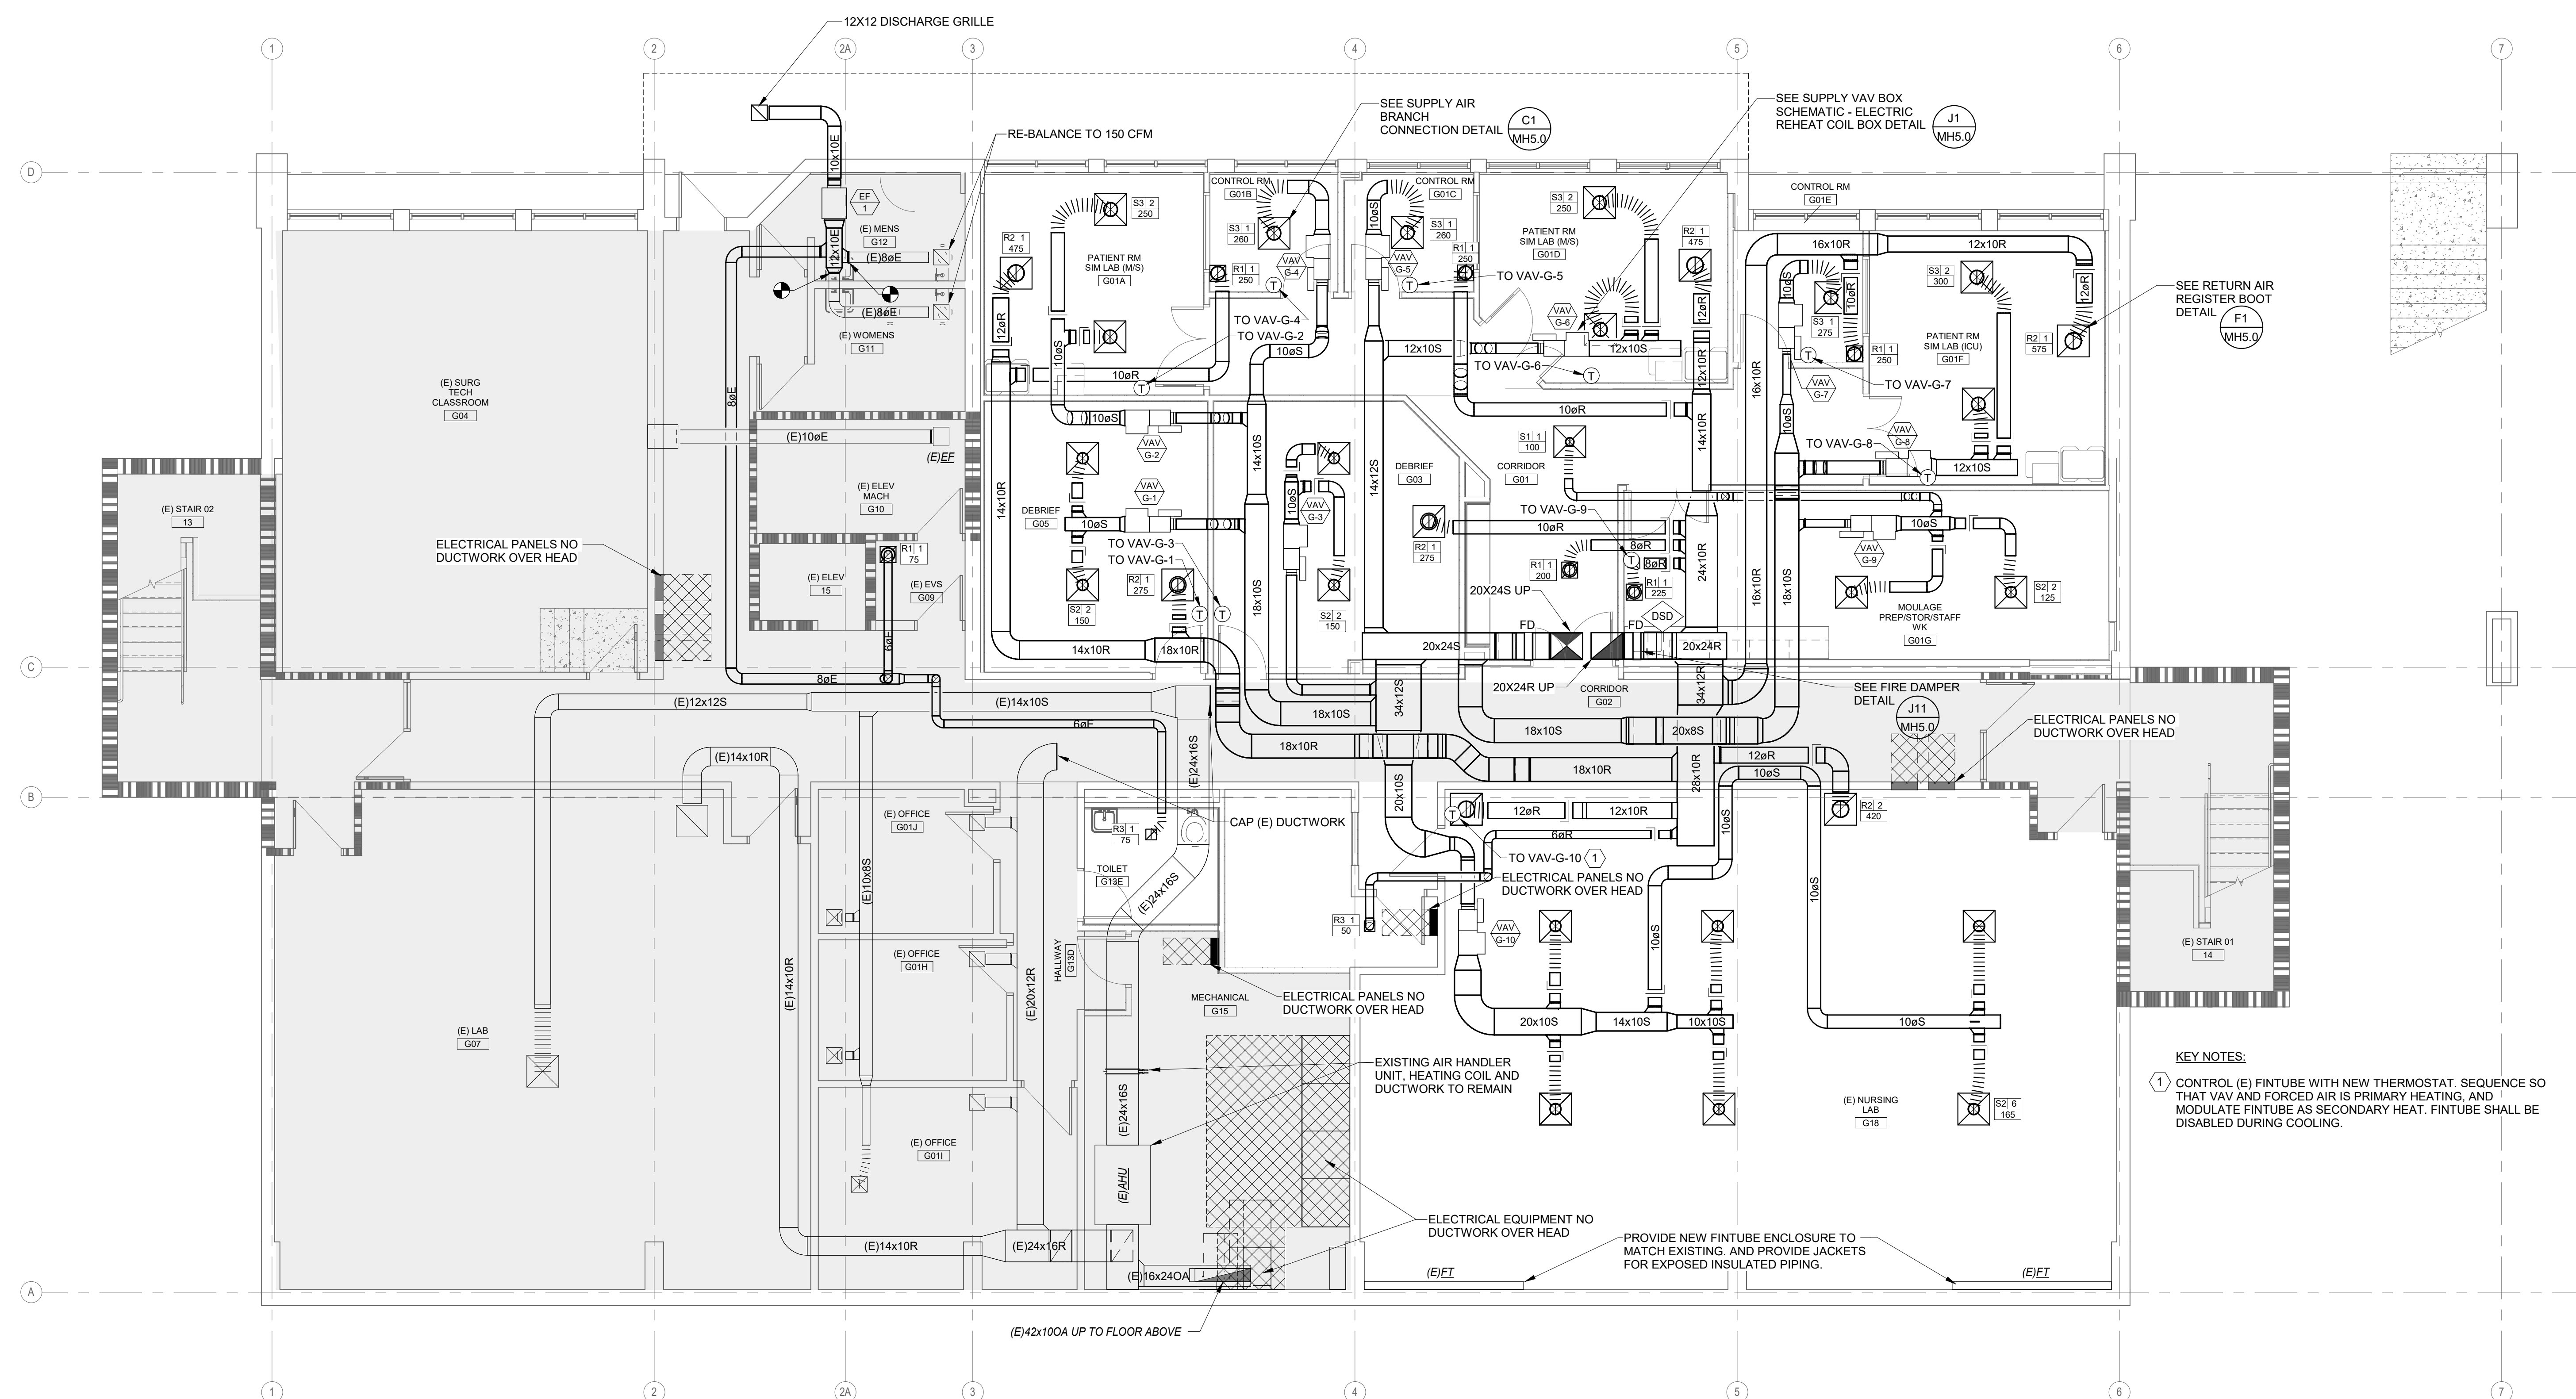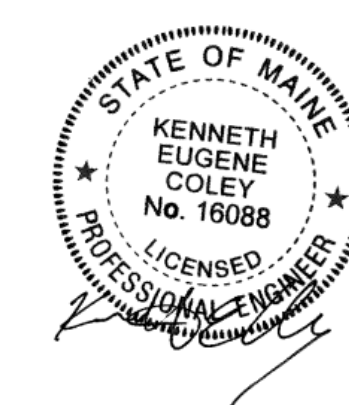

KEY NOTES:

1 CONTROL (E) FINTUBE WITH NEW THERMOSTAT. SEQUENCE SO THAT VAV AND FORCED AIR IS PRIMARY HEATING, AND MODULATE FINTUBE AS SECONDARY HEAT. FINTUBE SHALL BE DISABLED DURING COOLING.




HEALTH SCIENCE
CENTER

BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106


NO.	DESCRIPTION	DATE




CONTENT: MECHANICAL PLAN - FIRST FLOOR
DRAWN BY: SCL
PROJECT NO: 25-062-00
DATE: 02/13/2025
REVISED:
SCALE: 3/16" = 1'-0"
M1.1
Project Phase CONSTRUCTION DOCUMENTS 5-08-2026
COPYRIGHT © 2025 BY LAVALLEE/BRENSINGER PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.

KEY NOTES:

1 WORK UNDER ADD ALTERNATE # 2 RTU-1 REPLACEMENT.

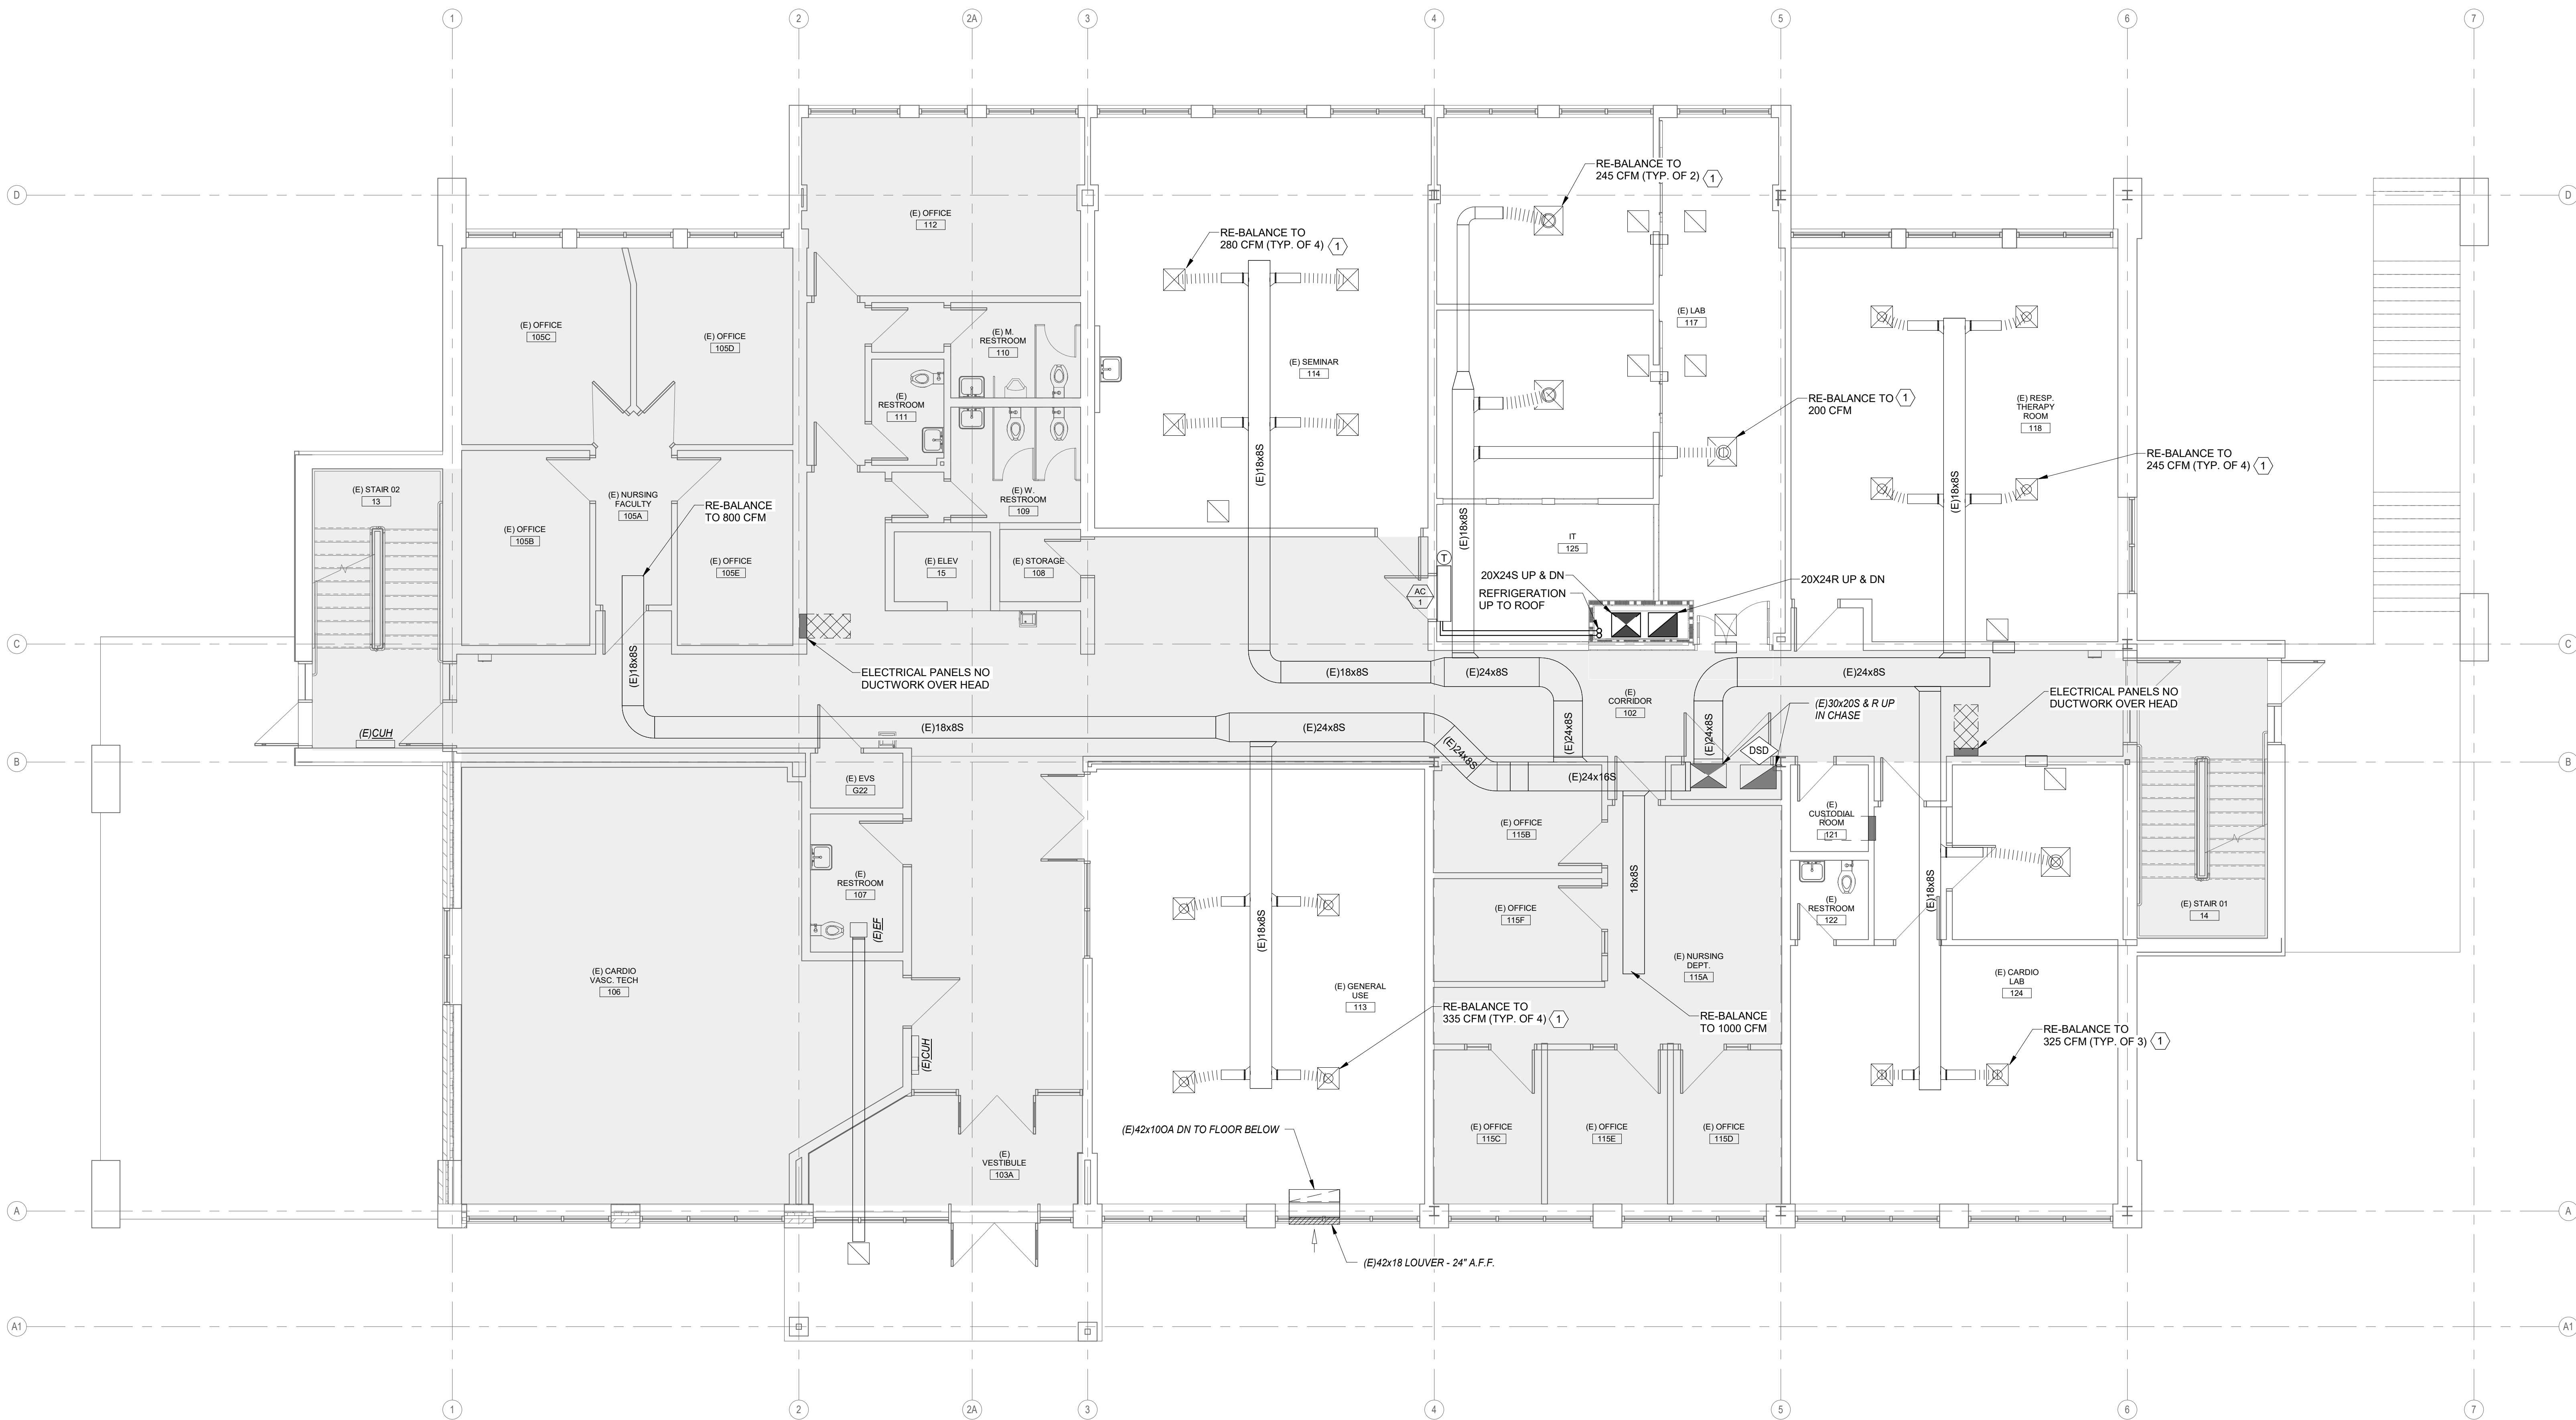

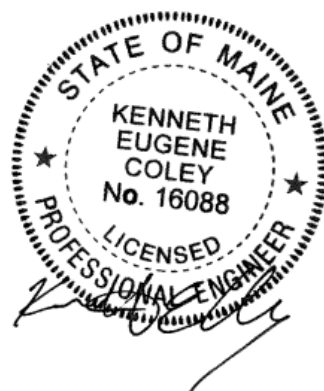

HEALTH SCIENCE
CENTER

BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE

KEY NOTES:

- ROUTE DUCTWORK THROUGH EXISTING ROOF JOIST WEBBING.
- CONTROL (E) FIN TUBE WITH NEW THERMOSTAT. SEQUENCE SO THAT VAV AND FORCED AIR IS PRIMARY HEATING, AND MODULATE FIN TUBE AS SECONDARY HEAT. FIN TUBE SHALL BE DISABLED DURING COOLING.
- PROVIDE NEW FIN TUBE ENCLOSURE TO MATCH EXISTING.

CONTENT:
MECHANICAL PLAN - SECOND FLOOR

DRAWN BY: SCL

PROJECT NO: 25-062-00


DATE: 02/13/2025

REVISED:

SCALE: 3/16" = 1'-0"

M1.2

Project Phase
CONSTRUCTION DOCUMENTS 5-08-2026
COPYRIGHT © 2025 BY LAVALLEE-BRENSINGER
PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED.
NO REPRODUCTION WITHOUT PERMISSION.

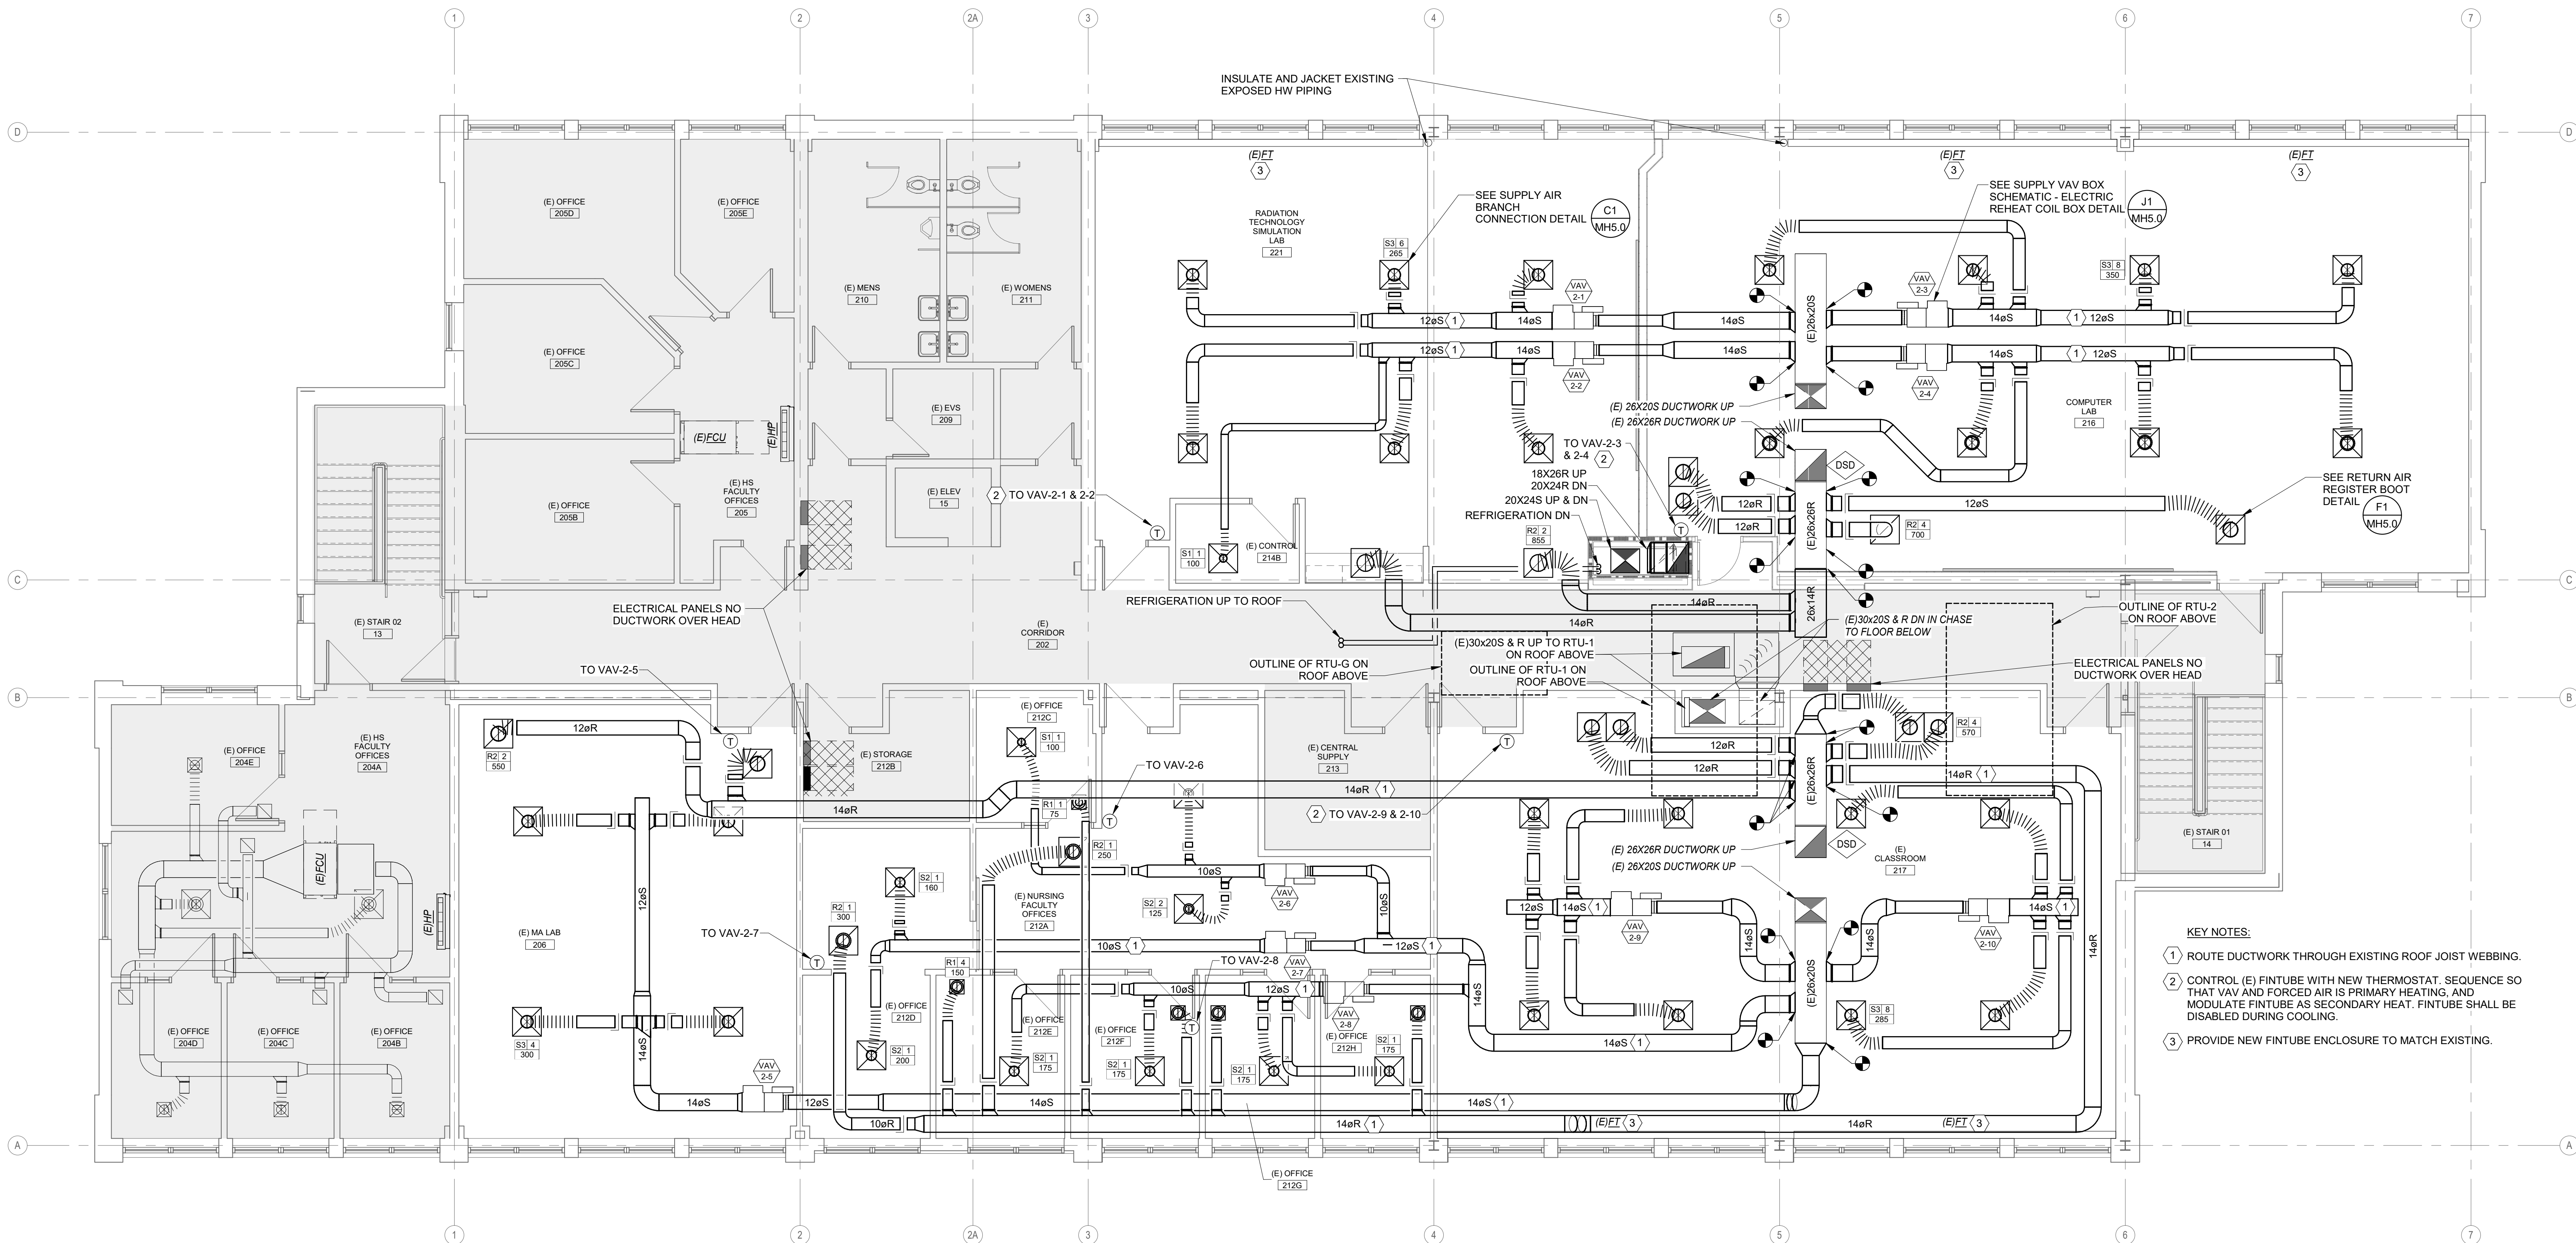

J1
MECHANICAL PLAN - SECOND FLOOR
3/16" = 1'-0"




HEALTH SCIENCE
CENTER

BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE



CONTENT: MECHANICAL ROOF PLAN
DRAWN BY: SCL
PROJECT NO: 25-062-00
DATE: 02/13/2026
REVISED:
SCALE: 3/16" = 1'-0"
M1.3
Project Phase CONSTRUCTION DOCUMENTS 5-08-2026
COPYRIGHT © 2025 BY LAVALLEE/BRENSINGER PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.

FOR ADDITIONAL INFORMATION, REFER TO PROJECT MANUAL.

KEY NOTES:

- 1 14" HIGH INSULATED ROOF CURB
PROVIDE 2" OF INSULATION.

REFRIGERATION DN IN 4" PIPE
WITH 90 DEGREE ELBOW & 45
DEGREE ELBOW

SEE DETAIL - DUCTLESS
SPLIT SYSTEM PIPING
DETAIL

PROVIDE CURB ADAPTOR TO
FACILITATE DUCT CONNECTION
TO EXISTING DUCT DROPS
WITHIN CURB

EXISTING 26x20S DUCTWORK DN

EXISTING 26x26R DUCTWORK DN

20x24S DUCTWORK DN 1

18x26R DUCTWORK DN 1

26X26 RETURN CONNECTION BELOW

(E)28x24S


(E)28x20S

28x28R

26X26 RETURN BELOW

EXISTING 26x26R DUCTWORK DN

EXISTING 26x20S DUCTWORK DN

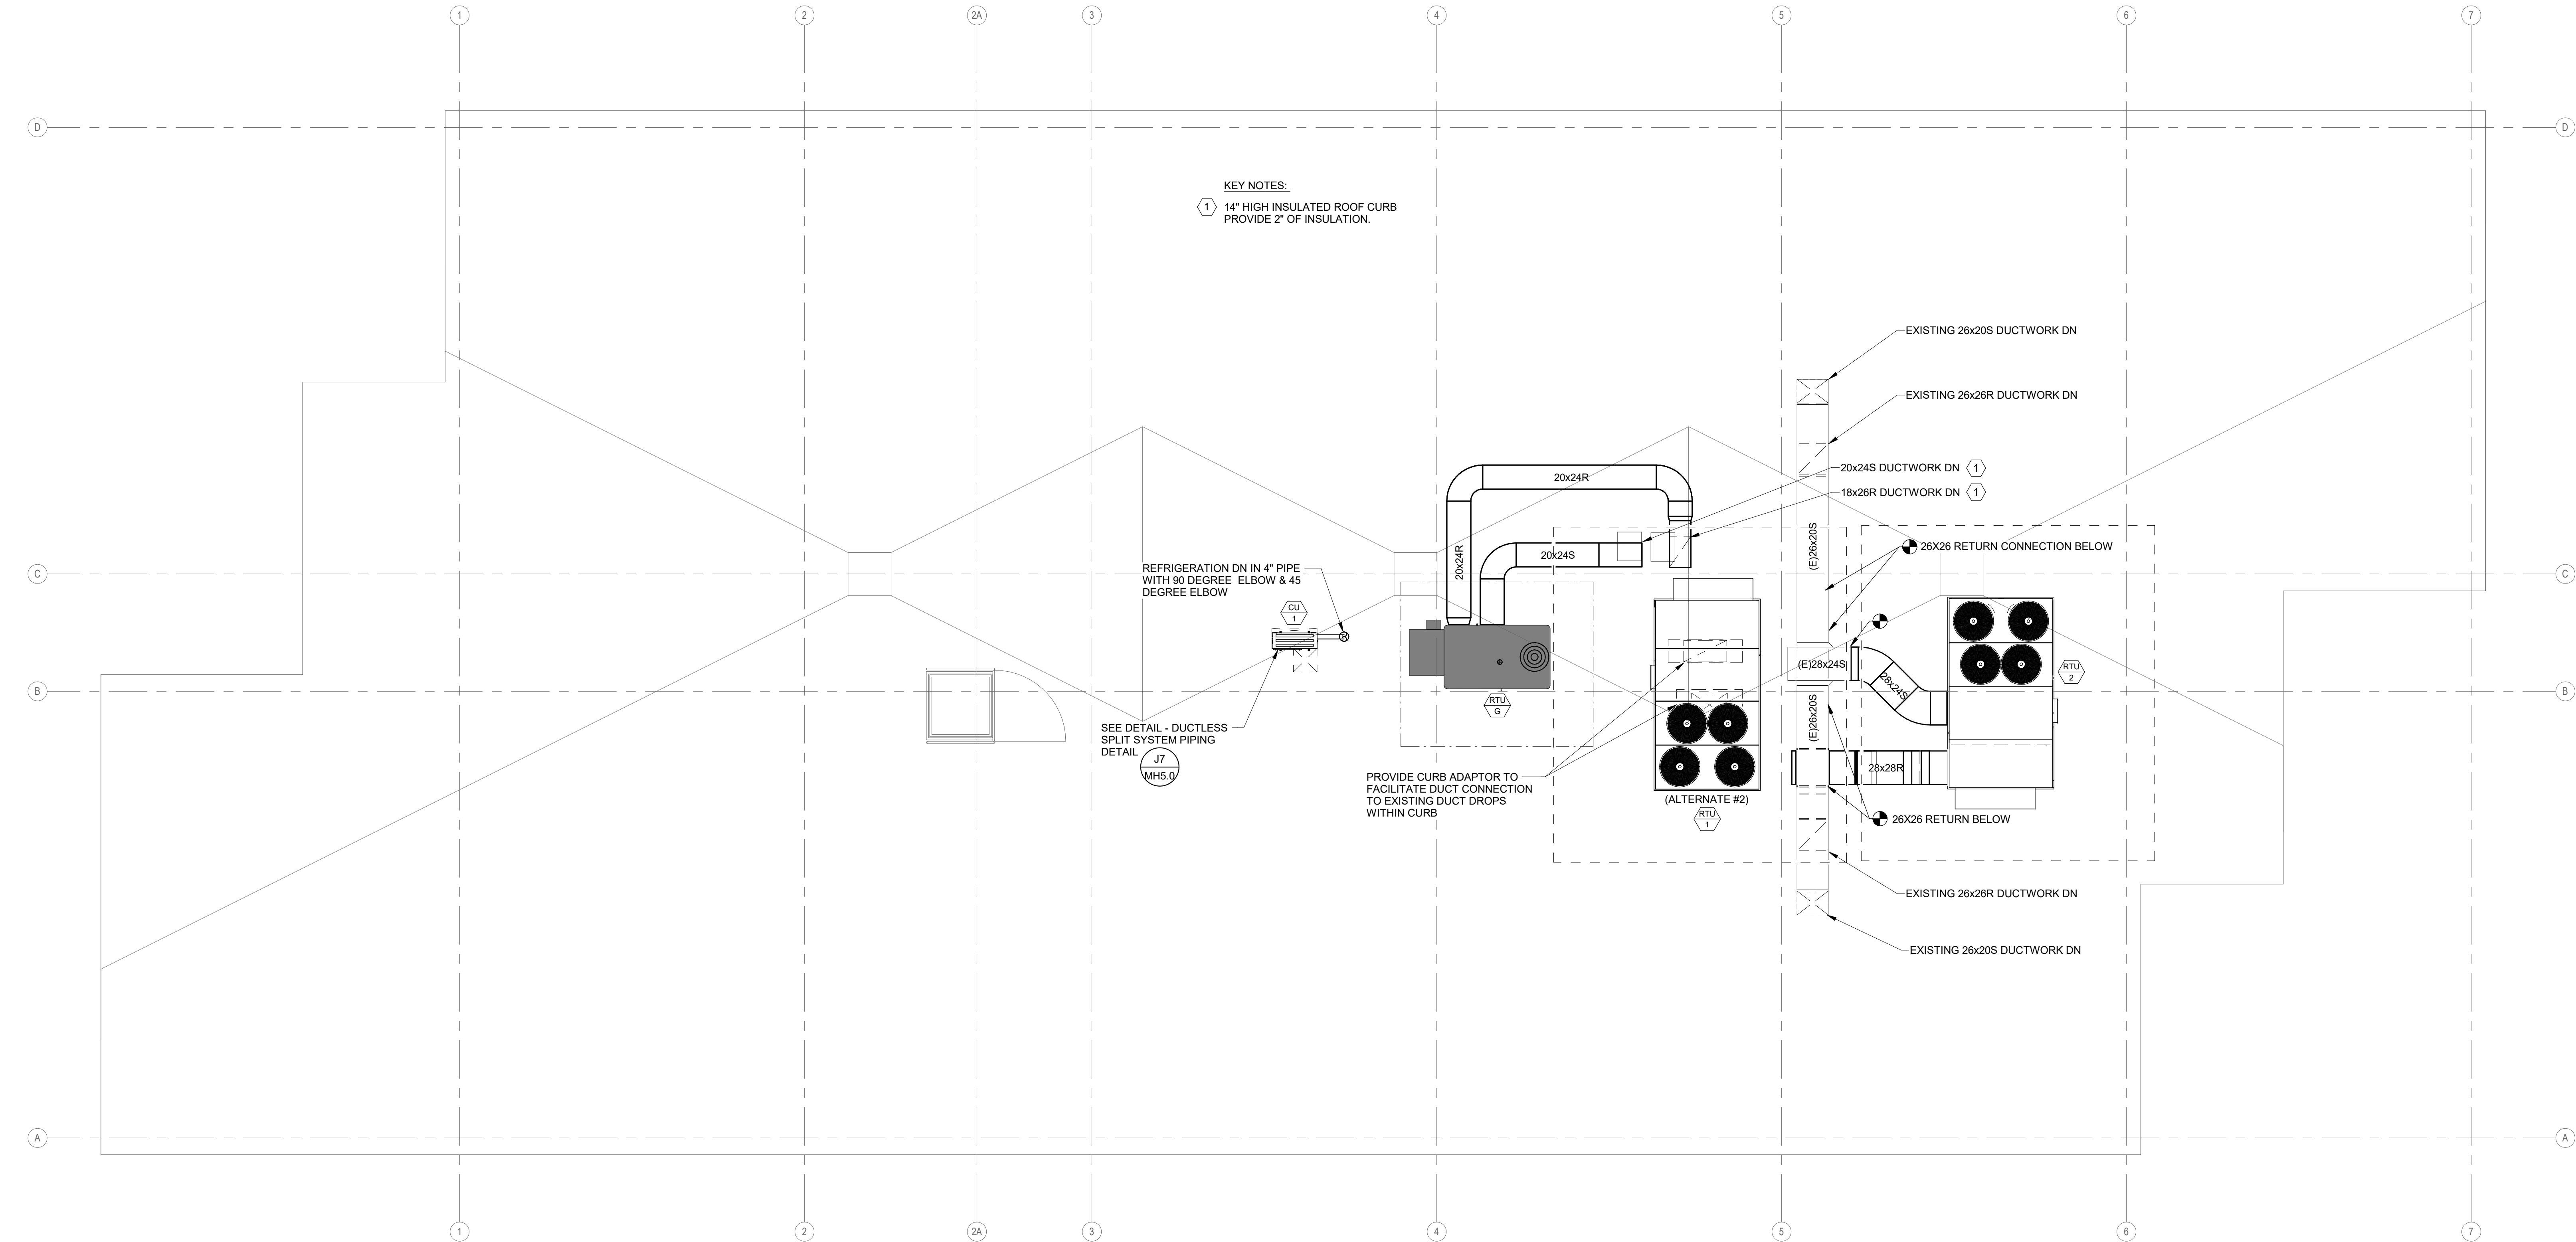



SMCC


HEALTH SCIENCE
CENTER

BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106


NO.	DESCRIPTION	DATE

CONTENT: MECHANICAL DETAILS	DRAWN BY: SCL
PROJECT NO: 25-062-00	DATE: 02/13/2025
REVISED:	SCALE: 1/2" = 1'-0"
Project Phase CONSTRUCTION DOCUMENTS 5-08-2026	
COPYRIGHT © 2025 BY LAVALLEE/BRENSINGER PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

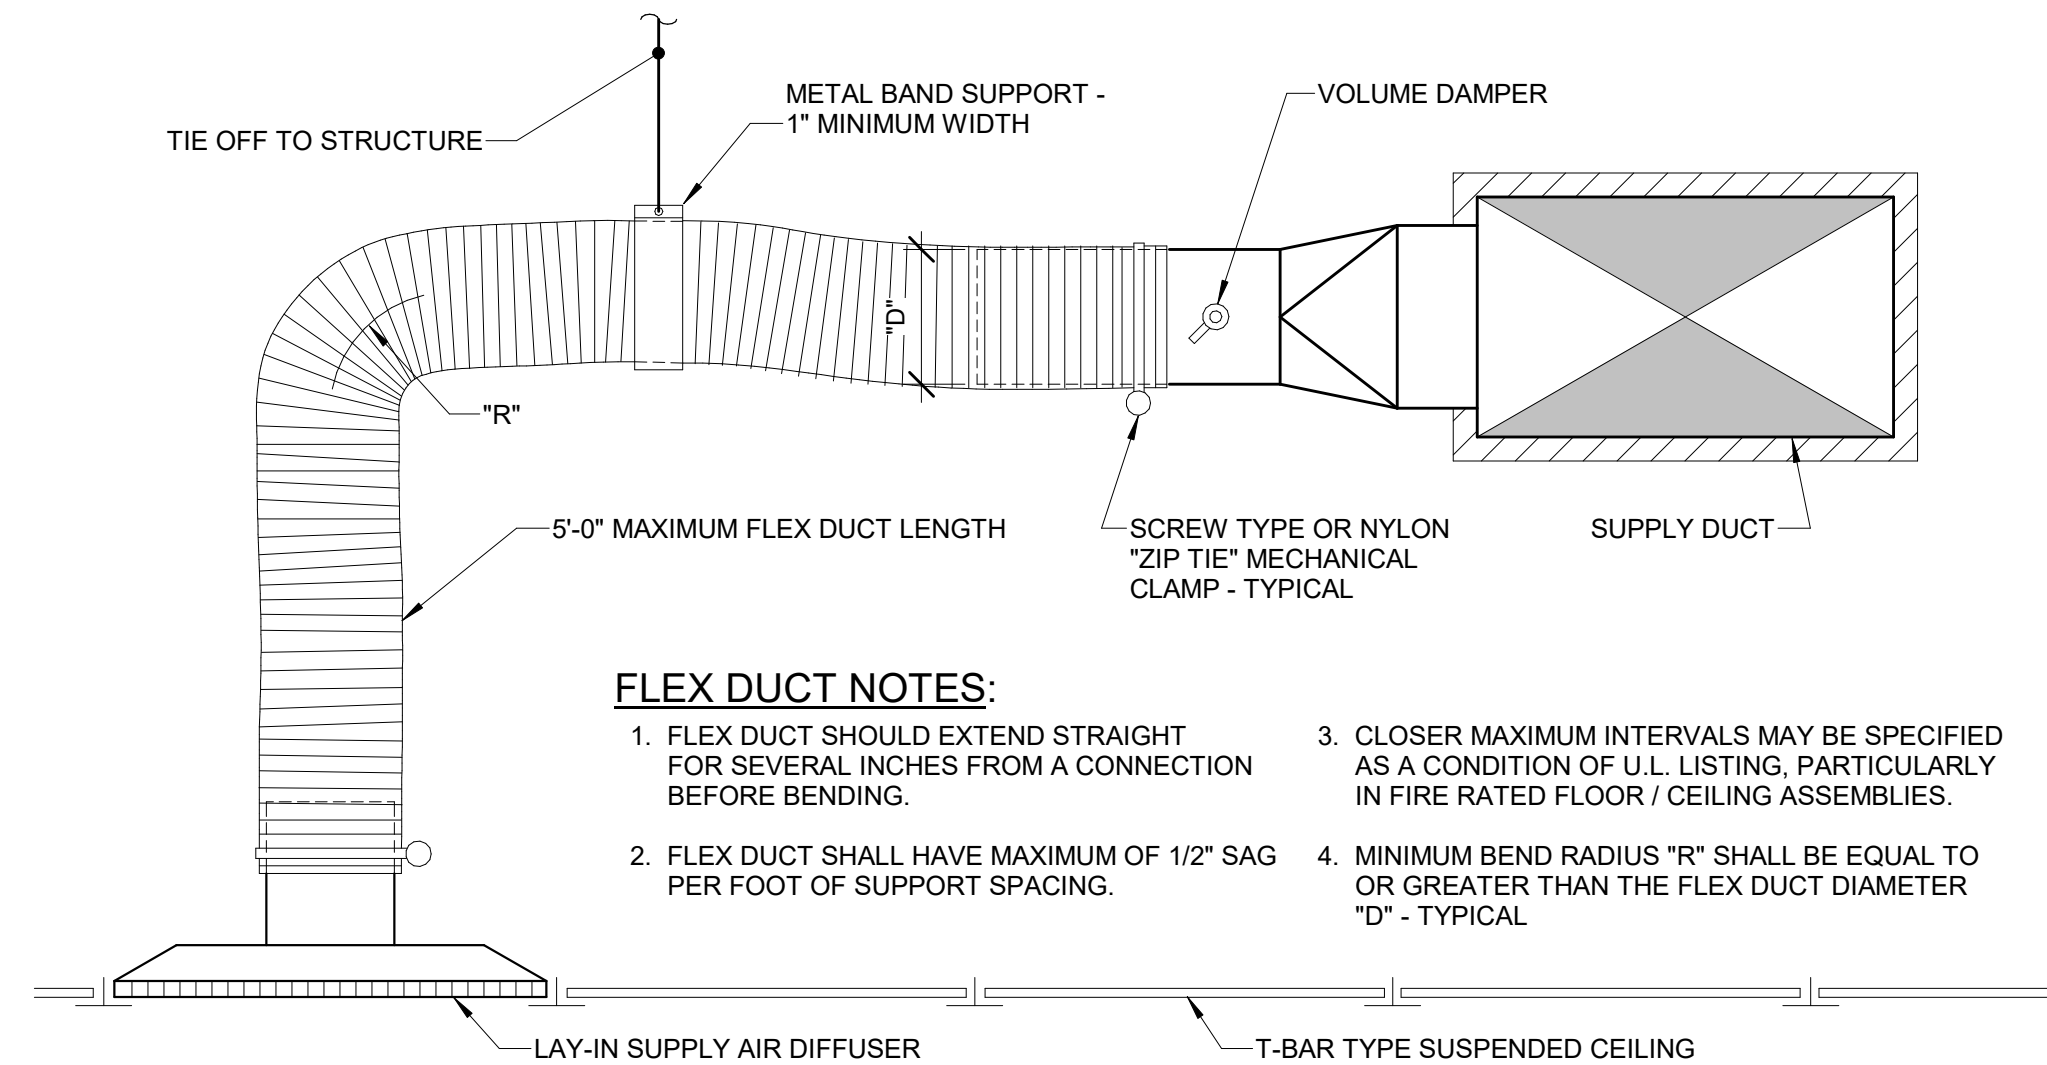


C1 SUPPLY AIR BRANCH CONNECTION

NONE

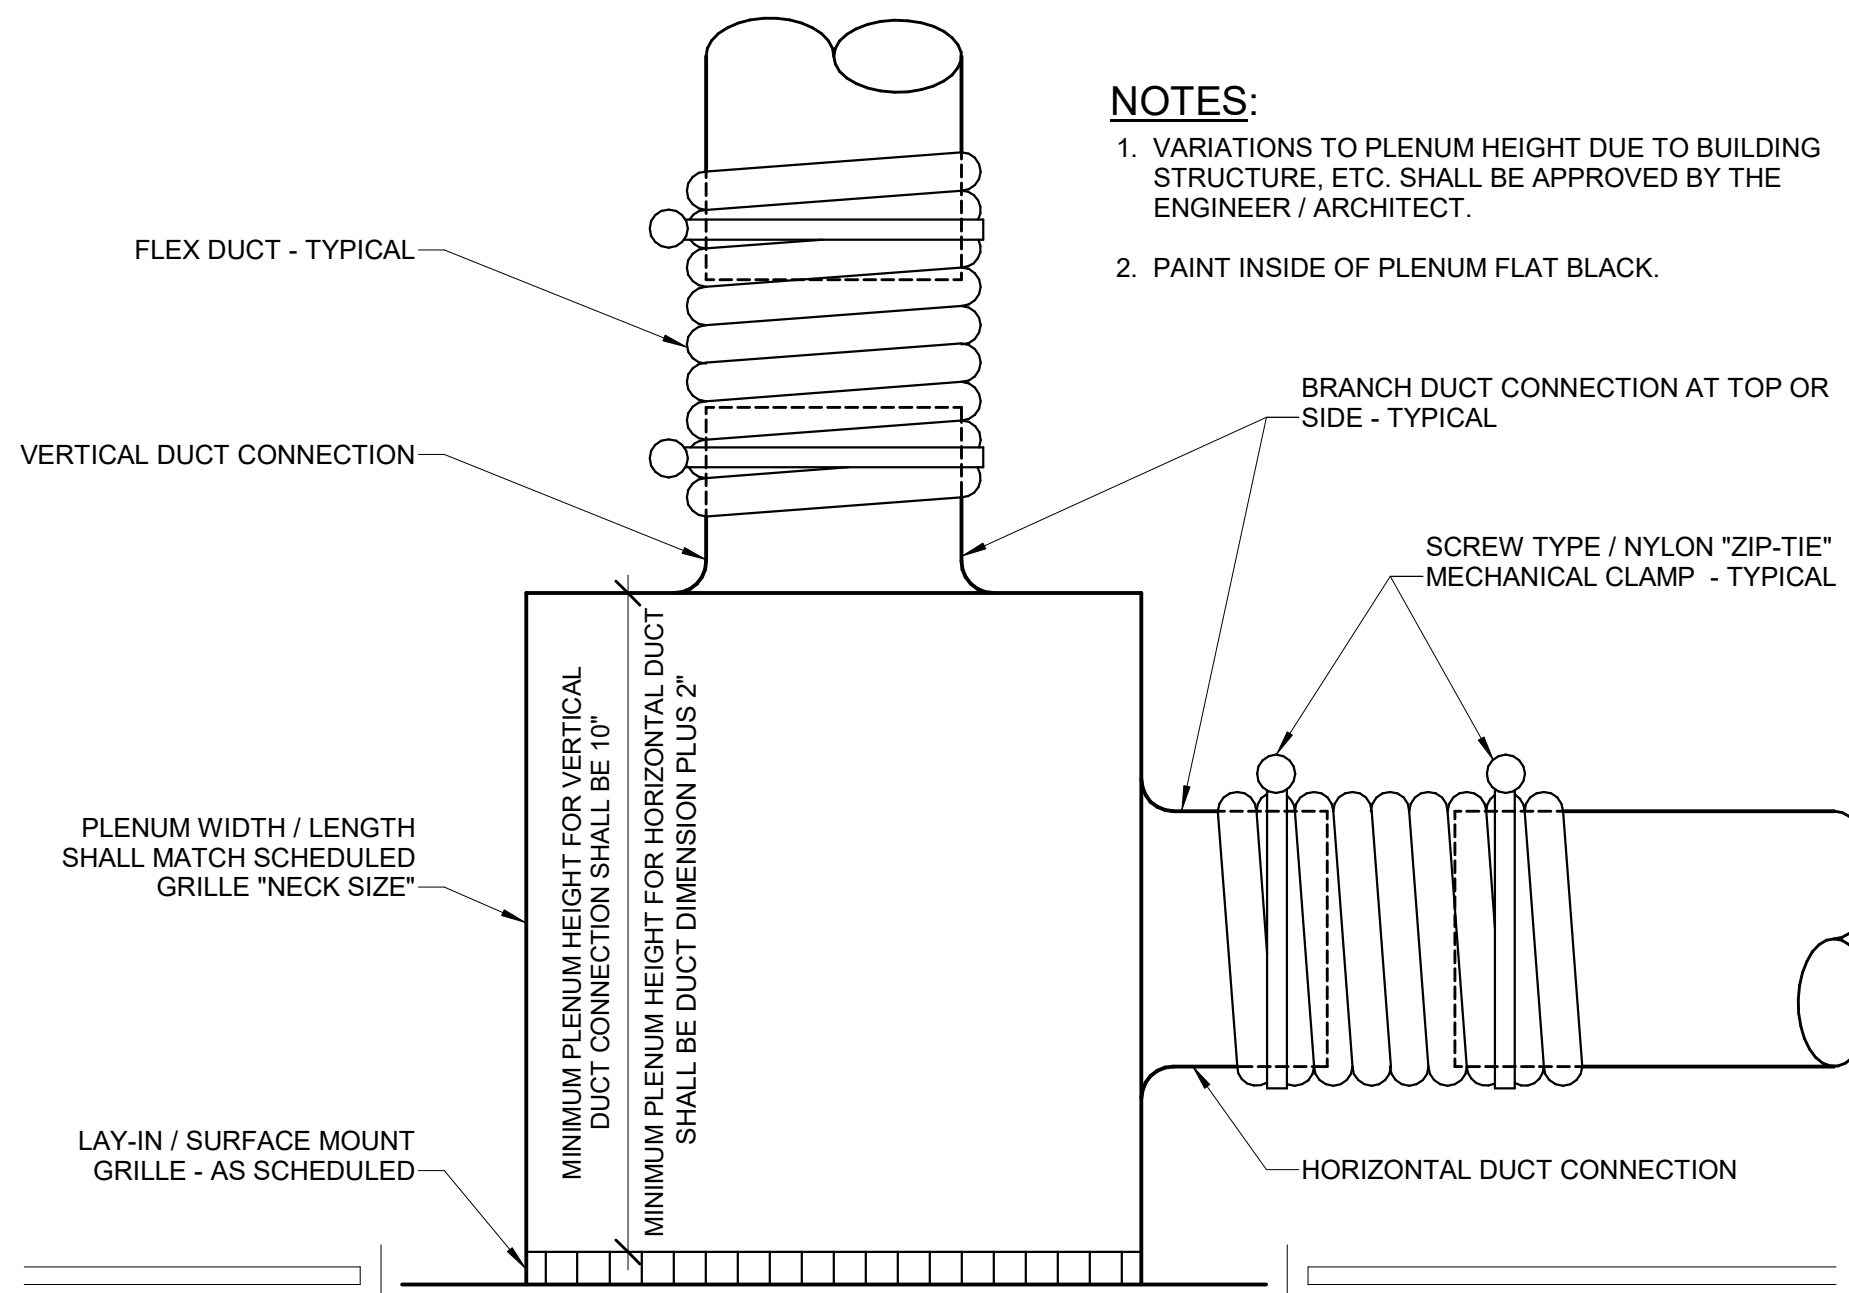


F1 233713-02 - RETURN AIR REGISTER BOOT

NONE

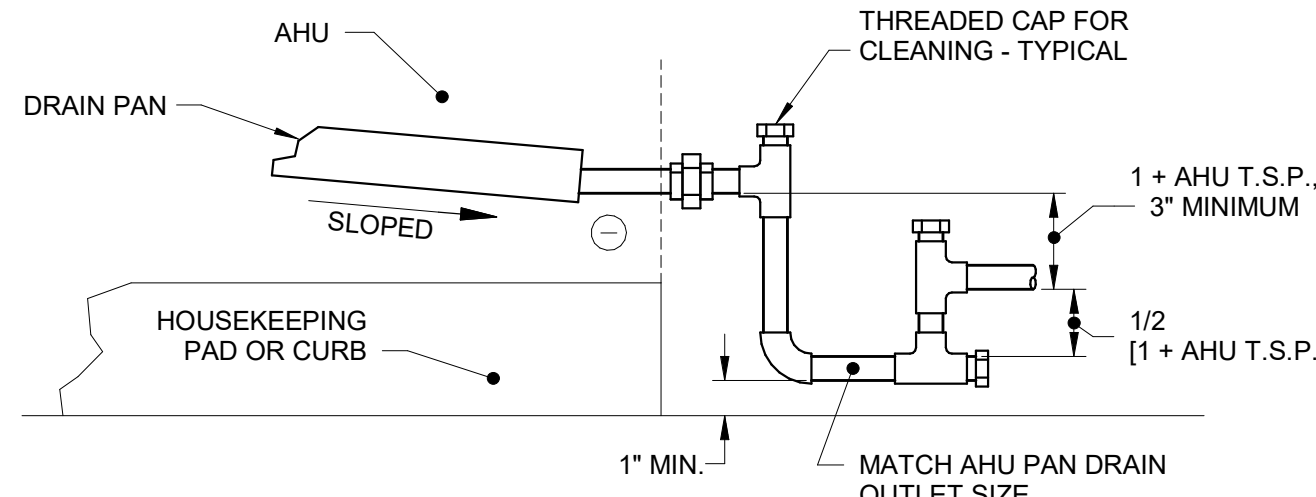


F7 RTU CONDENSATE PIPING

NONE

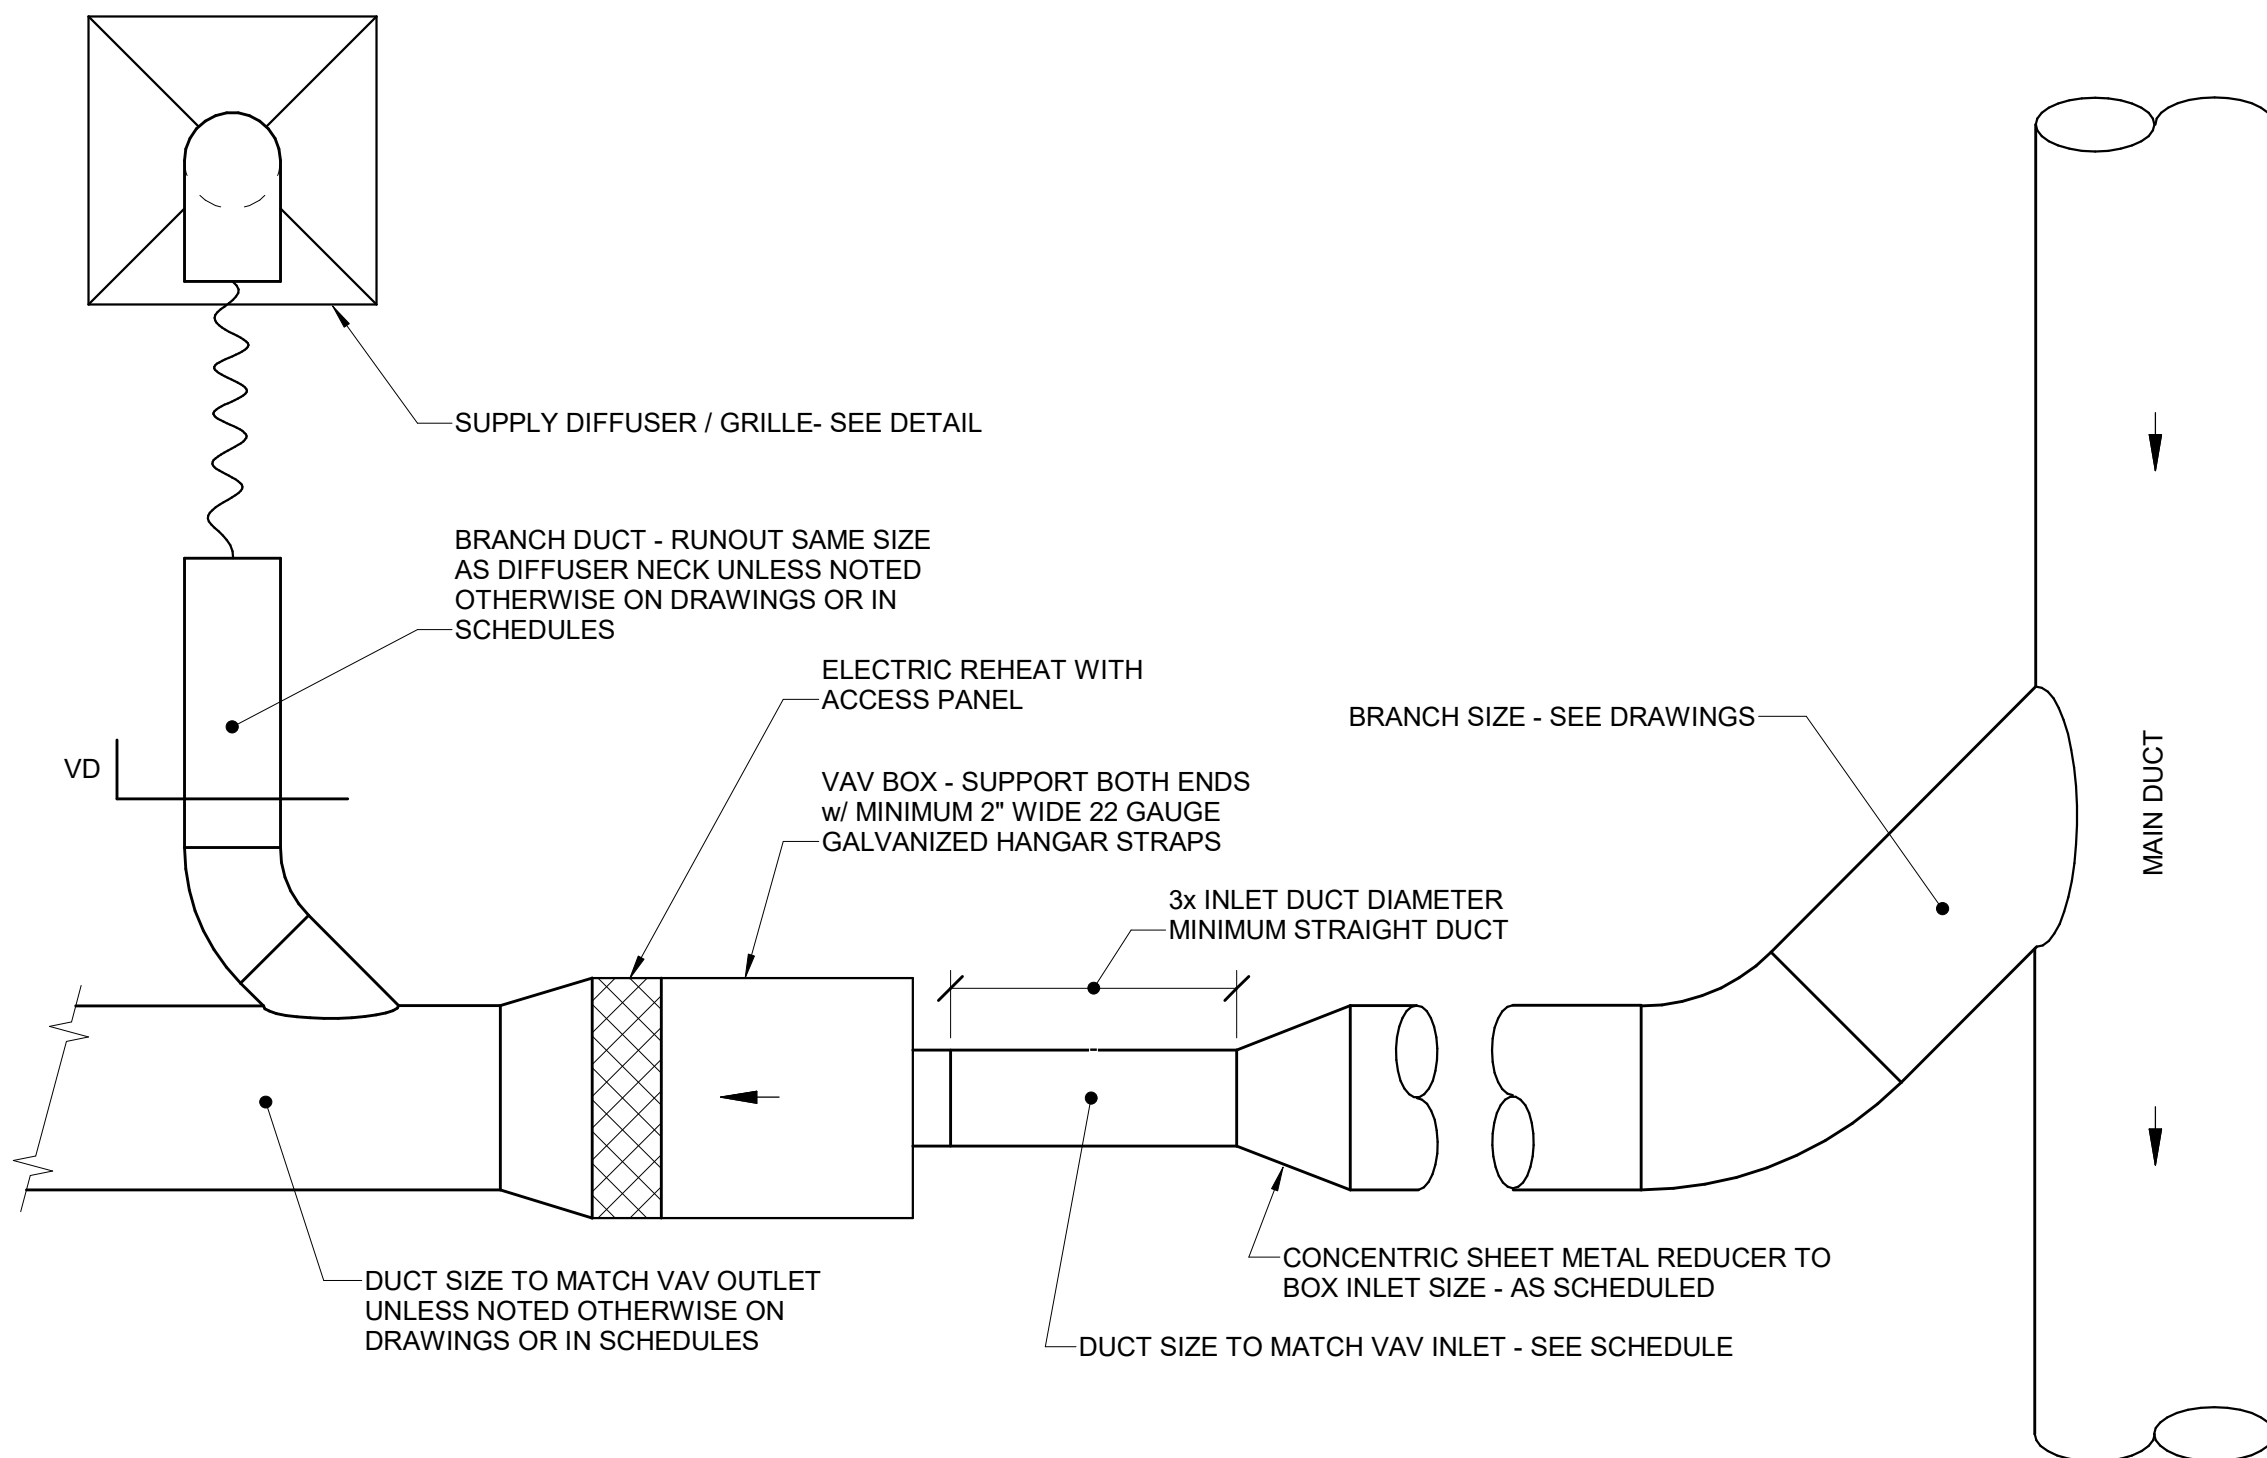


J1 SUPPLY VAV BOX SCHEMATIC - WITHOUT REHEAT COIL

NONE

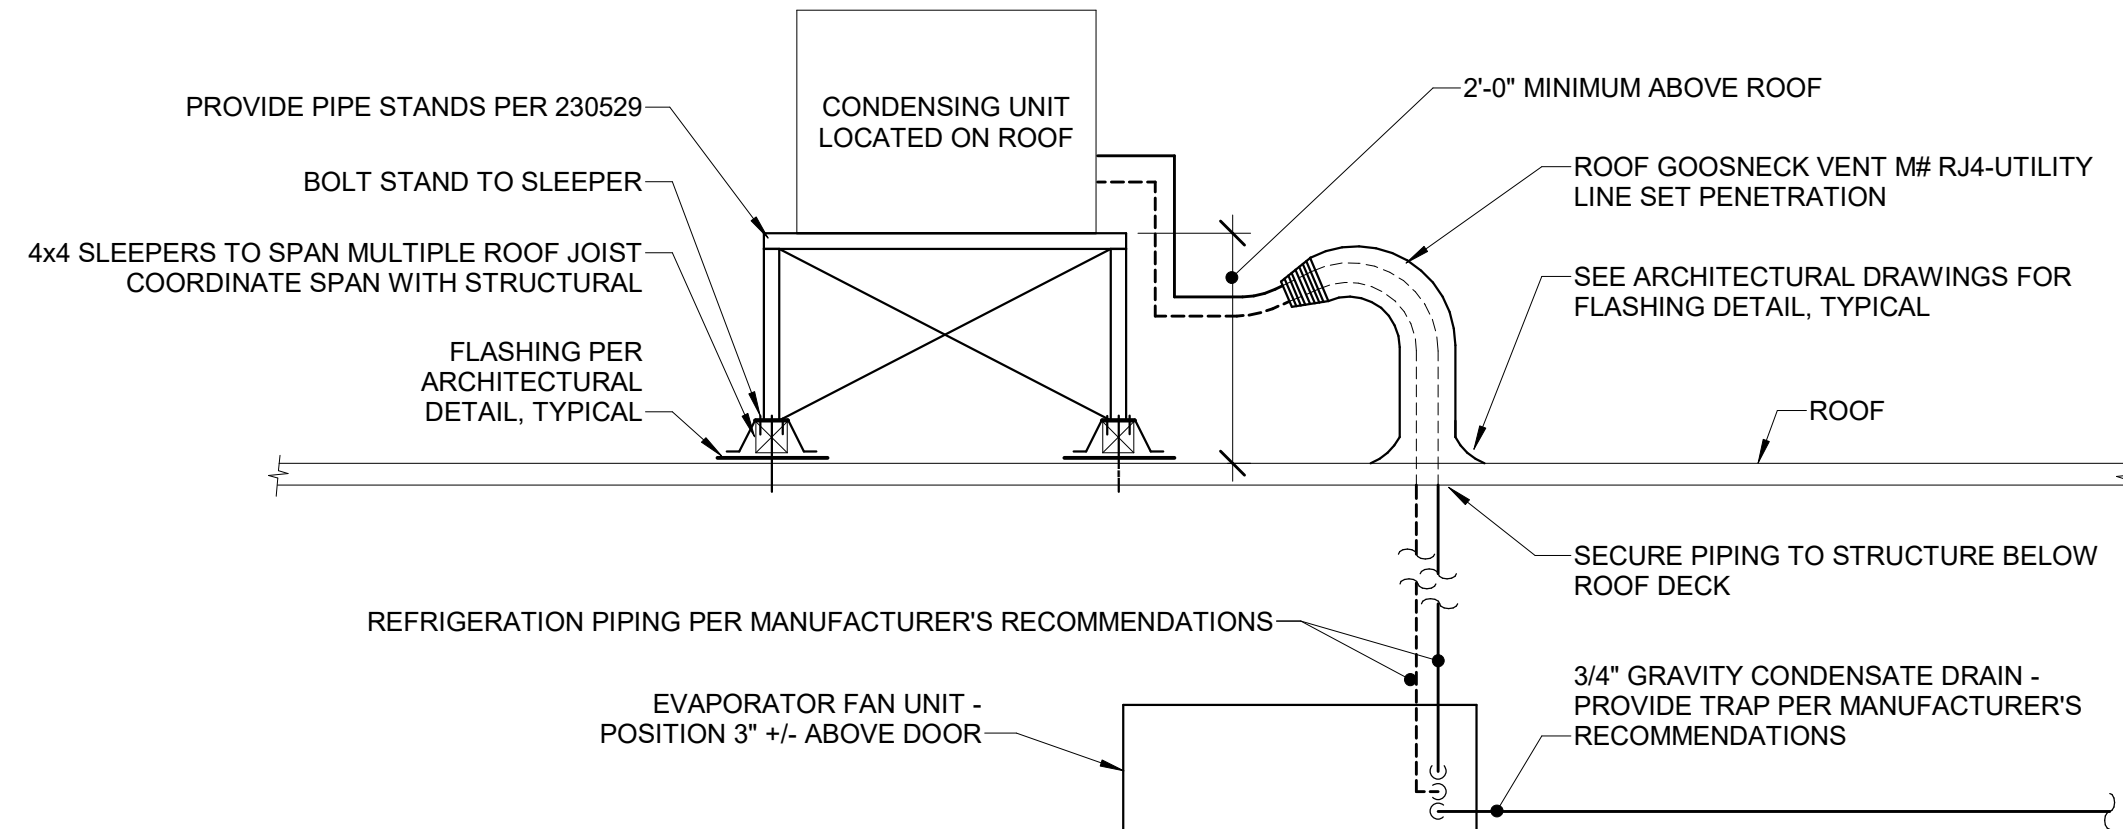

J7 DETAIL - DUCTLESS SPLIT SYSTEM PIPING

NONE

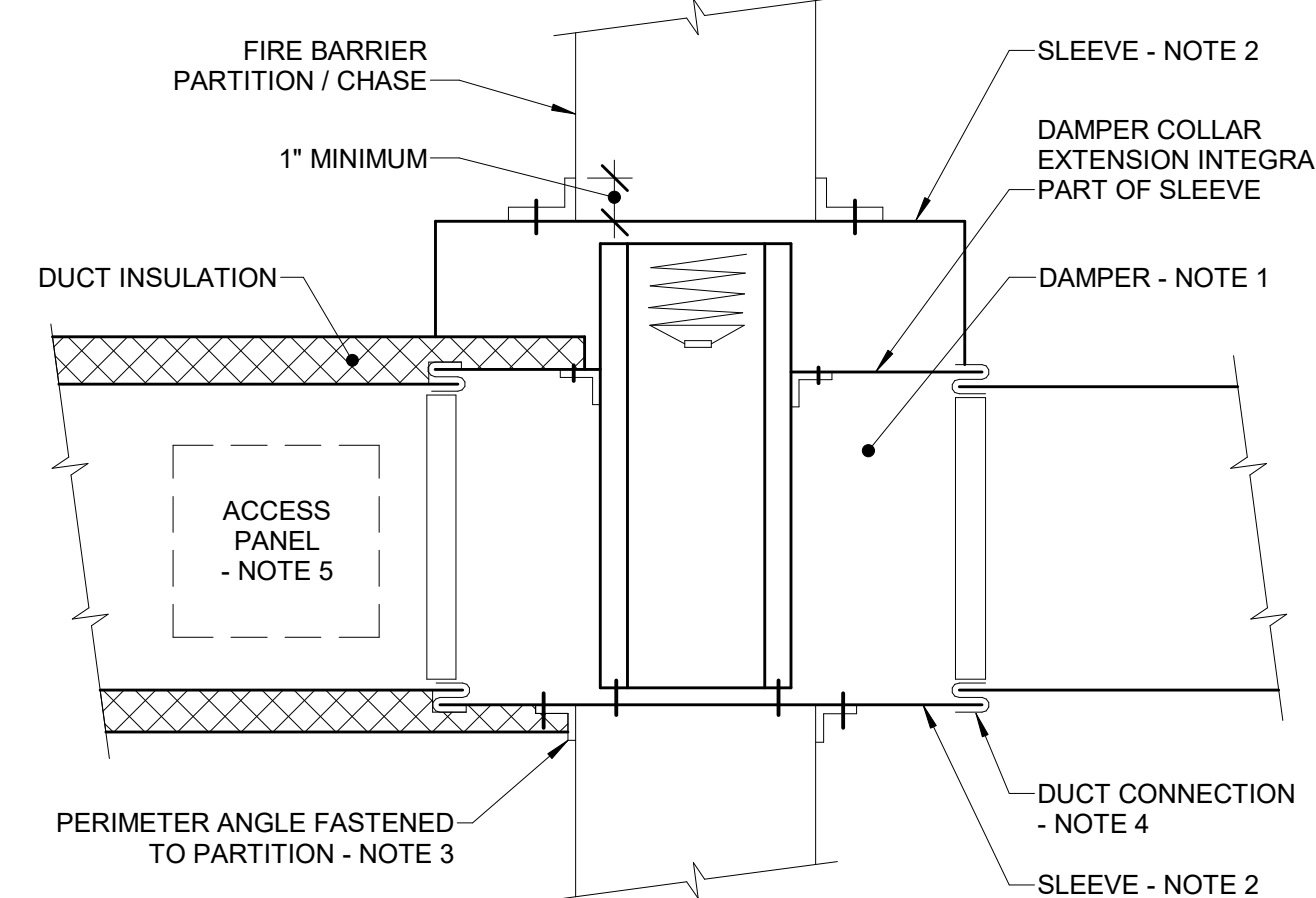

- NOTES:**
1. VERTICAL DAMPER INSTALLATION SHOWN - HORIZONTAL DAMPER INSTALLATION SIMILAR. FOLLOW ALL MANUFACTURER'S INSTRUCTIONS, INCLUDING FASTENER OPTIONS, GAUGES OF SLEEVE AND PERIMETER ANGLES. FIRE DAMPERS MUST BE INSTALLED IN THE PARTITION OR FLOOR AND NOT OUTSIDE OF THE PENETRATION.
 2. GALVANIZED SLEEVE - GAUGE OF NOT LESS THAN THAT OF THE CONNECTING DUCT. FASTEN SLEEVE TO DAMPER FRAME / PERIMETER ANGLES.
 3. PERIMETER ANGLES - GALVANIZED STEEL OF NOT LESS THAN 1-1/2"x1-1/2" - 14 GAUGE TO PROVIDE 1" MINIMUM OVERLAP OF OPENING ON ALL 4 SIDES.
 4. BREAK-AWAY DUCT CONNECTION - CONTRACTOR'S OPTION OF TYPE AS SHOWN IN SMACNA LPDS, FIGURE 2-13, SEAL JOINTS.
 5. ACCESS PANELS - SIZE AND LOCATION TO PERMIT SERVICING THE FUSIBLE LINK OR LINKS.

J11 TYPICAL FIRE DAMPER

NONE

5/8/2026 11:15:12 AM Autodesk Docs/2551-0024 SMCC-HEALTH SCIENCE CENTER/2551-0024-00_MEP.rvt

PACKAGED ROOF TOP UNIT SCHEDULE				
GENERAL	UNIT NO.	RTU-G	RTU-1 (ALT#2)	RTU-2
SERVICE		GROUND LEVEL	FIRST FLOOR	SECOND FLOOR
LOCATION		ROOF	ROOF	ROOF
MANUFACTURER		TEMPMASTER	TEMPMASTER	TEMPMASTER
MODEL		WP120E36R2ABBCFXB1	MV20E3EP2T4CBHP6F1	MV25E3FP2T4CBH86F1
TYPE		PACKAGED UNIT HEAT PUMP	PACKAGED UNIT HEAT PUMP	PACKAGED UNIT HEAT PUMP
DISCHARGE ORIENTATION		HORIZONTAL SUPPLY & RETURN	VERTICAL SUPPLY & RETURN	HORIZONTAL SUPPLY & RETURN
WEIGHT (LBS) W/CURB		1,180	2,834	3,039
ELECTRICAL	VOLTAGE	208/230-3-60	208/230-3-60	208/230-3-60
	UNIT MCA / MFS	146.5 / 150	211 / 225	235.5 / 250
	VFD'S FURNISHED BY	MANUFACTURER	MANUFACTURER	MANUFACTURER
	SD INSTALLED IN DUCT BY	DIV 23	DIV 23	DIV 23
	SD WIRED TO HVAC CONTROLS BY	DIV 23	DIV 23	DIV 23
	SD WIRED TO FIRE ALARM BY	DIV 26	DIV 26	DIV 26
SUPPLY FAN	SUPPLY AIRFLOW, CFM	4,235	7,000	9,400
	PEAK OUTSIDE AIRFLOW, cfm	1,000	1,750	2,100
	% OA	24%	25%	22%
	ESP, in.wc.	1.16	2	1.5
	MAX-BHP	2.99	6.80	9.08
	MOTOR HP	3	7.5	10.0
	TYPE	ECM, DIRECT DRIVE	ECM, DIRECT DRIVE	ECM, DIRECT DRIVE
EXHAUST FAN	EXHAUST AIRFLOW, CFM	4,235	(2)@3000	(2)@3000
	ESP, in.wc.	1	0.25	0.25
	VOLTAGE	208-1-60	208-1-60	208-1-60
	HP	-	(2)@1.5	(2)@1.5
COOLING COIL	FLA	5.5	(2)@2	(2)@2
	ENT. AIR, DBWB	80.0/67.0	80.0/67.0	80.0/67.0
	LVG. AIR, DBWB	61.1/57.6	60.4/57.9	61.5/58.7
	GROSS / NET TOTAL MBH	128.7	251.2	293.3
	GROSS / NET SENSIBLE MBH	91.3	188.4	225.8
	FACE AREA, SQ.FT	-	-	-
	COIL FACE VELOCITY FPM	-	-	-
	FLUID	R-454B	R-454B	R-454B
	FINS PER INCH	-	-	-
	ROWS	-	-	-
PRIMARY HEAT	TYPE	HEAT PUMP	HEAT PUMP	HEAT PUMP
	TOTAL CAPACITY, MBH @ 47°F...	105.7 / 60.0	218.0/126.0	278.0/162.0
	KW	6.59	15.53	17.87
	EAT °F	60	60	60
	LAT °F	84.5	85	85.5
	COP @ 47°F / 17°F	3.5 / 2.25	3.2/2.05	3.20/2.05
SECONDARY HEAT	TYPE	ELECTRIC	ELECTRIC	ELECTRIC
	KW	36	75	75
	STAGES	2	2	2
	EAT °F	60	60	60
	LAT °F	80.1	82.2	77.8
FILTERS (SUPPLY)	TYPE	MERV8	MERV8	MERV8
PROVIDE THE FOLLOWING: 1. PROVIDE FUSED DISCONNECT 2. PROVIDE 24" INSULATED ROOF CURB. PROVIDE ADAPTER CURB VERTICAL DISCHARGE UNITS. 3. FACTORY WIRED CONVENIENCE OUTLET 4. PROVIDE COATED EVAPORATOR AND CONDENSER COILS 5. PROVIDE POWERED EXHAUST				

DUCTLESS SPLIT SCHEDULE	
UNIT	AC-1
SERVES	IT 125
COOLING BTUH	30,000
COOLING BTUH, MINIMUM	9,000
HEATING AT 47F	-----
HEATING BTUH @ -13F	-----
REFRIGERANT	R-454B
SEER	19.8
INDOOR UNIT:	WALL MOUNT
MITSUBISHI MODEL NO.	PKA-A30KA7
DIMENSIONS (W X D X H)	46-1/16"x11-5/8"x14-3/8"
WEIGHT, LBS.	46
CFM	775
EXT. SP. IN. WC.	0"
VOLTAGE/PHASE	208/1
MCA	1.0
OUTDOOR COND. UNIT:	CU-1
MITSUBISHI MODEL NO.	PUY-A30NHA7-BS
WEIGHT, LBS.	176
LIQUID LINE SIZE	3/8"
HOT GAS LINE SIZE	5/8"
VOLTAGE/PHASE	208/1
MCA	19
MOCP	26
PROVIDE: 1. PROVIDE NEMA 3R DISCONNECT SWITCHES 2. PROVIDE WIND BAFFLE OPTION; 100% COOL TO -40F... 3. PROVIDE SUPPORTS AS SPECIFIED.	

FAN SCHEDULE																
TAG	SERVES	MFR.	MODEL	TYPE	DRIVE	CFM	SP (IN. WC.)	ELECTRICAL					MAX SONES	WEIGHT (LBS.)	DAMPER	NOTES
								MOTOR WATTS	MOTOR TYPE	STARTER / CONTROLLER TYPE	DISC. SWITCH FURN BY	VOLTS / PH				
EF-1	REST ROOMS JANITORS CLOSET	GREENHECK	CSP-A00-VG	INLINE	DIRECT	450	0.5"	115	ECM	ECM - FAN MFR	FAN MFR	120/1/60	1.9	39	BDD	


SINGLE DUCT AIR TERMINAL SCHEDULE																	
TAG	SERVES	Price Model No.	INLET SIZE	CFM MIN	HEAT CFM	CFM MAX	OUTLET SIZE	MAX RAD. & DISCH. NC	A, P, D . AT MAX COOLING	COIL MBH	ROOM HEAT MBH	KW	MODULATING	ELEC	ROOM TEMP	LAT	
VAV-G-1	DEBRIEF G05	SDV06	6	180	100	300	12"x 8"	30	.08"	3412.0	2.0	1.0	SCR	208/3	70	95	
VAV-G-2	PATIENT RM SIM LAB G01A	SDV07	7	300	300	500	12"x 10"	30	.07"	8530.0	6.1	2.5	SCR	208/3	70	95	
VAV-G-3	DEBRIEF G03	SDV06	6	180	100	300	12"x 8"	30	.08"	3412.0	2.0	1.0	SCR	208/3	70	95	
VAV-G-4	CONTROL RM G01B	SDV05	5	160	160	260	12"x 8"	30	.08"	5118.0	4.6	1.5	SCR	208/3	70	95	
VAV-G-5	CONTROL RM G01C	SDV05	5	160	160	260	12"x 8"	30	.08"	5118.0	4.6	1.5	SCR	208/3	70	95	
VAV-G-6	PATIENT RM SIM LAB G01D	SDV8	8	300	300	500	12"x 10"	30	.07"	8530.0	6.4	2.5	SCR	208/3	70	95	
VAV-G-7	CONTROL RM G01E	SDV05	5	165	165	275	12"x 8"	30	.08"	5118.0	4.6	1.5	SCR	208/3	70	95	
VAV-G-8	PATIENT RM SIM LAB G01F	SDV8	8	360	360	600	12"x 10"	30	.07"	8530.0	7.6	2.5	SCR	208/3	70	95	
VAV-G-9	MOULAGE PREP/STOR/STAFF G01G	SDV06	6	200	150	350	12"x 8"	30	.07"	6624.0	4.0	2.0	SCR	208/3	70	95	
VAV-G-10	NURSING LAB G18	SDV10	10	600	600	990	14"x 12"	30	.19"	20472.0	17.3	6.0	SCR	208/3	70	95	
						4335											
VAV-2-1	RADIATION TECH SIM LAB 221	SDV09	9	525	100	855	14"x 12"	30	.17"	17060.0		5.0	SCR	208/3	70	95	
VAV-2-2	RADIATION TECH SIM LAB 221	SDV09	9	525	100	855	14"x 12"	30	.17"	17060.0	23.2	5.0	SCR	208/3	70	95	
VAV-2-3	COMPUTER LAB 216	SDV12	12	840	100	1400	16"x15"	30	.27"	34120.0		10.0	SCR	208/3	70	95	
VAV-2-4	COMPUTER LAB 216	SDV12	12	840	100	1400	16"x15"	30	.27"	34120.0	54.6	10.0	SCR	208/3	70	95	
VAV-2-5	MA LAB 206	SDV10	10	720	100	1200	14"x 12"	30	.24"	17060.0	11.5	5.0	SCR	208/3	70	95	
VAV-2-6	OFFICE 212C & NURSING OFFICE 212A	SDV06	6	210	100	350	12"x 8"	30	.08"	3412.0	1.8	1.0	SCR	208/3	70	95	
VAV-2-7	OFFICE 212E	SDV06	6	220	100	360	12"x 8"	30	.08"	5118.0	3.4	1.5	SCR	208/3	70	95	
VAV-2-8	OFFICE 212E, 212F, 212G, & 212H	SDV8	8	420	100	700	12"x 10"	30	.21"	17060.0	11.6	5.0	SCR	208/3	70	95	
VAV-2-9	CLASS ROOM 217	SDV10	10	700	100	1140	14"x 12"	30	.24"	17060.0	21.5	5.0	SCR	208/3	70	95	
VAV-2-10	CLASS ROOM 217	SDV10	10	700	100	1140	14"x 12"	30	.24"	17060.0		5.0	SCR	208/3	70	95	
						9400											
NOTES: 1. VAV BOX MANUFACTURER: BOX, AIRFLOW PICKUP, AND ELECTRIC COIL. 2. CONTROL CONTRACTOR: DAMPER ACTUATOR, VALVE ACTUATOR (WATER COILS ONLY), TRANSFORMERS, AND LOW VOLTAGE WIRING. 3. ELECTRICAL CONTRACTOR: LINE VOLTAGE SIDE OF TRANSFORMERS AND COIL POWER.																	

REGISTERS - GRILLES - DIFFUSERS (RGD) SCHEDULE								
TAG	MFR.	MODEL	TYPE	NECK SIZE	FACE SIZE	MAX CFM	MAX TOTAL P.D. (IN.W.C.)	MAX NC LEVEL
S-1	PRICE	SCD	SQ. CEILING SUPPLY DIFFUSER, ADJUSTABLE	6Ø	24" X 24"	120	0.09"	20
S-2	PRICE	SCD	SQ. CEILING SUPPLY DIFFUSER, ADJUSTABLE	8Ø	24" X 24"	220	0.09"	20
S-3	PRICE	SCD	SQ. CEILING SUPPLY DIFFUSER, ADJUSTABLE	10Ø	24" X 24"	400	0.09"	20
R-1	PRICE	630	ALUM. RETURN, 3/4" SPACING, 45 DEG VANES	10" X 10"	12" X 12"	250	0.06"	19<
R-2	PRICE	630	ALUM. RETURN, 3/4" SPACING, 45 DEG VANES	22" X 22"	24" X 24"	830	0.06"	19<
R-3	PRICE	85	EGG CRATE, 45 DEG VANES	22" X 22"	24" X 24"	1000	0.08"	20
R-4	PRICE	630	ALUM. RETURN, 3/4" SPACING, 45 DEG VANES	8" X 5"	10" X 7"	125	0.09"	20
INSTALLER SHALL COORDINATE MOUNTING CONDITIONS. PROVIDE PRICE SDA INSULATED PLENUM OR APPROVED EQUAL FOR LINEAR SLOT DIFFUSERS, PROVIDE DIFFUSERS W/ BLB LIEBERT MATTE BLACK FINISH.								




NO.	DESCRIPTION	DATE

FOR ADDITIONAL INFORMATION, REFER TO PROJECT MANUAL.	CONTENT: MECHANICAL SCHEDULES
	DRAWN BY: SCL
	PROJECT NO: 25-062-00
	DATE: 02/13/2025
	REVISED: SCALE:
J	M6.0
	Project Phase
	CONSTRUCTION DOCUMENTS 5-08-2026
COPYRIGHT © 2025 BY LAVALLEE/BRENSINGER PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

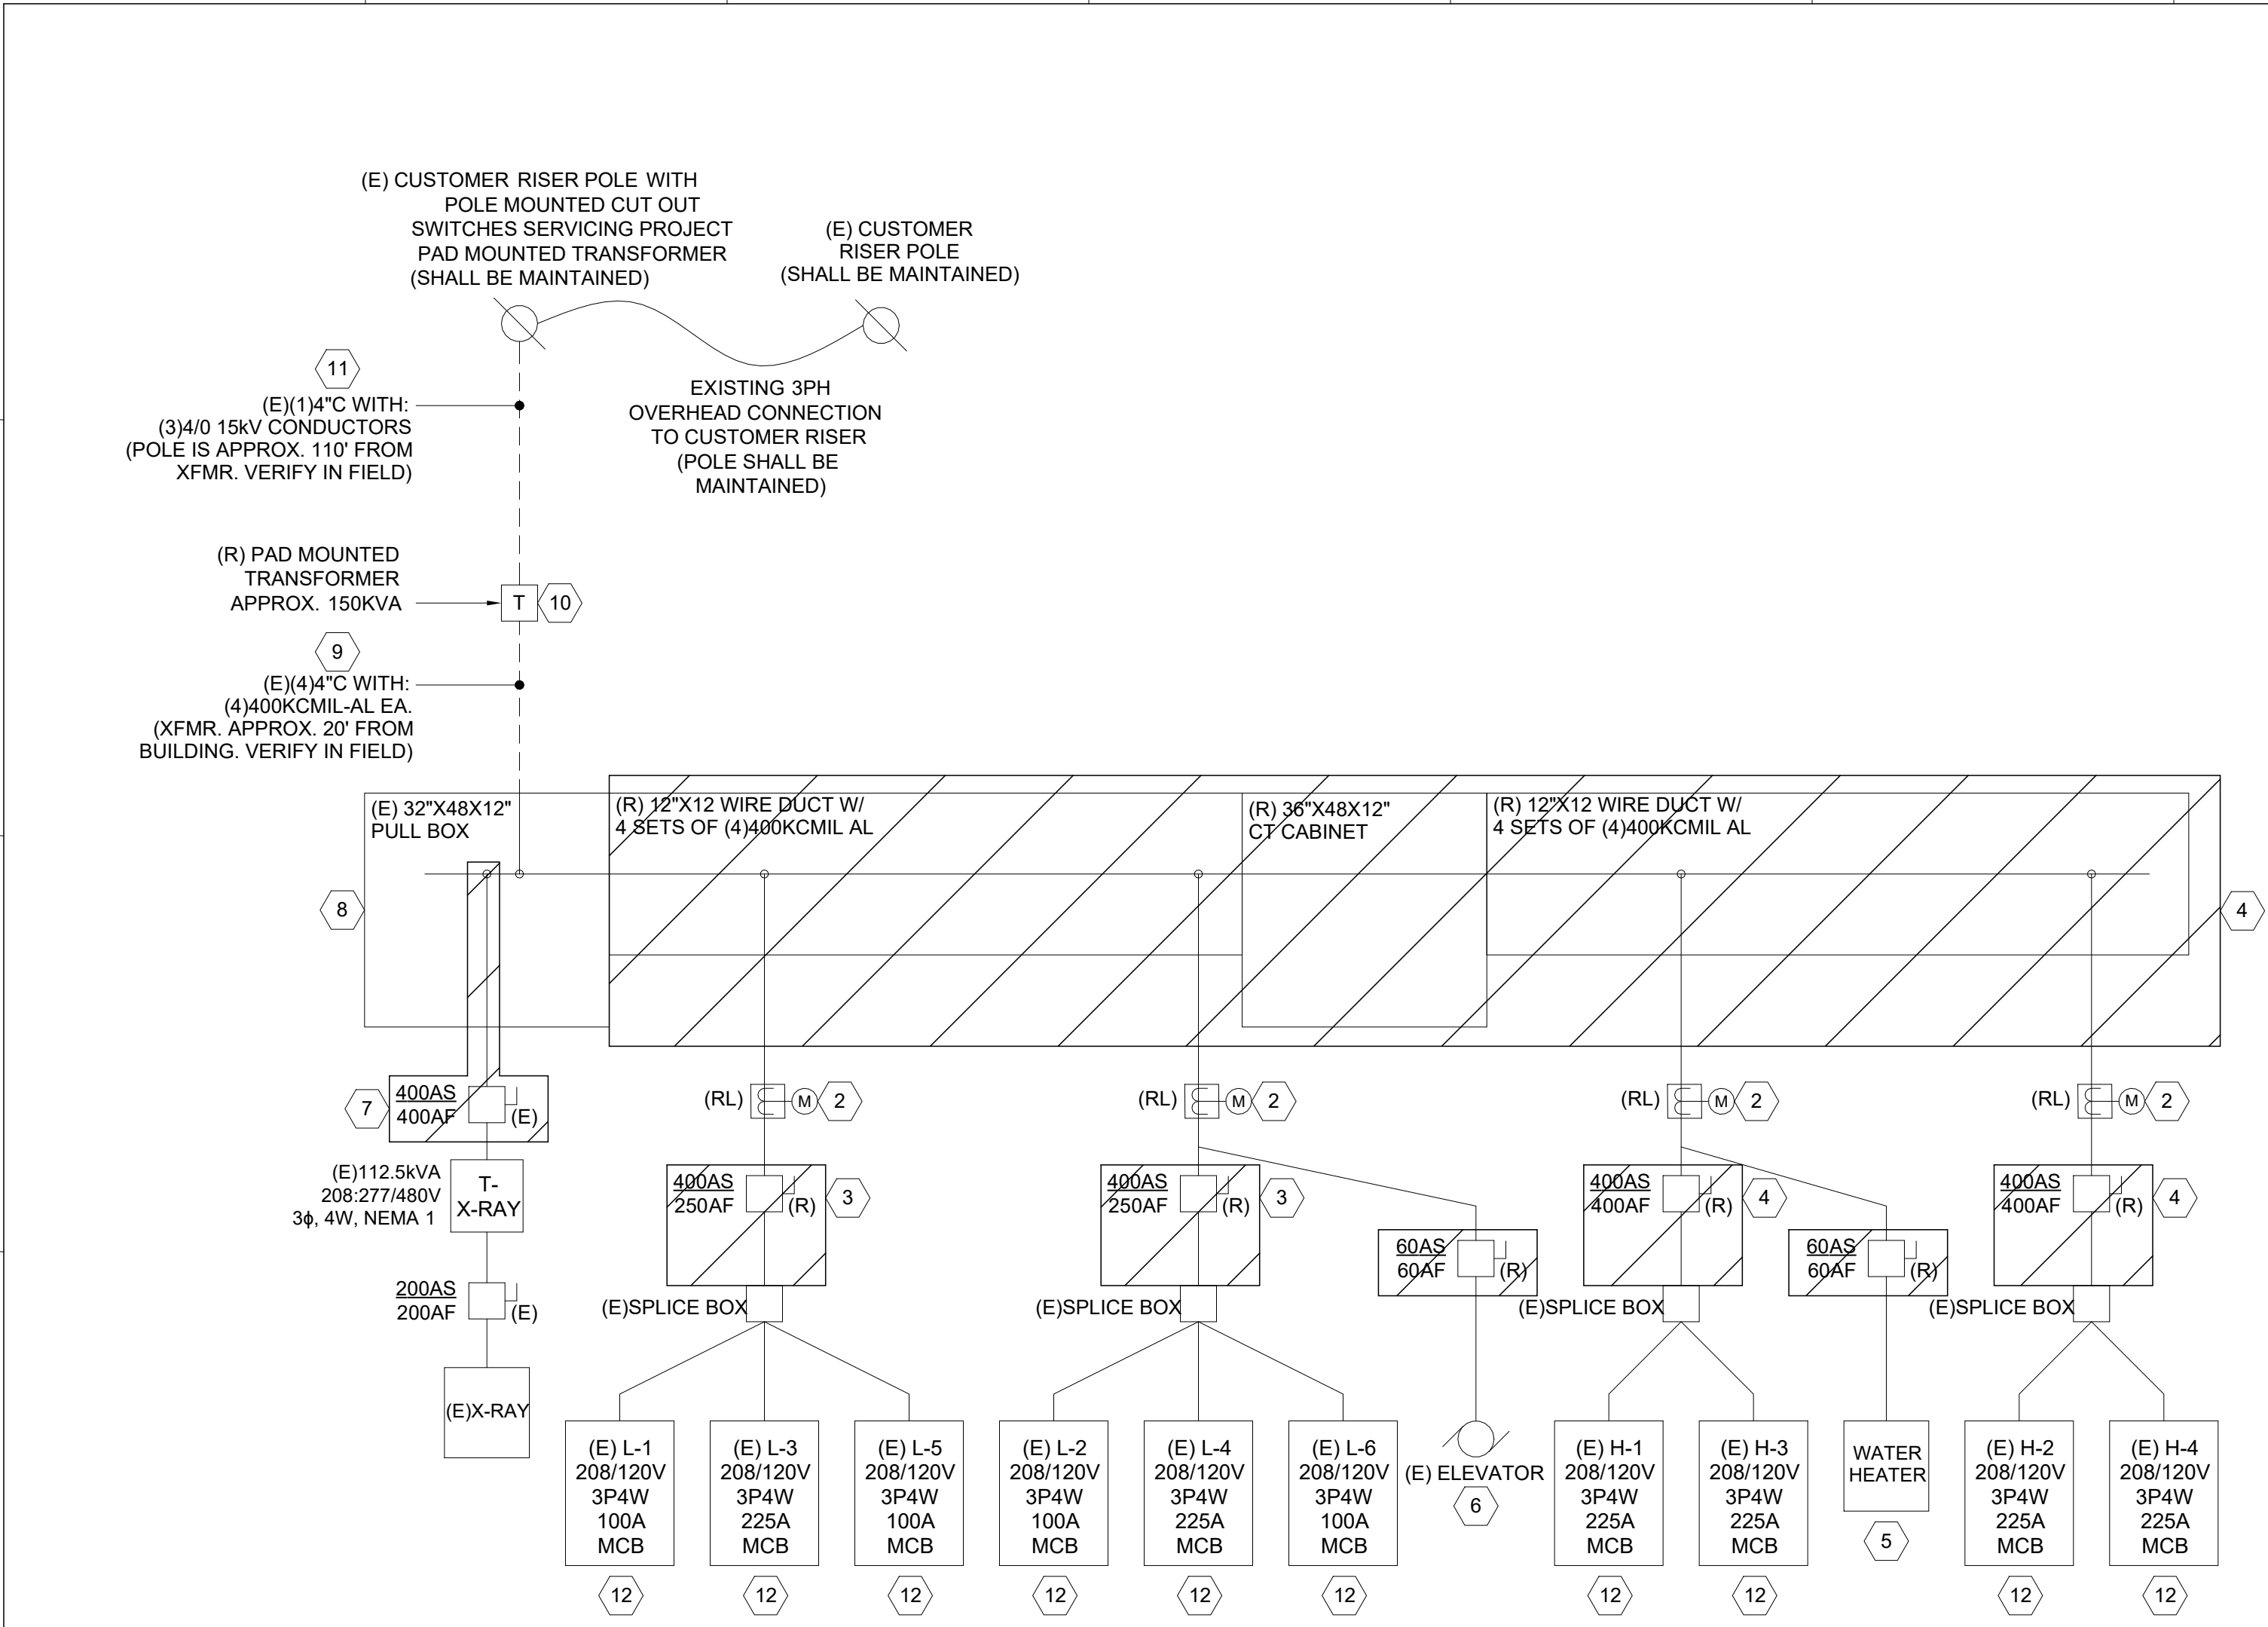

E1	DEMOLITION ONE-LINE DIAGRAM
N.T.S.	

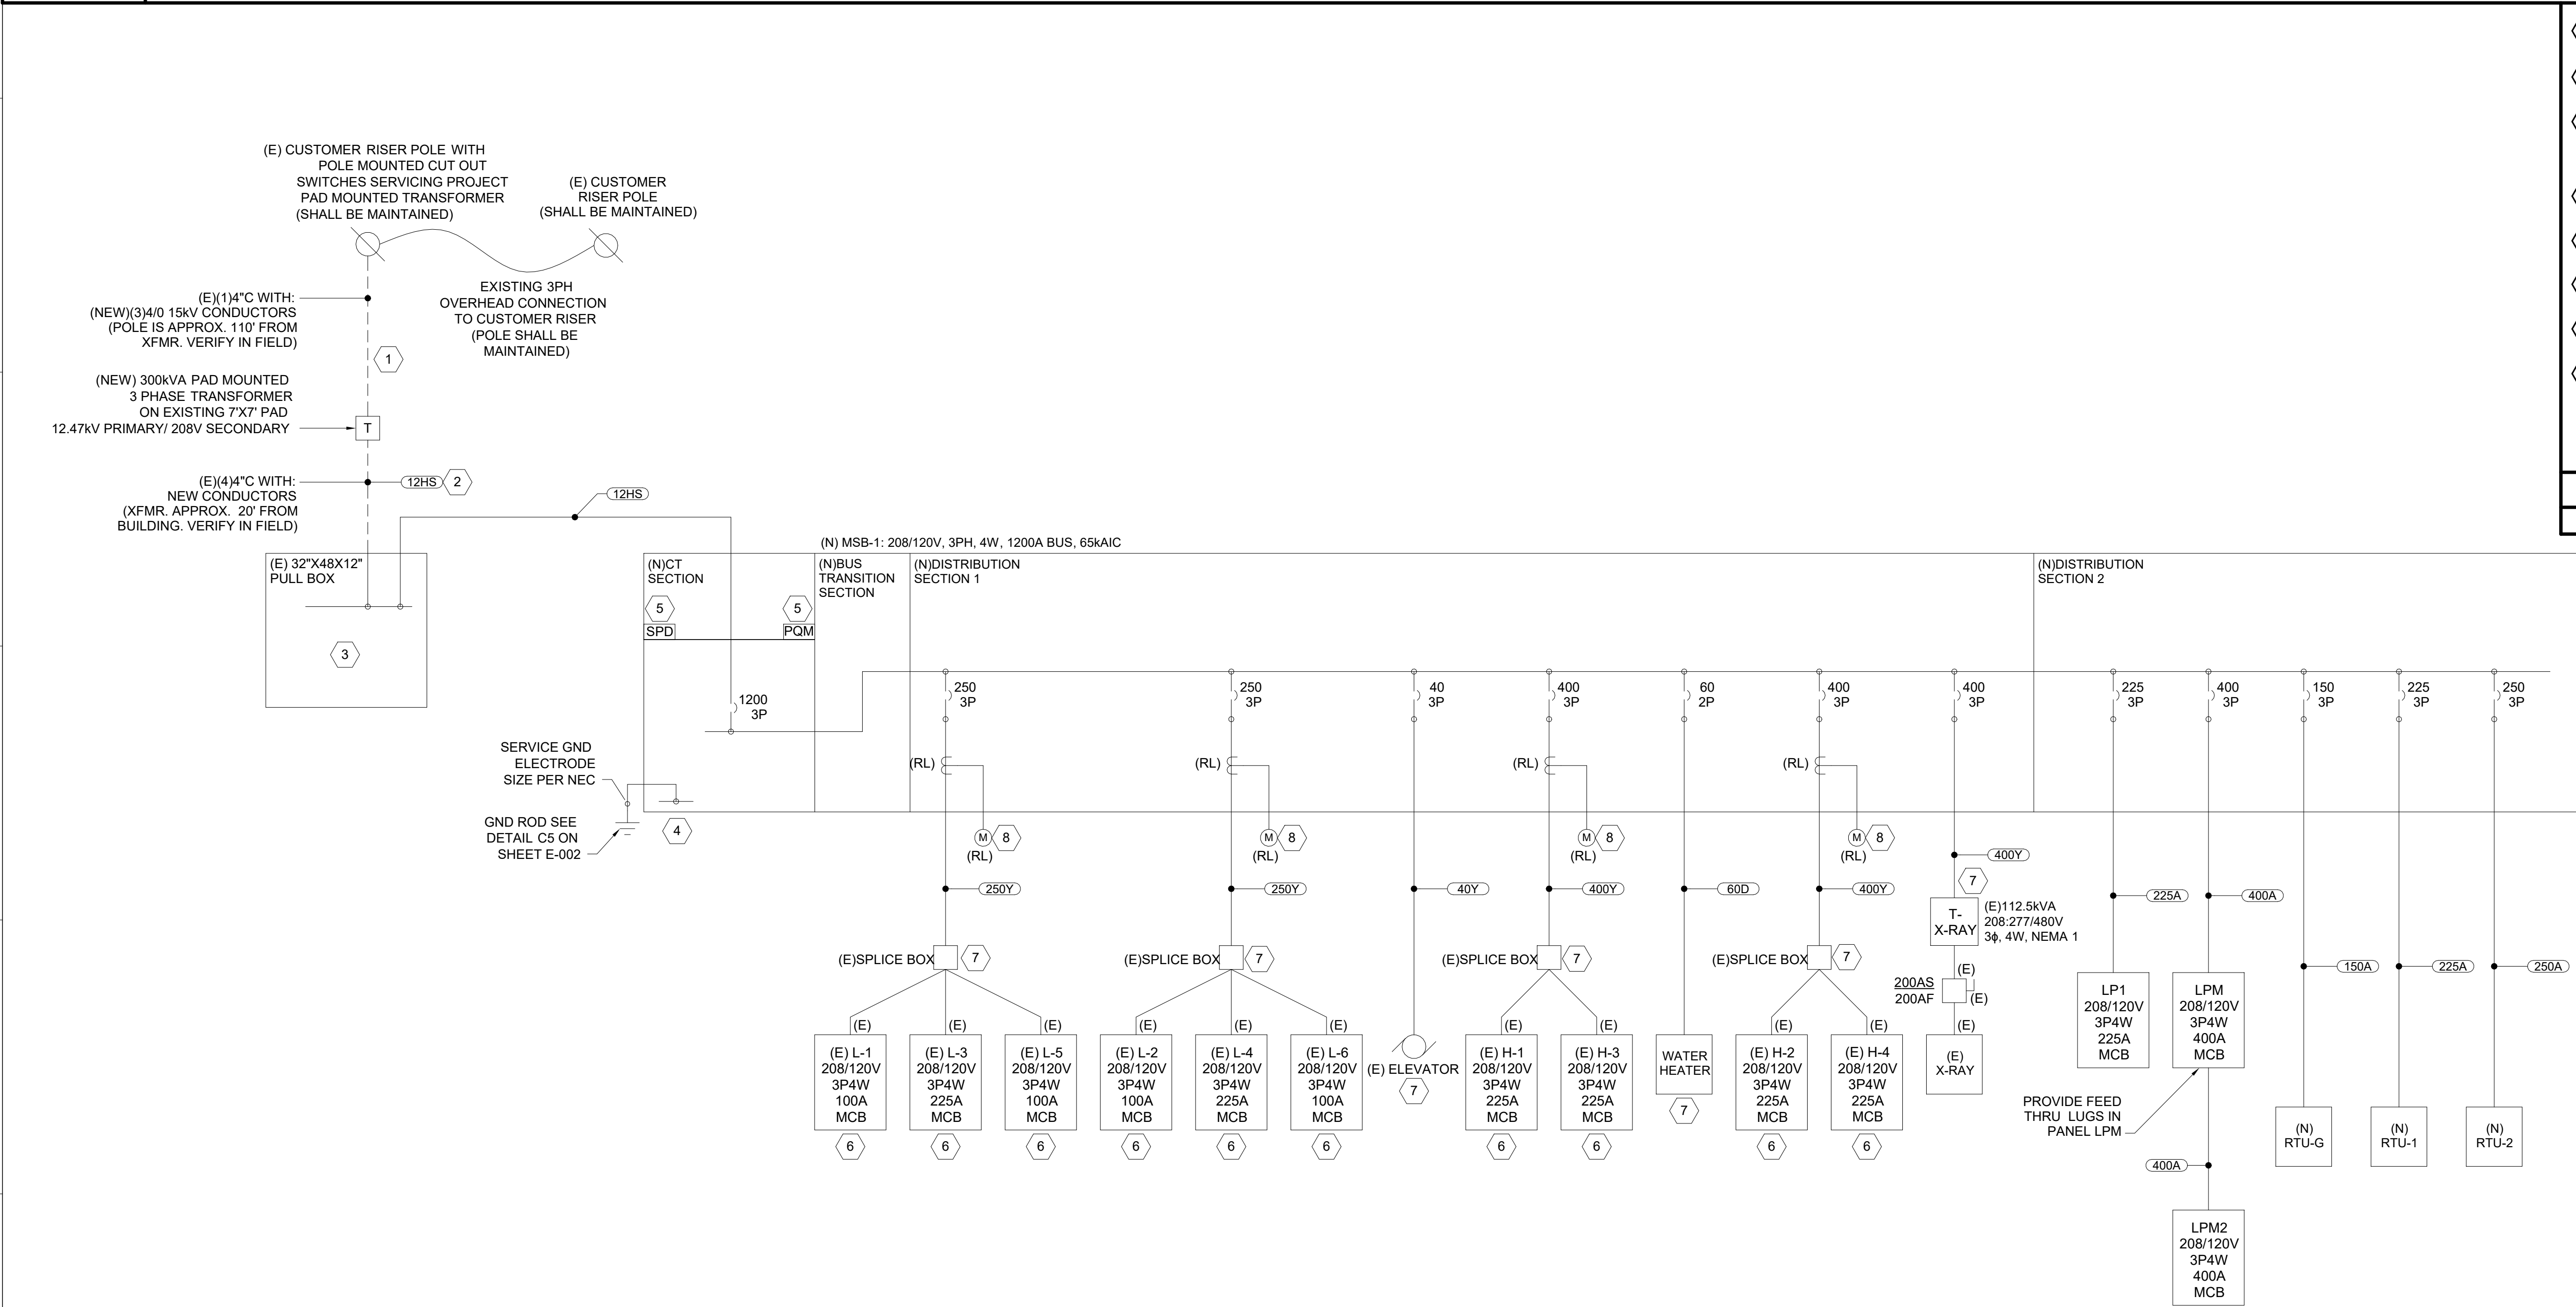

J1	NEW CONDITIONS ONE-LINE DIAGRAM
N.T.S.	

- DISCONNECT AND REMOVE THE EXISTING WIREWAYS, THE CT CABINET AND THE FEEDS TO THE (4) 400 AMP SERVICE DISCONNECT SWITCHES BACK TO THE EXISTING PULL BOX
- DISCONNECT AND REMOVE THE (4) EXISTING E-MON D-MON CUSTOMER METERS FOR REUSE IN THE REVISED POWER DISTRIBUTION DESIGN.
- DISCONNECT AND REMOVE THE (2) EXISTING 400 AMP SERVICE DISCONNECT SWITCHES AND THE FEEDS TO THEIR RESPECTIVE JUNCTION THAT IS USED TO SERVE MULTIPLE PANELS(L-1 THROUGH L-6). MAINTAIN THE (2) RESPECTIVE JUNCTION BOXES AND THEIR FEEDERS TO EACH OF THEIR PANELS SERVED. A NEW 400 AMP FEEDER WILL BE PROVIDED FROM THE JUNCTION BOXES TO THE NEW SWITCHBOARD
- DISCONNECT AND REMOVE THE (2) EXISTING 400 AMP SERVICE DISCONNECT SWITCHES AND THE FEEDS TO THEIR RESPECTIVE JUNCTION THAT IS USED TO SERVE MULTIPLE PANELS(H-1 THROUGH H-4). MAINTAIN THE (2) RESPECTIVE JUNCTION BOXES AND THEIR FEEDERS TO EACH OF THEIR PANELS SERVED. A NEW 400 AMP FEEDER WILL BE PROVIDED FROM THE JUNCTION BOXES TO THE NEW SWITCHBOARD
- DISCONNECT AND REMOVE THE EXISTING 60 AMP SERVICE DISCONNECT SWITCH AND THE FEED TO THE RESPECTIVE JUNCTION THAT IS USED TO SERVE THE WATER HEATER. MAINTAIN THE RESPECTIVE JUNCTION BOX AND THE FEEDER TO THE LOAD SERVED. A NEW 60 AMP FEEDER WILL BE PROVIDED FROM THE JUNCTION BOX TO THE NEW SWITCHBOARD
- DISCONNECT AND REMOVE THE EXISTING 60 AMP SERVICE DISCONNECT SWITCH AND THE FEED TO THE RESPECTIVE JUNCTION THAT IS USED TO SERVE THE ELEVATOR. MAINTAIN THE RESPECTIVE JUNCTION BOX AND THE FEEDER TO THE LOAD SERVED. A NEW 60 AMP FEEDER WILL BE PROVIDED FROM THE JUNCTION BOX TO THE NEW SWITCHBOARD
- DISCONNECT AND REMOVE THE FEEDER TAP FROM THE PULL BOX, THE EXISTING 400 AMP SERVICE DISCONNECT SWITCH AND THE FEED TO THE RESPECTIVE TRANSFORMER THAT IS USED TO SERVE THE X-RAY MACHINE. MAINTAIN THE RESPECTIVE TRANSFORMER AND THE SECONDARY FEEDER TO THE LOAD SERVED. A NEW 400 AMP FEEDER WILL BE PROVIDED FROM THE TRANSFORMER PRIMARY TO THE NEW SWITCHBOARD
- MAINTAIN THE EXISTING SERVICE ENTRANCE PULL BOX AND REUSE TO ROUTE NEW SERVICE ENTRANCE FEEDER TO THE NEW SWITCHBOARD
- DISCONNECT AND REMOVE THE EXISTING SECONDARY CONDUCTORS FROM THE EXISTING PAD MOUNTED TRANSFORMER TO THE PULL BOX. MAINTAIN THE EXISTING (4) 4 UNDERGROUND CONDUITS FORM THE EXISTING PULL BOX TO THE EXISTING TRANSFORMER PAD. THE EXISTING CONDUITS SHALL BE REUSE FOR A NEW 1200AMP CU SECONDARY SERVICE FEEDER
- DISCONNECT AND REMOVE THE EXISTING 150 KVA PAD MOUNTED SERVICE TRANSFORMER. MAINTAIN THE EXISTING 7X7 PAD. THE PRIMARY UNDERGROUND CONDUITS ENTRANCE, THE SECONDARY UNDERGROUND CONDUIT ENTRANCE, AND THE EXISTING GROUNDING ELECTRODE SYSTEM. THE EXISTING CONDUITS, GROUNDING AND PAD SHALL BE REUSED FOR THE NEW 300 KVA TRANSFORMER
- DISCONNECT AND REMOVE THE EXISTING PRIMARY CONDUCTORS FROM THE EXISTING PAD MOUNTED TRANSFORMER TO THE PULL BOX. MAINTAIN THE EXISTING 4 UNDERGROUND CONDUIT FROM THE EXISTING UTILITY POLE TO THE EXISTING TRANSFORMER PAD. THE EXISTING CONDUITS SHALL BE REUSED FOR A NEW 15KV (40) CU PRIMARY SERVICE FEEDER
- DISCONNECT AND REMOVE THE EXISTING FLUSH MOUNTED PANEL BOX. REMOVE THE EXISTING PANEL COVER AND INTERIOR/OUTS (HUNG BUSSES, BREAKERS, BREAKER MOUNTING, LUGS) AND MAINTAIN EXISTING FLUSH PANEL BOX. REPLACE THE EXISTING PANEL COVER AND INTERIORS WITH MODERN INTERIORS. PROVIDE A ONE FOR ONE REPLACEMENT QUANTITY, AMPLIFY, POLE CONFIGURATION) OF THE BRANCH AND FEEDER MAIN CIRCUIT BREAKERS IN THE SAME POLE POSITIONS AS THE RESPECTIVE EXISTING PANEL INTERIORS FOR THE EXISTING BRANCH CIRCUITS TO BE MAINTAINED AND THE NEW BRANCH CIRCUITS BEING ADDED. MAINTAIN/RE-TERMINATE THE ACTIVE BRANCH CIRCUITS. REMOVE THE ABANDONED BRANCH CIRCUITS. PROVIDE NEW BRANCH CIRCUIT WHERE INDICATED ON NEW WORK PLANS. UPDATE THE RESPECTIVE PANEL DIRECTORY WITH MAINTAINED, SPARE AND NEW LOAD ID.

DEMOLITION KEYED NOTES

- RE-USE EXISTING UNDERGROUND PRIMARY CONDUIT. PROVIDE NEW 15 KV RISER FEEDER. MAKE NEW TERMINATION AT EXISTING POLE MOUNTED FUSED CUT OUTS AND AT NEW PAD MOUNTED TRANSFORMER.
- RE-USE EXISTING UNDERGROUND SECONDARY CONDUIT. PROVIDE NEW INDICATED FEEDER. MAKE NEW TERMINATIONS AT NEW PAD MOUNTED TRANSFORMER AND AT EXISTING SERVICE PULL BOX.
- RE-USE EXISTING PULL BOX TO SERVE NEW CONDUIT / FEEDER TO NEW SWITCHBOARD. PROVIDE BLANK COVER PLATE AT BOTTOM OF EXISTING PULL BOX TO FACILITATE THE ROUTING OF NEW CONDUITS FROM IT TO THE NEW SWITCHBOARD WHILE FILLING IN THE EXISTING OPENING FROM PREVIOUS WIRE WAY CONNECTION.
- NEW 4 SECTION SWITCHBOARD ; CT ABOVE MAIN CIRCUIT BREAKER SECTION. PULL/BUS TRANSITION SECTION, TWO DISTRIBUTION SECTIONS POPULATED WITH THE INDICATED FEEDER BREAKERS.
- PROVIDE POWER QUALITY METER AND SURGE PROTECTION DEVICE. REFER TO SPECIFICATIONS FOR ADDITIONAL INFORMATION.
- REFER TO DEMOLITION KEY NOTE 12 FOR ADDITIONAL INFORMATION ABOUT PLANNED UPGRADE SCOPE FOR THE (10) EXISTING PANEL BOARDS.
- RE-FED/RE-TERMINATE THE INDICATED EXISTING LOAD FROM A NEW RESPECTIVE CIRCUIT BREAKER IN THE NEW SWITCHBOARD.
- RE-USE EXISTING E-MON D-MON CUSTOMER METERING DEVICES. RELOCATE THE EXISTING RESPECTIVE CTS/PTS LOCATED IN THE EXISTING REMOVED DISCONNECT SWITCHES, TO THE RESPECTIVE NEW CIRCUIT BREAKER IN THE NEW SWITCHBOARD. REWIRE THE RELOCATED CTS/PTS TO THEIR RESPECTIVE METER. EXTEND AND REWIRE THE OUTPUT MONITORING LOW VOLTAGE COMMUNICATION WIRING TO THE RESPECTIVE METER FOR CONTINUED CAMPUS DATA MONITORING. LOCATE EACH OF THE (4) E-MON D-MON METERS ADJACENT TO THE NEW SWITCHBOARD AND LABEL WHICH CIRCUIT BREAKER LOAD THEY SERVE.

KEYED NOTES

LAVALLEE BRENSINGER ARCHITECTS
Boston | Manchester | Portland
[www.LBPA.com](#)

Allied Engineering
A Salas O'Brien Company
160 Veranda Street
Portland, Maine 04103
P: 207.221.2260
F: 207.221.2266

SMCC

HEALTH SCIENCE CENTER
BGS NUM: 3809
2 Ford Road, South Portland, Maine, 04106

NO.	DESCRIPTION	DATE

E6.0
CONSTRUCTION DOCUMENTS 5-08-2026
COPYRIGHT © 2025 BY LAVALLEE BRENSINGER ARCHITECTS, INC. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.

AutoCAD Docs:\2561-0024-BMCC-HEALTH SCIENCE CENTER\065-10024-00_MEP.rvt
5/8/2026 2:02:09 PM

FEEDER SCHEDULE										
TAG	MAXIMUM AMPERE RATING	PHASE AND NEUTRAL CONDUCTORS (NOTE 1)	GROUND CONDUCTOR (NOTE 2)	CONDUIT (NOTE 3)	TAG	MAXIMUM AMPERE RATING	PHASE AND NEUTRAL CONDUCTORS (NOTE 1)	GROUND CONDUCTOR (NOTE 2)	CONDUIT (NOTE 3)	
15D	15	3#12	1#12	3/4"	400D	400	3#500 KCMIL	1#3	3 1/2"	
15Y		4#12	1#12	3/4"			400Y	4#500 KCMIL	1#3	4"
30D	30	3#10	1#10	3/4"	450D	450	2 SETS OF 3#250 KCMIL	2 - #2	2 - 2 1/2"	
30Y		4#10	1#10	3/4"			450Y	2 SETS OF 4#250 KCMIL	2 - #2	2 - 3"
50D	50	3#8	1#10	3/4"	500D	500	2 SETS OF 3#250 KCMIL	2 - #2	2 - 2 1/2"	
50Y		4#8	1#10	1"			500Y	2 SETS OF 4#250 KCMIL	2 - #2	2 - 3"
60D	60	3#6	1#10	3/4"	600D	600	2 SETS OF 3#350 KCMIL	2 - #1	2 - 3"	
60Y		4#6	1#10	1 1/4"			600Y	2 SETS OF 4#350 KCMIL	2 - #1	2 - 3"
80D	80	3#4	1#8	1 1/4"	700D	700	2 SETS OF 3#500 KCMIL	2 - #1/0	2 - 3 1/2"	
80Y		4#4	1#8	1 1/4"			700Y	2 SETS OF 4#500 KCMIL	2 - #1/0	2 - 4"
100D	100	3#2	1#8	1 1/4"	800D	800	2 SETS OF 3#600 KCMIL	2 - #1/0	2 - 3 1/2"	
100Y		4#2	1#8	1 1/4"			800Y	2 SETS OF 4#600 KCMIL	2 - #1/0	2 - 4"
125D	125	3#1	1#6	1 1/2"	900D	900	3 SETS OF 3#350 KCMIL	3 - #2/0	3 - 3"	
125Y		4#1	1#6	1 1/2"			900Y	3 SETS OF 4#350 KCMIL	3 - #2/0	3 - 3"
150D	150	3#1/0	1#6	1 1/2"	10#D	1000	3 SETS OF 3#400 KCMIL	3 - #2/0	3 - 2 1/2"	
150Y		4#1/0	1#6	2"			10#Y	3 SETS OF 4#400 KCMIL	3 - #2/0	3 - 3"
175D	175	3#2/0	1#6	2"	12#D	1200	3 SETS OF 3#600 KCMIL	3 - #3/0	3 - 4"	
175Y		4#2/0	1#6	2"			12#Y	3 SETS OF 4#600 KCMIL	3 - #3/0	3 - 4"
200D	200	3#3/0	1#6	2"	16#D	1600	4 SETS OF 3#600 KCMIL	4 - #4/0	4 - 4"	
200Y		4#3/0	1#6	2"			16#Y	4 SETS OF 4#600 KCMIL	4 - #4/0	4 - 4"
225D	225	3#4/0	1#4	2"	20#D	2000	5 SETS OF 3#600 KCMIL	5 - #250 KCMIL	5 - 4"	
225Y		4#4/0	1#4	2 1/2"			20#Y	5 SETS OF 4#600 KCMIL	5 - #250 KCMIL	5 - 4"
250D	250	3#250 KCMIL	1#4	2 1/2"	25#D	2500	6 SETS OF 3#600 KCMIL	6 - #350 KCMIL	6 - 4"	
250Y		4#250 KCMIL	1#4	3"			25#Y	6 SETS OF 4#600 KCMIL	6 - #350 KCMIL	6 - 4"
300D	300	3#350 KCMIL	1#4	3"	30#D	3000	8 SETS OF 3#600 KCMIL	8 - #500 KCMIL	8 - 4"	
300Y		4#350 KCMIL	1#4	3"			30#Y	8 SETS OF 4#600 KCMIL	8 - #500 KCMIL	8 - 4"
350D	350	3#500 KCMIL	1#3	3 1/2"	40#D	4000	10 SETS OF 3#600 KCMIL	10 - #500 KCMIL	10 - 4"	
350Y		4#500 KCMIL	1#3	4"			40#Y	10 SETS OF 4#600 KCMIL	10 - #500 KCMIL	10 - 4"
TRS	REFER TO TRANSFORMER SCHEDULE FOR PRIMARY, SECONDARY AND GROUND FEEDER SIZES					50#D	5000	12 SETS OF 3#600 KCMIL	12 - #500 KCMIL	12 - 4"
						50#Y		12 SETS OF 4#600 KCMIL	12 - #500 KCMIL	12 - 4"
FEEDER SCHEDULE NOTES:										
1	WIRING BASED ON COPPER THHN/THHN.									
2	GROUNDING CONDUCTORS BASED ON USE AS A FEEDER (REFER TO ONE LINE DIAGRAMS FOR SERVICE ENTRANCE GROUNDING ELECTRODE SIZES).									
3	CONDUIT SIZE BASED ON EMT.									
4	FEEDER TAG ENDING IN "E" INDICATES PROVIDE CONDUITS ONLY; CONDUCTORS ARE FUTURE.									
5	FEEDERS GREATER THAN 300 FEET APPLY VOLTAGE DROP ACCOMMODATION BY INCREASING CONDUCTOR AND CONDUIT SIZES APPROPRIATELY.									
6	MAXIMUM SYSTEM VOLTAGE IS 600 (REFER TO ONE LINE DIAGRAMS FOR MEDIUM AND HIGH VOLTAGE FEEDER SIZES).									
7	FEEDER TAG ENDING IN "S" INDICATES SERVICE ENTRANCE FEEDER. EXCLUDE THE GROUND CONDUCTOR INDICATED IN THE TABLE.									

VOLTAGE DROP CHART				
MAXIMUM LOAD (VA)	MAXIMUM LENGTH PER CONDUCTOR SIZE			
	#12	#10	#8	
120 VOLT CIRCUITS				
800	155	245	390	
1000	125	195	310	
1200	105	165	260	
1400	90	140	220	
1600	80	125	195	
1800	70	110	175	
277 VOLT CIRCUITS				
2000	330	525	830	
2500	265	420	665	
3000	220	350	555	
3500	190	300	475	
4000	165	260	415	

TECHNOLOGY MATRIX						
TECHNOLOGY GENERAL NOTES:						
1. DIVISION 26 SHALL PROVIDE BOXES AND CONDUITS WITH PULL STRINGS UNO. DIVISION 27 SHALL PROVIDE CABLING, OUTLETS, AND TERMINATIONS.						
2. FOR EACH TECHNOLOGY OUTLET, PROVIDE CONCEALED CONDUIT FROM EACH OUTLET BOX TO 1' ABOVE THE NEAREST ACCESSIBLE CORRIDOR CEILING THAT IS CONTIGUOUS TO THE NEAREST IT ROOM, J-HOOK, OR CABLE TRAY PATHWAY. UNO IN ROOMS WITHOUT CEILINGS, CONDUIT SHALL BE RUN AT UNDERSIDE OF DECK TO 1' ABOVE THE NEAREST ACCESSIBLE CORRIDOR CEILING THAT IS CONTIGUOUS TO THE NEAREST IT ROOM, J-HOOK, OR CABLE TRAY PATHWAY. UNO. C/S 3-OUT PATHWAYS SHALL BE PROVIDED FOR ANY PORTION OF THE PATH TO NEAREST IT ROOM, J-HOOK, OR CABLE TRAY THAT HAS EXPOSED DECK OR HAS INACCESSIBLE CEILINGS.						
SYMBOL	MTG HT AFF UNO	DESCRIPTION	KEY NOTE	CONDUIT SIZE	SINGLE GANG BOX DOUBLE GANG BOX FUSE/CONVERTIBLE UNDERFLOOR BOX	BOX TYPE
	18"	(1) VOICE AND (1) DATA OUTLETS		3/4"	X	
	18"	(2) VOICE AND (2) DATA OUTLETS		3/4"	X	
	18"	(1) VOICE AND (2) DATA OUTLETS		3/4"	X	
	18"	(1) DATA OUTLET		3/4"	X	
	18"	(2) DATA OUTLETS		3/4"	X	
	45"	WALL PHONE OUTLET		3/4"	X	
		ELEVATOR PHONE OUTLET		3/4"	X	
	18"	CATV OUTLET		3/4"	X	
		ABOVE DATA OUTLET FOR WIRELESS ACCESS CEILING POINT			X	
	F1	UNDERFLOORFLUSH COVER BOX WITH (1) DATA OUTLETS, (1) QUAD RECEPTACLES AND EMPTY 2-GANG FOR AV USE	2	(2) 1" UNDERSLAB & (1) 1/4" UNDERSLAB		X
	F2	UNDERFLOORFLUSH FLOOR BOX WITH (1) GPI DUPLEX RECEPTACLE	2	(1) 1" UNDERSLAB		X
	F3	UNDERFLOORFLUSH FLOOR BOX WITH (2) GPI DUPLEX RECEPTACLE	2	(1) 1" UNDERSLAB		X
NOTES:						
1. MOUNTING HEIGHT AS NOTED ON PLANS.						
2. SEE FLOOR BOX DETAIL, BASIS OF DESIGN: FSR, INC., FL-400P SERIES.						
3. FOR AREAS WITH SUSPENDED CEILINGS, INSTALL BOX ABOVE CEILING. WIRING SHALL BE CONCEALED ABOVE CEILINGS OR IN CONDUIT WHERE EXPOSED. FOR AREAS WITHOUT CEILINGS, MOUNT BOX AT UNDERSIDE OF DECK AND PROVIDE CONDUIT PER TECHNOLOGY GENERAL NOTE 2 ABOVE.						

ELECTRICAL SCHEDULE OF MECHANICAL EQUIPMENT															
TAG	DESCRIPTION/ AREA SERVED	VOLTS	PH	LOAD	FLA	MCA	MOPD	DISCONNECT SWITCH				STARTER (NEMA)		CBD	POWER SOURCE
								FRAME	POLES	FUSE	NEMA...	SIZE/...	FBD		
VAV-G-1	DEBRIEF G05	208	3	1.0KW	2.77	3.46	15	MRT	3	-	1	26		23	5.9
VAV-G-2	PATIENT RM SIM LAB G01A	208	3	2.5KW	6.90	8.63	15	MRT	3	-	1	26		23	5.9
VAV-G-3	DEBRIEF G03	208	3	1KW	2.77	3.46	15	MRT	3	-	1	26		23	5.9
VAV-G-4	CONTROL RM G01B	208	3	1.5KW	4.16	5.20	15	MRT	3	-	1	26		23	5.9
VAV-G-5	CONTROL RM G01C	208	3	1.5KW	4.16	5.20	15	MRT	3	-	1	26		23	5.9
VAV-G-6	PATIENT RM SIM LAB G01D	208	3	2.5KW	6.90	8.63	15	MRT	3	-	1	26		23	5.9
VAV-G-7	CONTROL RM G01E	208	3	1.5KW	4.16	5.20	15	MRT	3	-	1	26		23	5.9
VAV-G-8	PATIENT RM SIM LAB G01F	208	3	2.5KW	6.90	8.63	15	MRT	3	-	1	26		23	5.9
VAV-G-9	MOULAGE PREP/STOR/STAFF G01G	208	3	2.0KW	5.55	6.94	15	MRT	3	-	1	26		23	5.9
VAV-G-10	NURSING LAB G18	208	3	6.0KW	16.65	20.81	30	30	3	-	1	26		23	5.9
VAV-2-1	RADIATION TECH SIM LAB 221	208	3	5KW	13.90	17.38	25	MRT	3	-	1	26		23	5.9
VAV-2-2	RADIATION TECH SIM LAB 221	208	3	5KW	13.90	17.38	25	MRT	3	-	1	26		23	5.9
VAV-2-3	COMPUTER LAB 216	208	3	10KW	27.80	34.75	45	60	3	-	1	26		23	9
VAV-2-4	COMPUTER LAB 216	208	3	10KW	27.80	34.75	45	60	3	-	1	26		23	9
VAV-2-5	MA LAB 206	208	3	5KW	13.90	17.38	25	MRT	3	-	1	26		23	5.9
VAV-2-6	OFFICE 212C & NURSING OFFICE 212A	208	3	1KW	2.80	3.50	15	MRT	3	-	1	26		23	5.9
VAV-2-7	OFFICE 212E	208	3	1.5KW	4.20	5.25	15	MRT	3	-	1	26		23	5.9
VAV-2-8	OFFICE 212E, 212F, 212G, & 212H	208	3	5KW	13.90	17.38	25	MRT	3	-	1	26		23	5.9
VAV-2-9	CLASS ROOM 217	208	3	5KW	13.90	17.38	25	MRT	3	-	1	26		23	5.9
VAV-2-10	CLASS ROOM 217	208	3	5KW	13.90	17.38	25	MRT	3	-	1	26		23	5.9
RTU-G	GROUND LEVEL (ROOF MOUNTED)	208	3	3HP, 0.5HP, 6.59KW, 36KW	117.20	146.50	150	FWE				23	ECM	23	2.9
RTU-1	FIRST FLOOR (ROOF MOUNTED) - ALT NO.2	208	3	7.5HP, (2)1.5HP, 15.5KW,....	168.80	211.00	225	FWE				23	ECM	23	2.9
RTU-2	SECOND FLOOR (ROOF MOUNTED)	208	3	10HP, (2)1.5HP, 17.9KW,....	188.40	235.50	250	FWE				23	ECM	23	2.9
EF-1	EXHAUST FAN - REST ROOMS IN JANITORS CLOSET	120	1	115W	1.00	1.00	20	MRT	1	-	1	26		23	
CU-1/AC-1	DUCTLESS SPLIT SYSTEM - IT125	208	1	30K BTU	20.00	20.00	30					23	ECM	23	3
NOTES:															
1 LEADLAG															
2 DUCT SMOKE DETECTORS, IN BOTH SUPPLY AND RETURN DUCT, FURNISHED BY DIVISION 26, INSTALLED BY DIVISION 23, WIRED TO FIRE ALARM BY DIVISION 26.															
3 POWER TO OUTDOOR CU BY DIVISION 26. WIRING BETWEEN OUTDOOR CU AND INDOOR AC PROVIDED BY DIVISION 23.															
4 PUMPS SHALL BE WIRED TO BOILER, SAME CIRCUIT AS RESPECTIVE BOILER.															
5 PROVIDE MOTOR RATED TOGGLE SWITCH SUITABLE FOR VOLTAGE, LOAD, AND POLE CONFIGURATION FOR EQUIPMENT SERVED															
6 PROVIDE A SINGLE CIRCUIT TO SERVE THE RESPECTIVE HP UNITS SERVED BY A CU															
7 PROVIDE 120V, 10A CIRCUIT TO PUMP CONTROLLER, POWER PUMP FROM CONTROLLER.															
8 CORD AND PLUG FURNISHED WITH EQUIPMENT, PROVIDE NEMA 5-20 RECEPTACLE. COORDINATE EXACT LOCATION FOR RECEPTACLE IN FIELD.															
9 REFER TO FLOOR PLANS FOR EQUIPMENT LOCATIONS; COORDINATE EXACT LOCATIONS WITH MECHANICAL CONTRACTOR IN THE FIELD															

ABBREVIATIONS:

FWE	FURNISHED WITH EQUIPMENT
NF	NOT FUSED
SWBD	SWITCHBOARD
FBD	FURNISHED BY DIVISION
CBD	CONTROL WIRING BY DIVISION
MRT	MOTOR RATED TOGGLE SWITCH

SINGLE- AND THREE-PHASE CIRCUIT SCHEDULE NOTES

1	UNLESS OTHERWISE INDICATED, CONDUCTOR SIZING SHALL MATCH THE SIZE INDICATED FOR THE APPLICABLE OVERCURRENT DEVICE. PROVIDE LARGER CONDUCTORS AND RACEWAY WHERE INDICATED.
2	PROVIDE TYPE AND MINIMUM SIZE OF RACE

Lighting and Appliance Panelboard:

LP1

Location: STORAGE G13C
Supply From: MSB1
Mounting: Surface

Volts: 120/208 Wye
Phases: 3
Wires: 4

A.I.C. Rating: 35kA
Mains Type: MCB
Bus Rating: 250 A
MCB Rating: 225 A

CKT	Circuit Description	Trip Amps	Poles	A (kVA)		B (kVA)		C (kVA)		Poles	Trip Amps	Circuit Description	CKT
1	Receptacle Room G13E, G13C	20	1	0.4	1.3					1	20	Receptacles Headwall G01D	2
3	Receptacles Headwall G01D	20	1			0.7	1.1					Receptacles Headwall G01A	4
5	Receptacles Headwall G01A	20	1					0.9	1.3	1	20	Receptacles Headwall G01F	6
7	Receptacle PATIENT RM SIM LAB (ICU)	20	1	0.9	0.5					1	20	Receptacle IT 125	8
9	Spare	20	1			0	0			1	20	Spare	10
11	Spare	20	1					0	0	1	20	Spare	12
13	Spare	20	1	0	0					1	20	Spare	14
15	Spare	20	1			0	0			1	20	Spare	16
17	Spare	20	1					0	0	1	20	Spare	18
19	Spare	20	1	0	0					1	20	Spare	20
21	Spare	20	1			0	0			1	20	Spare	22
23	Spare	20	1					0	0	1	20	Spare	24
25	Spare	20	1	0	0					1	20	Spare	26
27	Spare	20	1			0	0			1	20	Spare	28
29	Spare	20	1					0	0	1	20	Spare	30
31	Spare	20	1	0	0					1	20	Spare	32
33	Spare	20	1			0	0			1	20	Spare	34
35	Spare	20	1					0	0	1	20	Spare	36
37	Spare	20	1	0	0					1	20	Spare	38
39	Spare	20	1			0	0			1	20	Spare	40
41	Spare	20	1					0	0	1	20	Spare	42
Total Load:				3.1 kVA	1.8 kVA	2.2 kVA							
Total Amp:				26 A	15 A	18 A							
Load Classification		Connected Load		Demand Factor		Panel Totals							
Receptacle		7020 VA		100.00%		Total Conn. Load: 7.0 kVA							
						Total Est. Demand: 7.0 kVA							
						Total Conn.: 19 A							
						Total Est. Demand: 19 A							

- 1 REMOVE ALL EXISTING LIGHTING AND LIGHTING CONTROLS WITHIN THIS SPACE. REFER TO LIGHTING SHEETS EL1.0-EL1.3 FOR NEW LIGHTING FIXTURES AND CONTROLS
- 2 REMOVE ALL FIRE ALARM DEVICES WITH THE CEILING.

B1 ELECTRICAL DEMOLITION KEYNOTES

LAVALLEE
BRENSINGER


ARCHITECTS

Boston | Manchester | Portland

www.LBPA.com

Allied Engineering
A Salas O'Brien Company

160 Veranda Street
Portland, Maine 04103
P: 207.221.2260
F: 207.221.2266

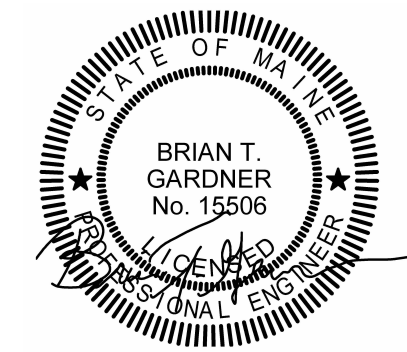


SMCC

HEALTH SCIENCE
CENTER

BGS NUM: 3809


2 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE



CONTENT: ELECTRICAL DEMOLITION PLAN - GROUND FLOOR	
DRAWN BY:	PMC
PROJECT NO:	25-062-00
DATE:	02/13/2026
REVISED:	
SCALE:	3/16" = 1'-0"
ED1.0	
Project Phase CONSTRUCTION DOCUMENTS 5-08-2026	
COPYRIGHT © 2025 BY LAVALLEEBRENSINGER PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

FOR ADDITIONAL INFORMATION, REFER TO PROJECT MANUAL.

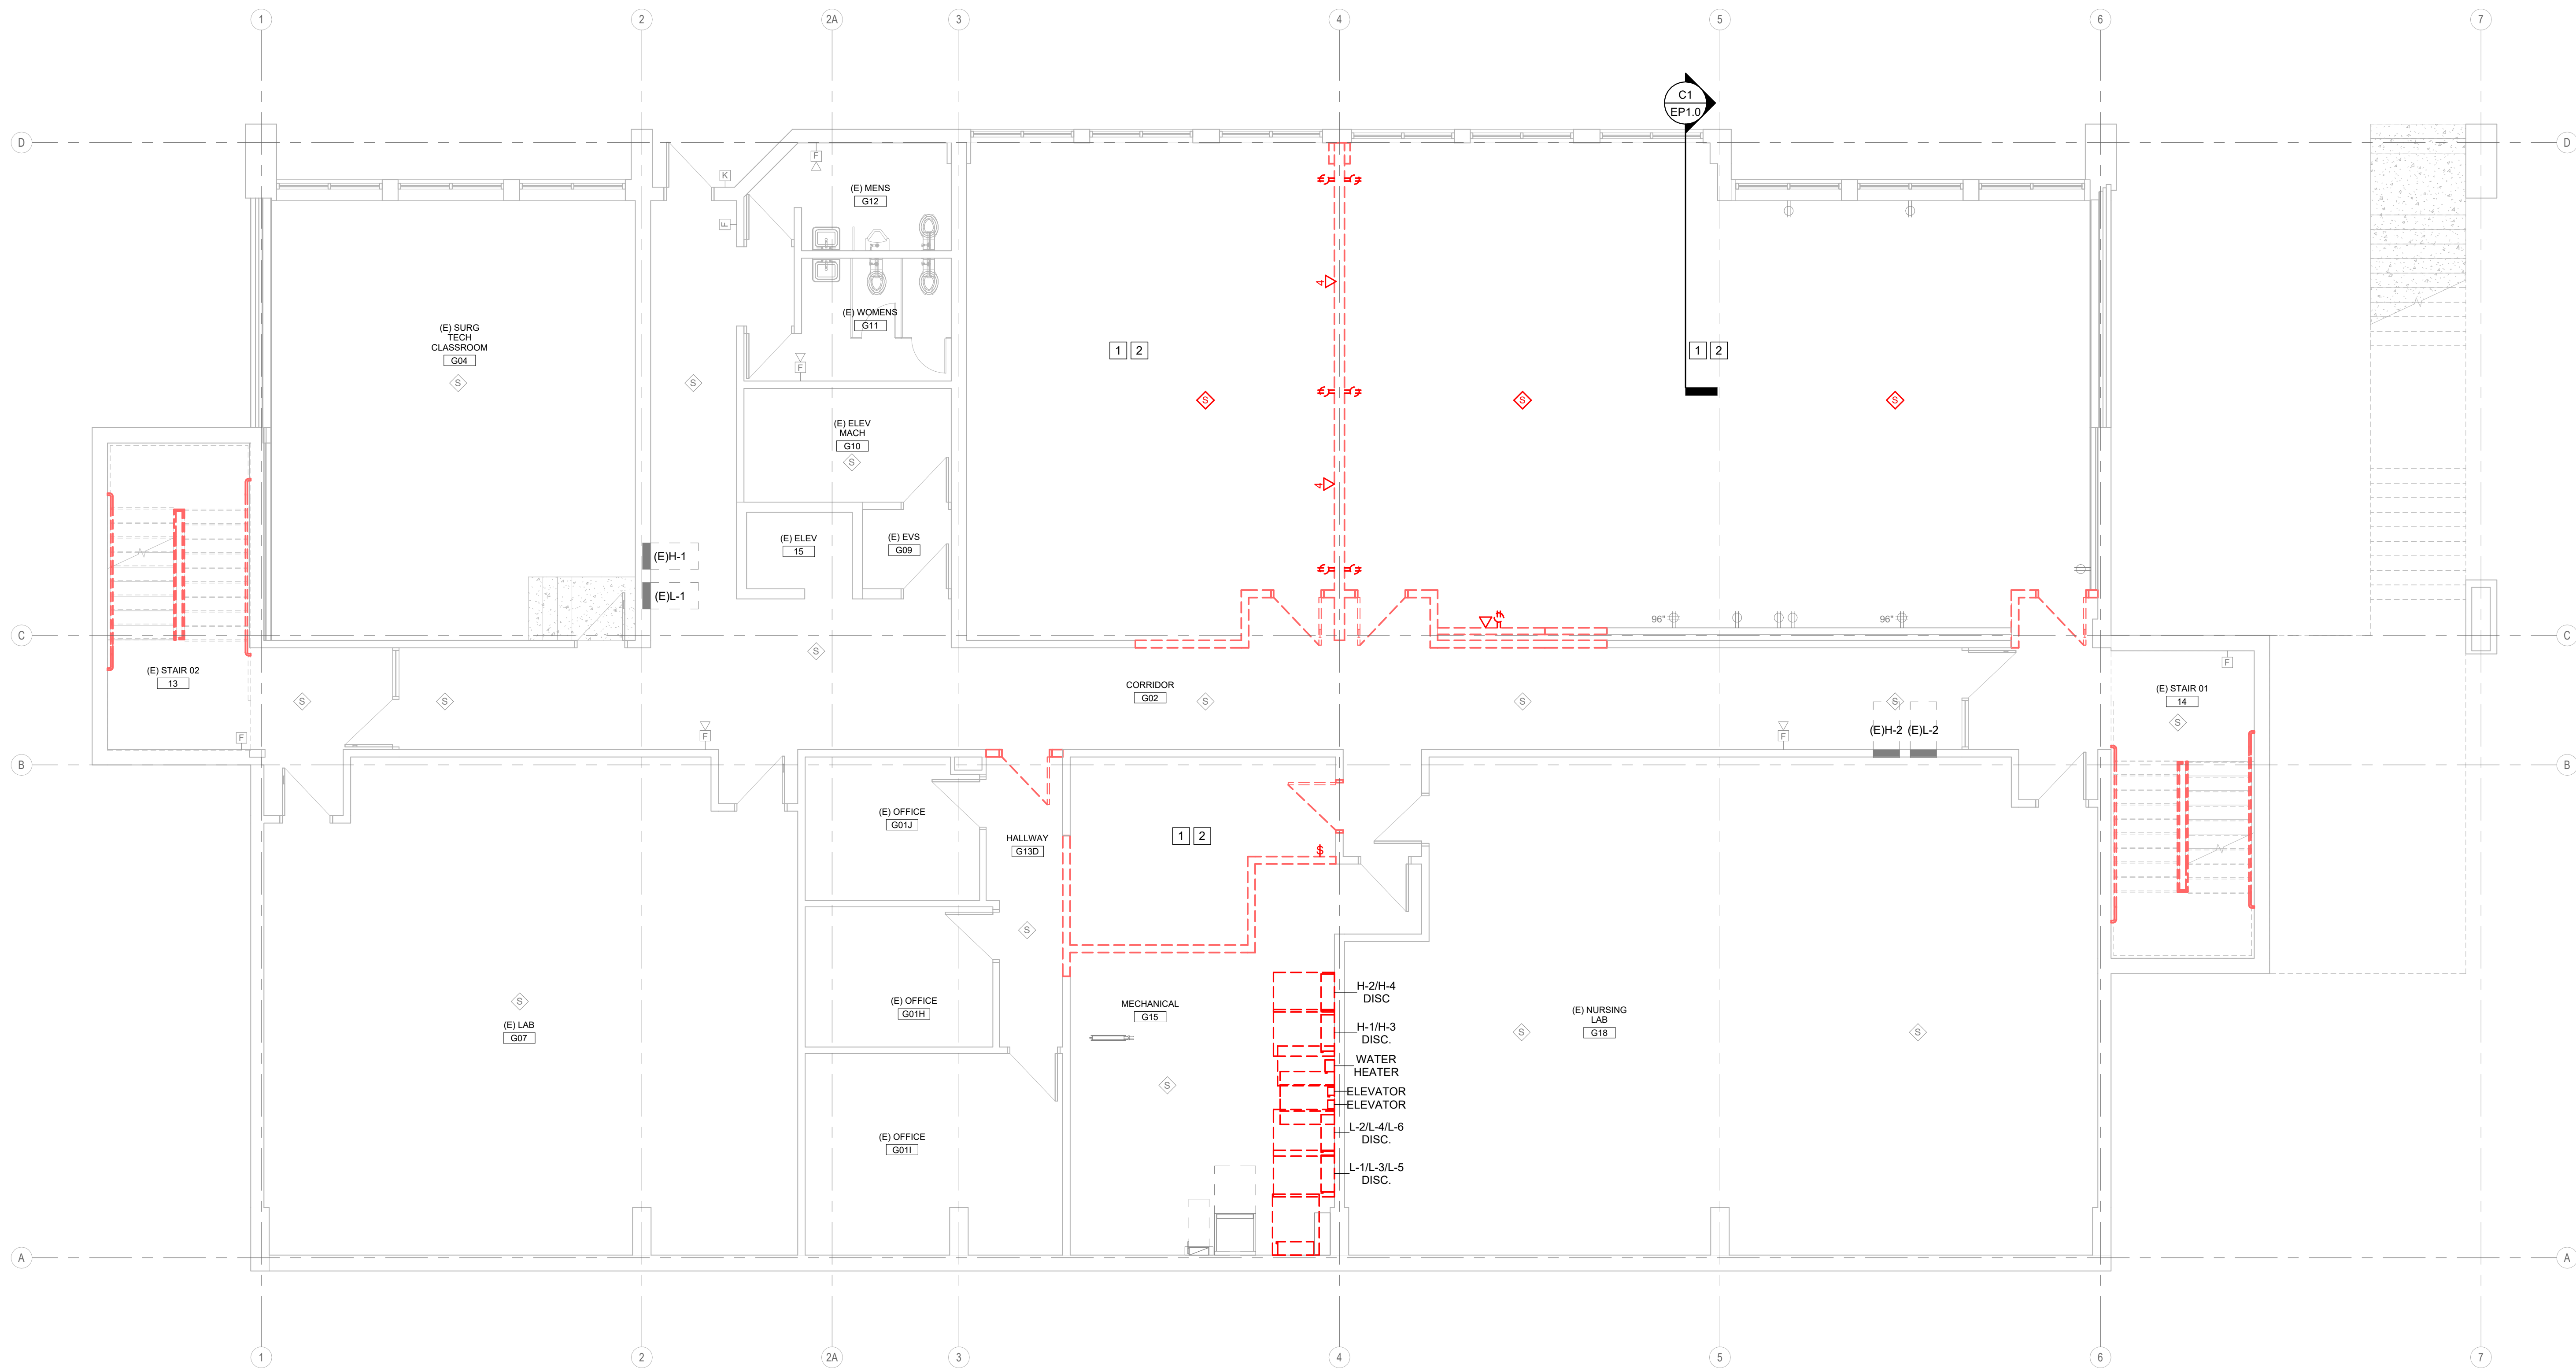

J1 ELECTRICAL DEMOLITION PLAN - GROUND FLOOR

3/16" = 1'-0"

- 1

REMOVE ALL EXISTING LIGHTING AND LIGHTING CONTROLS WITHIN THIS SPACE. REFER TO LIGHTING SHEETS EL1.0-EL1.3 FOR NEW LIGHTING FIXTURES AND CONTROLS
- 2


REMOVE ALL FIRE ALARM DEVICES WITH THE CEILING.

B1ELECTRICAL DEMOLITION KEYNOTES



J1ELECTRICAL DEMOLITION PLAN - FIRST FLOOR

3/16" = 1'-0"

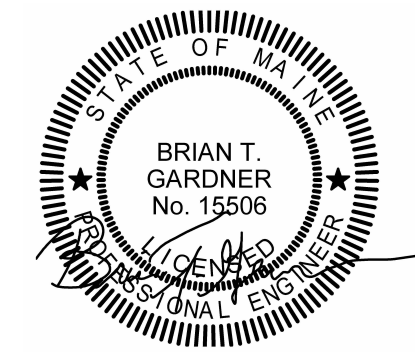


SMCC

HEALTH SCIENCE
CENTER

BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE




CONTENT: ELECTRICAL DEMOLITION PLAN - FIRST FLOOR	
DRAWN BY:	PMC
PROJECT NO:	25-062-00
DATE:	02/13/2026
REVISED:	
SCALE:	3/16" = 1'-0"
ED1.1	
Project Phase CONSTRUCTION DOCUMENTS 5-08-2026	
COPYRIGHT © 2025 BY LAMALLEEBRENSINGER PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

- 1

REMOVE ALL EXISTING LIGHTING AND LIGHTING CONTROLS WITHIN THIS SPACE. REFER TO LIGHTING SHEETS EL1.0-EL1.3 FOR NEW LIGHTING FIXTURES AND CONTROLS
- 2

REMOVE ALL FIRE ALARM DEVICES WITH THE CEILING.

B1	ELECTRICAL DEMOLITION KEYNOTES

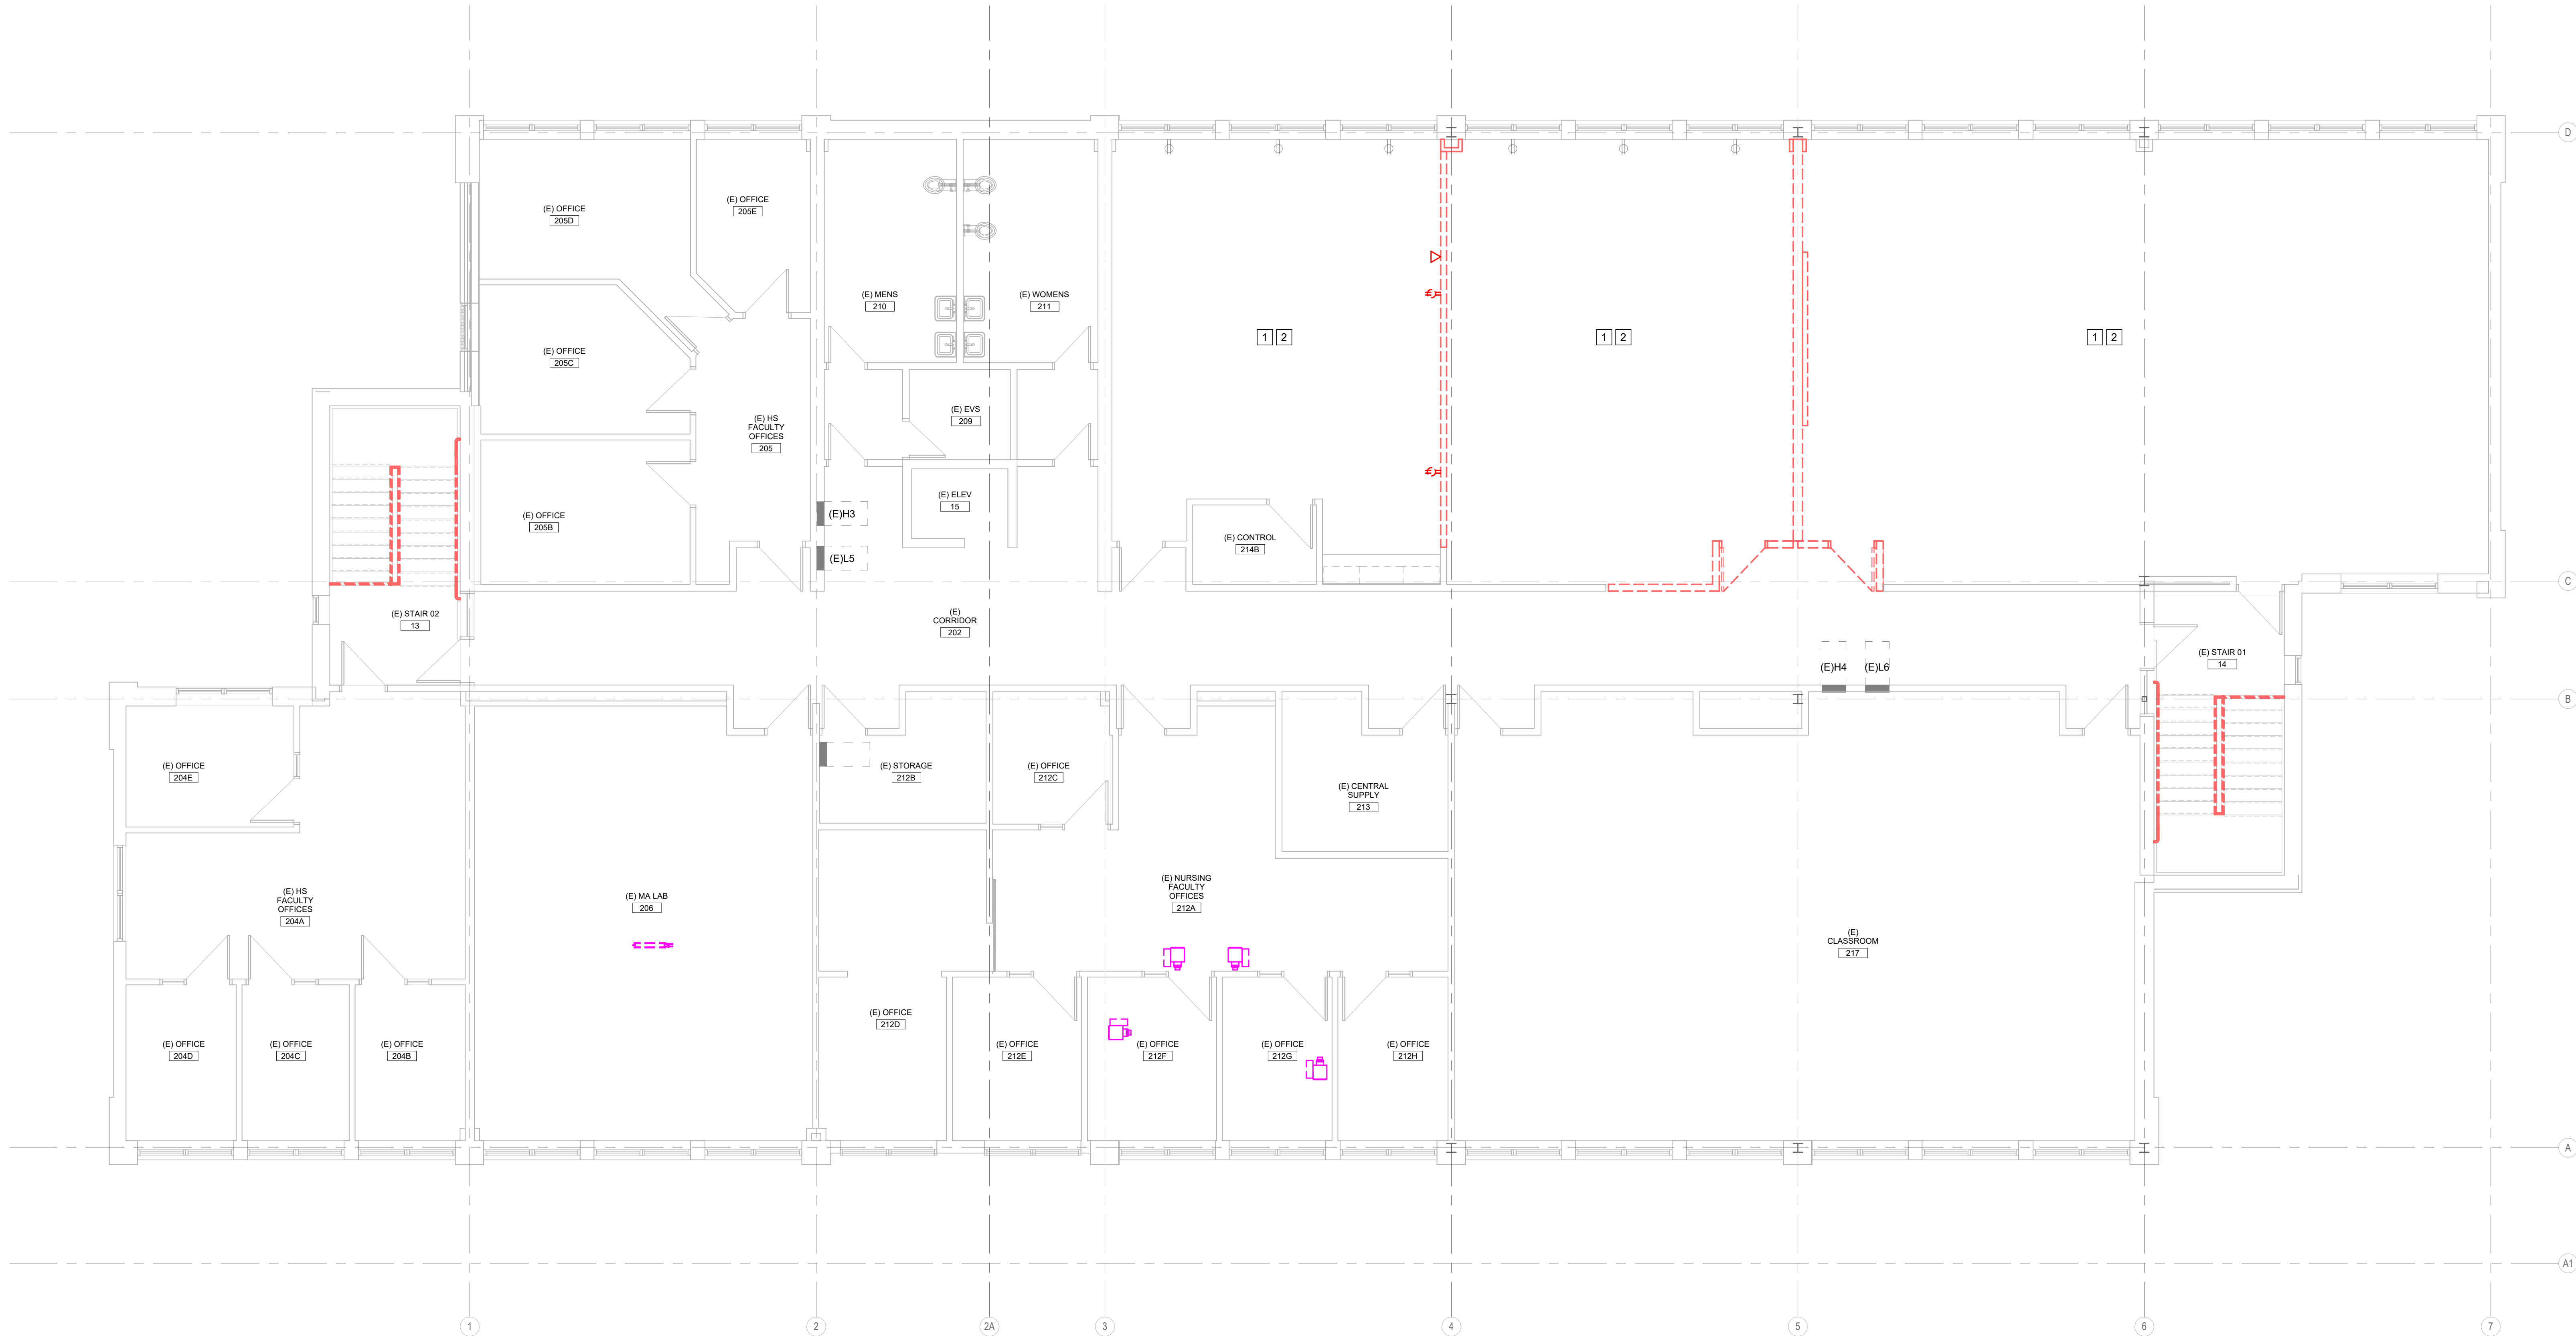


J1	ELECTRICAL DEMOLITION PLAN - SECOND FLOOR
3/16" = 1'-0"	

www.LBPA.com



160 Veranda Street
Portland, Maine 04103
P: 207.221.2260
F: 207.221.2266

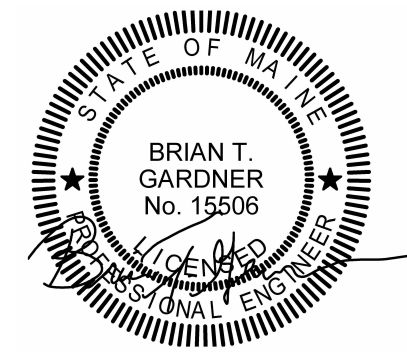


SMCC

HEALTH SCIENCE
CENTER


BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE



CONTENT: ELECTRICAL DEMOLITION PLAN - SECOND FLOOR	
DRAWN BY:	PMC
PROJECT NO:	25-062-00
DATE:	02/13/2026
REVISED:	
SCALE:	3/16" = 1'-0"
ED1.2	
Project Phase CONSTRUCTION DOCUMENTS 5-08-2026	
COPYRIGHT © 2025 BY LАVALLЕЕBRENSINGER PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

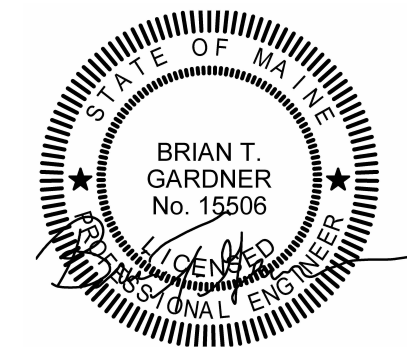

SMCC

HEALTH SCIENCE
CENTER

BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE




FOR ADDITIONAL INFORMATION, REFER TO PROJECT MANUAL.

CONTENT: LIGHTING PLAN - GROUND FLOOR	
DRAWN BY:	PMC
PROJECT NO:	25-062-00
DATE:	02/13/2026
REVISED:	
SCALE:	3/16" = 1'-0"
EL1.0	
Project Phase CONSTRUCTION DOCUMENTS 5-08-2026	
COPYRIGHT © 2025 BY LAVALLEE BRENSINGER PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

LIGHTING CONTROL NOTES SCHEDULE		
TAG/ NOTE	DESCRIPTION OF LIGHTING CONTROL DEVICES AND OPERATION	DETAIL NUMBER
1	WALL SWITCH - MANUAL ON/MANUAL OFF	NO DETAIL
2	WALL SWITCH WITH OCCUPANCY SENSOR - MANUAL ON AND OFF/AUTO OFF	NO DETAIL
3	WALL SWITCH WITH DIMMER - MANUAL ON/MANUAL OFF/MANUAL DIMMING	
4	LIGHTING CONTROLLED BY INTEGRAL MOTION/DAYLIGHT SENSOR.	NO DETAIL
5	AUTO ON/AUTO OFF VIA OCCUPANCY SENSOR(S)	E1/EL5.1
6	WALL SWITCH(ES) - MANUAL ON AND OFF; AUTO OFF VIA OCCUPANCY SENSOR(S)	NO DETAIL
7	WALL SWITCH WITH DIMMER AND OCCUPANCY SENSOR - MANUAL ON AND OFF/MANUAL DIMMING/AUTO OFF	NO DETAIL
8	WALLSTATION(S) - MANUAL ON AND OFF WHERE NOTED ON PLANS; WALLSTATION(S) WITH DIMMER(S) - MANUAL ON AND OFF/MANUAL DIMMING; AUTO OFF VIA OCCUPANCY SENSORS	J1/EL5.1
9	WALLSTATION(S) - MANUAL ON AND OFF, WHERE NOTED ON PLANS; WALLSTATION(S) WITH DIMMER(S) - MANUAL ON AND OFF/MANUAL DIMMING; AUTO OFF VIA OCCUPANCY SENSORS; DIMMING VIA DAYLIGHT HARVESTING SENSOR FOR FIXTURES INDICATED	G1/EL5.1
12	LIGHTING CONTROL BY INTEGRAL OCCUPANCY SENSOR - STEP DOWN TO 50% WHEN SPACE IS NOT OCCUPIED, UP TO 100% WHEN SPACE IS OCCUPIED	



J1	LIGHTING PLAN - GROUND FLOOR
3/16" = 1'-0"	

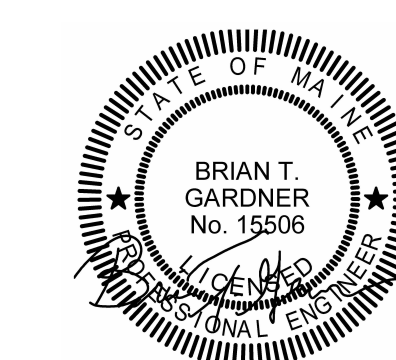

SMCC

**HEALTH SCIENCE
CENTER**

BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106

[illegible]

AL. CONTENT:
LIGHTING PLAN - FIRST FLOOR

DRAWN BY: _____ PM _____

PROJECT NO:	25-062-4
-------------	----------

DATE: 02/13/2017

REVISÉ: _____

SCALE: 2/16" = 1'

EL1.1


Project Phase

CONSTRUCTION DOCUMENTS 5-08-2026

TAG/ NOTE	DESCRIPTION OF LIGHTING CONTROL DEVICES AND OPERATION	DETAIL NUMBER
1	WALL SWITCH - MANUAL ON/MANUAL OFF	NO DETAIL
2	WALL SWITCH WITH OCCUPANCY SENSOR - MANUAL ON AND OFF/AUTO OFF	NO DETAIL
3	WALL SWITCH WITH DIMMER - MANUAL ON/MANUAL OFF/MANUAL DIMMING	
4	LIGHTING CONTROLLED BY INTEGRAL MOTION/DAYLIGHT SENSOR.	NO DETAIL
5	AUTO ON/AUTO OFF VIA OCCUPANCY SENSOR(S)	E1/ELS.1
6	WALL SWITCH(ES) - MANUAL ON AND OFF; AUTO OFF VIA OCCUPANCY SENSOR(S)	NO DETAIL
7	WALL SWITCH WITH DIMMER AND OCCUPANCY SENSOR - MANUAL ON AND OFF/MANUAL DIMMING/AUTO OFF	NO DETAIL
8	WALL STATION(S) - MANUAL ON AND OFF WHERE NOTED ON PLANS; WALL STATION(S) WITH DIMMER(S) - MANUAL ON AND OFF/MANUAL DIMMING; AUTO OFF VIA OCCUPANCY SENSORS	J1/ELS.1
9	WALL STATION(S) - MANUAL ON AND OFF, WHERE NOTED ON PLANS; WALL STATION(S) WITH DIMMER(S) - MANUAL ON AND OFF/MANUAL DIMMING; AUTO OFF VIA OCCUPANCY SENSORS; DIMMING VIA DAYLIGHT HARVESTING SENSOR FOR FIXTURES INDICATED	G1/ELS.1
12	LIGHTING CONTROL BY INTEGRAL OCCUPANCY SENSOR - STEP DOWN TO 50% WHEN SPACE IS NOT OCCUPIED. UP TO 100% WHEN SPACE IS OCCUPIED	



J1	LIGHTING PLAN - FIRST FLOOR
3/16" = 1'-0"	

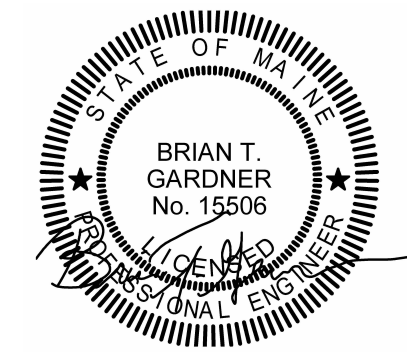


SMCC

HEALTH SCIENCE
CENTER

BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE



CONTENT: LIGHTING PLAN - SECOND FLOOR	
DRAWN BY:	PMC
PROJECT NO:	25-062-00
DATE:	02/13/2026
REVISED:	
SCALE:	3/16" = 1'-0"
EL1.2	
Project Phase	
CONSTRUCTION DOCUMENTS 5-08-2026	
COPYRIGHT © 2025 BY LAVALLEEBRENSINGER PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.	

LIGHTING CONTROL NOTES SCHEDULE		
TAG/ NOTE	DESCRIPTION OF LIGHTING CONTROL DEVICES AND OPERATION	DETAIL NUMBER
1	WALL SWITCH - MANUAL ON/MANUAL OFF	NO DETAIL
2	WALL SWITCH WITH OCCUPANCY SENSOR - MANUAL ON AND OFF/AUTO OFF	NO DETAIL
3	WALL SWITCH WITH DIMMER - MANUAL ON/MANUAL OFF/MANUAL DIMMING	
4	LIGHTING CONTROLLED BY INTREGAL MOTION/DAYLIGHT SENSOR.	NO DETAIL
5	AUTO ON/AUTO OFF VIA OCCUPANCY SENSOR(S)	E1/EL5.1
6	WALL SWITCH(ES) - MANUAL ON AND OFF; AUTO OFF VIA OCCUPANCY SENSOR(S)	NO DETAIL
7	WALL SWITCH WITH DIMMER AND OCCUPANCY SENSOR - MANUAL ON AND OFF/MANUAL DIMMING/AUTO OFF	NO DETAIL
8	WALLSTATION(S) - MANUAL ON AND OFF WHERE NOTED ON PLANS; WALLSTATION(S) WITH DIMMER(S) - MANUAL ON AND OFF/MANUAL DIMMING; AUTO OFF VIA OCCUPANCY SENSORS	J1/EL5.1
9	WALLSTATION(S) - MANUAL ON AND OFF, WHERE NOTED ON PLANS; WALLSTATION(S) WITH DIMMER(S) - MANUAL ON AND OFF/MANUAL DIMMING; AUTO OFF VIA OCCUPANCY SENSORS; DIMMING VIA DAYLIGHT HARVESTING SENSOR FOR FIXTURES INDICATED	G1/EL5.1
12	LIGHTING CONTROL BY INTEGRAL OCCUPANCY SENSOR - STEP DOWN TO 50% WHEN SPACE IS NOT OCCUPIED, UP TO 100% WHEN SPACE IS OCCUPIED	




J1	LIGHTING PLAN - SECOND FLOOR
3/16" = 1'-0"	
1	2
3	4
5	6
7	8
9	10
11	12
13	14




BGS NUM: 3809

FOR AD

COPYRIGHT © 2025 BY LAVALLEE/BRENSINGER
PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED.
NO REPRODUCTION WITHOUT PERMISSION.



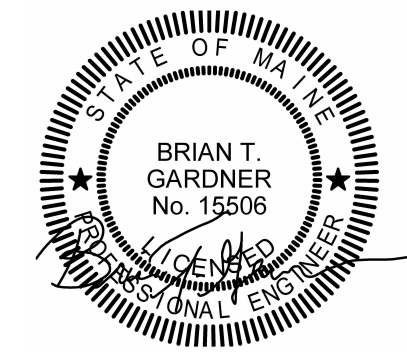


SMCC

HEALTH SCIENCE
CENTER

BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106

NO.	DESCRIPTION	DATE




CONTENT: ELECTRICAL PLAN - FIRST FLOOR
DRAWN BY: PMC
PROJECT NO: 25-062-00
DATE: 02/13/2026
REVISED:
SCALE: 3/16" = 1'-0"
EP1.1
Project Phase
CONSTRUCTION DOCUMENTS 5-08-2026
COPYRIGHT © 2025 BY LAMALLEEBRENSINGER PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.

FOR ADDITIONAL INFORMATION, REFER TO PROJECT MANUAL.



J1	ELECTRICAL PLAN - FIRST FLOOR												
3/16" = 1'-0"													
1	2	3	4	5	6	7	8	9	10	11	12	13	14

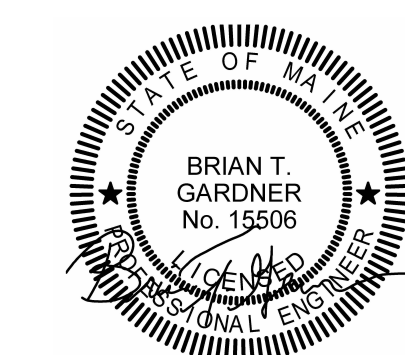


SMCC

**HEALTH SCIENCE
CENTER**

BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106

[illegible]

AL. ELECTRICAL PLAN - SECOND FLOOR

DRAWN BY: _____ PM _____

PROJECT NO:	25-062-4
-------------	----------

DATE: 02/13/2011

REVISÉ: _____

SCALE: 3/16" = 1'

EP1.2

Project Phase


CONSTRUCTION DOCUMENTS 5-08-2026

FOR AD

COPYRIGHT © 2025 BY LAVALLEE/BRENSINGER
PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED.
NO REPRODUCTION WITHOUT PERMISSION.



J1	ELECTRICAL PLAN - SECOND FLOOR
3/16" = 1'-0"	

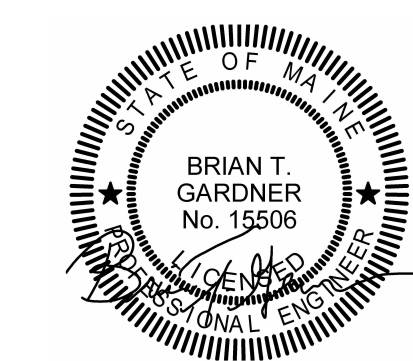


SMCC

**HEALTH SCIENCE
CENTER**

BGS NUM: 3809

2 Ford Road, South Portland, Maine,
04106

[illegible]

FOR ADDITIONAL INFORMATION, REFER TO PROJECT MANUAL.	CONTENT:	
	ELECTRICAL PLAN - ROOF	
	DRAWN BY:	PM
	PROJECT NO:	25-0624
	DATE:	02/13/20
	REVISED:	
	SCALE:	3/16" = 1'-0"
EP1.3		
Project Phase		
CONSTRUCTION DOCUMENTS 5-08-2026		
COPYRIGHT © 2025 BY LVALEE/RENSINGER PROFESSIONAL ASSOCIATION. ALL RIGHTS RESERVED. NO REPRODUCTION WITHOUT PERMISSION.		