

A

B

C

D

F

F

10

SHEET INDEX - BLDG 47	
Sheet Number	Sheet Name
47-TN402	TELECOMMUNICATIONS ENLARGED 1ST FLOOR PLANS
47-TN403	TELECOMMUNICATIONS ENLARGED 2ND FLOOR PLANS
47-TN600	TELECOMMUNICATIONS RISER DIAGRAM
47-TN601	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN602	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN603	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN604	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN605	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN606	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN607	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN608	TELECOMMUNICATIONS RISER DIAGRAM
47-TN609	TELECOMMUNICATIONS RISER DIAGRAM
47-TN610	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN611	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN612	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN613	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN614	TELECOMMUNICATIONS RACK ELEVATIONS
16.4 - PHYSICAL SECURITY	
47-TY100A	SECURITY PLAN - BASEMENT
47-TY100B	SECURITY PLAN - BASEMENT (DATACENTER)
47-TY101	SECURITY PLAN - 1ST FLOOR
47-TY102	SECURITY PLANS - 2ND FLOOR
47-TY103	SECURITY PLANS - 3RD, 4TH & 5TH FLOORS
Grand total: 201	

47-TN402	TELECOMMUNICATIONS ENLARGED 1ST FLOOR PLANS
47-TN403	TELECOMMUNICATIONS ENLARGED 2ND FLOOR PLANS
47-TN600	TELECOMMUNICATIONS RISER DIAGRAM
47-TN601	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN602	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN603	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN604	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN605	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN606	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN607	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN608	TELECOMMUNICATIONS RISER DIAGRAM
47-TN609	TELECOMMUNICATIONS RISER DIAGRAM
47-TN610	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN611	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN612	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN613	TELECOMMUNICATIONS RACK ELEVATIONS
47-TN614	TELECOMMUNICATIONS RACK ELEVATIONS
16.4 - PHYSICAL SECURITY	
47-TY100A	SECURITY PLAN - BASEMENT
47-TY100B	SECURITY PLAN - BASEMENT (DATACENTER)
47-TY101	SECURITY PLAN - 1ST FLOOR
47-TY102	SECURITY PLANS - 2ND FLOOR
47-TY103	SECURITY PLANS - 3RD, 4TH & 5TH FLOORS
Grand total: 201	

FINAL BID DOCUMENTS

[illegible]

AWEN
SOLUTIONS GROUP
ARCHITECTURE | ENGINEERING | PLANNING

STAMP



VA | U.S. Department
of Veterans
Affairs

Drawing Title

SHEET INDEX

Approved:

FOR OFFICIAL USE ONLY

Phase

FINAL BID DOCUMENTS

Project Title

EHRM INFRASTRUCTURE UPGRADES

Location	1100 TUNNEL ASHEVILLE, N
----------	-----------------------------

Checked

Drawn


Project Number
637-22-700

Building Number
47

Drawing Number

47-GI002

12/19/2025 11:37:43 AM
VA FORM 08 - 6231
Autosaved Docs:\Asheville EHRM_V23637-22-700.047.ASH - EHRM.rvt

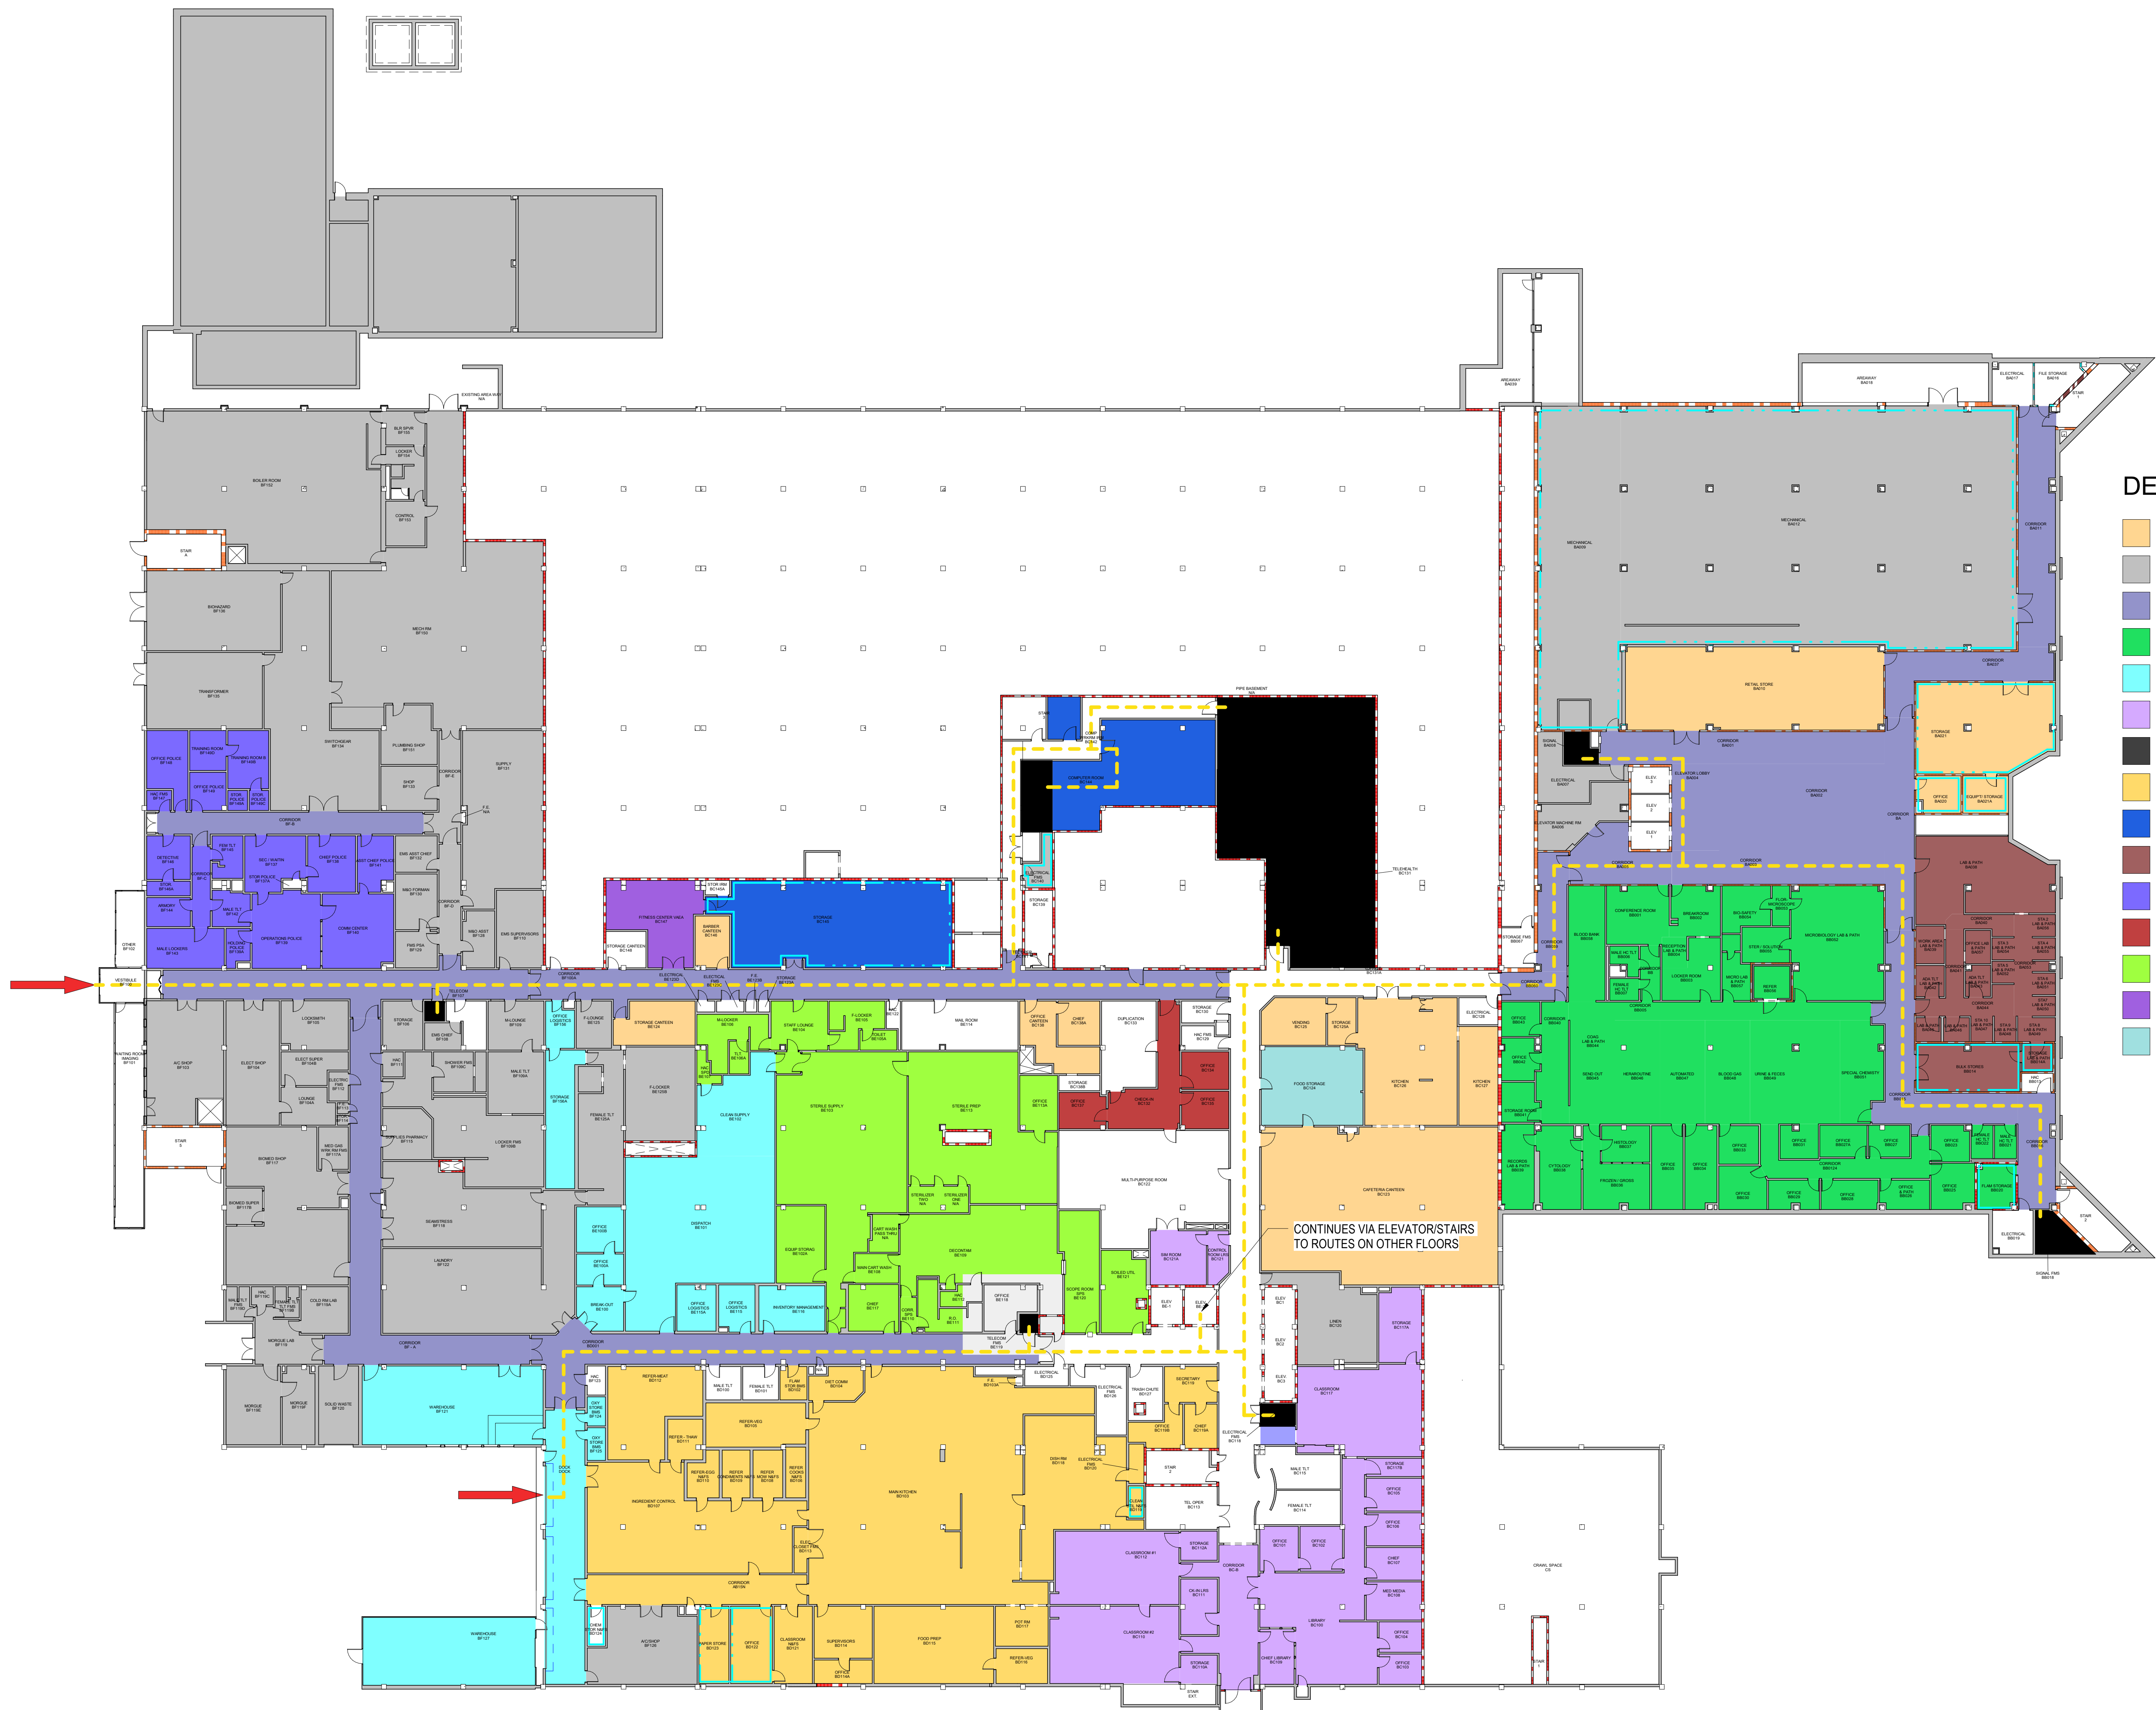

DEPARTMENT PLAN


- Canteen
- FMS
- Interdepartmental circulation
- Lab & Path
- Logistics
- LRS
- Multi-purpose
- N&FS
- OI&T
- Phlebotomy
- Police
- ROI
- SPS
- VAEA
- VOL

PARTITION LEGEND

- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING


SEQUENCING LEGEND

- CONTRACTOR PATH OF TRAVEL
- CONSTRUCTION STAGING AREA
- CONSTRUCTION WORK AREA
- TEMPORARY CONSTRUCTION
- CONSTRUCTION ENTRANCE

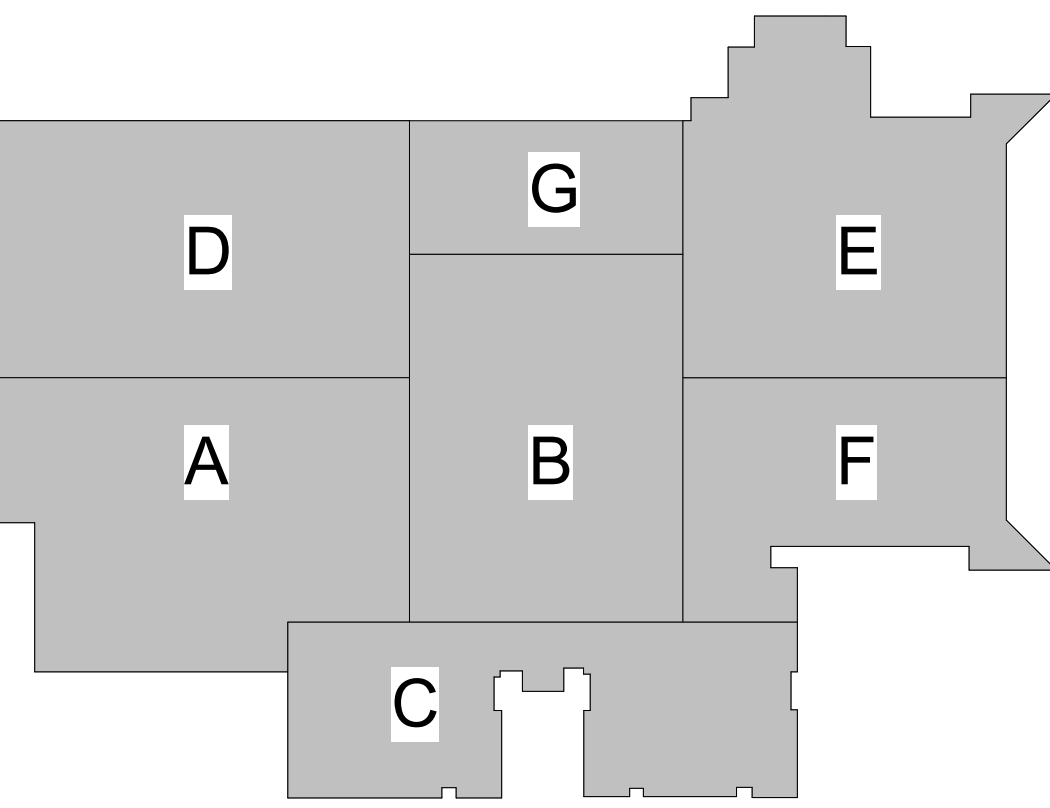

KEY PLAN

1 BASEMENT FLOOR SEQUENCING PLAN
1" = 20'-0"

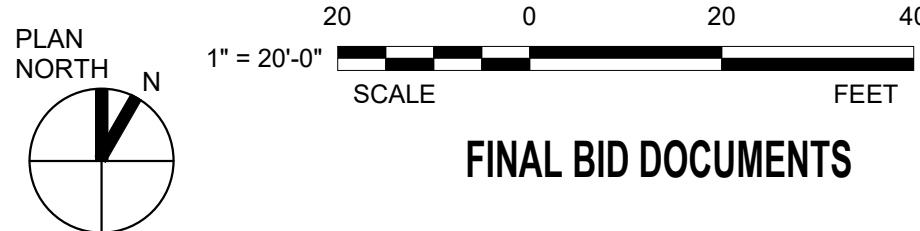

FINAL BID DOCUMENTS

Revisions:	Date:

ARCHITECT/ENGINEER OF RECORD

AWEN
SOLUTIONS GROUP
ARCHITECTURE | ENGINEERING | PLANNING

A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314



Facilities
Management
Services

VA U.S. Department
of Veterans
Affairs

Drawing Title
SEQUENCING PLAN - BASEMENT

Approved:

FOR OFFICIAL USE ONLY

Phase
FINAL BID DOCUMENTS

FULLY SPRINKLERED

Project Title
EHRM INFRASTRUCTURE
UPGRADES

Location
1100 TUNNEL ROAD
ASHEVILLE, NC 28805

Issue Date
12.19.2025

Checked


Drawn

Project Number
637-22-700

Building Number
47

Drawing Number
47-GC100

SHEET 286 of 559

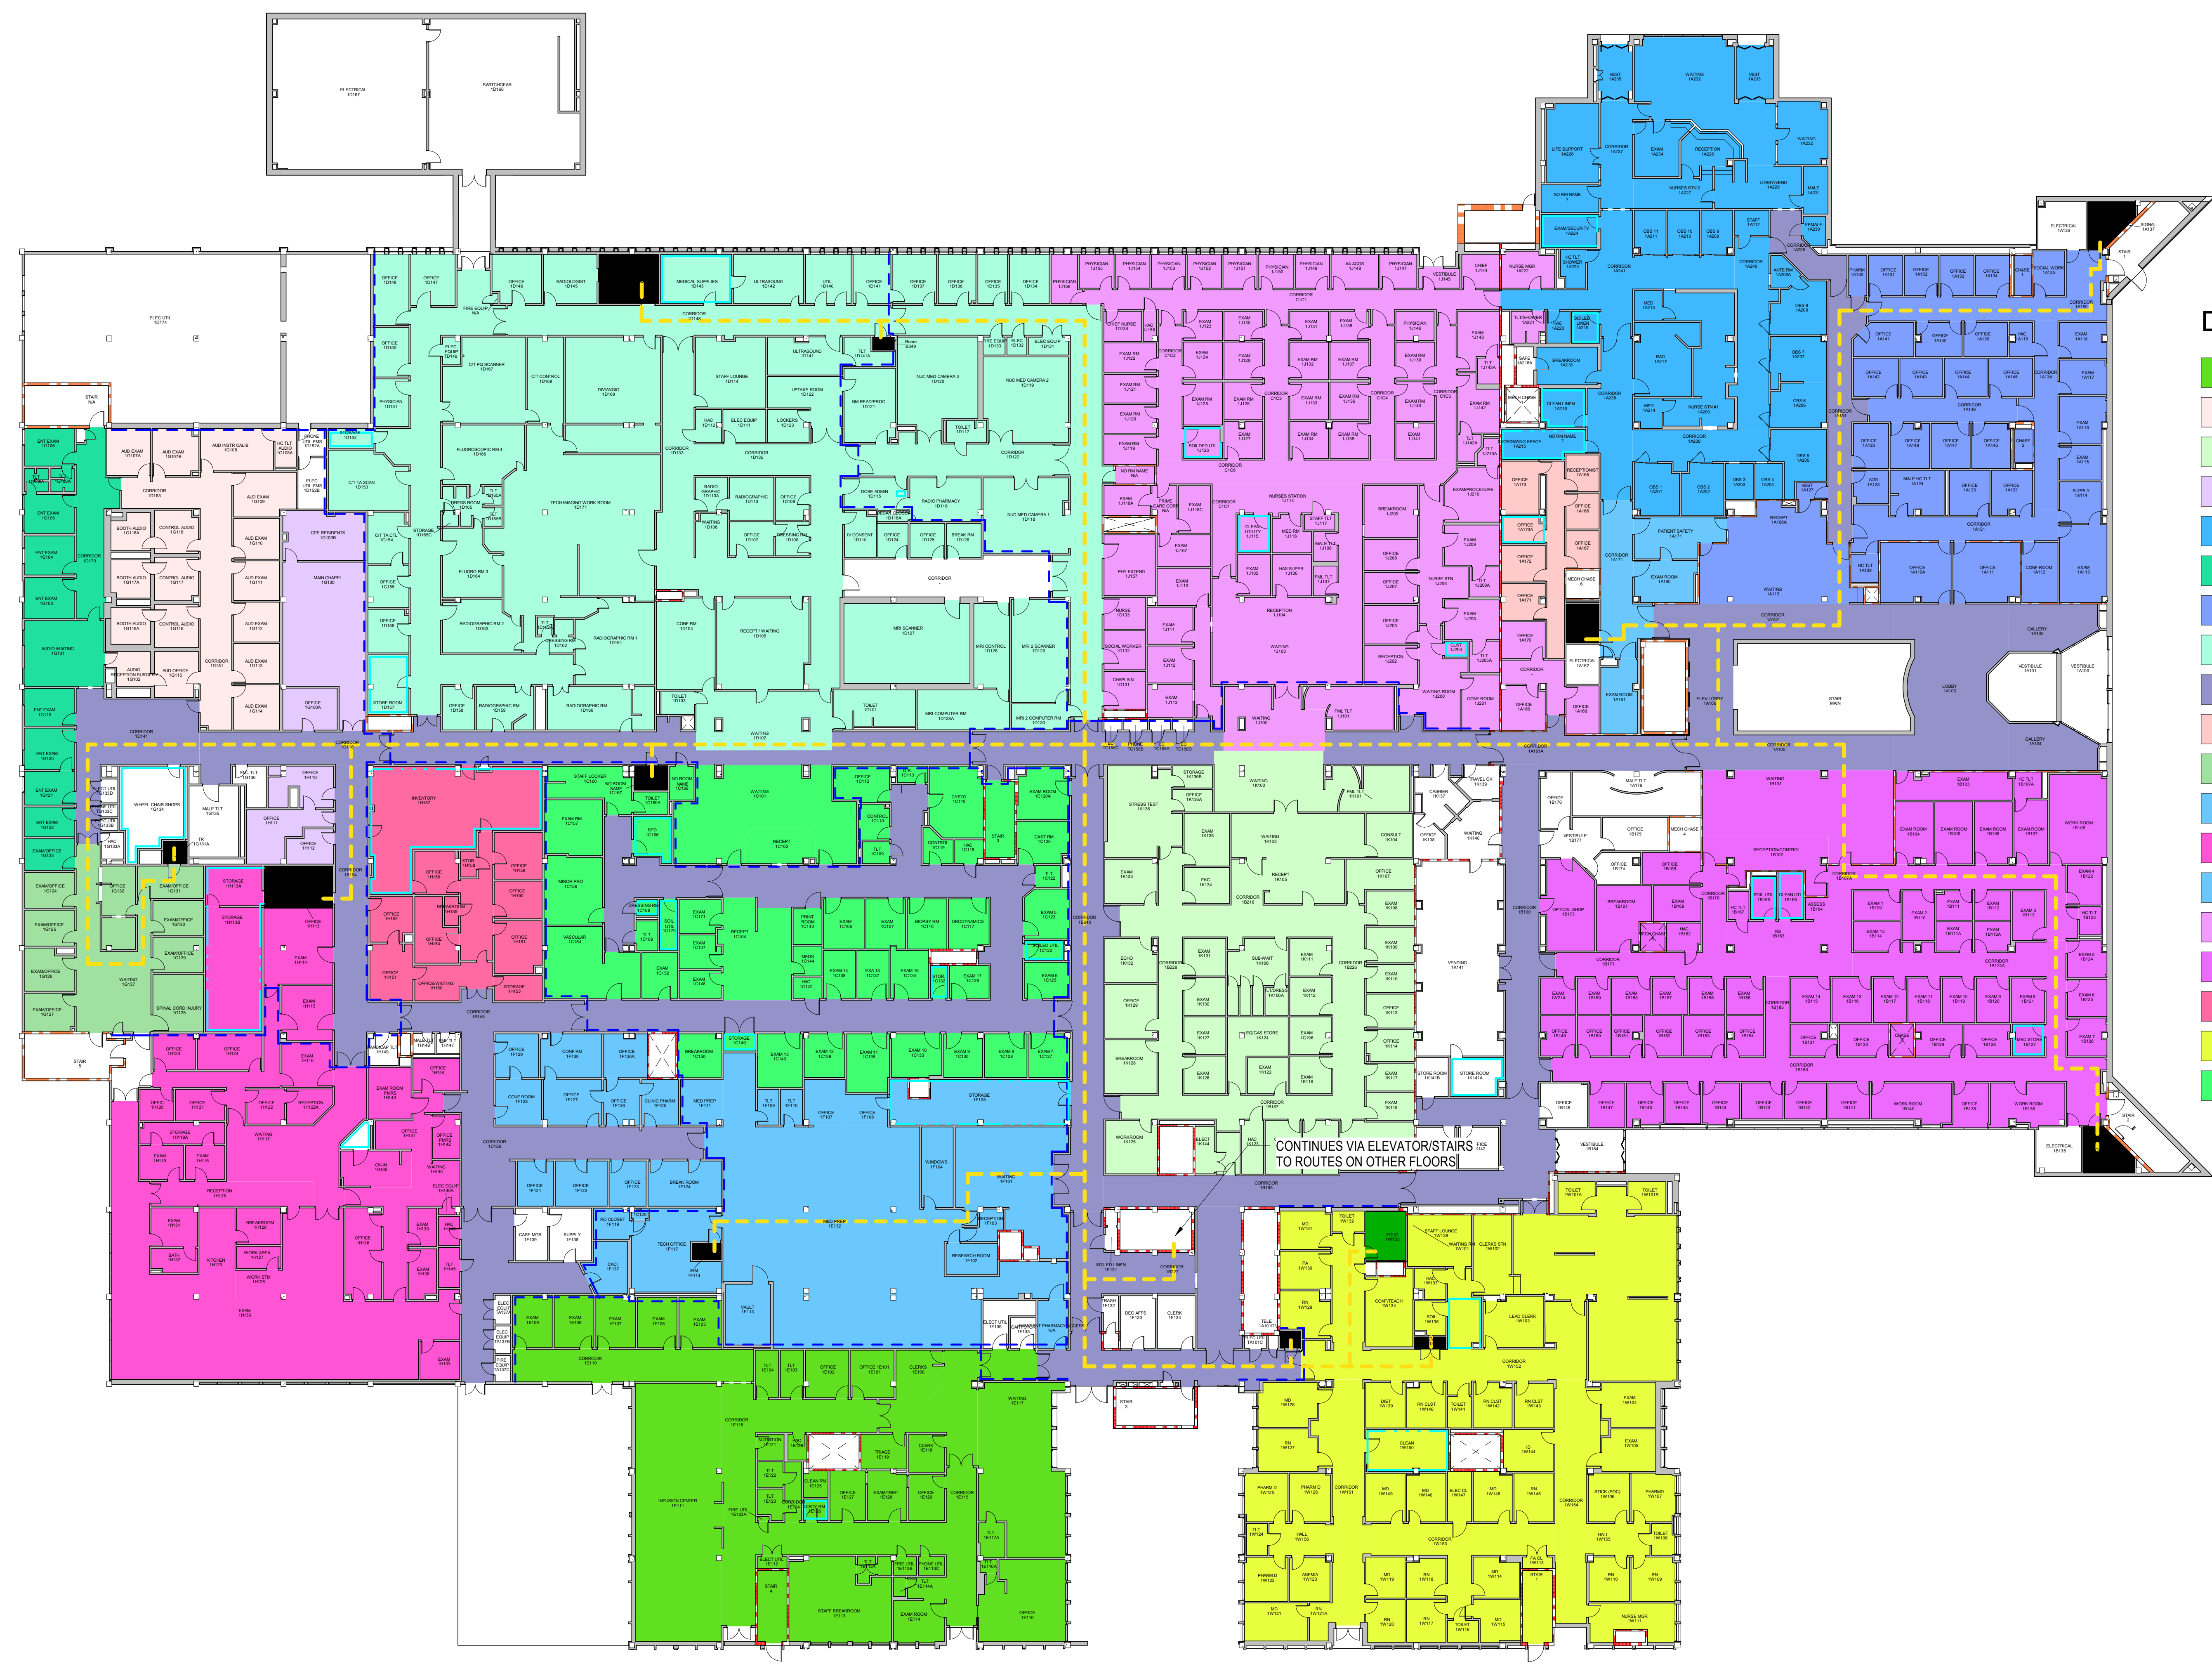

DEPARTMENT PLAN


- 1 East/Oncology
- Audiology
- Cardio / Pulmonary
- Chaplain
- Emergency Department
- ENT Clinic
- HAS
- Imaging
- Interdepartmental circulation
- Mental Health
- Pain Mgt
- Pharmacy
- PM&RS
- POD
- Primary Care 1
- Primary Care 3
- Prosth
- Specialty Clinic
- Surgery

PARTITION LEGEND

- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING


SEQUENCING LEGEND

- CONTRACTOR PATH OF TRAVEL
- CONSTRUCTION STAGING AREA
- CONSTRUCTION
- TEMPORARY CONSTRUCTION

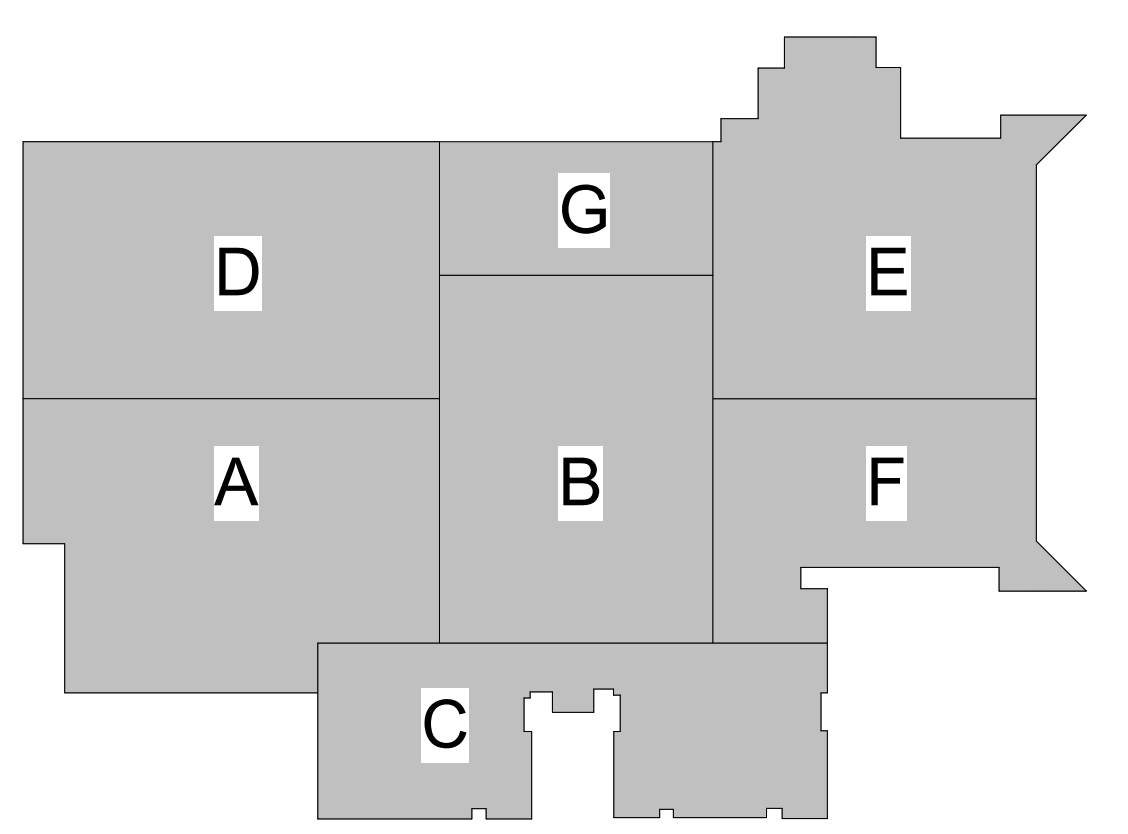

KEY PLAN

1 1ST FLOOR SEQUENCING PLAN
1" = 20'-0"

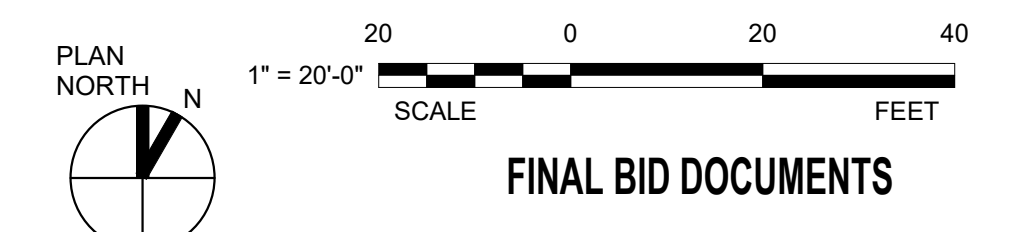

FINAL BID DOCUMENTS

Revisions:	Date:

ARCHITECT/ENGINEER OF RECORD

AWEN SOLUTIONS GROUP
ARCHITECTURE | ENGINEERING | PLANNING

A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314



Facilities Management Services

VA U.S. Department of Veterans Affairs

Drawing Title
SEQUENCING PLAN - 1ST FLOOR

Approved:

FOR OFFICIAL USE ONLY

Phase
FINAL BID DOCUMENTS

FULLY SPRINKLERED

Project Title
EHRM INFRASTRUCTURE UPGRADES

Location
1100 TUNNEL ROAD
ASHEVILLE, NC 28805

Issue Date
12.19.2025

Checked

Drawn

Project Number
637-22-700

Building Number

Drawing Number
47-GC101

SHEET 287 of 559




1



Drawing Number

47-GC102

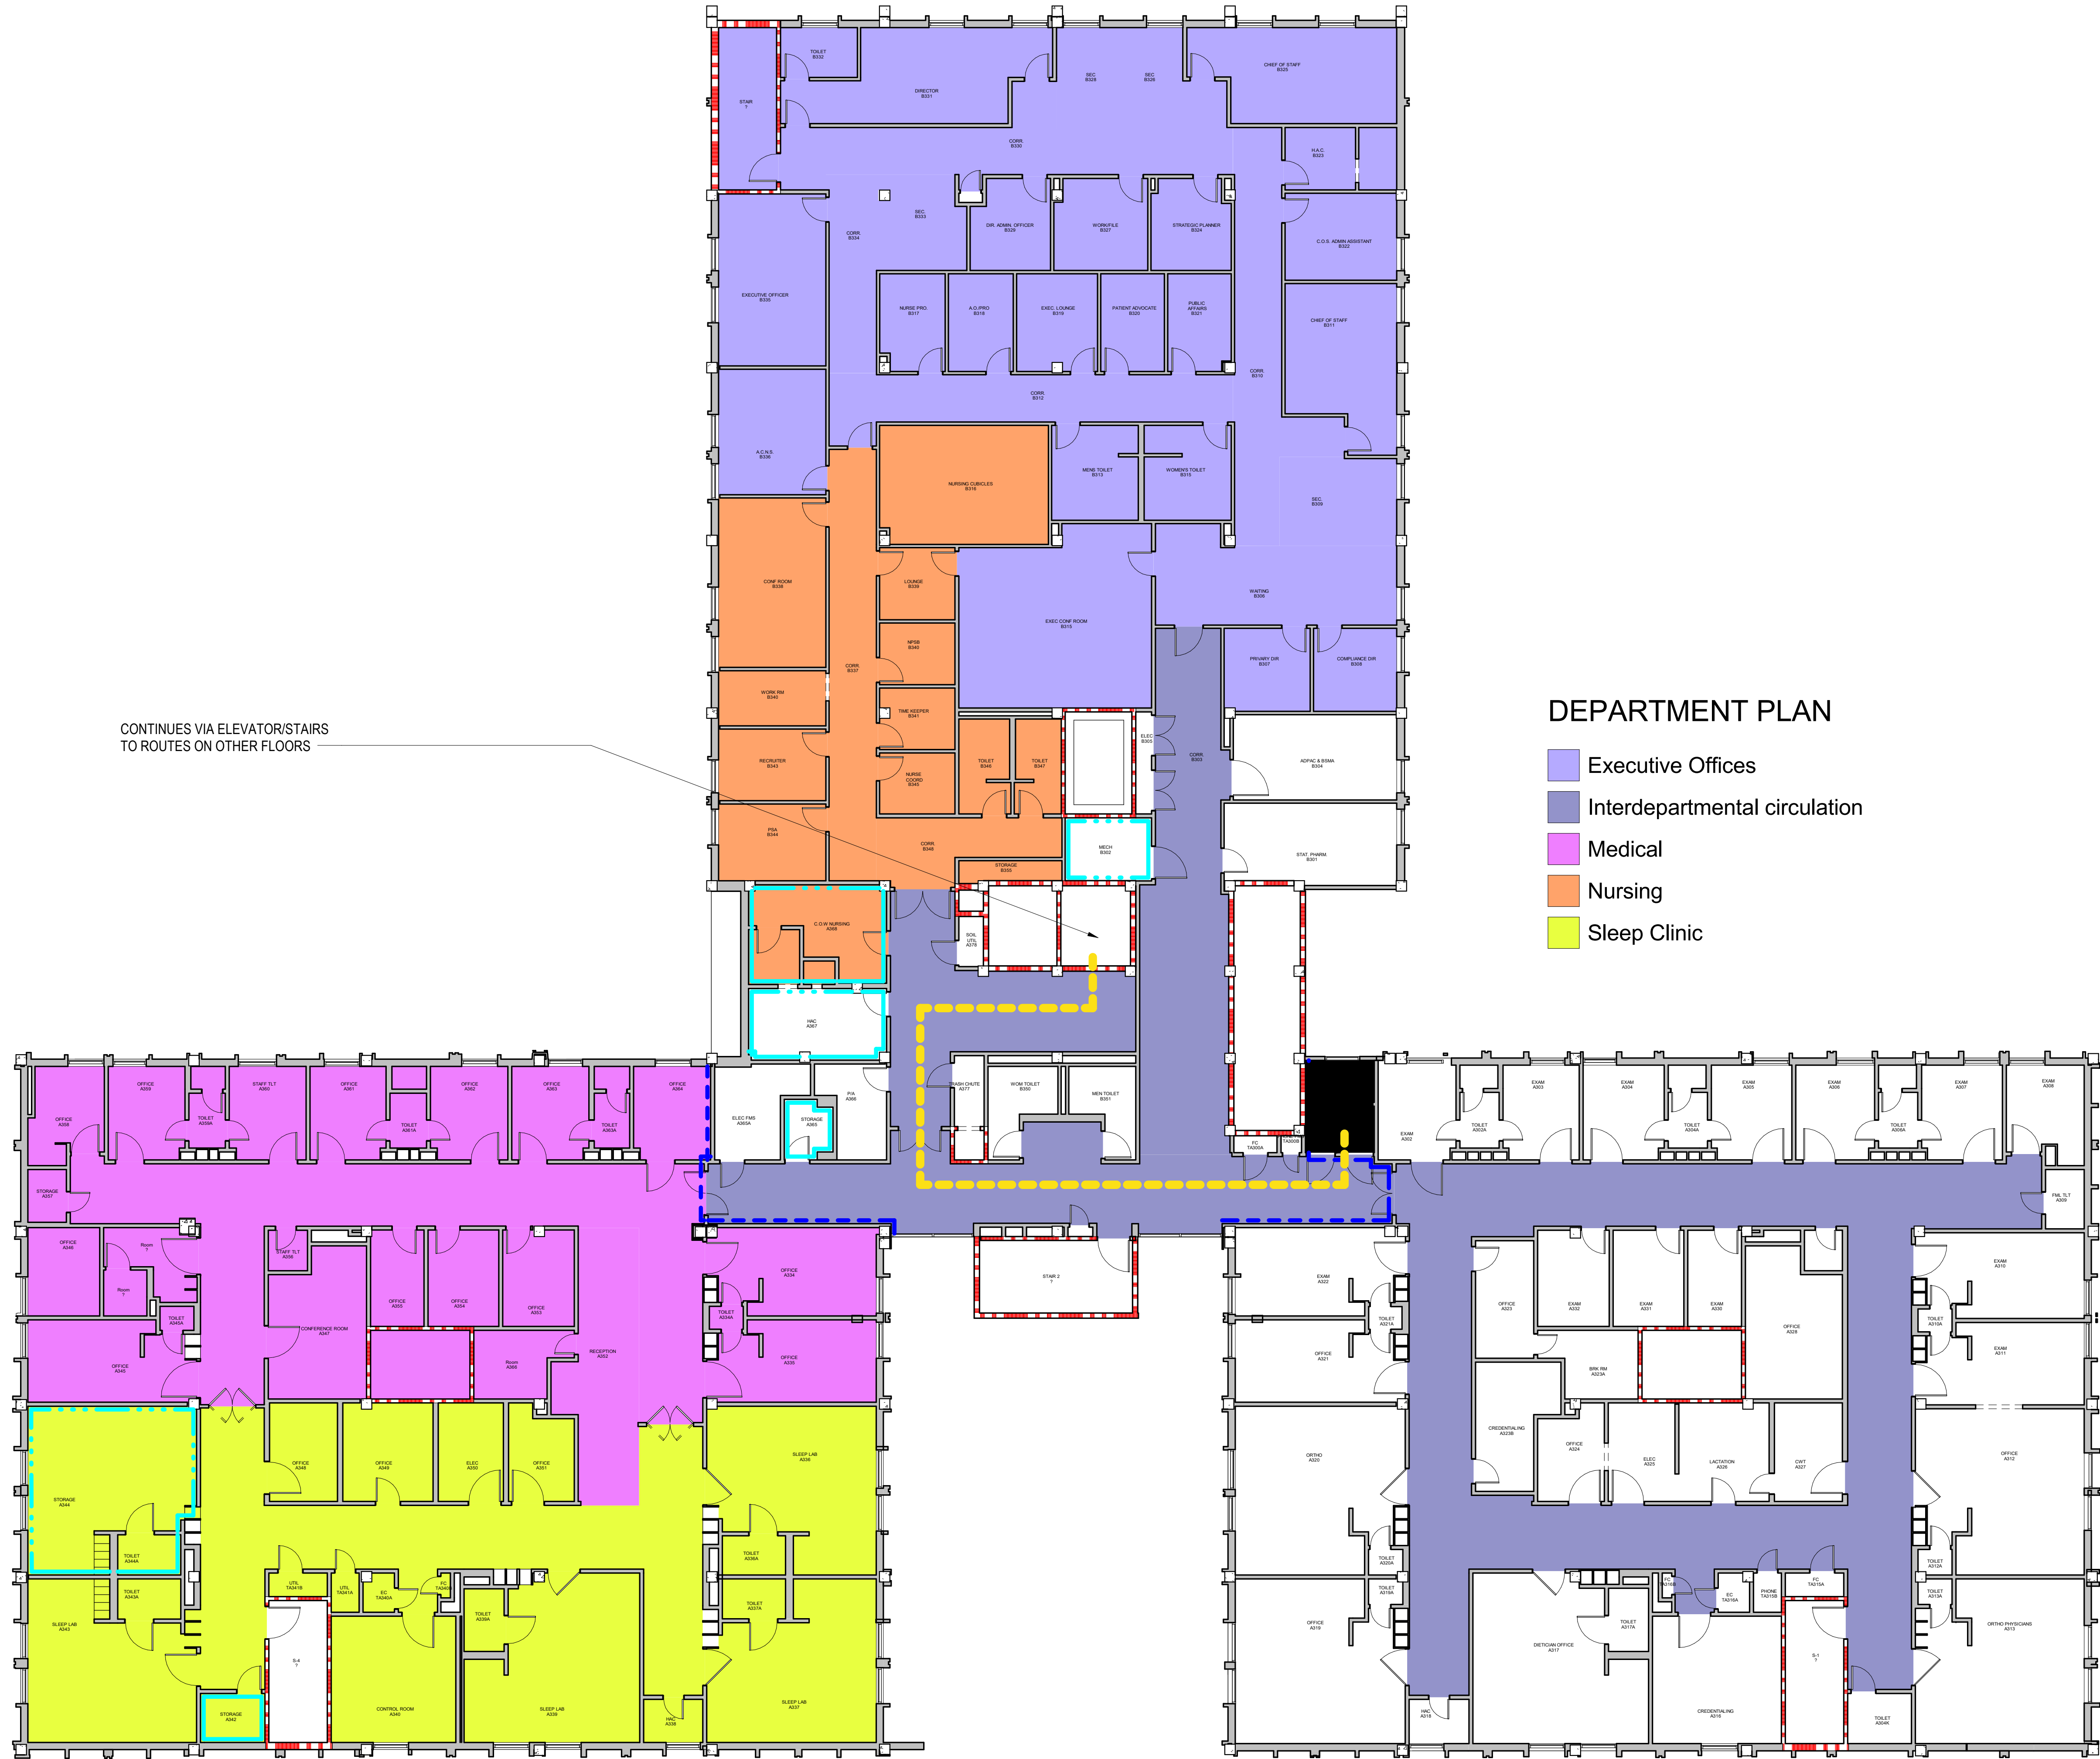

DEPARTMENT PLAN


- Executive Offices
- Interdepartmental circulation
- Medical
- Nursing
- Sleep Clinic

PARTITION LEGEND

- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING

SEQUENCING LEGEND

- CONTRACTOR PATH OF TRAVEL
- CONSTRUCTION STAGING AREA
- CONSTRUCTION
- TEMPORARY CONSTRUCTION

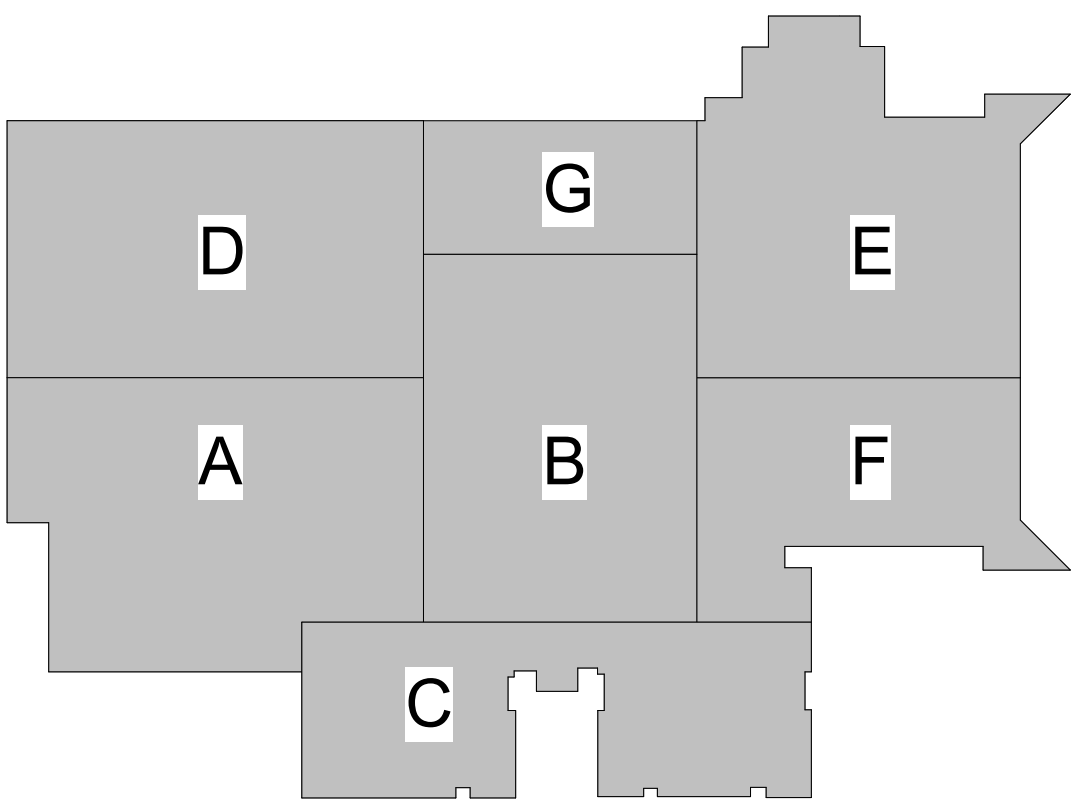

KEY PLAN

1 THIRD FLOOR PLAN - AREA B
3/32" = 1'-0"



Revisions:	Date:

ARCHITECT/ENGINEER OF RECORD



A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314

STAMP



Facilities
Management
Services



U.S. Department
of Veterans
Affairs

Drawing Title
SEQUENCING PLAN - 3RD FLOOR

Approved:

FOR OFFICIAL USE ONLY

Phase
FINAL BID DOCUMENTS

FULLY SPRINKLERED

Project Title
EHRM INFRASTRUCTURE
UPGRADES

Location
1100 TUNNEL ROAD
ASHEVILLE, NC 28805
Issue Date
12.19.2025

Checked


Drawn

Project Number
637-22-700

Building Number

Drawing Number

47-GC103
SHEET 289 of 559

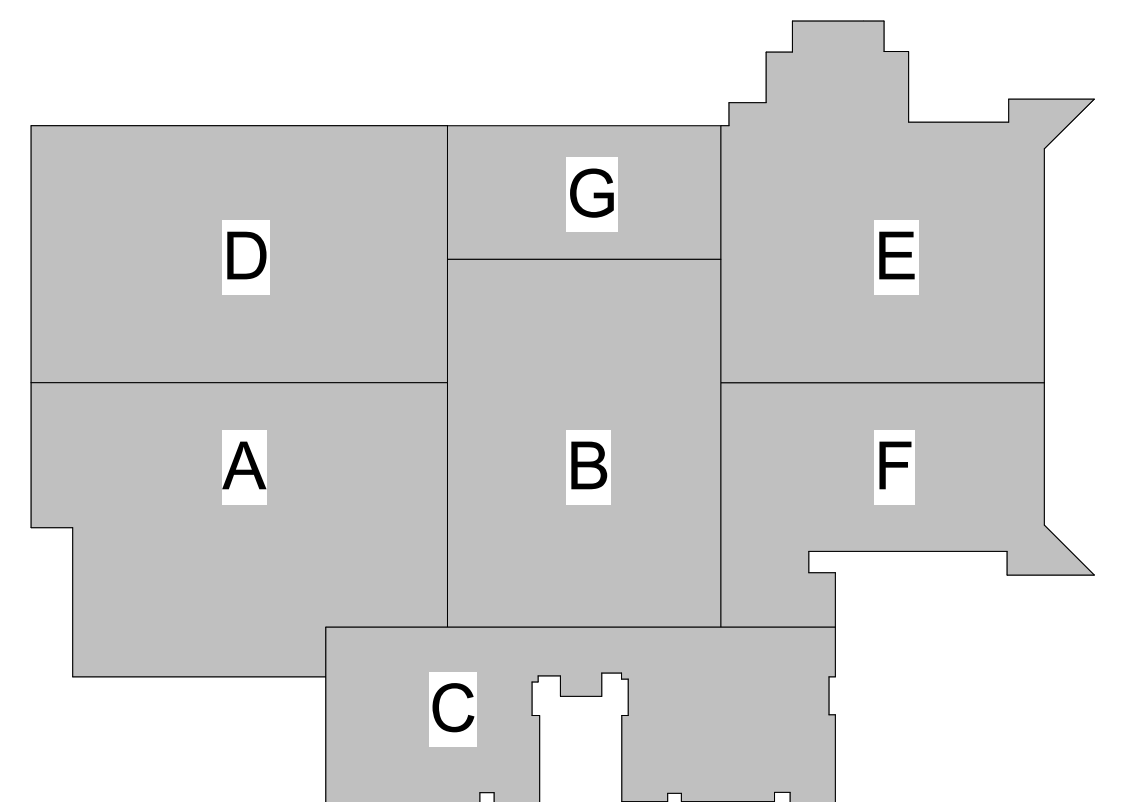

PLAN NORTH

20 0 20 40

1" = 20'-0"


SCALE FEET

FINAL BID DOCUMENTS

Drawing Number

47-GC104

SHEET 200 of 559



Interdepartmental circulation
 Mental Health
 Ward 5 West

	FIRE BARRIER, 2 HR
	FIRE BARRIER, 1 HR
	SMOKE BARRIER, 1/2 HR
	SMOKE RESISTIVE HAZARDOUS
	PATIENT SUIT/ NON SLEEPING

 CONTRACTOR PATH OF TRAVEL
 CONSTRUCTION STAGING AREA
 CONSTRUCTION
 TEMPORARY CONSTRUCTION



PLAN NORTH

1" = 20'-0"

SCALE

20 0 20 40

FEET

FINAL BID DOCUMENTS

47-GC105

SHEET 291 of 559




SHEET NOTES:

GENERAL NOTES:

1. FIELD VERIFY EXISTING CONDITIONS.

PARTITION LEGEND

- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING

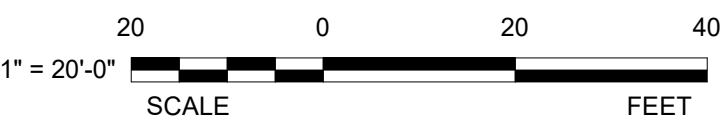

FINAL BID DOCUMENTS

Autodesk Docs/Adaptive EHRM/23807																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
-----------------------------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--




SHEET NOTES:

GENERAL NOTES:

1. FIELD VERIFY EXISTING CONDITIONS.

PARTITION LEGEND

- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING

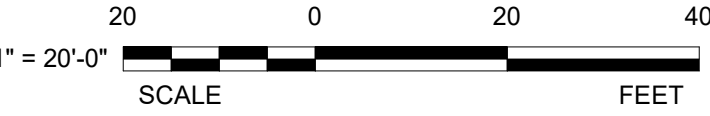


FINAL BID DOCUMENTS


1 STRUCTURAL 1ST FLOOR PLAN - OVERALL
1" = 20'-0"

12/12/2025 2:28:25 PM
Autodesk Docs\Asheville EHRM\Y26\637-22-700\47 S ASH - EHRM.rvt

Revisions:	Date:

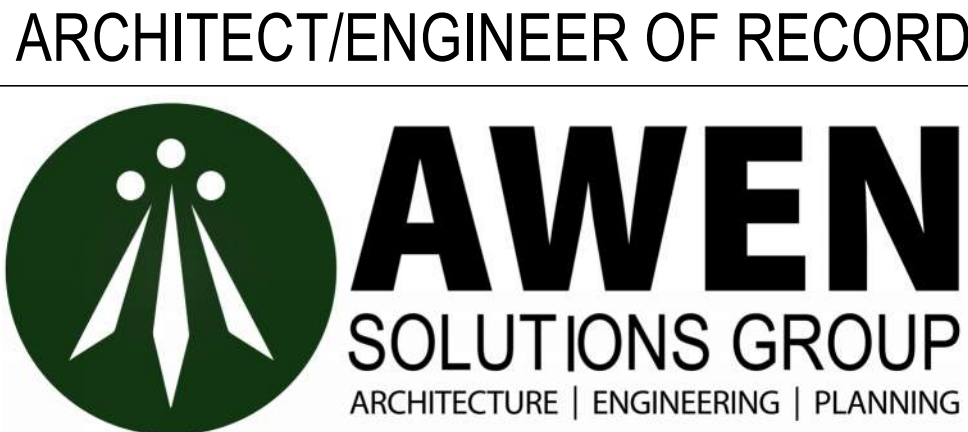

A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314

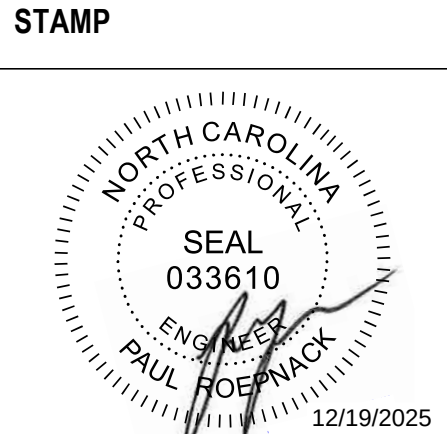

Drawing Title STRUCTURAL 1ST FLOOR PLAN - OVERALL
Approved:
FOR OFFICIAL USE ONLY

Phase FINAL BID DOCUMENTS

Project Title EHRM INFRASTRUCTURE UPGRADES
Location 1100 TUNNEL ROAD ASHEVILLE, NC 28805
Issue Date 12.19.2025

Checked DU

Drawn MBH

Project Number 637-22-700
Building Number BLDG 47
Drawing Number 47-SF101 SHEET 293 of 559




SHEET NOTES:

GENERAL NOTES:


1. FIELD VERIFY EXISTING CONDITIONS.

PARTITION LEGEND

- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING

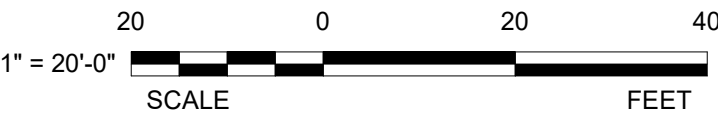

FINAL BID DOCUMENTS

Autodesk Docs/Manville EHRM_V23857			ARCHITECT/ENGINEER OF RECORD	 AWEN SOLUTIONS GROUP ARCHITECTURE ENGINEERING PLANNING	A/E: Awen Solutions Group 215 N. Payne Street, Suite 122 Alexandria, VA 22314	 COFFMAN ENGINEERS 701 Corporate Center Drive, Suite 419 Raleigh, NC 27607 ph 919.374.6888 www.coffman.com	STAMP  PAUL BOENICK 12/19/2025	Facilities Management Services	VA U.S. Department of Veterans Affairs	Drawing Title STRUCTURAL 2ND FLOOR PLAN - OVERALL	Phase FINAL BID DOCUMENTS	Project Title EHRM INFRASTRUCTURE UPGRADES	Project Number 637-22-700
											Building Number BLDG 47		
										Location 1100 TUNNEL ROAD ASHEVILLE, NC 28805	Drawing Number 47-SF102		
										Issue Date 12.19.2025	Checked DU	Drawn MBH	SHEET 294 of 559
	Revisions:	Date:											



47-SF402


SHEET 296 of 559

1 (N) FLOOR MOUNTED TELECOM RACK. SEE DETAIL 11 OR 12
00-S503 00-S503

2 (N) CABLE TRAY SUPPORT, SEE DETAIL 1 OR 3
00-S503 00-S503

3 PROVIDE METAL STUD BACKING AT (N) WALL
MOUNTED SPLIT SYSTEM UNIT PER DETAIL
SEE MECH. DRAWINGS FOR UNIT LOCATION
10
00-S503

1. FIELD VERIFY EXISTING CONDITIONS.

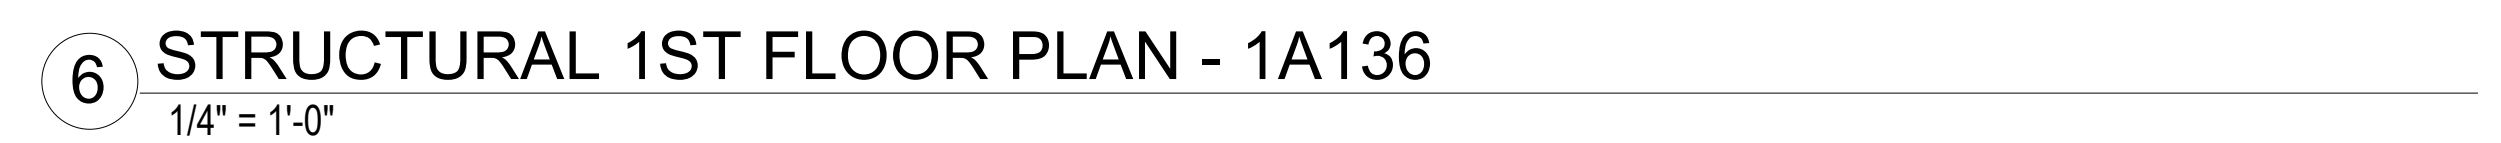

	FIRE BARRIER, 2 HR
	FIRE BARRIER, 1 HR
	SMOKE BARRIER, 1/2 HR
	SMOKE RESISTIVE HAZARDOUS
	PATIENT SUIT/ NON SLEEPING



ARCHITECT/ENGINEER OF RECORD

 **AWEN**
SOLUTIONS GROUP
ARCHITECTURE | ENGINEERING | PLANNING




COFFMAN
ENGINEERS
701 Corporate Center Drive, Suite 475
Raleigh, NC 27607
ph 919.314.6636
www.coffman.com



Phase	FINAL BID DOCUMENTS

Project Number 637-22-700
Building Number BLDG 47
Drawing Number 47-SF403
SHEET 297 of 559

1. FIELD VERIFY EXISTING CONDITIONS.

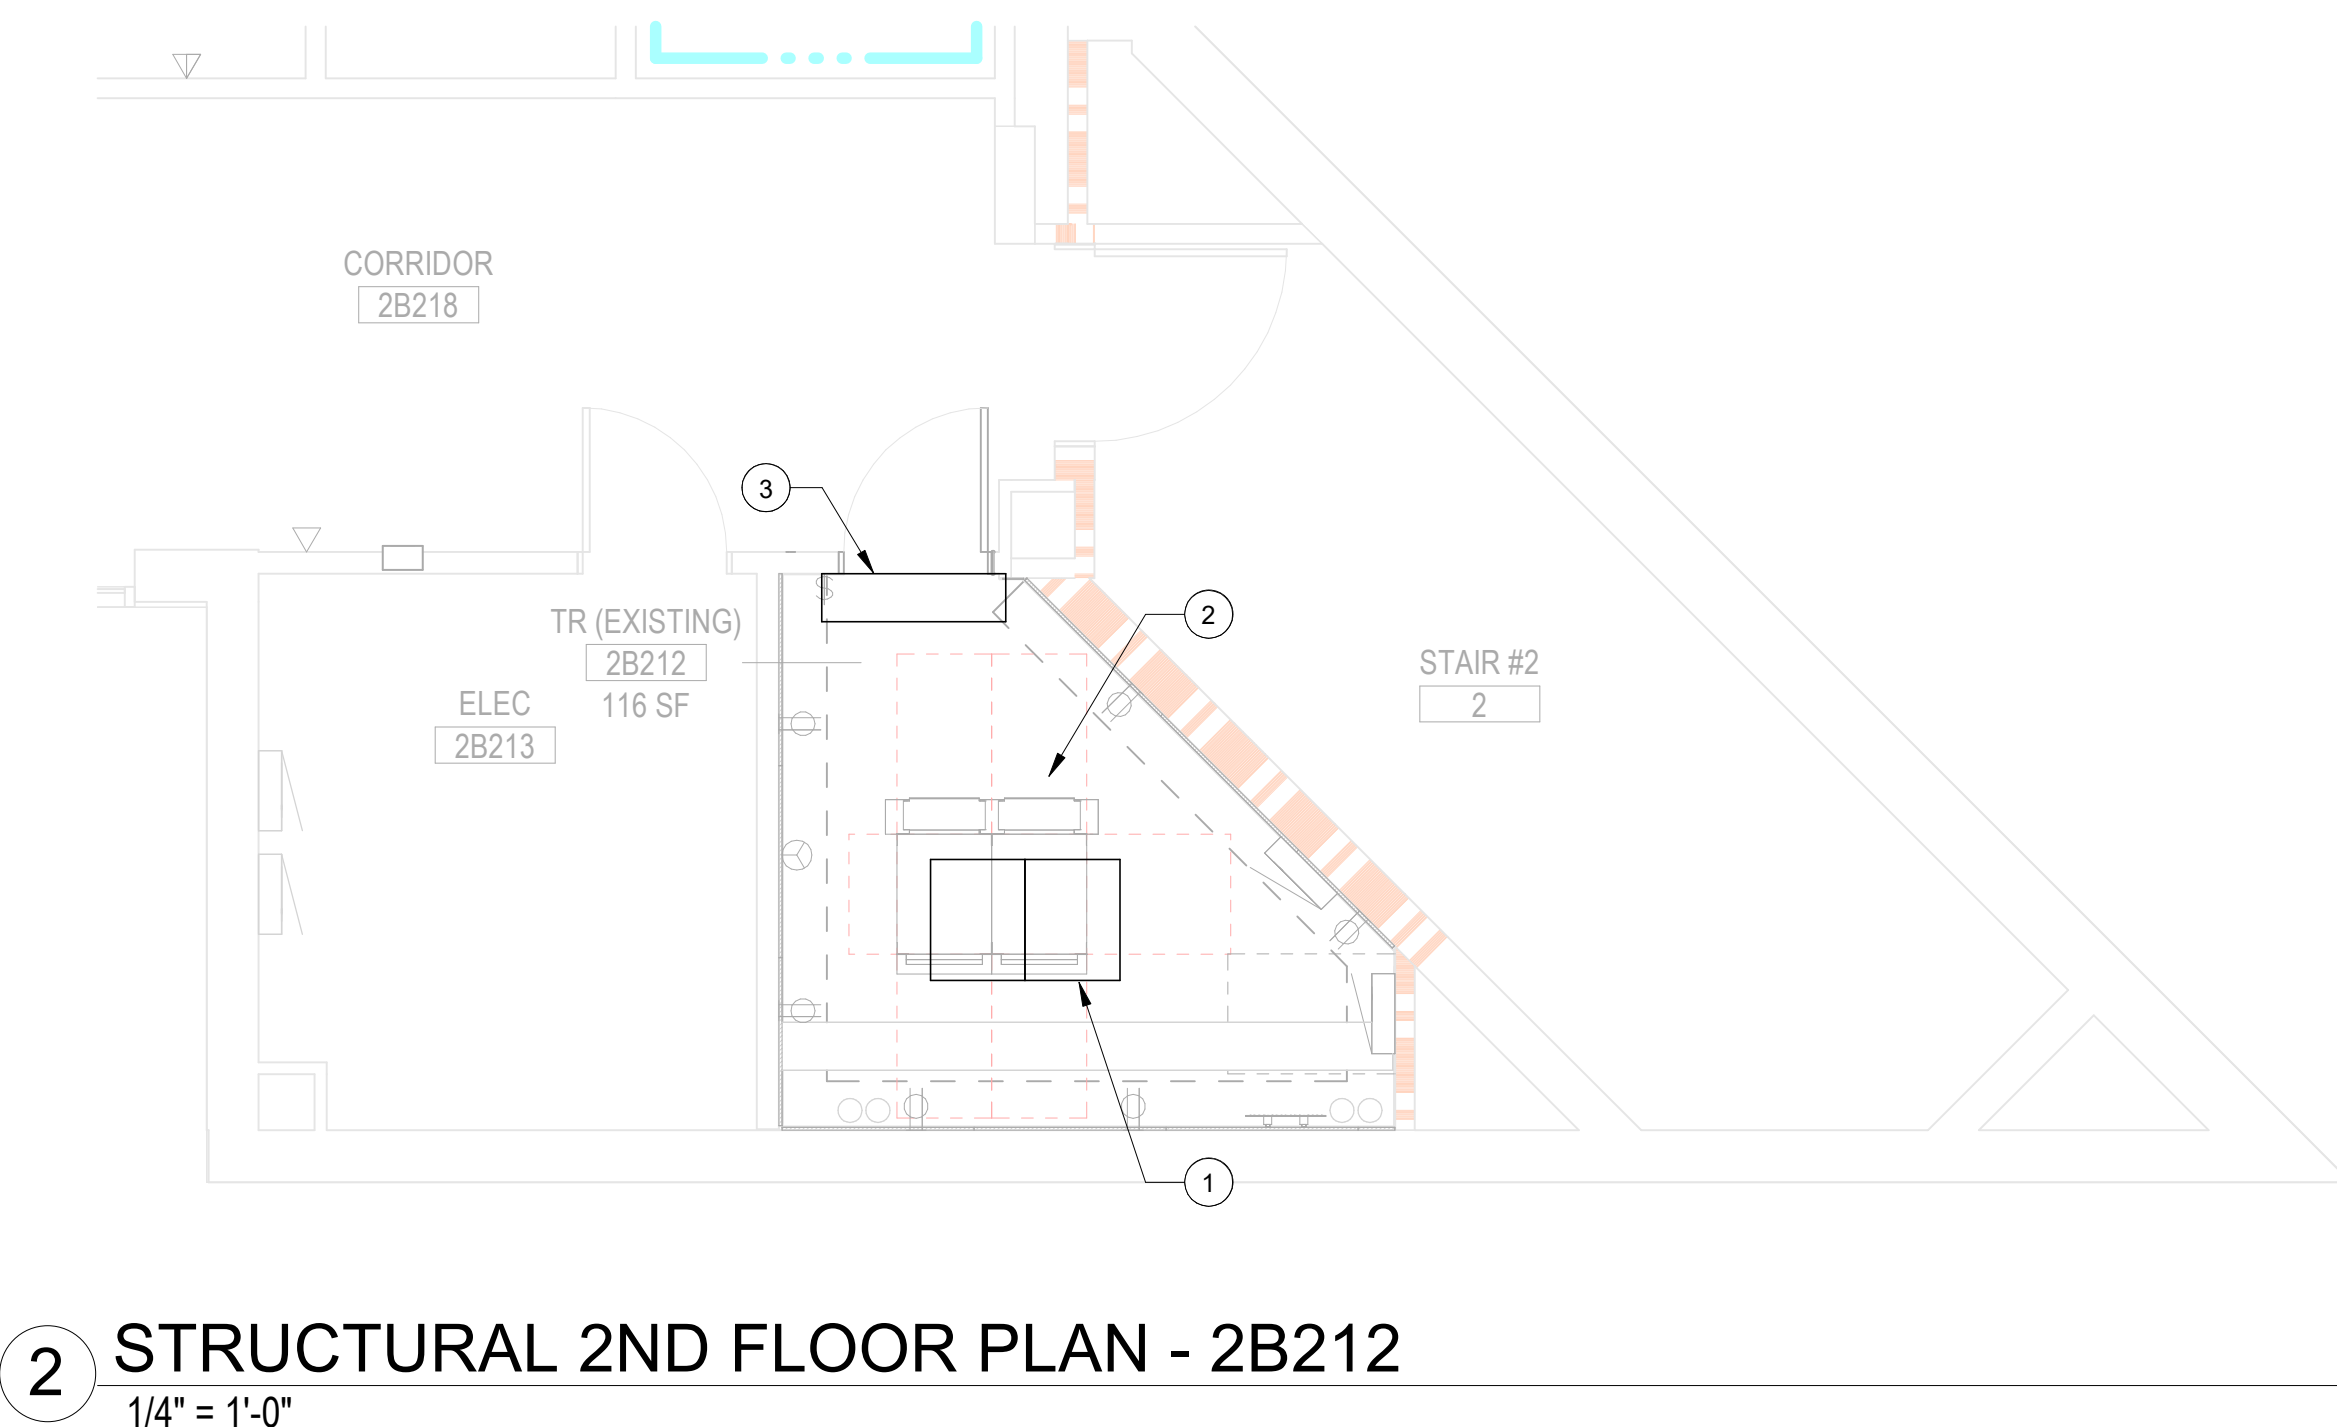

Project Number 637-22-700
Building Number BLDG 47
Drawing Number 47-SF404
SHEET 298 of 559

Checked	Drawn
DU	MBH



1. THESE DOCUMENTS DO NOT INDICATE ALL MINOR AREAS AFFECTED BY SELECTIVE DEMOLITION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR QUANTIFYING THE MATERIAL AND LABOR COSTS TO DEMOLISH, PATCH, REPAIR ADJACENT AREAS AFFECTED BY THE CONSTRUCTION INDICATED TO A "LIKE NEW" CONDITION.
2. COORDINATE WITH FIRE PROTECTION, MECHANICAL, ELECTRICAL, PLUMBING, TELECOMMUNICATIONS, AND SECURITY PLANS FOR ADDITIONAL REQUIREMENTS NOT SHOWN ON THIS DRAWING.
3. SOME KEYNOTES LISTED BELOW MANY NOT APPLY TO THIS SHEET.
4. DIMENSIONS PRECEDED BY A TILDE (~) ARE APPROXIMATE, SUBJECT TO FIELD VERIFICATION.
5. ALL NEW INTERIOR PARTITIONS ARE TYPE 01, UNLESS OTHERWISE NOTED.
6. ASBESTOS-CONTAINING PIPE INSULATION AND FITTINGS MAY BE FOUND IN PIPE CHASES, WALLS AND OTHER HIDDEN AREAS THROUGHOUT THE BUILDING. IF THESE MATERIALS HAVE TO BE DISTURBED DURING THE PROJECT, ABATEMENT MUST BE CONDUCTED PER SPECIFICATION 02 82 11.
7. ASPHALT ROOFING MATERIALS SHOULD BE ASSUMED TO CONTAIN ASBESTOS. IF THESE MATERIALS HAVE TO BE DISTURBED DURING THE PROJECT, ABATEMENT MUST BE CONDUCTED PER SPECIFICATION 02 82 12.21.
8. ASBESTOS IS PRESENT IN JOINT COMPOUND ON SHEETROCK WALLS THROUGHOUT ORIGINAL WALLS. BULK SAMPLE OF INDIVIDUAL WALLS SHOULD BE CONDUCTED PRIOR TO ANY DISTURBANCE.
9. ASBESTOS-CONTAINING 12x12 FLOOR TILE IS PRESENT IN **ROOM BF107** (EXISTING), WHITE WITH OYSTER SHELL PATTERN AND MASTIC PRESENT. 1ST FLOOR **ROOM 1H113** (NEW TR) ASBESTOS-CONTAINING BLACK MASTIC UNDER EXISTING FLOOR, 4TH FLOOR **ROOM A401** AND 5TH FLOOR **ROOM A501** (EXISTING TRS) ASSUMED ASBESTOS-CONTAINING 12x12 FLOOR TILE, WHITE WITH OYSTER SHELL PATTERN AND MASTIC. ABATE PER SPECIFICATION 02 82 13.19.

DEMO PLAN KEYNOTES

KEY TAG	DESCRIPTION
A01	STATIC DISSIPATING FLUID-APPLIED ESD EPOXY FLOORING
A02	EXTEND FULL-HEIGHT PARTITION TO DECK (VERIFY IN FIELD)
A03	4'-0" x 8'-0" AC GRADE 3/4" TRADE SIZE FIRE-RATED BACKBOARD PAINTED HIGH-GLOSS WHITE WITH TWO COATS OF FIRE-RESISTANT PAINT
A04	12' DEDICATED SPACE TO ACCOMMODATE SERVICE PROVIDER, SECURITY, VIDEO, ETC. EQUIPMENT MOUNTED TO BACKBOARDS
A05	DOOR AS SCHEDULED, REFER TO DOOR SCHEDULE
A06	BASE TRIM AS SCHEDULED, REFER TO SHEET AE01
A07	NEW GYPSUM WALLBOARD FINISH ON EXISTING FRAMING
A08	NEW METAL STUD PARTITION TO DECK
A09	EXISTING CEILING TO REMAIN
A10	WATER BARRIER BETWEEN TR AND ROOMS WITH WATER (RESTROOMS, BREAK ROOMS, KITCHENS, ETC.)
A11	NEW ACCT SYSTEM
A12	CARD READER, MOUNT 3'-6" TO B.O. READER, SEE TELECOMMUNICATIONS DRAWINGS
A13	PROVIDE A SEMI RECESSED FEC WITH A DRY AGENT FIRE EXTINGUISHER WITHIN 75' FROM TR BUT IN TR. VA TO VERIFY AND FINALIZE THE FINAL LOCATION OF THE FEC.
A14	ADD RATED FURRING WALL.
A15	PROVIDE BLACK-OUT WINDOW FILM. STATION GC TO CONFIRM THE TYPE OF THE FILM.
B25	PATCH AND REPAIR EXTERIOR WALL AT NEW MECHANICAL PENETRATIONS
B25	PATCH AND REPAIR ROOF AT NEW MECHANICAL PENETRATIONS. SEE PENETRATION DETAIL. @ 200-AE53
D01	REMOVE EXISTING FLOOR. PREP FLOOR TO RECEIVE FLOOR FINISH SPECIFIED.
D02	REMOVE EXISTING CEILING, CEILING SUPPORT, ALL FASTENERS, LIGHTING FIXTURES, VENTS, AND MEANS OF ATTACHMENT BACK TO STRUCTURE
D04	REMOVE DOOR AND FRAME, SALVAGE ALL DOOR HARDWARE AND TURN OVER TO VA. VERIFY FRAMING AND PROVIDE MODIFICATIONS NECESSARY IF DOOR INCREASES IN SIZE. PATCH ADJACENT FINISHES TO MATCH EXISTING. PAINT AFFECTED WALL TO CLOSEST CORNER.
D05	REMOVE GYPSUM BOARD AND METAL FRAMING
D06	REMOVE EXISTING GYPSUM WALLBOARD FINISH
D07	REMOVE WINDOW AND INFILL OPENING
D08	REMOVE EXISTING PARTITION AT AREA OF NEW DOOR
D09	REMOVE EXISTING CMU WALL
D10	PROVIDE WALK OFF MATS AND PLASTIC SHEETING (VISQUEEN) AT CONSTRUCTION AREAS.
D11	PROVIDE 1 HOUR TEMPORARY CONSTRUCTION BARRIER. REFER TO TEMPORARY CONSTRUCTION BARRIER DETAIL IN 00-GC001.
E01	ELECTRICAL EQUIPMENT, SEE ELECTRICAL DRAWINGS
E02	LIGHTING FIXTURES, SEE ELECTRICAL DRAWINGS
M01	MECHANICAL EQUIPMENT, SEE MECHANICAL DRAWINGS
M01	MECHANICAL EQUIPMENT, SEE MECHANICAL DRAWINGS, PROVIDE 1/4" MINIMUM THICK FACTORY-FORMED, HEAVY DUTY, SLIP-RESISTANT WALKWAY PAD SET IN FULL BED OF COMPATIBLE UTILITY OR FLASHING CEMENT. EXTEND 12-INCHES PAST SUPPORTS AT ALL MECHANICAL EQUIPMENT.
T01	BONDING BUS BAR, SEE TELECOMMUNICATIONS DRAWINGS
T01	TELECOM RACK SYSTEM, SEE TELECOMMUNICATIONS DRAWINGS
T04	HORIZONTAL CABLE TRAY, SEE TELECOMMUNICATIONS DRAWINGS
	TR TO BE DECOMMISSIONED
	EXISTING TR
	NEW TR
	EXPANDED TR
	EXISTING DATA CENTER
	NEW DATA CENTER
	NEW TELECOM ENCLOSURE (TE)

[illegible]

ARCHITECT/ENGINEER OF RECORD



A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314

STAMP



Facilities
Managemen
Services

VA | U.S. Department
of Veterans
Affairs

Drawing Title

ENLARGED DEMO FLOOR & RC PLANS - BASEMENT

Approved

FOR OFFICIAL USE ONLY

Phase

FINAL BID DOCUMENTS

FULLY SPRINKLERED

Project Title

EHRM INFRASTRUCTURE UPGRADES

Location
1100 TUNNEL ROAD
ASHEVILLE, NC 28805

Issue Date
12.19.2025

Checked

Drawn

Project Number
637-22-700

Building Number
47

Drawing Number


47-AD400B

SHEET 300 of 559


12/19/2025 11:38:24 AM
AutoCAD Doc: Nashville EHRM_V23637-22-700-047-ASH - EHRM.rvt
VA FORM 08 - 6231

1 2 3 4 5 6 7 8 9 10

A
B
C
D
E
F

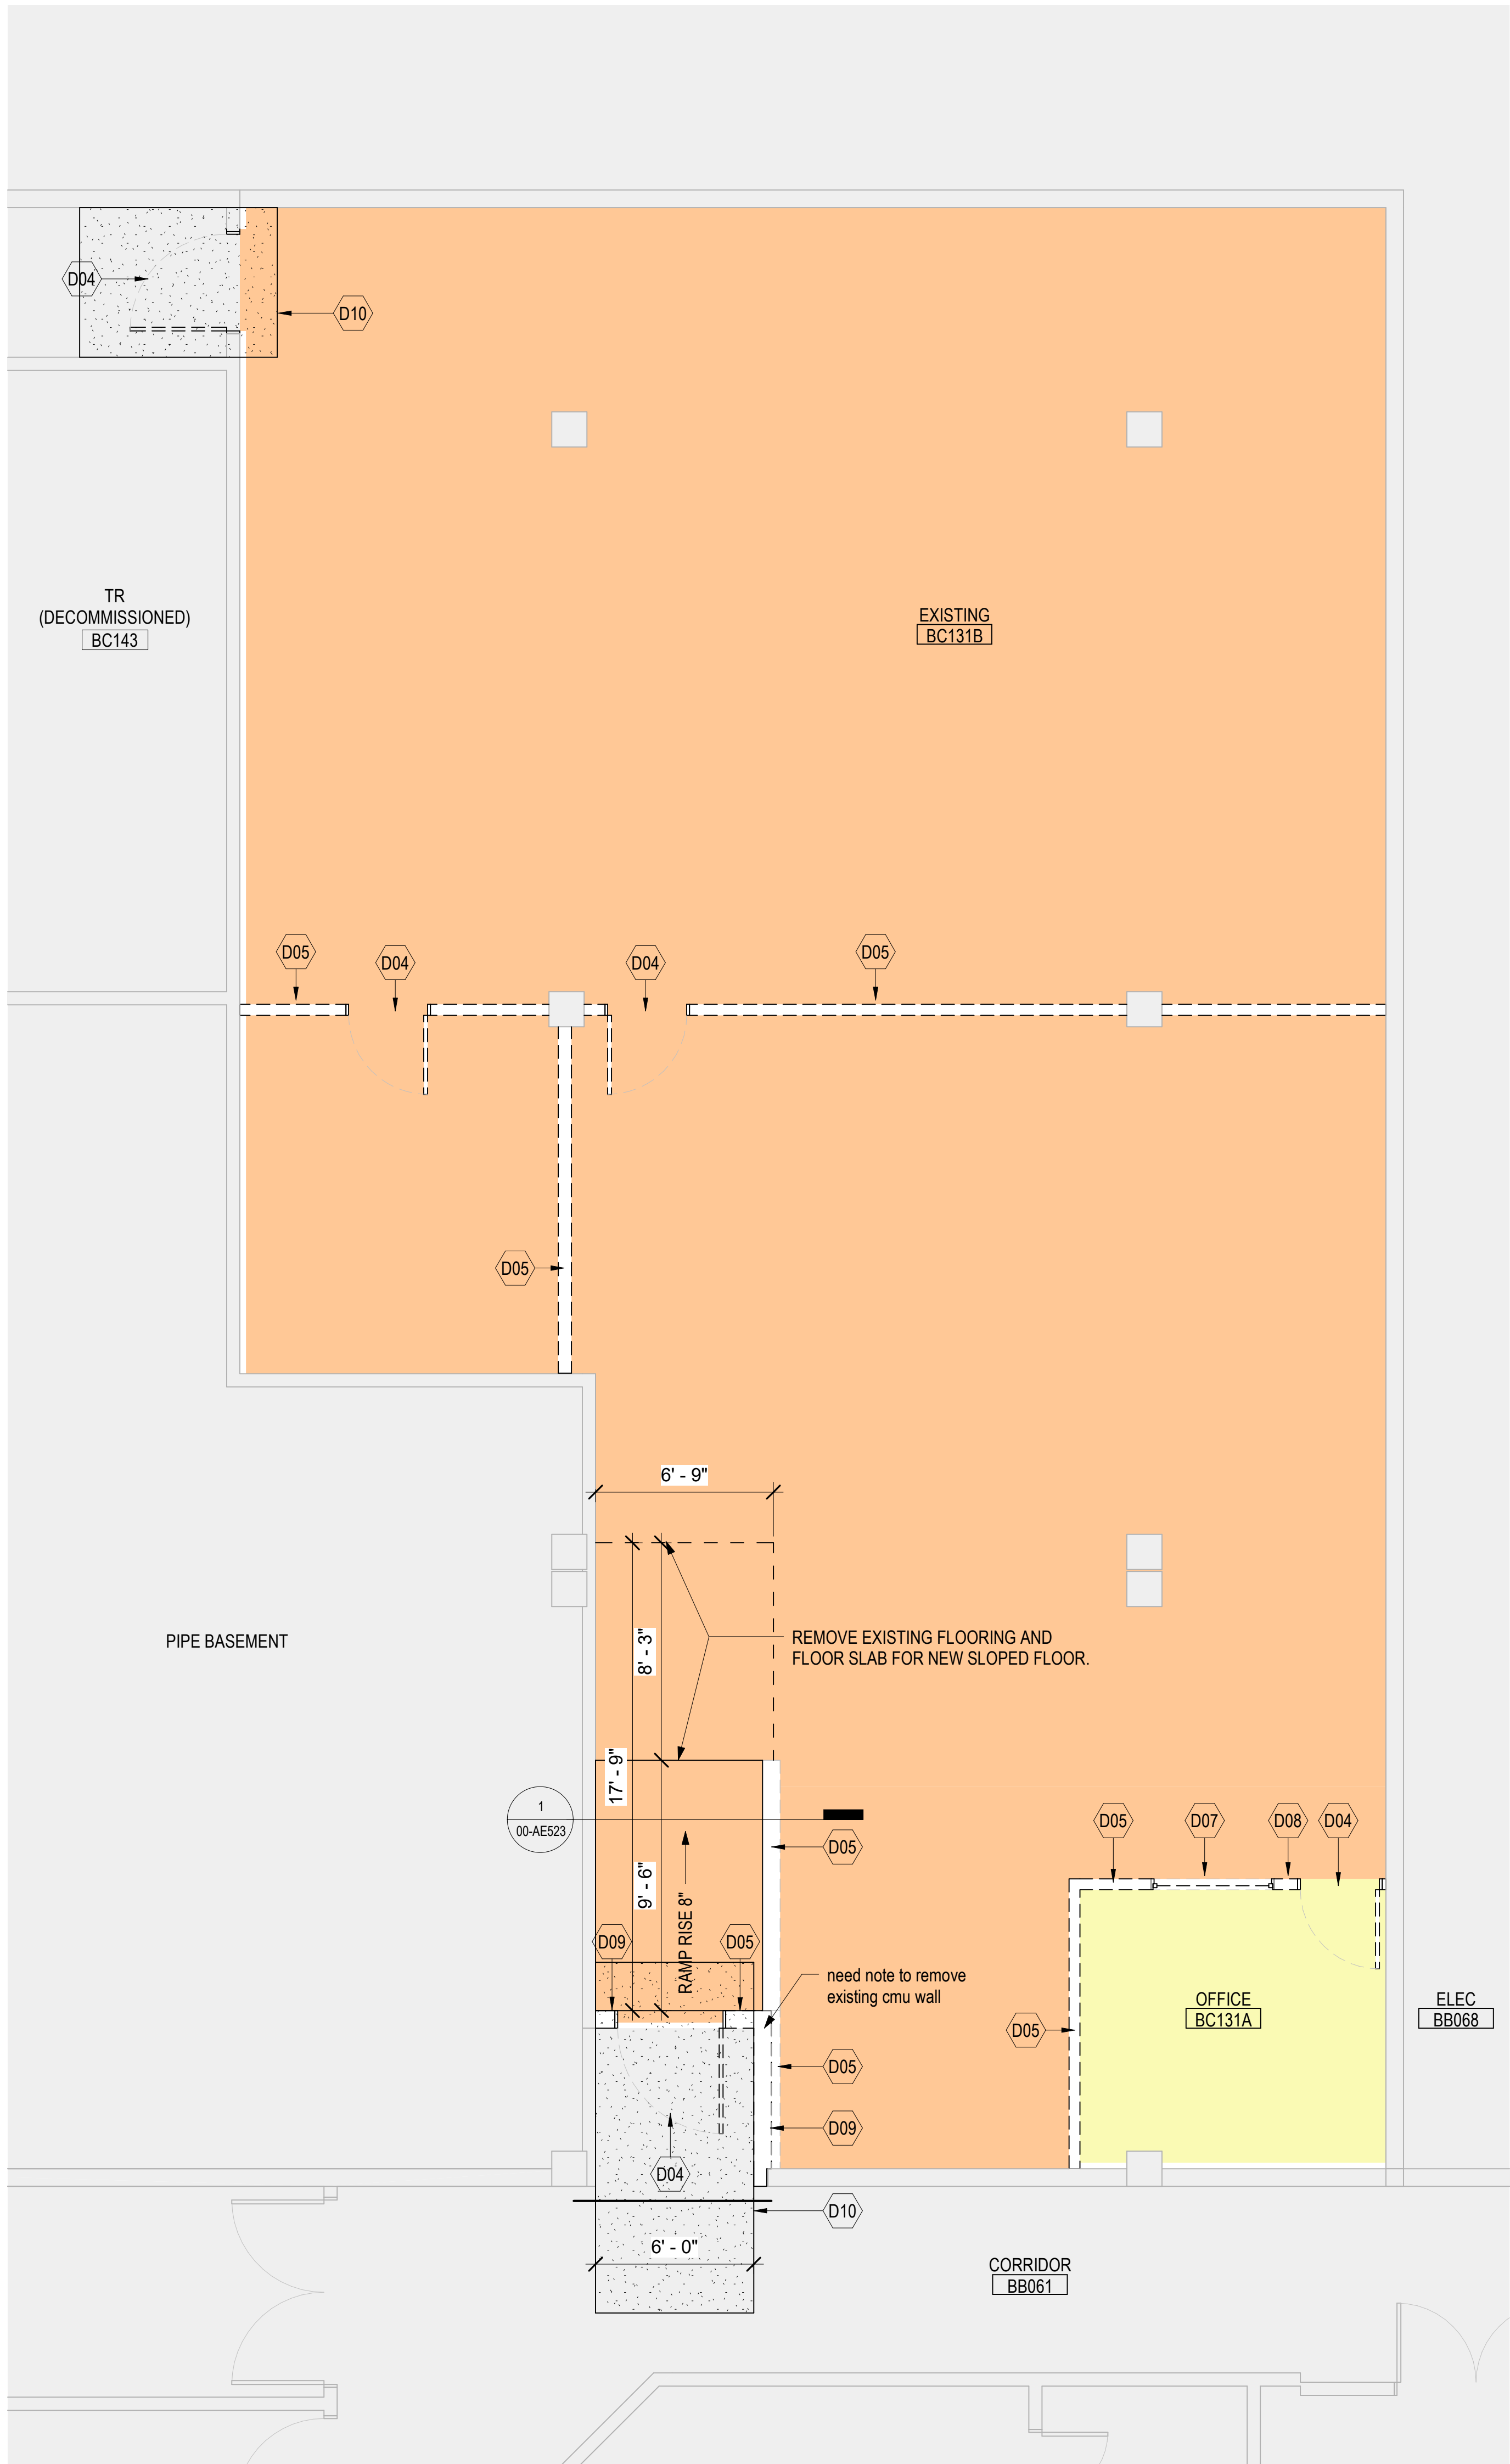

1 ENLARGED DEMO PLAN - BASEMENT (BC131B)
1/4" = 1'-0"

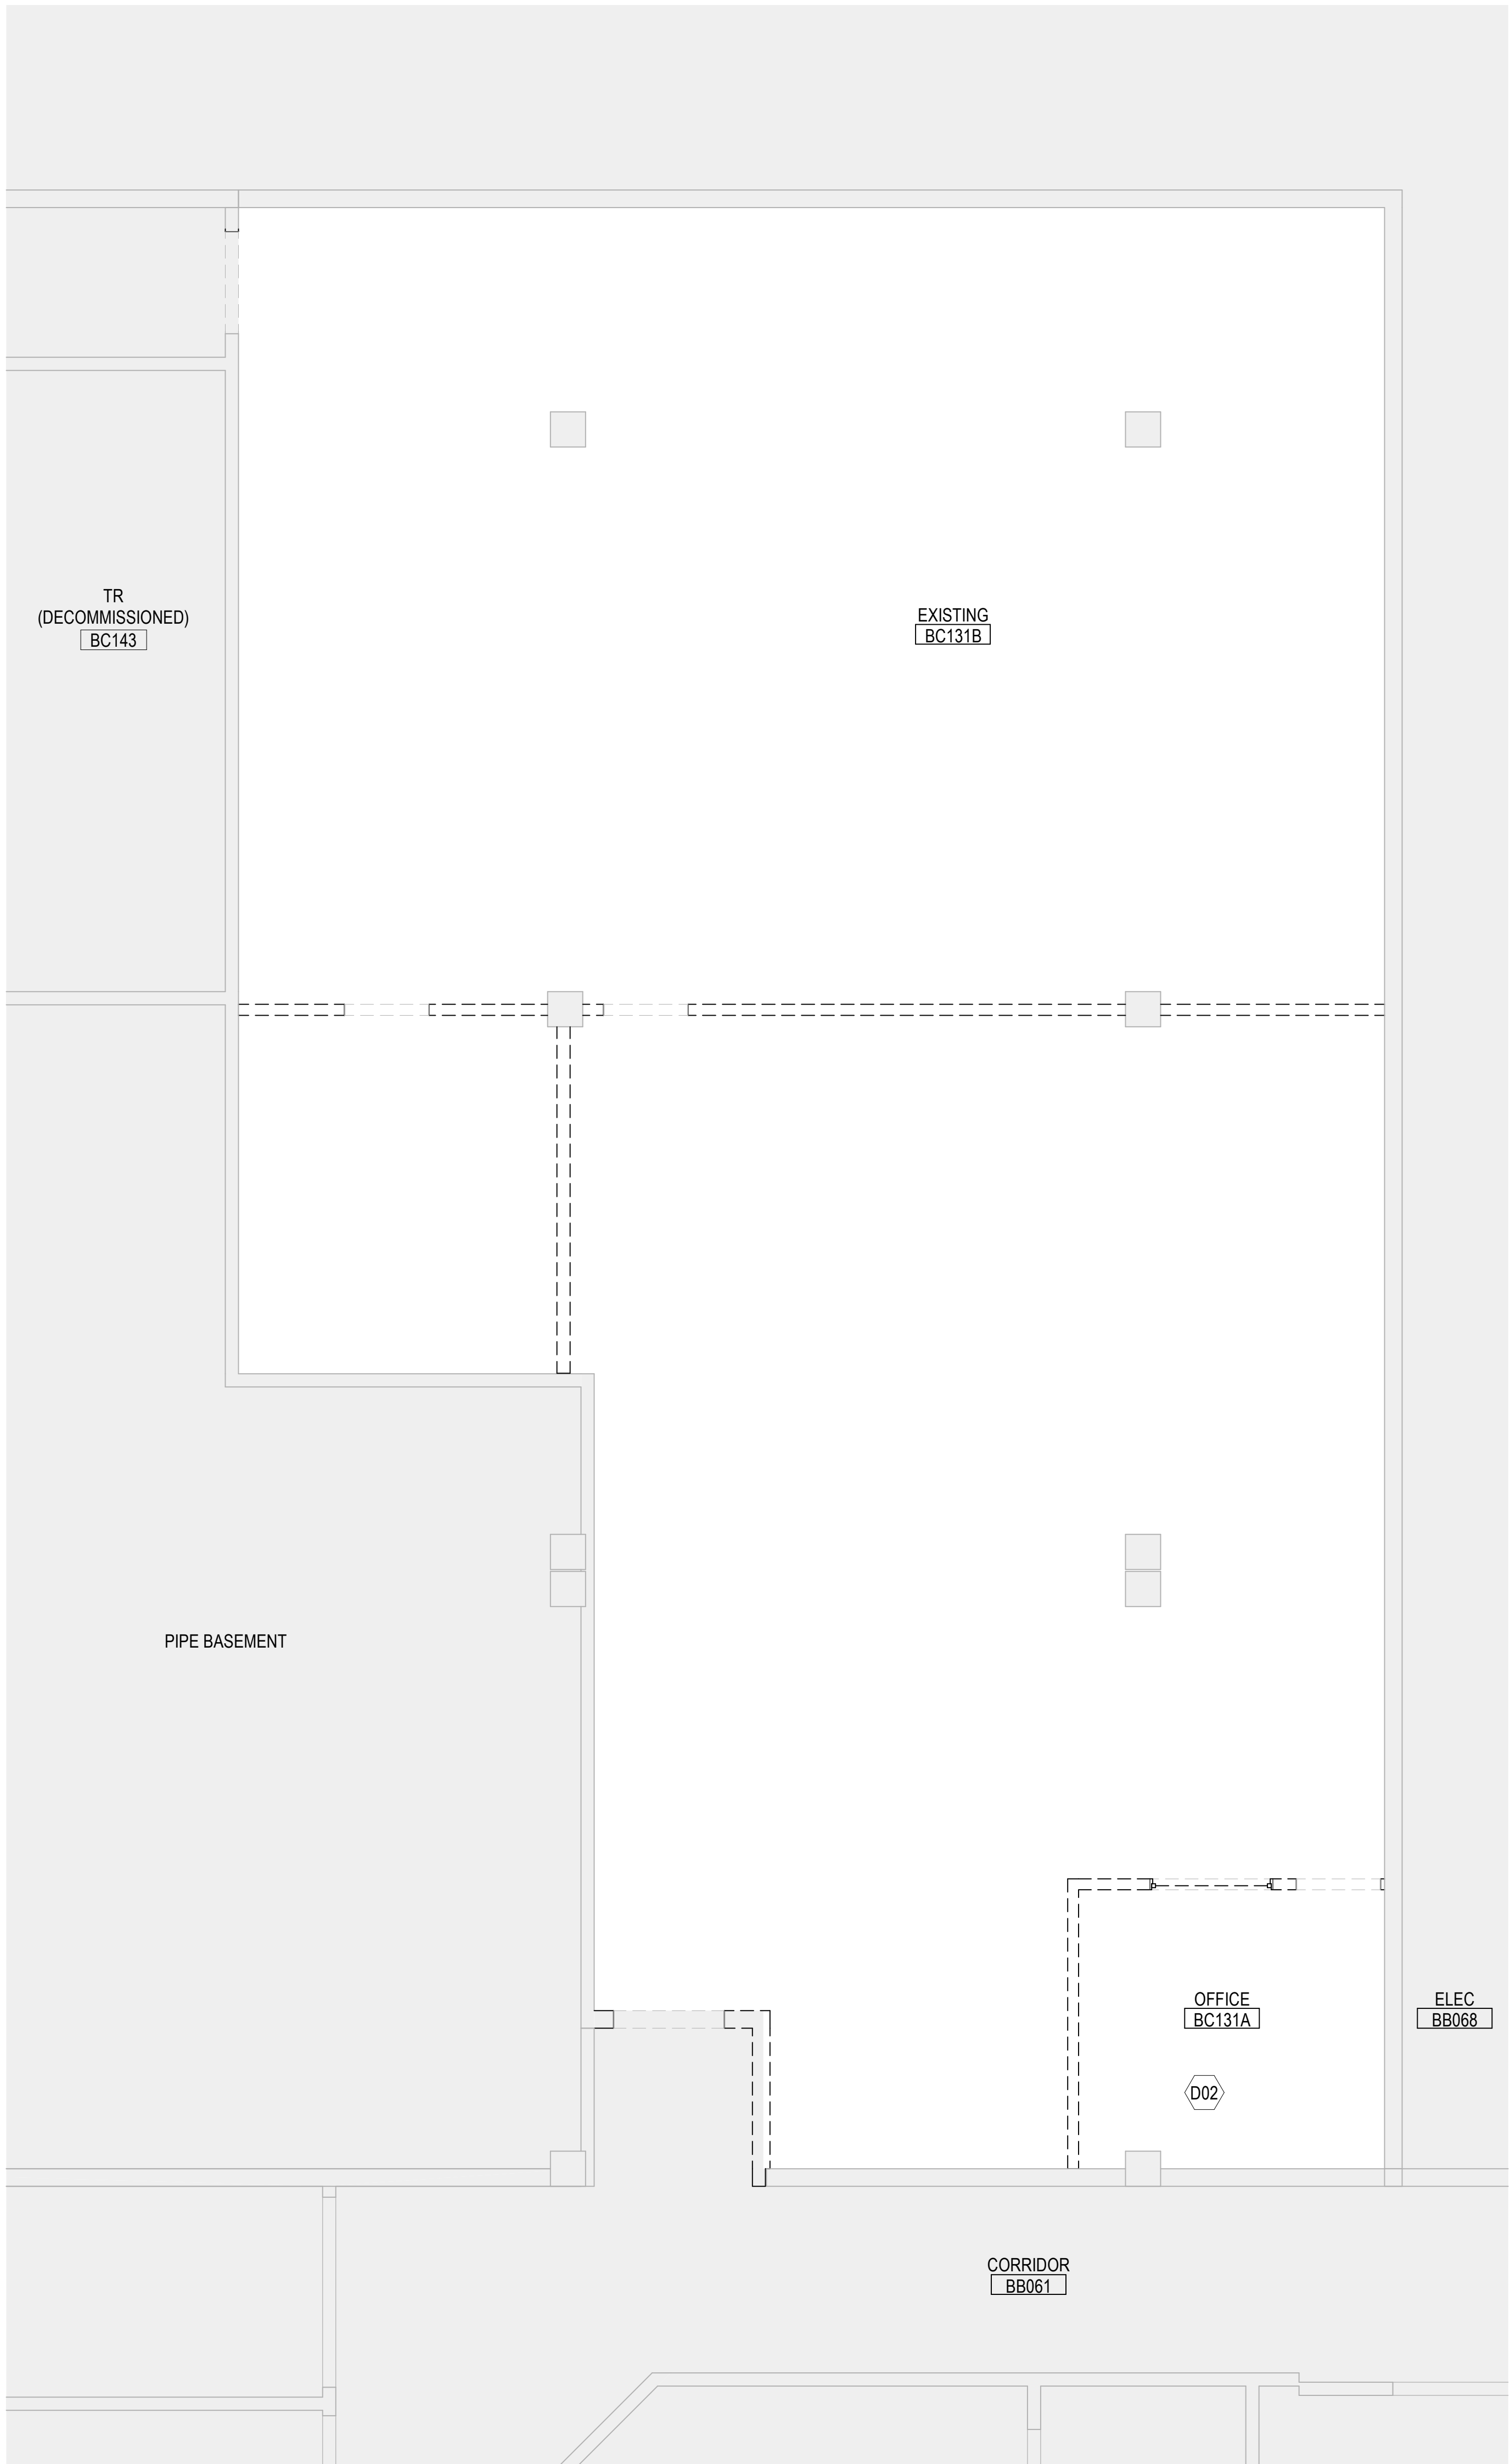

2 ENLARGED DEMO RCP - BASEMENT (BC131B)
1/4" = 1'-0"



FINAL BID DOCUMENTS

DEMO SHEET NOTES

- THESE DOCUMENTS DO NOT INDICATE ALL MINOR AREAS AFFECTED BY SELECTIVE DEMOLITION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR QUANTIFYING THE MATERIAL AND LABOR COSTS TO DEMOLISH, PATCH, REPAIR ADJACENT AREAS AFFECTED BY THE CONSTRUCTION INDICATED TO A "LIKE NEW" CONDITION.
- COORDINATE WITH FIRE PROTECTION, MECHANICAL, ELECTRICAL, PLUMBING, TELECOMMUNICATIONS AND SECURITY PLANS FOR ADDITIONAL SELECTIVE DEMOLITION REQUIREMENTS NOT SHOWN ON THIS DRAWING.
- SOME SHEET KEYNOTES LISTED BELOW MAY NOT APPLY TO THIS SHEET.
- DIMENSIONS PRECEDED BY A TILDE (~) ARE APPROXIMATE, SUBJECT TO FIELD VERIFICATION.

DEMOLITION LEGEND

- OUT OF SCOPE AREAS, COORDINATE WITH FIRE PROTECTION, MECHANICAL, ELECTRICAL, PLUMBING, TELECOMMUNICATIONS, AND SECURITY PLANS FOR ADDITIONAL REQUIREMENTS WITHIN THIS AREA
- CONSTRUCTION TO REMAIN IN PLACE (SHOWN SOLID)
- CONSTRUCTION TO BE DEMOLISHED (SHOWN DASHED)
- TEMPORARY CONSTRUCTION BARRIER (F5/AE523)
- PLASTIC SHEETING (VISQUEEN)
- WALK-OFF MATS

DEMO PLAN KEYNOTES

- | KEY TAG | DESCRIPTION |
|---------|--|
| A01 | STATIC DISSIPATING FLUID-APPLIED ESD EPOXY FLOORING |
| A02 | EXTEND FULL-HEIGHT PARTITION TO DECK (VERIFY IN FIELD) |
| A03 | 4'-0" x 8'-0" AC GRADE 3/4" TRADE SIZE FIRE-RATED BACKBOARD PAINTED HIGH-GLOSS WHITE WITH TWO COATS OF FIRE-RESISTANT PAINT |
| A04 | 12" DEDICATED SPACE TO ACCOMMODATE SERVICE PROVIDER, SECURITY, VIDEO, ETC. EQUIPMENT MOUNTED TO BACKBOARDS |
| A05 | DOOR AS SCHEDULED, REFER TO DOOR SCHEDULE |
| A06 | BASE TRIM AS SCHEDULED, REFER TO SHEET AE601 |
| A07 | NEW GYPSUM WALLBOARD FINISH ON EXISTING FRAMING |
| A08 | NEW METAL STUD PARTITION TO DECK |
| A09 | EXISTING CEILING TO REMAIN |
| A10 | WATER BARRIER BETWEEN TR AND ROOMS WITH WATER (RESTROOMS, BREAK ROOMS, KITCHENS, ETC.) |
| A11 | NEW ACT SYSTEM |
| A12 | CARD READER, MOUNT 3'-6" TO B.O. READER, SEE TELECOMMUNICATIONS DRAWINGS |
| A13 | PROVIDE A SEMI RECESSED FEC WITH A DRY AGENT FIRE EXTINGUISHER WITHIN 75' FROM TR BUT IN TR. VA TO VERIFY AND FINALIZE THE FINAL LOCATION OF THE FEC. |
| A14 | ADD RATED FURRING WALL |
| A15 | PROVIDE BLACK-OUT WINDOW FILM. STATION GC TO CONFIRM THE TYPE OF THE FILM. |
| B25 | PATCH AND REPAIR EXTERIOR WALL AT NEW MECHANICAL PENETRATIONS |
| B25 | PATCH AND REPAIR ROOF AT NEW MECHANICAL PENETRATIONS. SEE PENETRATION DETAIL @ 200-AE523 |
| D01 | REMOVE EXISTING FLOOR. PREP FLOOR TO RECEIVE FLOOR FINISH SPECIFIED. |
| D02 | REMOVE EXISTING CEILING, CEILING SUPPORT, ALL FASTENERS, LIGHTING FIXTURES, VENTS, AND MEANS OF ATTACHMENT BACK TO STRUCTURE |
| D04 | REMOVE DOOR AND FRAME, SALVAGE ALL DOOR HARDWARE AND TURN OVER TO VA. VERIFY FRAMING AND PROVIDE MODIFICATIONS NECESSARY IF DOOR INCREASES IN SIZE. PATCH ADJACENT FINISHES TO MATCH EXISTING. PAINT AFFECTED WALL TO CLOSEST CORNER. |
| D05 | REMOVE GYPSUM BOARD AND METAL FRAMING |
| D06 | REMOVE EXISTING GYPSUM WALLBOARD FINISH |
| D07 | REMOVE WINDOW AND INFILL OPENING |
| D08 | REMOVE EXISTING PARTITION AT AREA OF NEW DOOR |
| D09 | REMOVE EXISTING CMU WALL |
| D10 | PROVIDE WALK OFF MATS AND PLASTIC SHEETING (VISQUEEN) AT CONSTRUCTION AREAS. |
| D11 | PROVIDE 1 HOUR TEMPORARY CONSTRUCTION BARRIER. REFER TO TEMPORARY CONSTRUCTION BARRIER DETAIL IN 00-G0001. |
| E01 | ELECTRICAL EQUIPMENT. SEE ELECTRICAL DRAWINGS |
| E02 | LIGHTING FIXTURES. SEE ELECTRICAL DRAWINGS |
| M01 | MECHANICAL EQUIPMENT. SEE MECHANICAL DRAWINGS |
| M01 | MECHANICAL EQUIPMENT. SEE MECHANICAL DRAWINGS. PROVIDE 1/4" MINIMUM THICK FACTORY-FORMED, HEAVY DUTY, SLIP-RESISTANT WALKWAY PAD SET IN FULL BED OF COMPATIBLE UTILITY OR FLASHING CEMENT. EXTEND 12-INCHES PAST SUPPORTS AT ALL MECHANICAL EQUIPMENT. |
| T01 | BONDING BUS BAR. SEE TELECOMMUNICATIONS DRAWINGS |
| T01 | TELECOMMUNICATIONS RACK SYSTEM. SEE TELECOMMUNICATIONS DRAWINGS |
| T04 | HORIZONTAL CABLE TRAY. SEE TELECOMMUNICATION DRAWINGS |
| TR | TR TO BE DECOMMISSIONED |

LEGEND

- EXISTING TR
- NEW TR
- EXPANDED TR
- EXISTING DATA CENTER
- NEW DATA CENTER
- NEW TELECOM ENCLOSURE (TE)

Revisions:	Date:

ARCHITECT/ENGINEER OF RECORD



A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314

STAMP



Facilities
Management
Services



Drawing Title
ENLARGED DEMO FLOOR & RC PLANS
- BASEMENT (DATA CENTER)

Approved:

FOR OFFICIAL USE ONLY

Phase
FINAL BID DOCUMENTS

FULLY SPRINKLERED

Project Title
EHRM INFRASTRUCTURE
UPGRADES

Location
1100 TUNNEL ROAD
ASHEVILLE, NC 28805
Issue Date
12.19.2025
Checked
Drawn

Project Number
637-22-700

Building Number
47


Drawing Number
47-AD400C

SHEET 301 of 559

1 2 3 4 5 6 7 8 9 10



2 ENLARGED DEMO RCP - 1ST FLOOR (1A137)
1/4" = 1'-0"

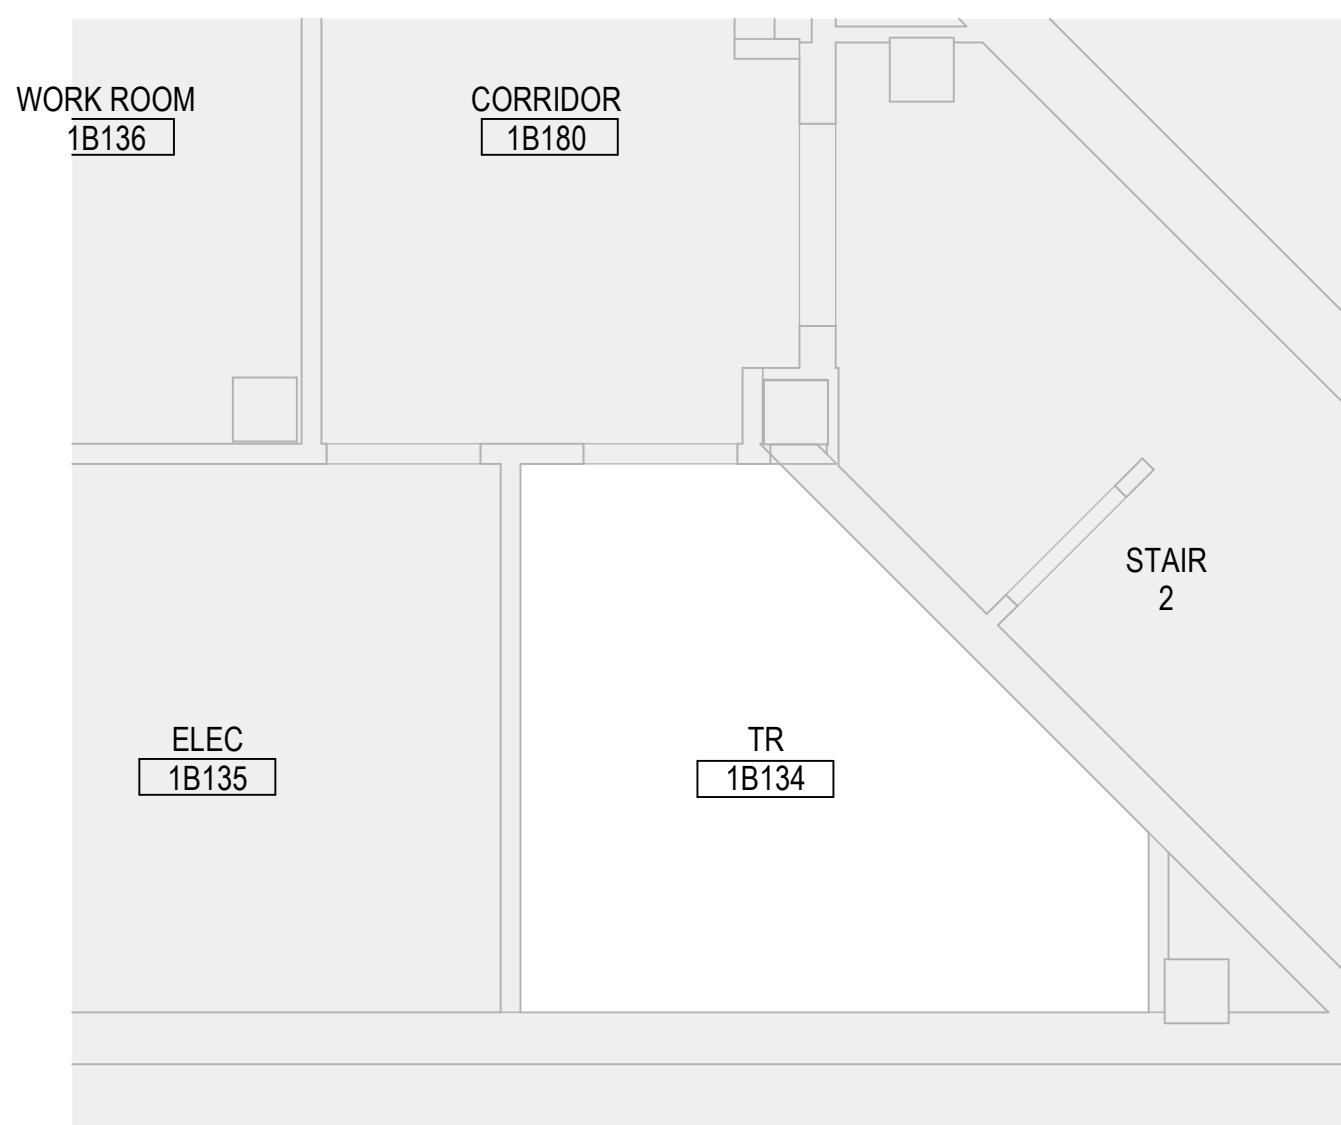

4 ENLARGED DEMO RCP - 1ST FLOOR (1B134)
1/4" = 1'-0"

6 ENLARGED DEMO RCP - 1ST FLOOR (1F114)
1/4" = 1'-0"

DEMO SHEET NOTES


3. THESE DOCUMENTS DO NOT INDICATE ALL MINOR AREAS AFFECTED BY SELECTIVE DEMOLITION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR QUANTIFYING THE MATERIAL AND LABOR COSTS TO DEMOLISH, PATCH, REPAIR ADJACENT AREAS DUE TO THE CONSTRUCTION INDICATED TO A "LIKE NEW" CONDITION.
2. COORDINATE WITH FIRE PROTECTION, MECHANICAL, ELECTRICAL, PLUMBING, TELECOMMUNICATIONS, AND SECURITY PLANS FOR ADDITIONAL REQUIREMENTS NOT SHOWN ON THIS DRAWING.
3. SOME KEYNOTES LISTED BELOW MAY NOT APPLY TO THIS SHEET.
4. DIMENSIONS PRECEDED BY A TILDE (~) ARE APPROXIMATE. SUBJECT TO FIELD VERIFICATION.
5. ALL NEW INTERIOR PARTITIONS ARE TYPE 01, UNLESS OTHERWISE NOTED.
6. ASBESTOS-CONTAINING PIPE INSULATION AND FITTINGS MAY BE FOUND IN PIPE CHASES, WALLS AND OTHER HIDDEN AREAS THROUGHOUT THE BUILDING. IF THESE MATERIALS HAVE TO BE DISTURBED DURING THE PROJECT, ABATEMENT MUST BE CONDUCTED PER SPECIFICATION 02 82 11.
7. ASPHALT ROOFING MATERIALS SHOULD BE ASSUMED TO CONTAIN ASBESTOS. IF THESE MATERIALS HAVE TO BE DISTURBED DURING THE PROJECT, ABATEMENT MUST BE CONDUCTED PER SPECIFICATION 02 82 12.21.
8. ASBESTOS IS PRESENT IN JOINT COMPOUND ON SHEETROCK WALLS THROUGHOUT ORIGINAL WALLS. BULK SAMPLE OF INDIVIDUAL WALLS SHOULD BE CONDUCTED PRIOR TO ANY DISTURBANCE.
9. ASBESTOS-CONTAINING 12x12 FLOOR TILE IS PRESENT IN **ROOM B1F07** (EXISTING TR), WHITE OYSTER SHELL PATTERN AND MASTIC. PRESENT, 1ST FLOOR **ROOM 1H113** (NEW TR) ASBESTOS-CONTAINING BLACK MASTIC UNDER EXISTING FLOOR, 4TH FLOOR **ROOM A401** AND 5TH FLOOR **ROOM A501** (EXISTING TR'S) ASSUMED ASBESTOS-CONTAINING 12x12 FLOOR TILE, WHITE WITH OYSTER SHELL PATTERN AND MASTIC. ABATE PER SPECIFICATION 02 82 13.19.

KEY TAG	DESCRIPTION
---------	-------------


- # TRILEGEND

- | | | | |
|--|---------|----------------|-----------------------------------|
| Project Title | | Project Number | |
| EHRM INFRASTRUCTURE UPGRADES | | 637-22-700 | |
| Location | | Drawing Number | |
| 1100 TUNNEL ROAD
ASHKEVILLE, NC 28805 | | 47 | |
| Issue Date | Checked | Drawn | 47-AD401B

SHEET 303 of 559 |
| 12.19.2025 | | | |

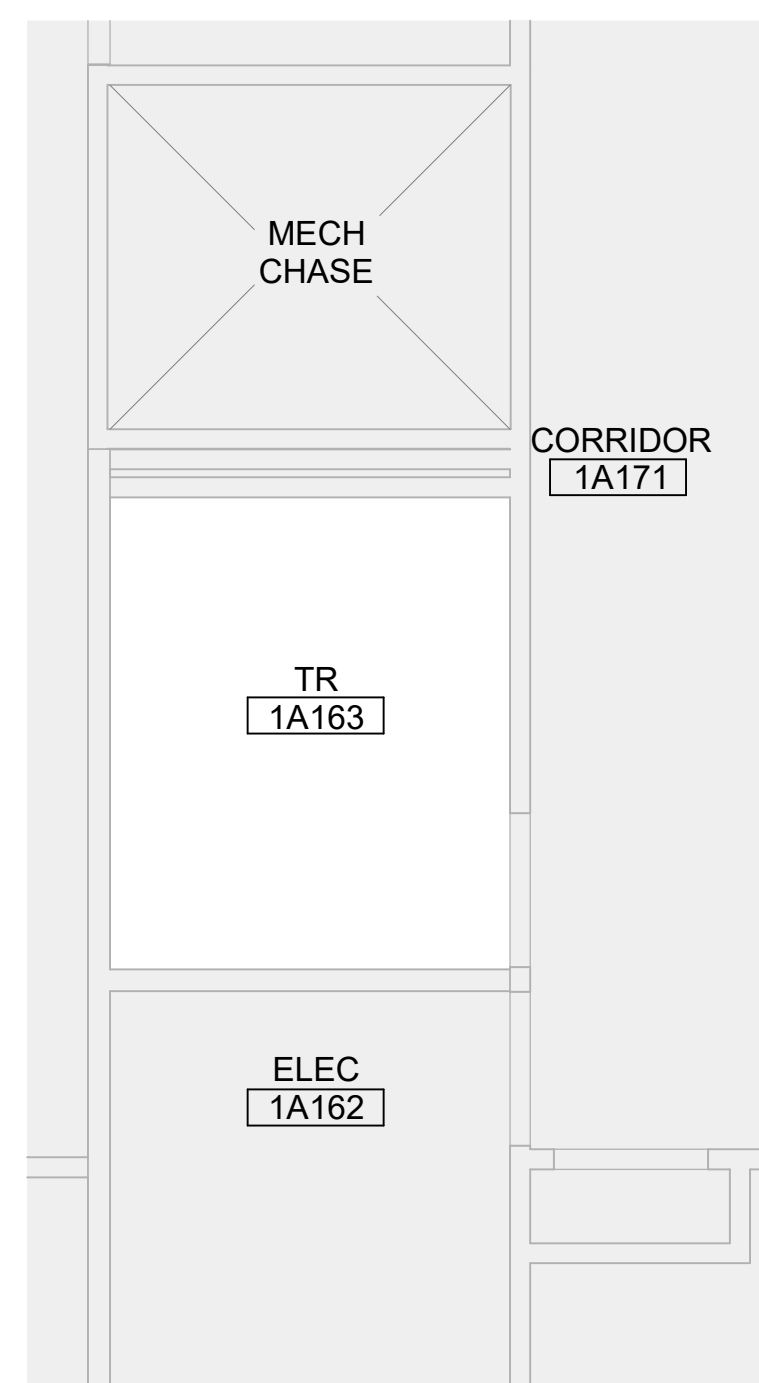

8 ENLARGED DEMO RCP - 1ST FLOOR (1A163)
1/4" = 1'-0"

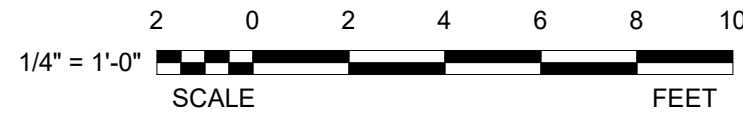**FINAL BID DOCUMENTS**[illegible]

AWEN
SOLUTIONS GROUP
ARCHITECTURE | ENGINEERING | PLANNING

STAMP



VA | U.S. Department
of Veterans
Affairs

Approved

FOR OFFICIAL USE ONLY

FULLY SPRINKLERED

Location
1100 TUNNEL ROAD
ASHEVILLE, NC 28805

Issue Date

12 19 2025

Checked

100


Project Number
637-22-700

Building Number
47

Drawing Number

47-AD401B

SHEET 303 of 559

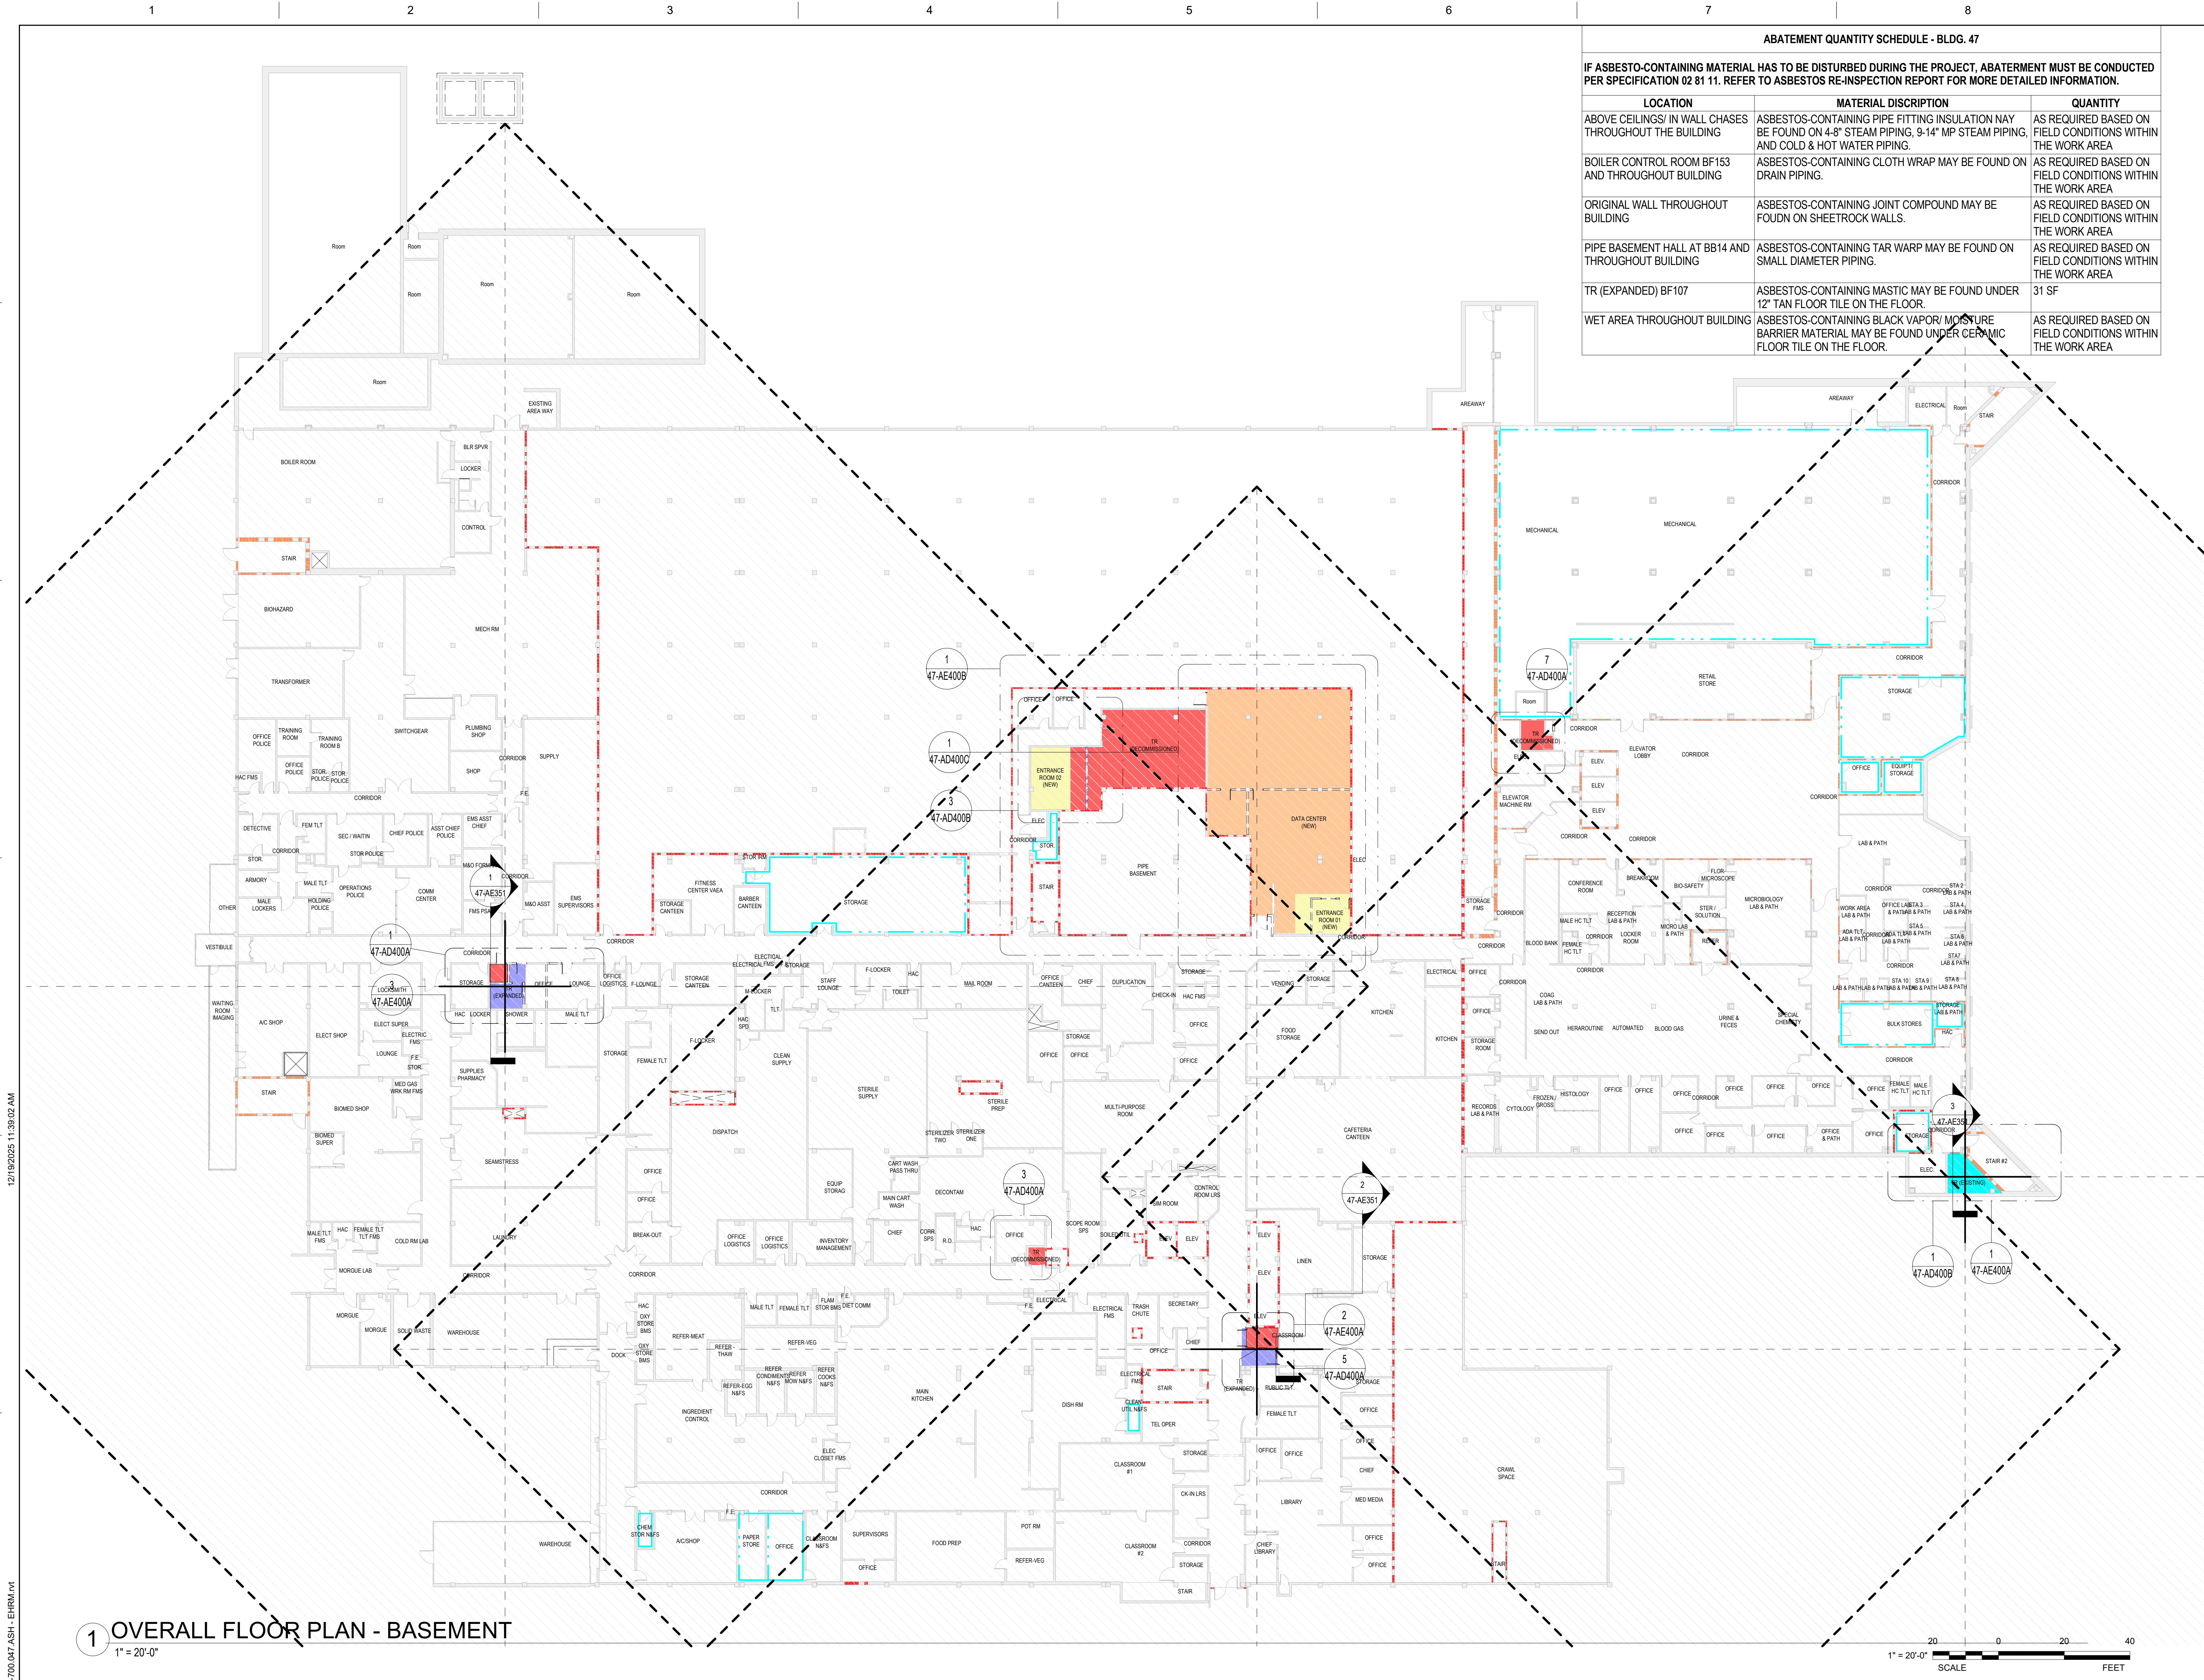

OVERALL PLAN SHEET NOTES

1. THERE SHALL BE A MINIMUM OF ONE STANDARDIZED TR PER FLOOR. ADDITIONAL STANDARD TELECOMMUNICATION ROOMS SHOULD BE PROVIDED WHEN

- THE FLOOR AREA TO BE SERVED EXCEEDS 10,000 SF
- THE HORIZONTAL DISTRIBUTION DISTANCE TO THE WORK AREA EXCEEDS 295' (ISTS 4.1.3)

HORIZONTAL CABLE DISTANCE STUDY (DIAMOND ANALYSIS)

NON-COMPLIANT EXAMPLE

COMPLIANT EXAMPLE

TR LEGEND

- TR TO BE DECOMMISSIONED
- EXISTING TR
- NEW TR
- EXPANDED TR
- EXISTING DATA CENTER
- NEW DATA CENTER
- NEW TELECOM ENCLOSURE (TE)
- ENTRANCE ROOM

PARTITION LEGEND

- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING

KEY PLAN

PLAN NORTH

FINAL BID DOCUMENTS

Revisions:

Date:

ARCHITECT/ENGINEER OF RECORD

A/E:

AWEN SOLUTIONS GROUP

ARCHITECTURE | ENGINEERING | PLANNING

STAMP

LICENSED ARCHITECT

GEN. HAMILTON

NO. 07-31-20

VA

U.S. Department of Veterans Affairs

Drawing Title

OVERALL FLOOR & DEMO PLAN - BASEMENT

Approved:

FOR OFFICIAL USE ONLY

Phase

FINAL BID DOCUMENTS

FULLY SPRINKLERED

Project Title

EHRM INFRASTRUCTURE UPGRADES

Location

1100 TUNNEL ROAD
ASHEVILLE, NC 28805

Issue Date

12.19.2025

Checked

Drawn

Project Number

637-22-700

Building Number


47

Drawing Number

47-AE100

SHEET 307 OF 559

12/19/2025 11:38:11 AM
E:\HRM\Drawings\ASHEVILLE\2025\22-700\47-ASH-UPGRADE\1-Overall Floor Plan - Level 01.dwg
VA FORM 08 - 6231

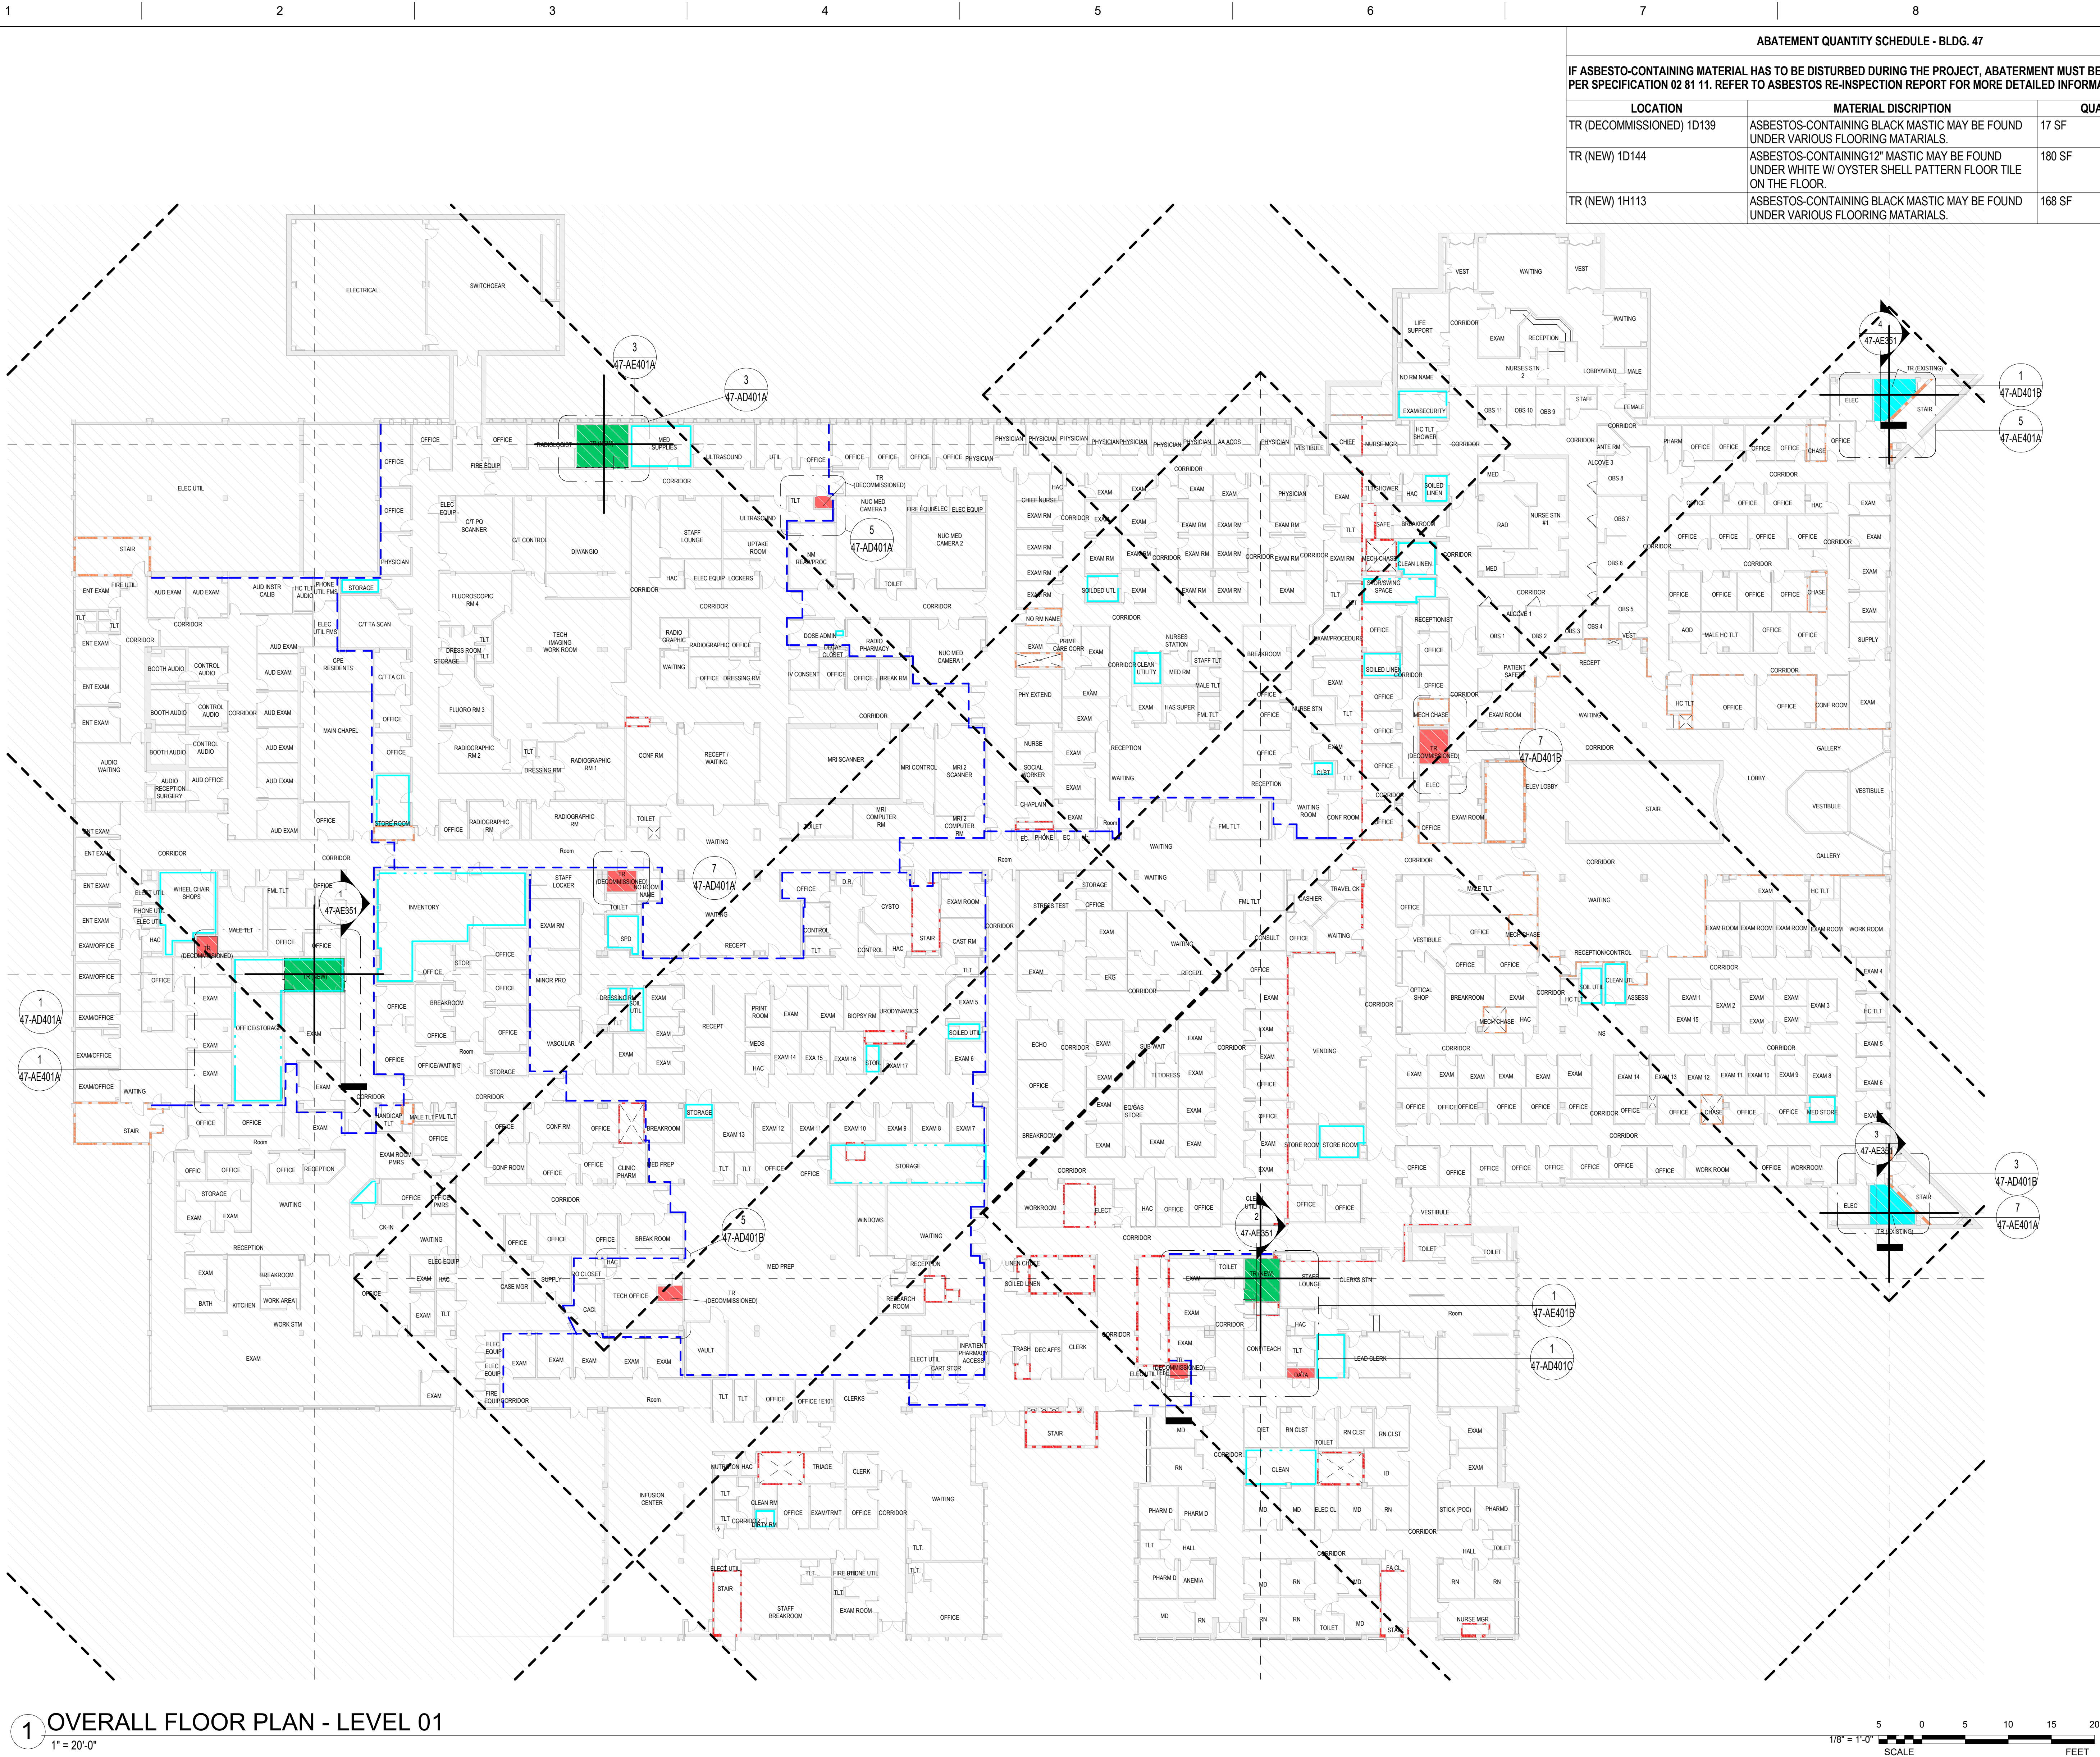


1 OVERALL FLOOR PLAN - LEVEL 01
1" = 20'-0"

ABATEMENT QUANTITY SCHEDULE - BLDG. 47		
IF ASBESTO-CONTAINING MATERIAL HAS TO BE DISTURBED DURING THE PROJECT, ABATERMENT MUST BE CONDUCTED PER SPECIFICATION 02 81 11. REFER TO ASBESTOS RE-INSPECTION REPORT FOR MORE DETAILED INFORMATION.		
LOCATION	MATERIAL DESCRIPTION	QUANTITY
TR (DECOMMISSIONED) 1D139	ASBESTOS-CONTAINING BLACK MASTIC MAY BE FOUND UNDER VARIOUS FLOORING MATERIALS.	17 SF
TR (NEW) 1D144	ASBESTOS-CONTAINING 12" MASTIC MAY BE FOUND UNDER WHITE W/ OYSTER SHELL PATTERN FLOOR TILE ON THE FLOOR.	180 SF
TR (NEW) 1H113	ASBESTOS-CONTAINING BLACK MASTIC MAY BE FOUND UNDER VARIOUS FLOORING MATERIALS.	168 SF

OVERALL PLAN SHEET NOTES

- THERE SHALL BE A MINIMUM OF ONE STANDARDIZED TR PER FLOOR. ADDITIONAL STANDARD TELECOMMUNICATION ROOMS SHOULD BE PROVIDED WHEN:
 - THE FLOOR AREA TO BE SERVED EXCEEDS 10,000 SF
 - THE HORIZONTAL DISTRIBUTION DISTANCE TO THE WORK AREA EXCEEDS 295' (ISTS 4.1.3)

HORIZONTAL CABLE DISTANCE STUDY (DIAMOND ANALYSIS)

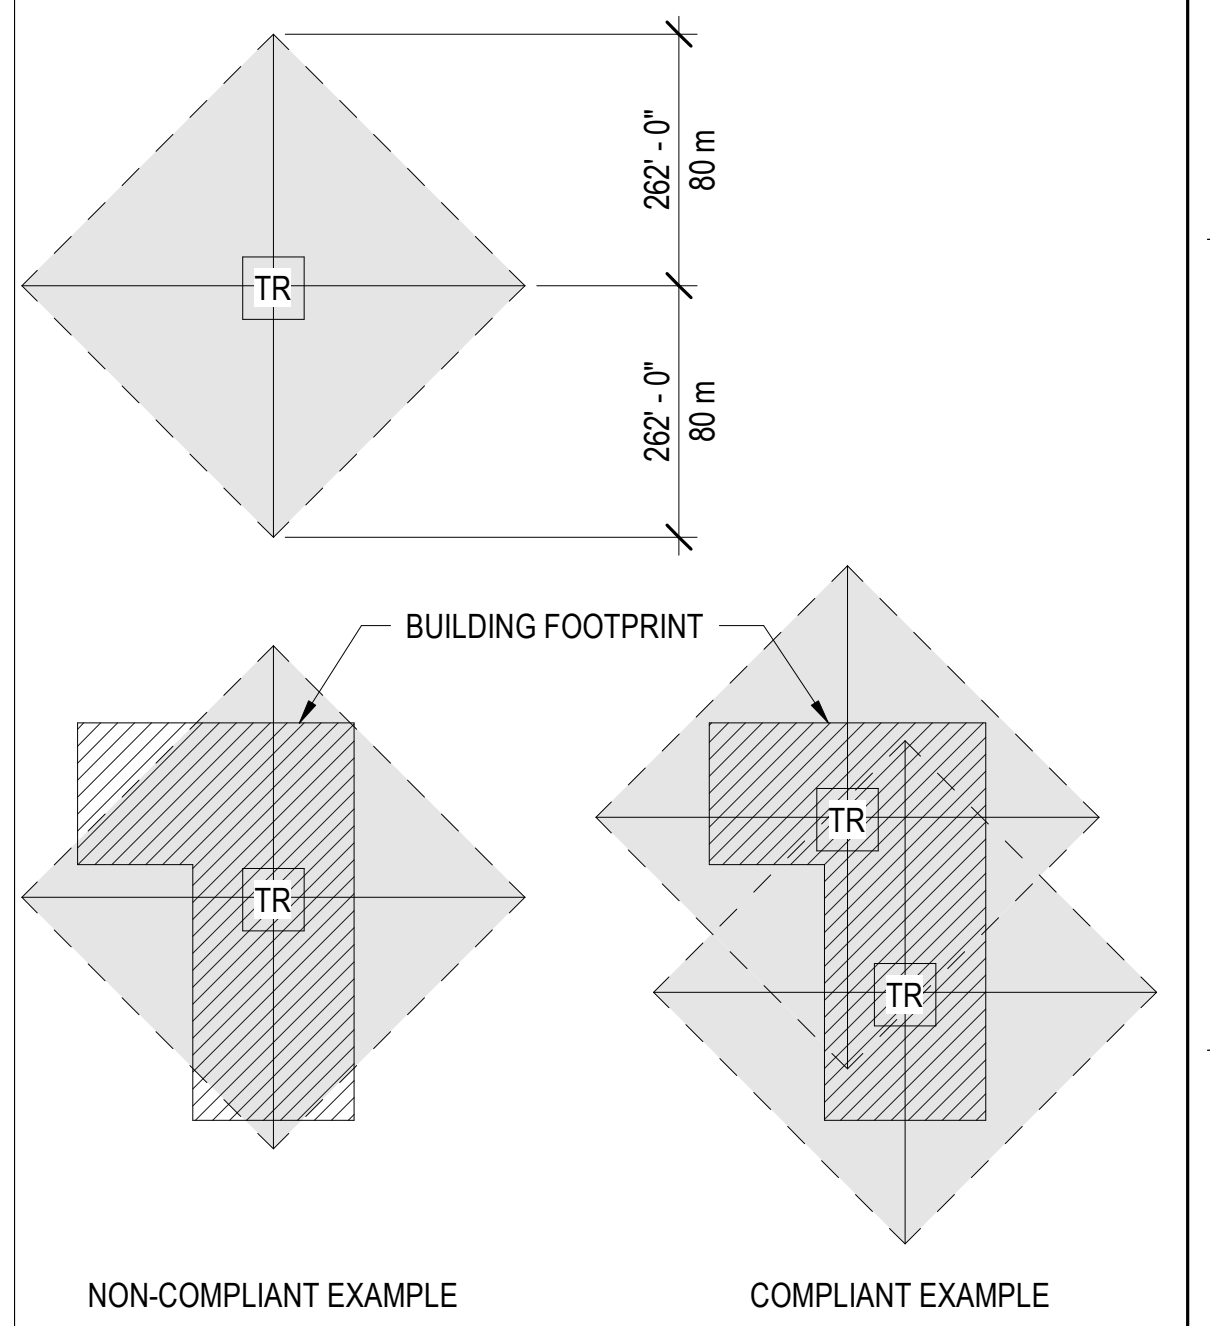


TR LEGEND


- TR TO BE DECOMMISSIONED
- EXISTING TR
- NEW TR
- EXPANDED TR
- EXISTING DATA CENTER
- NEW DATA CENTER
- NEW TELECOM ENCLOSURE (TE)
- ENTRANCE ROOM

PARTITION LEGEND

- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING

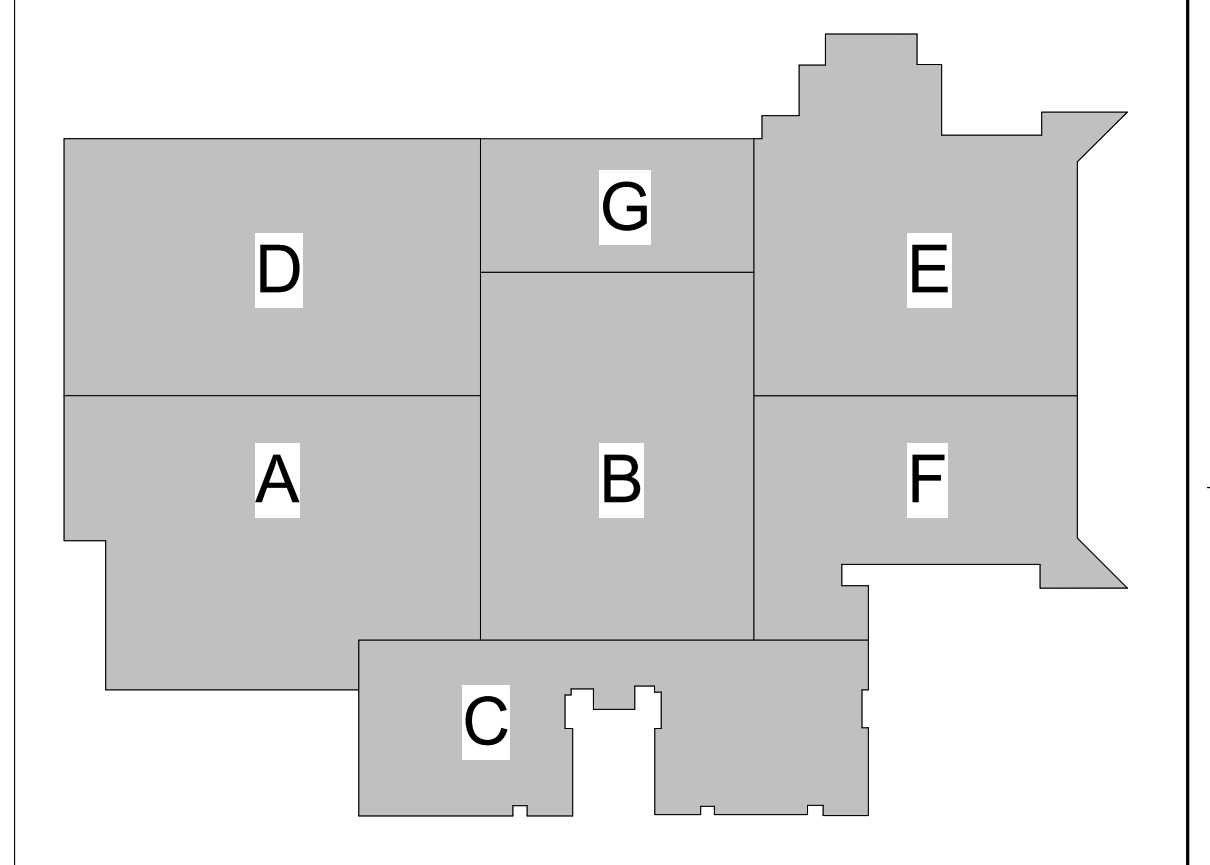

KEY PLAN

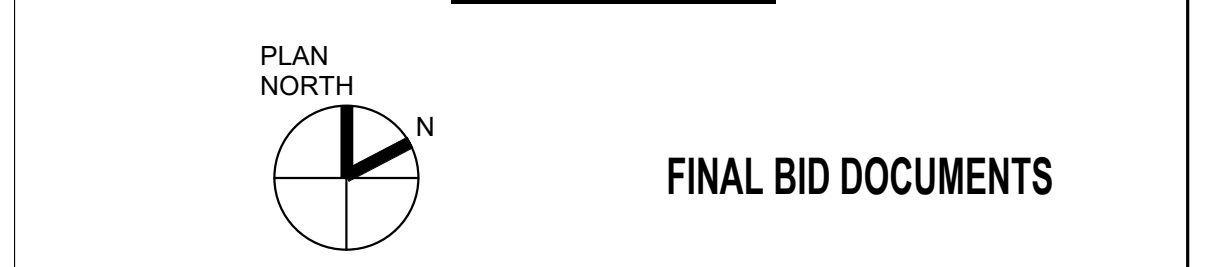

FINAL BID DOCUMENTS

ARCHITECT/ENGINEER OF RECORD



A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314

STAMP



Facilities
Management
Services



U.S. Department
of Veterans
Affairs

Drawing Title
OVERALL FLOOR & DEMO PLAN - 1ST
FLOOR

Approved:

FOR OFFICIAL USE ONLY

Phase

FINAL BID DOCUMENTS

FULLY SPRINKLERED

Project Title

EHRM INFRASTRUCTURE
UPGRADES

Location

1100 TUNNEL ROAD
ASHEVILLE, NC 28805

Issue Date
12.19.2025

Checked

Drawn

Project Number

637-22-700

Building Number

47

Drawing Number

47-AE101

SHEET 308 of 559

12/19/2025 11:38:16 AM
VA FORM 08 - 6231
Autosaved Docs:\Asheville EHRM_V23637-22-700.047.ASH - EHRM.rvt

1 OVERALL FLOOR PLAN - 2ND FLOOR
1" = 20'-0"

ARCHITECT/ENGINEER OF RECORD



A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314

STAMP



Facilities
Management
Services



U.S. Department
of Veterans
Affairs

Drawing Title
OVERALL FLOOR & DEMO PLAN - 2ND
FLOOR

Approved:

FOR OFFICIAL USE ONLY


Phase
FINAL BID DOCUMENTS

FULLY SPRINKLERED

OVERALL PLAN SHEET NOTES

1. THERE SHALL BE A MINIMUM OF ONE STANDARDIZED TR PER FLOOR.
ADDITIONAL STANDARD TELECOMMUNICATION ROOMS SHOULD BE PROVIDED
WHEN
- THE FLOOR AREA TO BE SERVED EXCEEDS 10,000 SF
 - THE HORIZONTAL DISTRIBUTION DISTANCE TO THE WORK AREA EXCEEDS
295' (ISTS 4.1.3)

HORIZONTAL CABLE DISTANCE
STUDY (DIAMOND ANALYSIS)

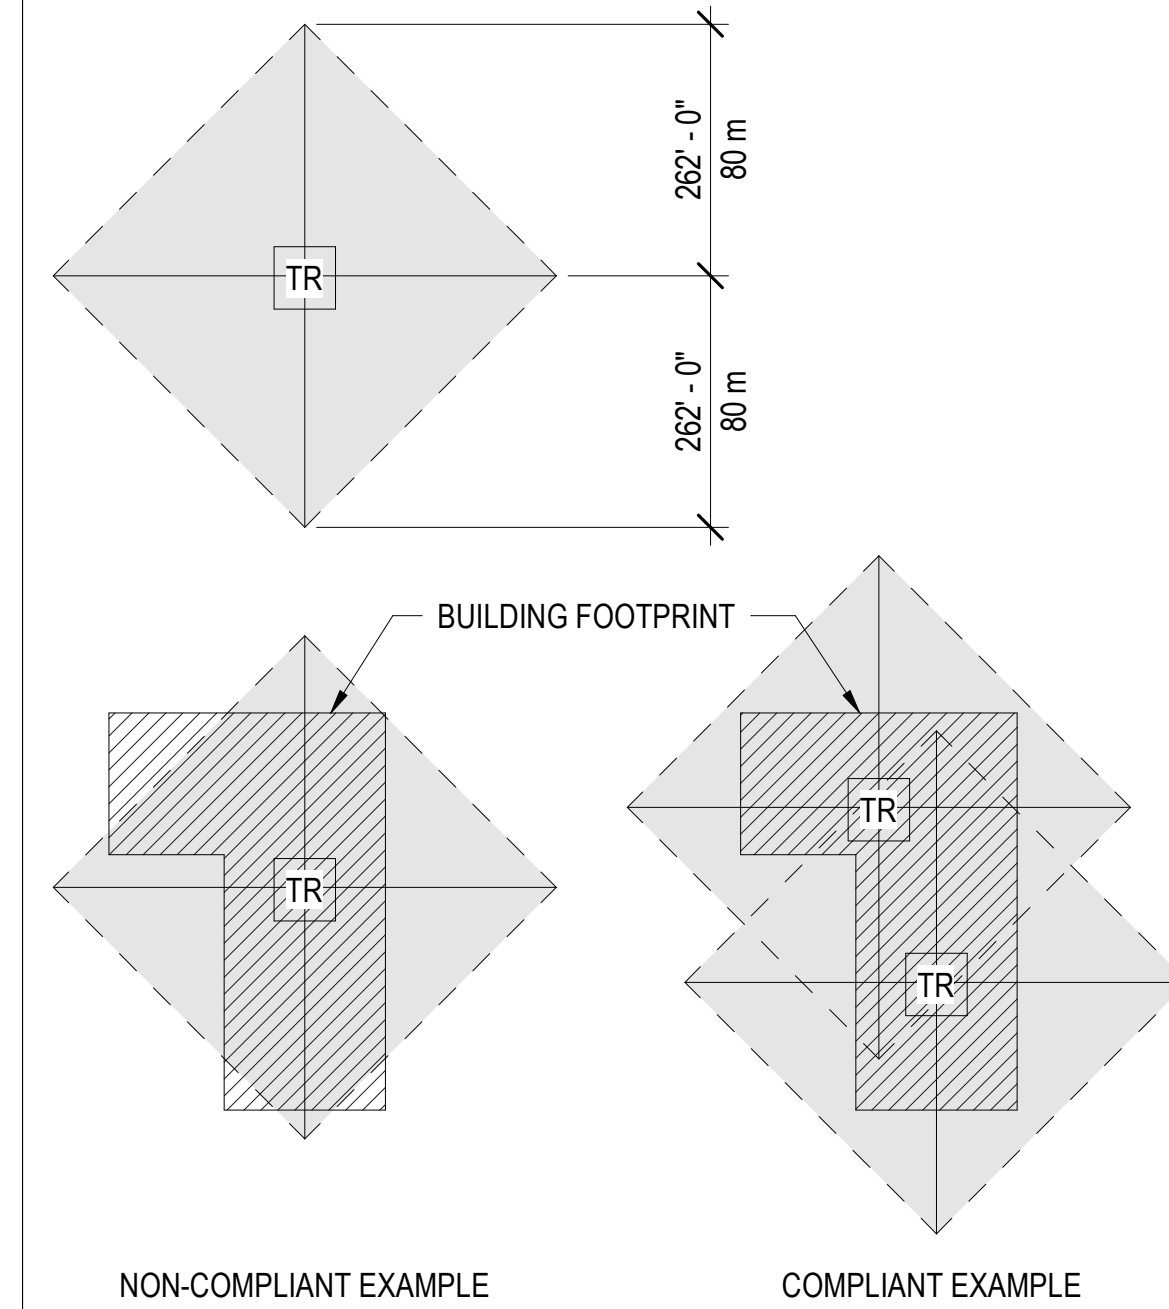


TR LEGEND


- TR TO BE DECOMMISSIONED
- EXISTING TR
- NEW TR
- EXPANDED TR
- EXISTING DATA CENTER
- NEW DATA CENTER
- NEW TELECOM ENCLOSURE (TE)
- ENTRANCE ROOM

PARTITION LEGEND

- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING

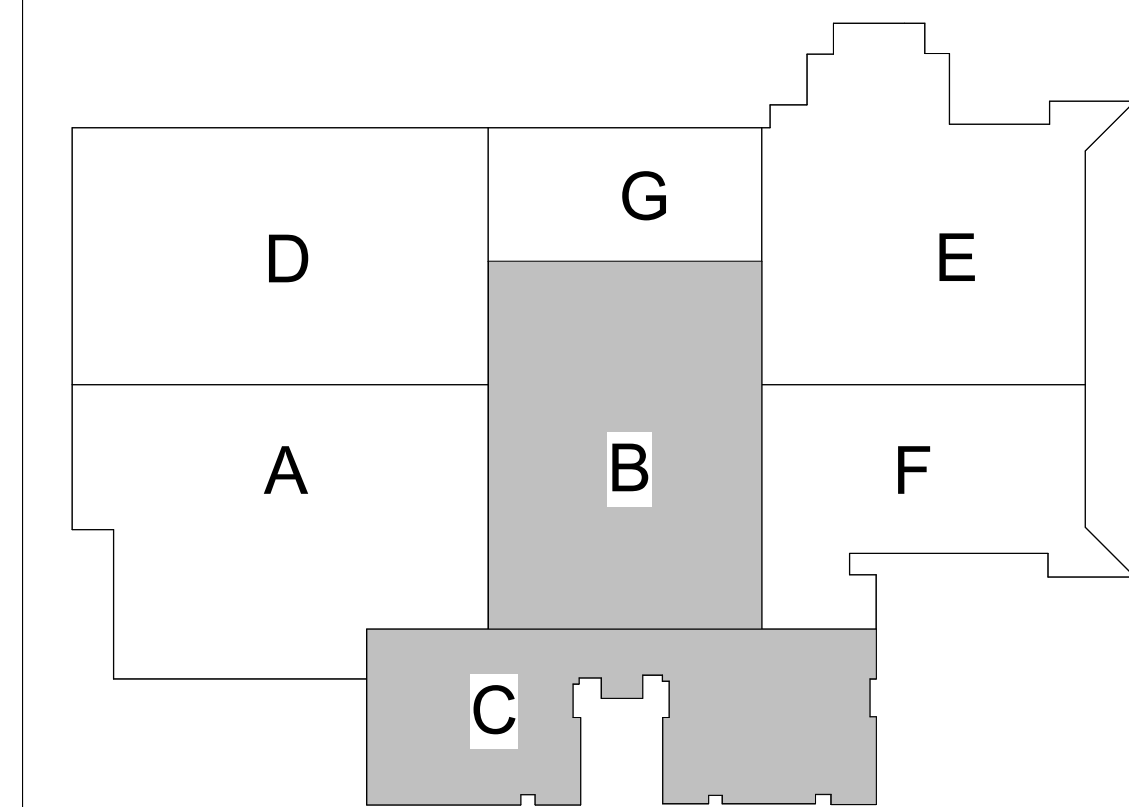

KEY PLAN



FINAL BID DOCUMENTS

Project Title EHRM INFRASTRUCTURE UPGRADES		Project Number 637-22-700	
Location 1100 TUNNEL ROAD ASHEVILLE, NC 28805		Building Number 47	
Issue Date 12.19.2025		Drawing Number 47-AE102	
Checked		Drawn	
		SHEET 309 of 559	

12/19/2025 11:38:20 AM
Autosaved Docs:\Asheville EHRM_V23637-22-700.047.ASH - EHRM.rvt

1 2 3 4 5 6 7 8 9 10

A
B
C
D
E
F




1 OVERALL FLOOR PLAN - 3RD FLOOR
3/32" = 1'-0"

OVERALL PLAN SHEET NOTES

1. THERE SHALL BE A MINIMUM OF ONE STANDARDIZED TR PER FLOOR. ADDITIONAL STANDARD TELECOMMUNICATION ROOMS SHOULD BE PROVIDED WHEN
 - THE FLOOR AREA TO BE SERVED EXCEEDS 10,000 SF
 - THE HORIZONTAL DISTRIBUTION DISTANCE TO THE WORK AREA EXCEEDS 295' (ISTS 4.1.3)

HORIZONTAL CABLE DISTANCE STUDY (DIAMOND ANALYSIS)

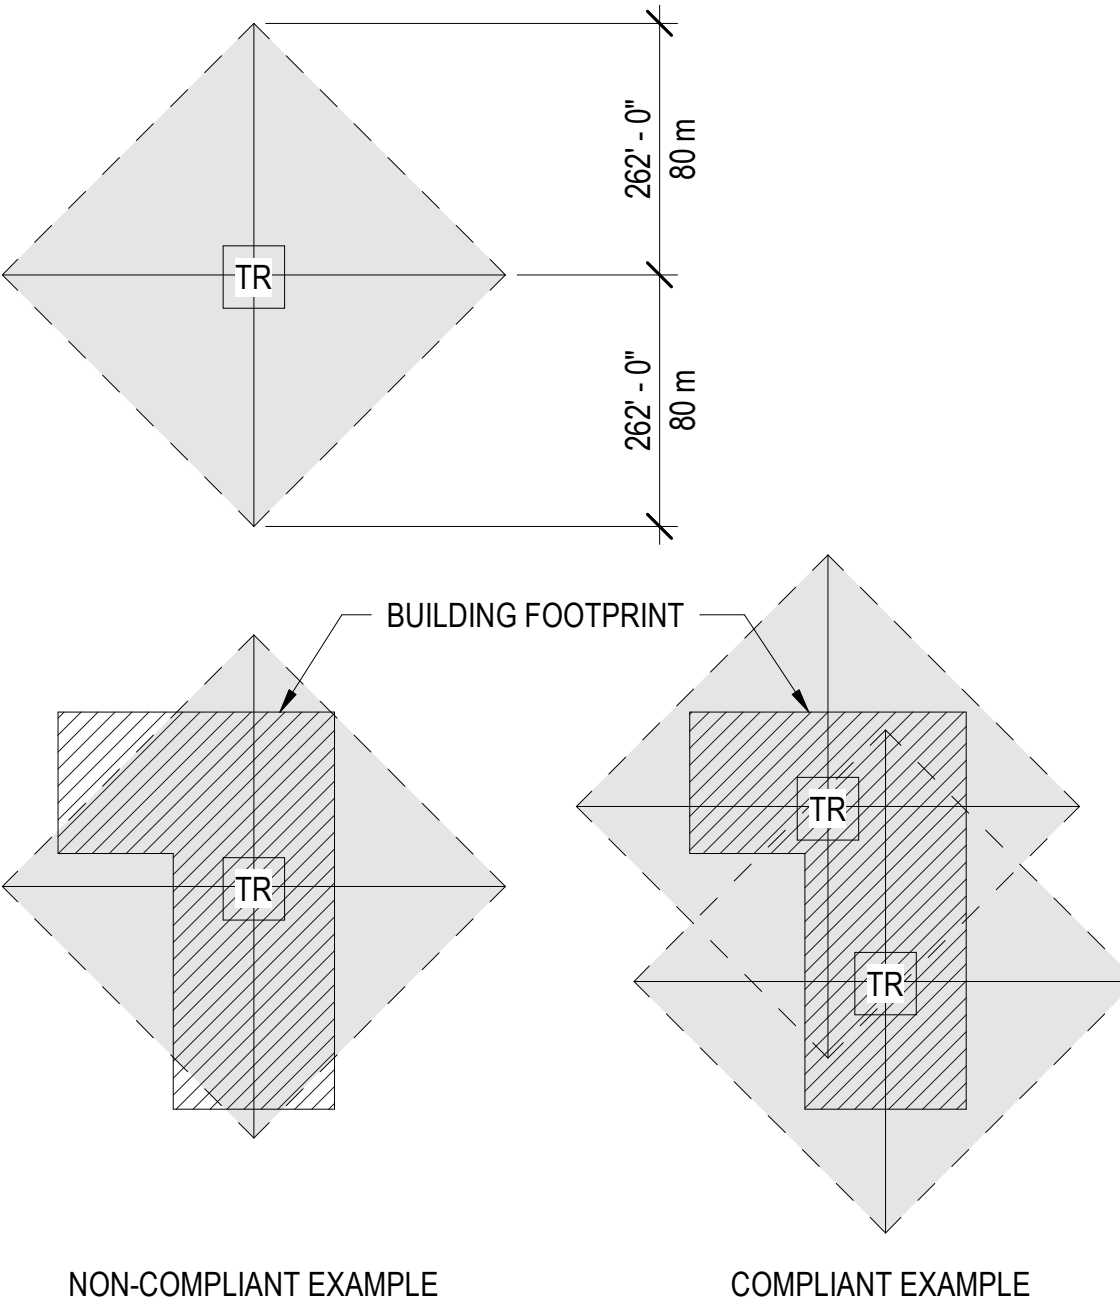


TR LEGEND


- TR TO BE DECOMMISSIONED
- EXISTING TR
- NEW TR
- EXPANDED TR
- EXISTING DATA CENTER
- NEW DATA CENTER
- NEW TELECOM ENCLOSURE (TE)
- ENTRANCE ROOM

PARTITION LEGEND

- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING

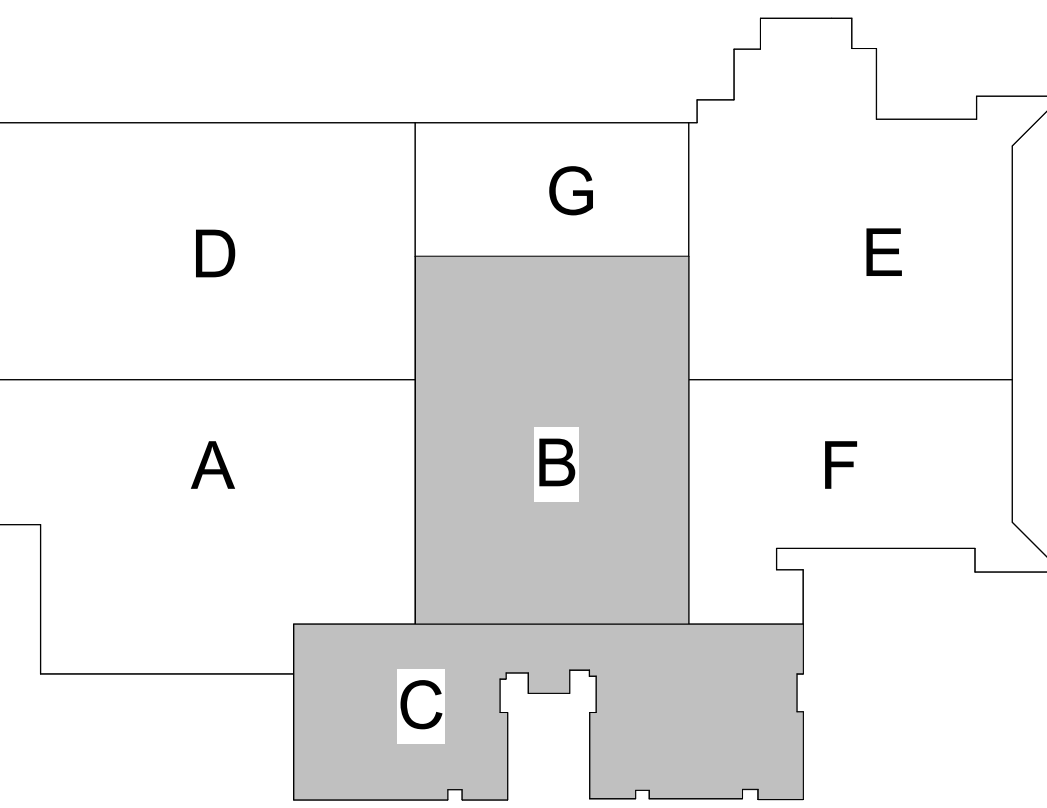

KEY PLAN



FINAL BID DOCUMENTS

Revisions:	Date:

ARCHITECT/ENGINEER OF RECORD



A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314

STAMP



Facilities
Management
Services



U.S. Department
of Veterans
Affairs

Drawing Title

OVERALL FLOOR PLAN, ENLARGED
DEMO & ARCH PLANS - 3RD FLOOR

Approved:

FOR OFFICIAL USE ONLY

Phase

FINAL BID DOCUMENTS

FULLY SPRINKLERED

Project Title

EHRM INFRASTRUCTURE
UPGRADES

Location

1100 TUNNEL ROAD
ASHEVILLE, NC 28805

Issue Date
12.19.2025

Checked

Drawn

Project Number

637-22-700

Building Number
47

Drawing Number

47-AE103

SHEET 310 of 559

12/19/2025 11:38:24 AM
AutoSave Docs\\Asheville EHR\\V23637-22-100.047 ASH - EHR\\A.mxd

1 OVERALL FLOOR PLAN - 4TH FLOOR
3/32" = 1'-0"

ARCHITECT/ENGINEER OF RECORD



A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314

STAMP



Facilities
Management
Services



U.S. Department
of Veterans
Affairs

Drawing Title
OVERALL FLOOR PLAN, ENLARGED
DEMO & ARCH PLANS - 4TH FLOOR

Approved:

FOR OFFICIAL USE ONLY


Phase
FINAL BID DOCUMENTS

FULLY SPRINKLERED

OVERALL PLAN SHEET NOTES

- THERE SHALL BE A MINIMUM OF ONE STANDARDIZED TR PER FLOOR. ADDITIONAL STANDARD TELECOMMUNICATION ROOMS SHOULD BE PROVIDED WHEN:
 - THE FLOOR AREA TO BE SERVED EXCEEDS 10,000 SF
 - THE HORIZONTAL DISTRIBUTION DISTANCE TO THE WORK AREA EXCEEDS 295' (ISTS 4.1.3)

HORIZONTAL CABLE DISTANCE STUDY (DIAMOND ANALYSIS)

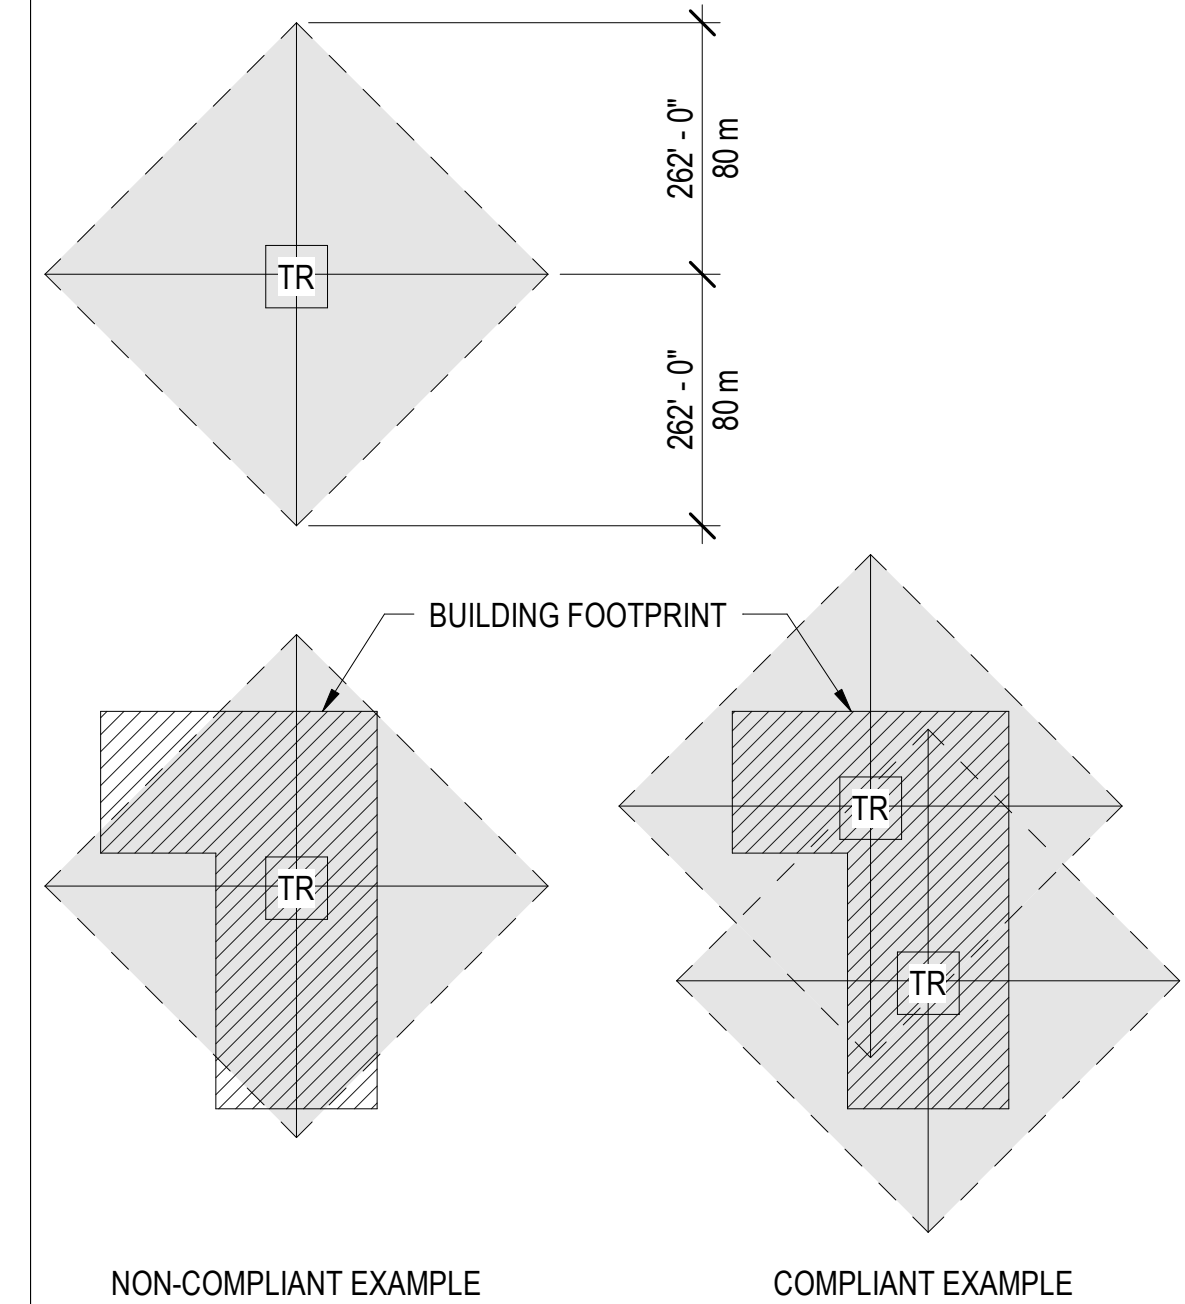

NON-COMPLIANT EXAMPLE


COMPLIANT EXAMPLE

TR LEGEND


- TR TO BE DECOMMISSIONED
- EXISTING TR
- NEW TR
- EXPANDED TR
- EXISTING DATA CENTER
- NEW DATA CENTER
- NEW TELECOM ENCLOSURE (TE)
- ENTRANCE ROOM

PARTITION LEGEND

- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING

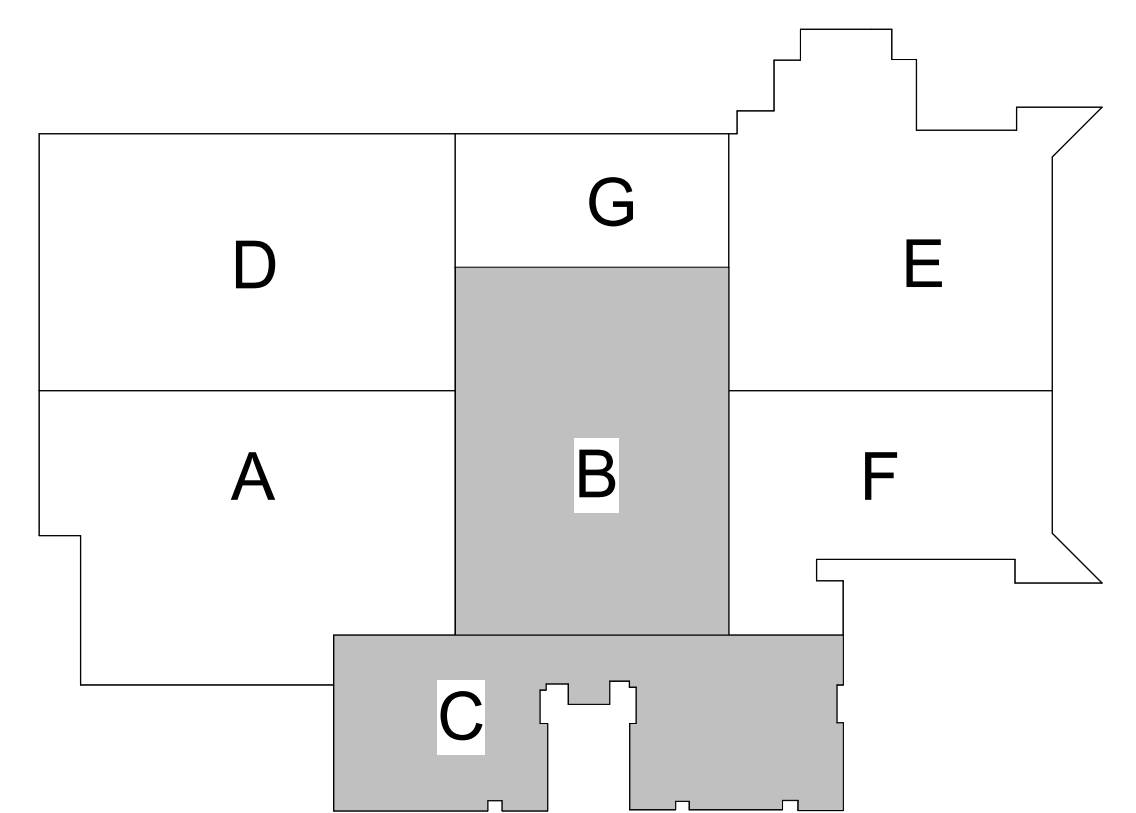

KEY PLAN



FINAL BID DOCUMENTS

Project Title
EHRM INFRASTRUCTURE
UPGRADES

Location
1100 TUNNEL ROAD
ASHEVILLE, NC 28805
Issue Date
12.19.2025

Checked

Drawn


Project Number
637-22-700
Building Number
47
Drawing Number
47-AE104
SHEET 311 of 559

ABATEMENT QUANTITY SCHEDULE - BLDG. 47		
IF ASBESTO-CONTAINING MATERIAL HAS TO BE DISTURBED DURING THE PROJECT, ABATERMENT MUST BE CONDUCTED PER SPECIFICATION 02 81 11. REFER TO ASBESTOS RE-INSPECTION REPORT FOR MORE...		
LOCATION	MATERIAL DISCRPTION	QUANTITY
TR (EXPANDED) A501	ASBESTOS-CONTAINING 12" MASTIC MAY BE FOUND UNDER WHITE W/ OYSTER SHELL PATTERN FLOOR TILE ON THE FLOOR.	78 SF

OVERALL PLAN SHEET NOTES

1. THERE SHALL BE A MINIMUM OF ONE STANDARDIZED TR PER FLOOR. ADDITIONAL STANDARD TELECOMMUNICATION ROOMS SHOULD BE PROVIDED WHEN
- THE FLOOR AREA TO BE SERVED EXCEEDS 10,000 SF
 - THE HORIZONTAL DISTRIBUTION DISTANCE TO THE WORK AREA EXCEEDS 295' (ISTS 4.1.3)

HORIZONTAL CABLE DISTANCE STUDY (DIAMOND ANALYSIS)

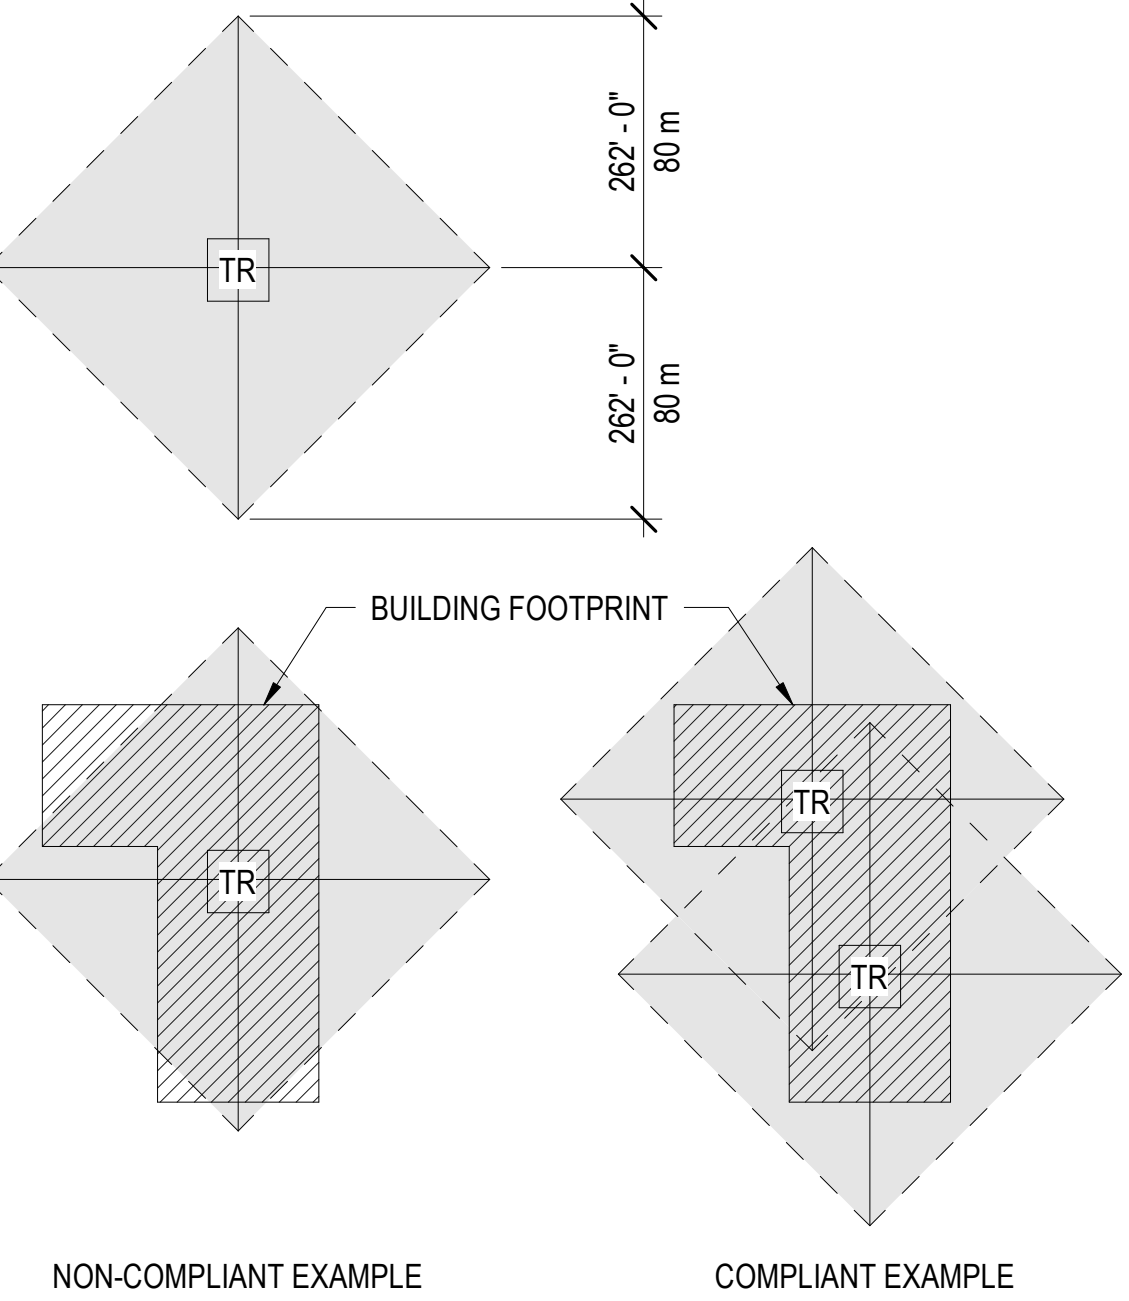


NON-COMPLIANT EXAMPLE COMPLIANT EXAMPLE

TR LEGEND

- TR TO BE DECOMMISSIONED
- EXISTING TR
- NEW TR
- EXPANDED TR
- EXISTING DATA CENTER
- NEW DATA CENTER
- NEW TELECOM ENCLOSURE (TE)
- ENTRANCE ROOM

PARTITION LEGEND


- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING

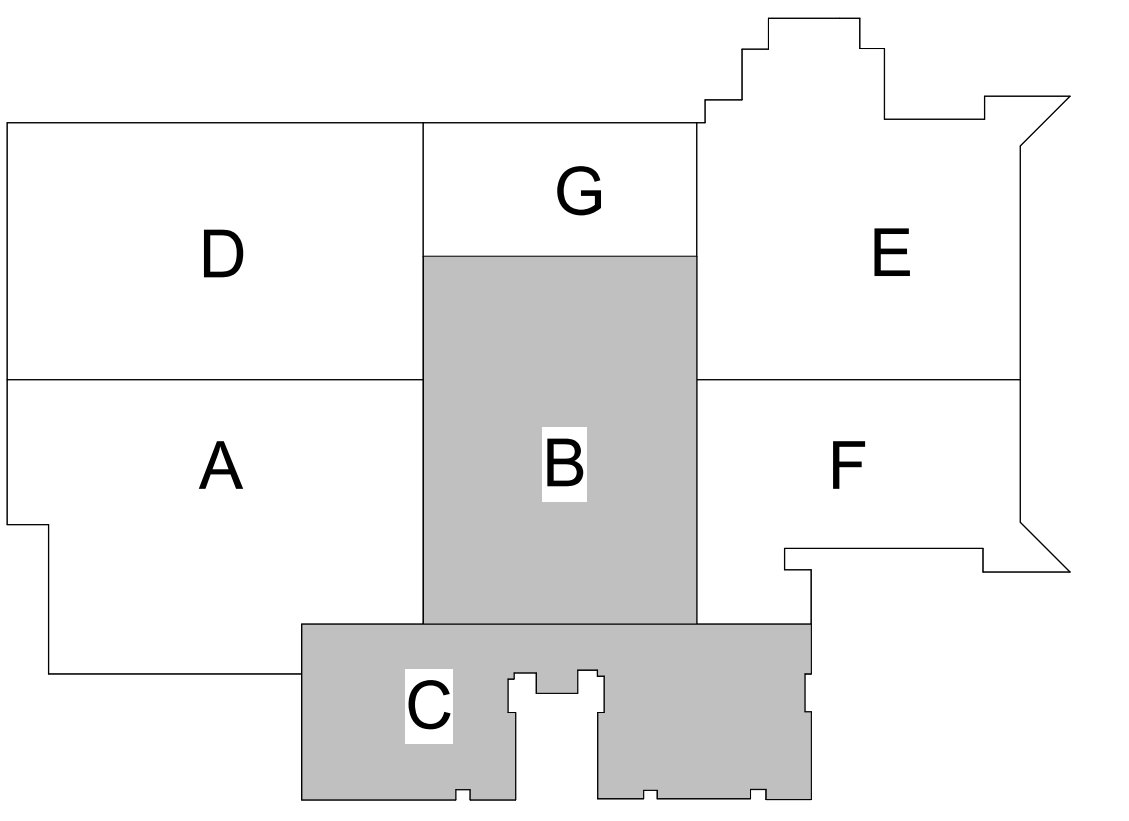


KEY PLAN



FINAL BID DOCUMENTS

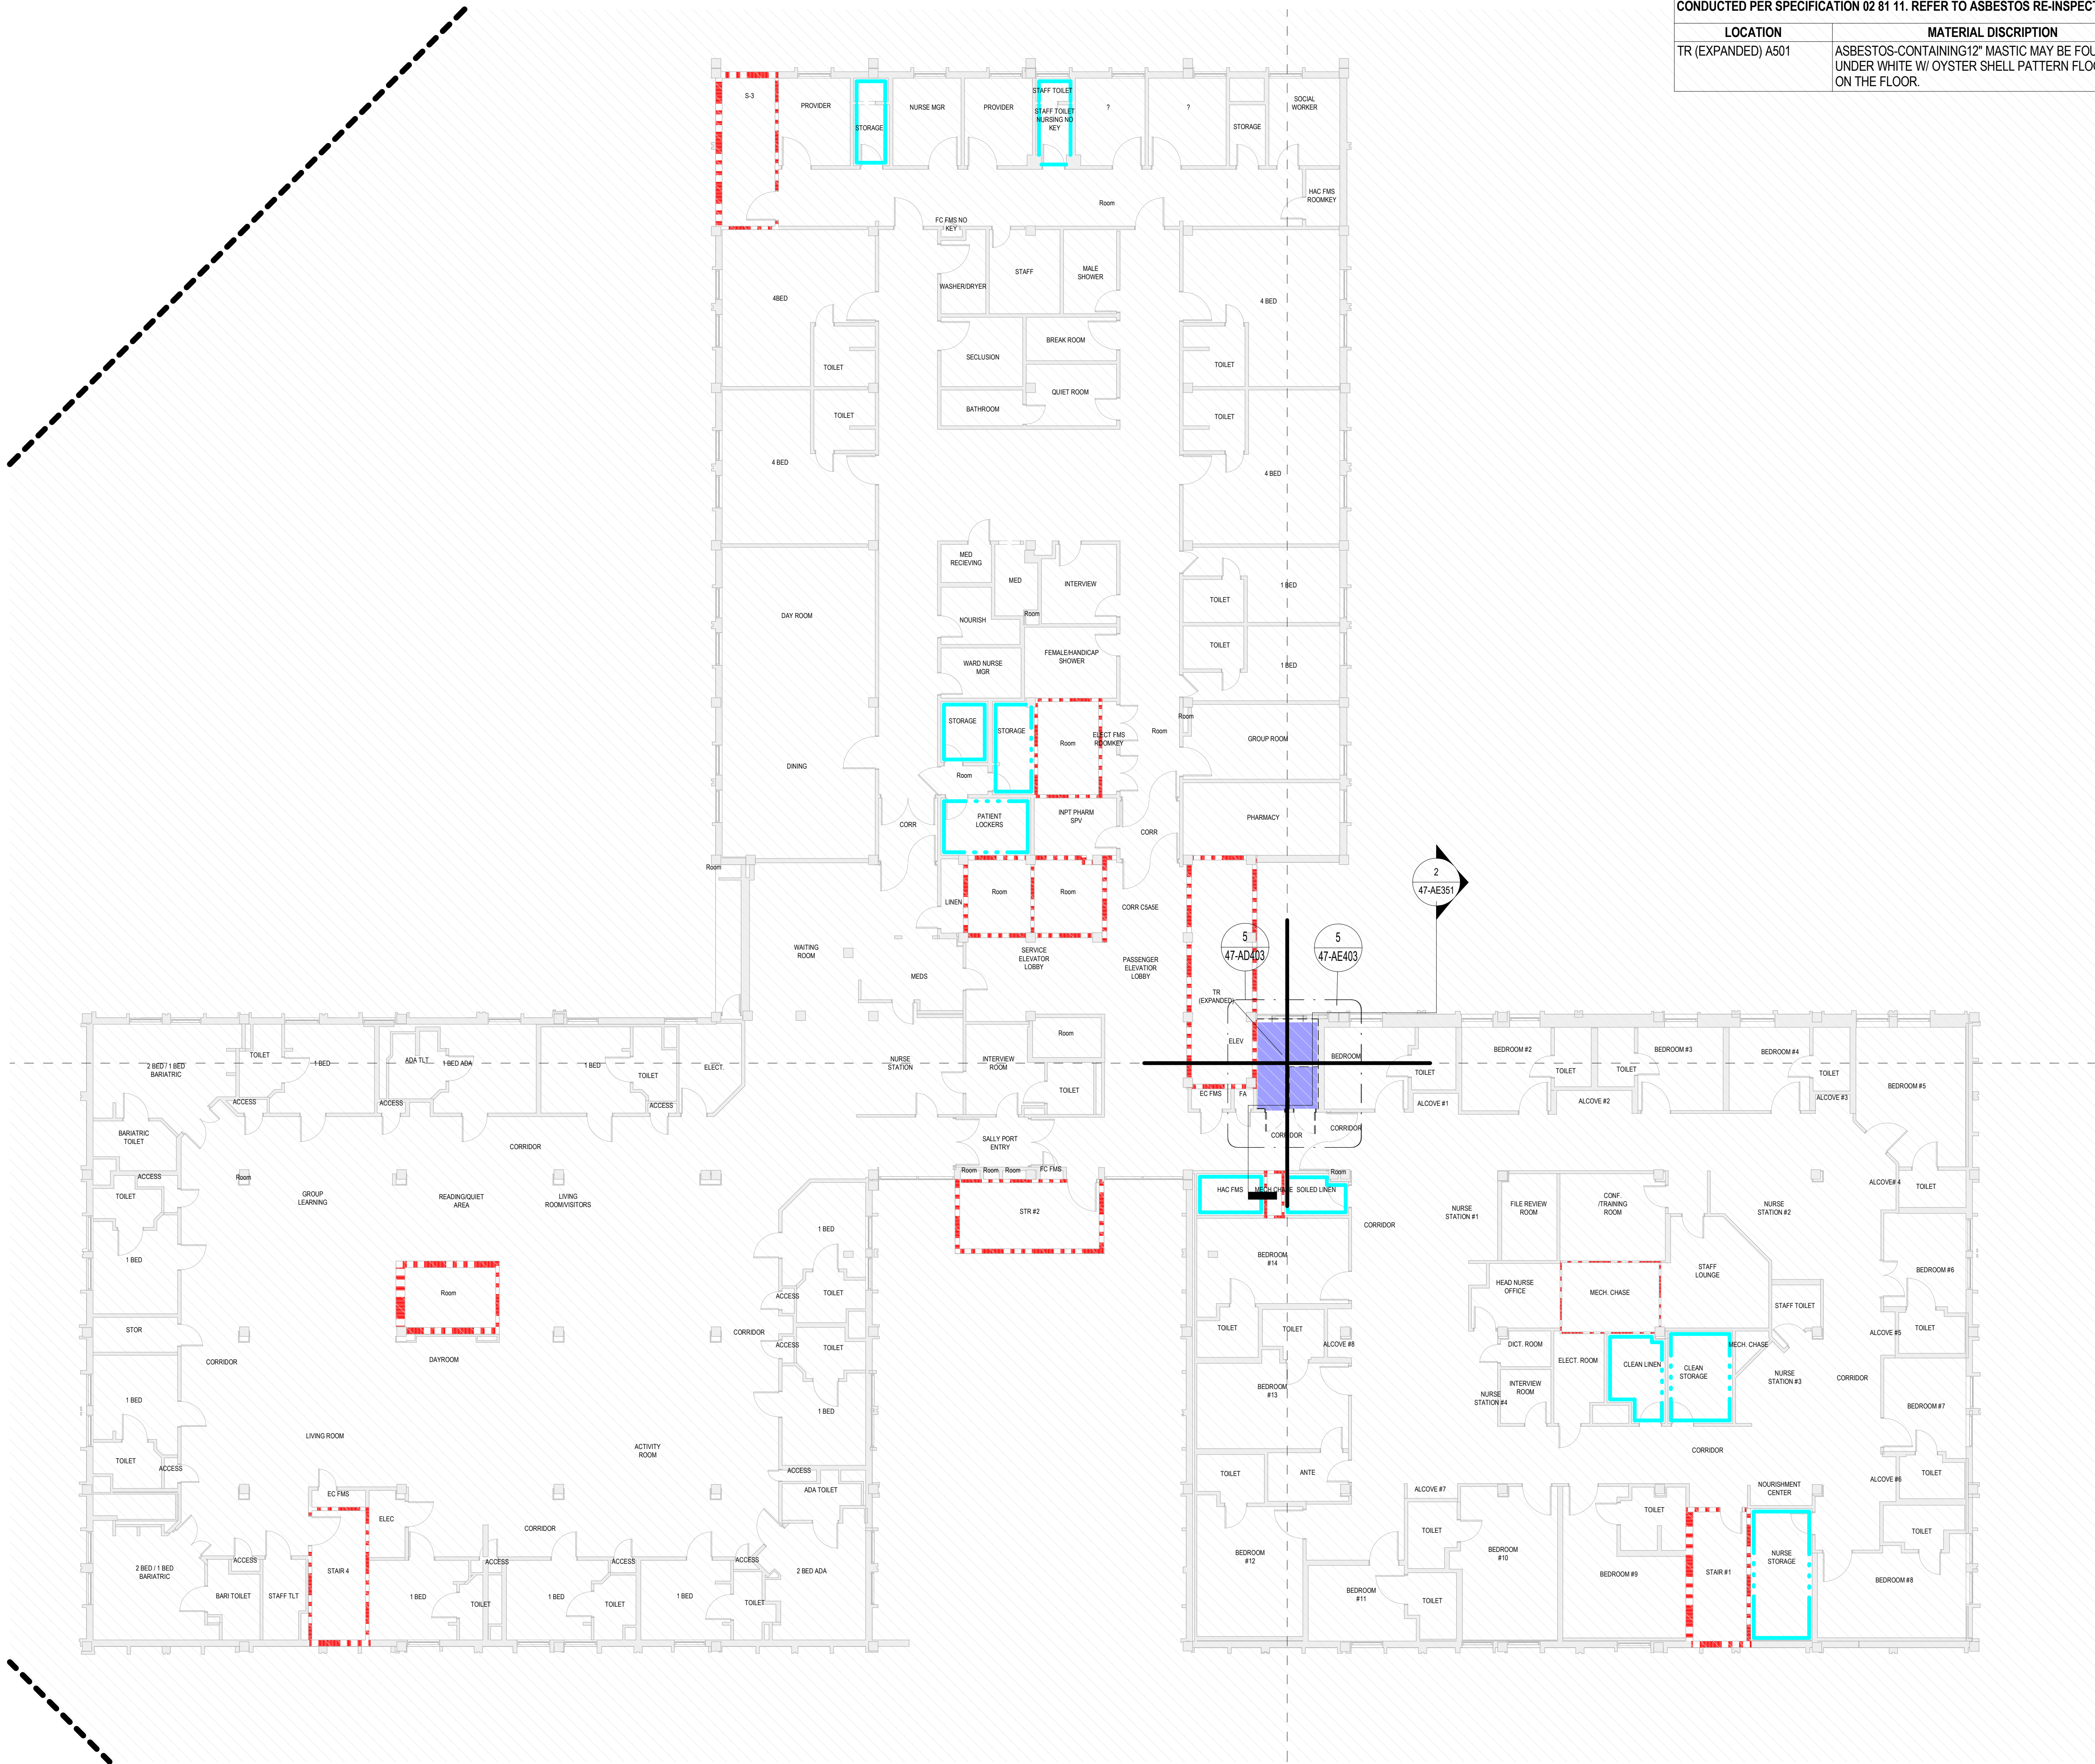

1 OVERALL FLOOR PLAN - 5TH FLOOR
3/32" = 1'-0"

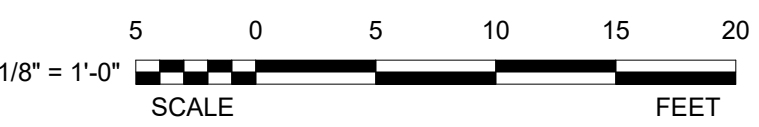

Revisions:	Date:

ARCHITECT/ENGINEER OF RECORD



A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314

STAMP



Facilities
Management
Services

VA U.S. Department
of Veterans
Affairs

Drawing Title
OVERALL FLOOR PLAN, ENLARGED
DEMO AND ARCH PLANS - 5TH FLOOR


Approved:

FOR OFFICIAL USE ONLY

Phase
FINAL BID DOCUMENTS

FULLY SPRINKLERED

Project Title EHRM INFRASTRUCTURE UPGRADES	Project Number 637-22-700
Location 1100 TUNNEL ROAD ASHEVILLE, NC 28805	Building Number 47
Issue Date 12.19.2025	Drawing Number 47-AE105 SHEET 312 of 559
Checked	Drawn

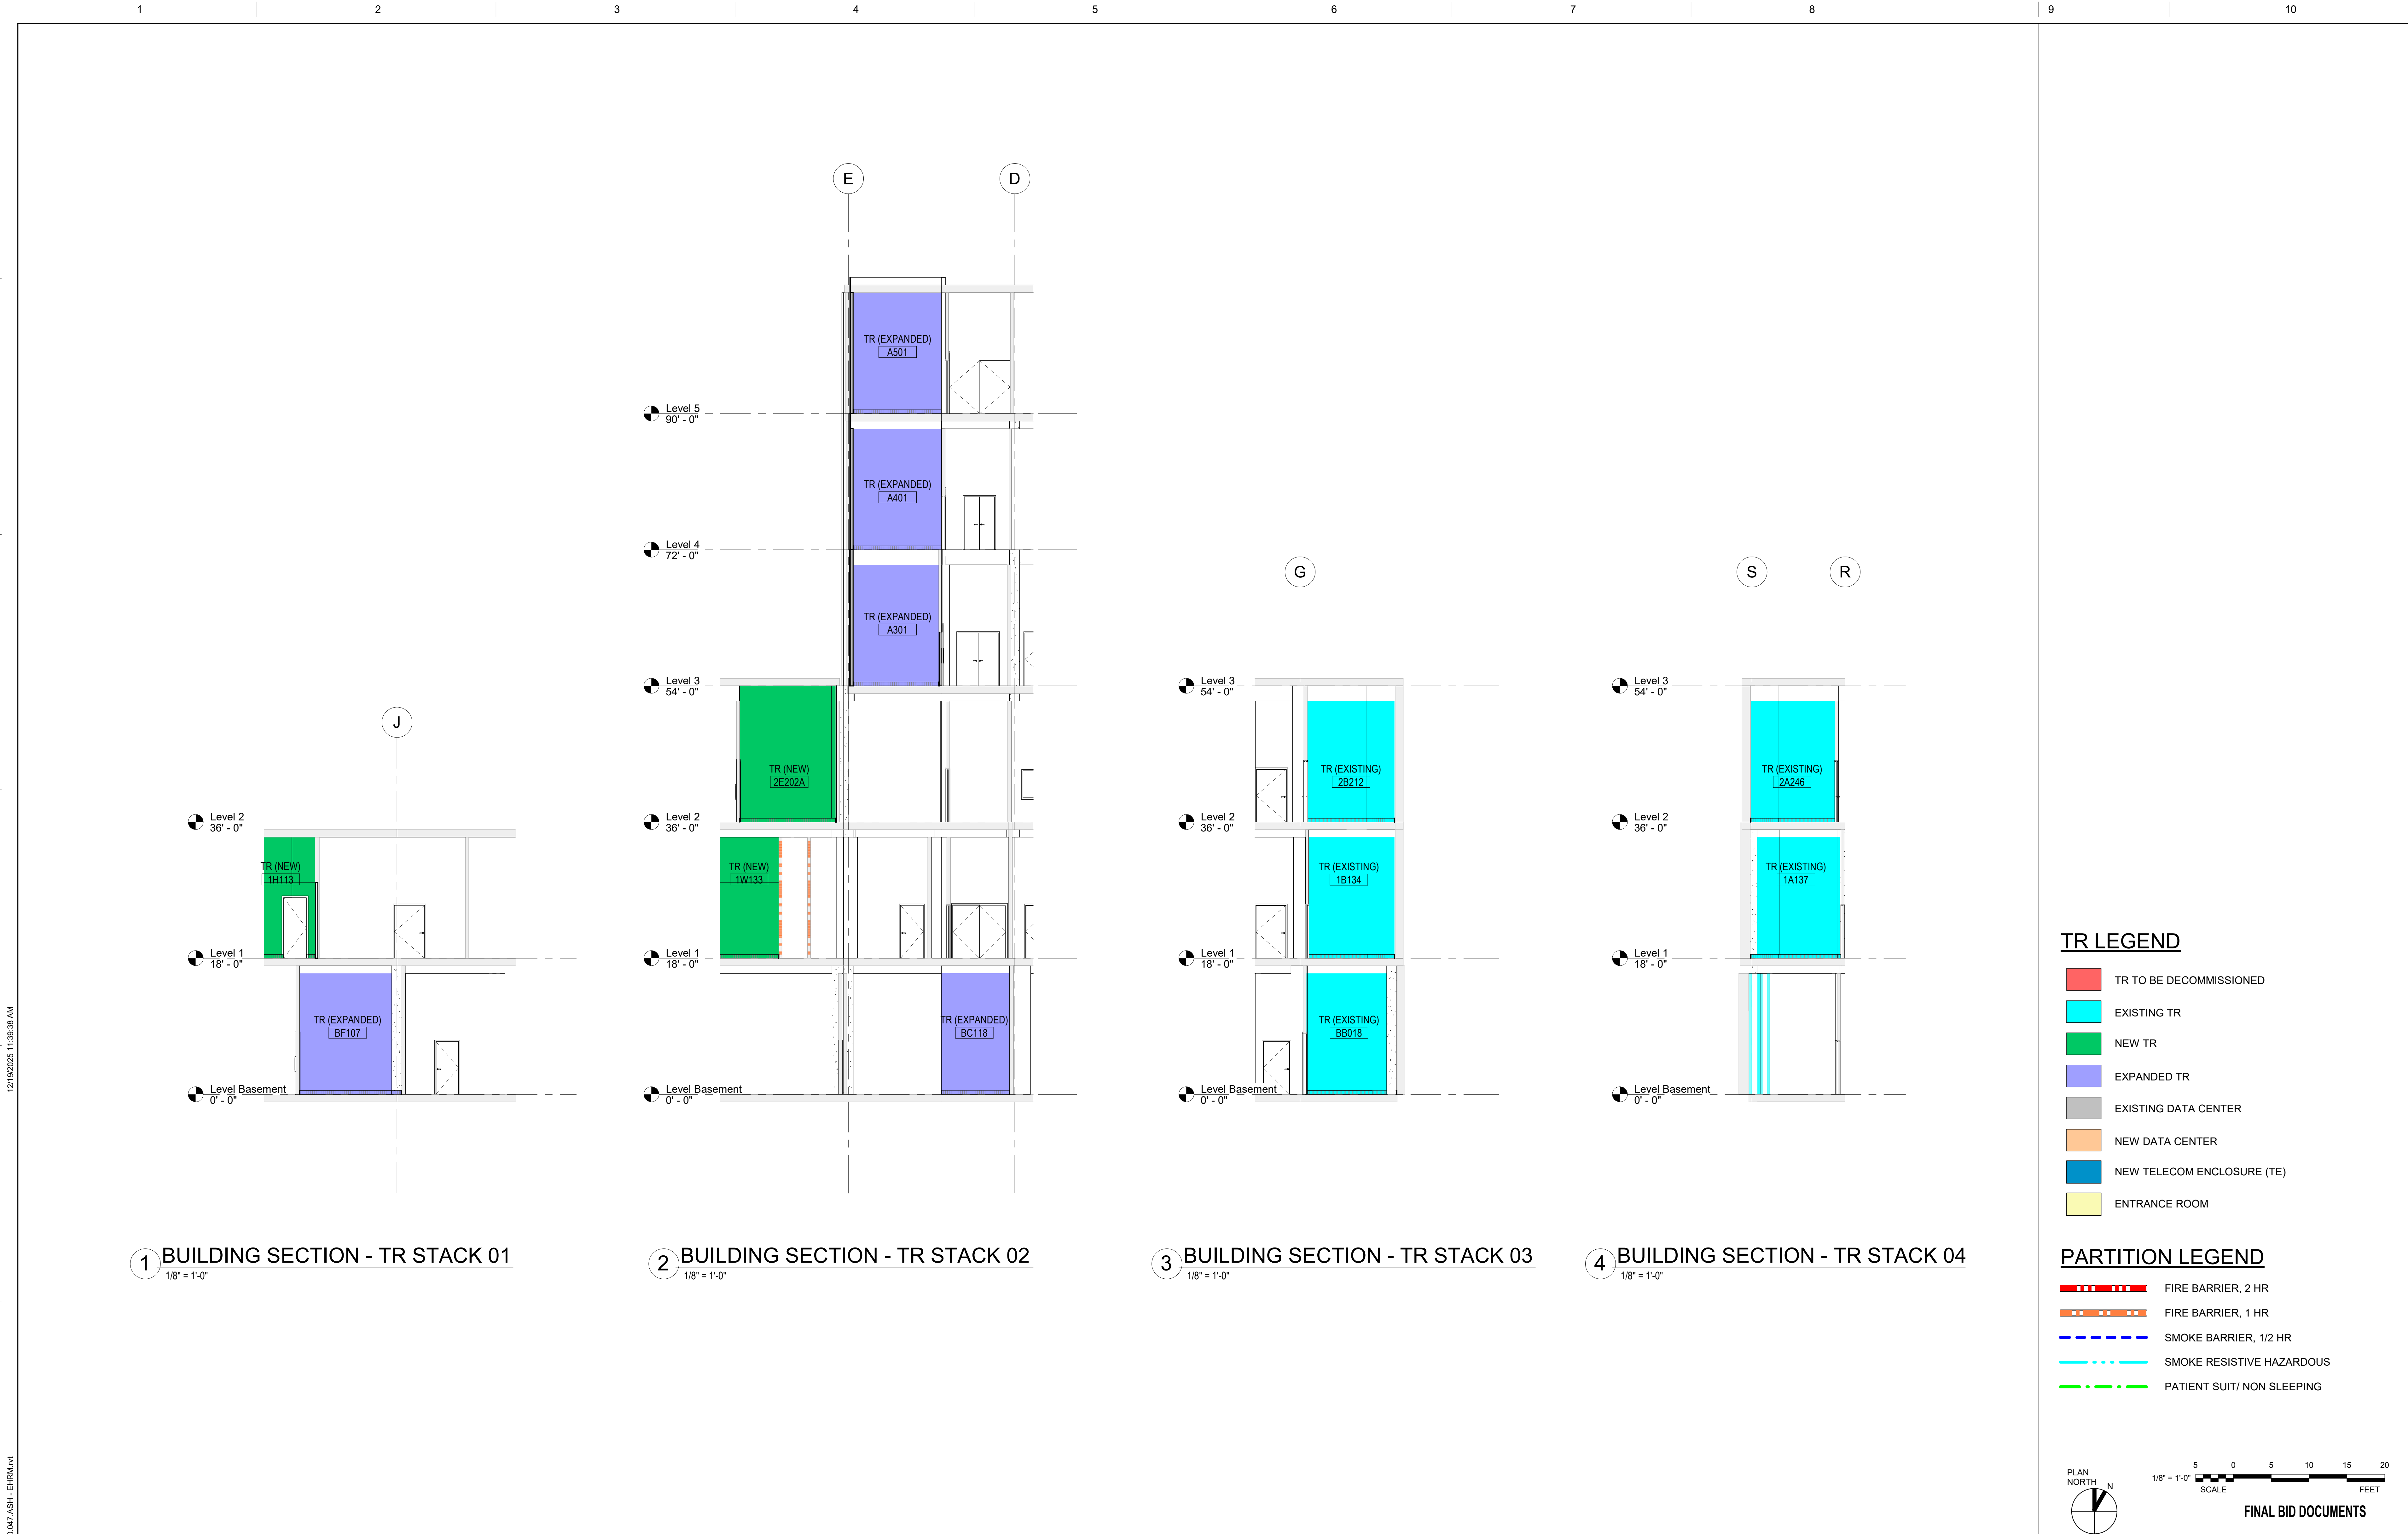

1 BUILDING SECTION - TR STACK 01
1/8" = 1'-0"


2 BUILDING SECTION - TR STACK 02
1/8" = 1'-0"

3 BUILDING SECTION - TR STACK 03
1/8" = 1'-0"

4 BUILDING SECTION - TR STACK 04
1/8" = 1'-0"

- TR LEGEND**
- TR TO BE DECOMMISSIONED
 - EXISTING TR
 - NEW TR
 - EXPANDED TR
 - EXISTING DATA CENTER
 - NEW DATA CENTER
 - NEW TELECOM ENCLOSURE (TE)
 - ENTRANCE ROOM

- PARTITION LEGEND**
- FIRE BARRIER, 2 HR
 - FIRE BARRIER, 1 HR
 - SMOKE BARRIER, 1/2 HR
 - SMOKE RESISTIVE HAZARDOUS
 - PATIENT SUIT/ NON SLEEPING

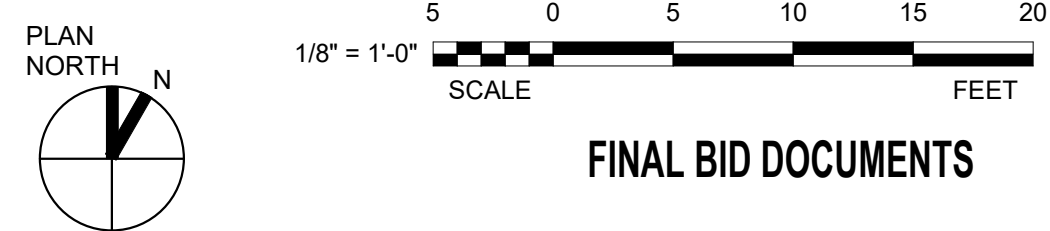

Revisions: <table><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr></table> Date:																					ARCHITECT/ENGINEER OF RECORD AWEN SOLUTIONS GROUP ARCHITECTURE ENGINEERING PLANNING A/E: Awen Solutions Group 215 N. Payne Street, Suite 122 Alexandria, VA 22314		STAMP LICENSED ARCHITECT GENE HAMILTON NO. C-19578 EXP. 07-31-25 STATE OF CALIFORNIA	Facilities Management Services VA U.S. Department of Veterans Affairs	Drawing Title BUILDING SECTIONS (TR STACKS) Approved:	Phase FINAL BID DOCUMENTS FULLY SPRINKLERED	Project Title EHRM INFRASTRUCTURE UPGRADES Location 1100 TUNNEL ROAD ASHEVILLE, NC 28805 Issue Date 12.19.2025 Checked Drawn	Project Number 637-22-700 Building Number 47 Drawing Number 47-AE351 SHEET 314 of 559
VA FORM 08 - 6231																												



1 ENLARGED FLOOR PLAN - BASEMENT (BC131)
1/4" = 1'-0"

ENLARGED PLAN SHEET NOTES

1. THESE DOCUMENTS DO NOT INDICATE ALL MINOR AREAS AFFECTED BY SELECTIVE DEMOLITION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR QUANTIFYING THE MATERIAL AND LABOR COSTS TO DEMOLISH. PATCH, REPAIR ADJACENT AREAS AFFECTED BY THE CONSTRUCTION INDICATED TO A "LIKE NEW" CONDITION.
2. COORDINATE WITH FIRE PROTECTION, MECHANICAL, ELECTRICAL, PLUMBING, TELECOMMUNICATIONS AND SECURITY PLANS FOR ADDITIONAL SELECTIVE DEMOLITION REQUIREMENTS NOT SHOWN ON THIS DRAWING.
3. SOME SHEET KEYNOTES LISTED BELOW MAY NOT APPLY TO THIS SHEET.
4. DIMENSIONS PRECEDED BY A TILDE (~) ARE APPROXIMATE, SUBJECT TO FIELD VERIFICATION.
5. ALL NEW INTERIOR PARTITIONS ARE TYPE 01, UNLESS OTHERWISE NOTED.

ENLARGED PLAN KEYNOTES


KEY TAG	DESCRIPTION
A01	STATIC DISSIPATING FLUID-APPLIED ESD EPOXY FLOORING
A02	EXTEND FULL-HEIGHT PARTITION TO DECK (VERIFY IN FIELD)
A03	4'-0" x 8'-0" AC GRADE 3/4" TRADE SIZE FIRE-RATED BACKBOARD PAINTED HIGH-GLOSS WHITE WITH TWO COATS OF FIRE-RESISTANT PAINT
A04	12" DEDICATED SPACE TO ACCOMMODATE SERVICE PROVIDER, SECURITY, VIDEO, ETC. EQUIPMENT MOUNTED TO BACKBOARDS
A05	DOOR AS SCHEDULED, REFER TO DOOR SCHEDULE
A06	BASE TRIM AS SCHEDULED, REFER TO SHEET AE601
A07	NEW GYPSUM WALLBOARD FINISH ON EXISTING FRAMING
A08	NEW METAL STUD PARTITION TO DECK
A09	EXISTING CEILING TO REMAIN
A10	WATER BARRIER BETWEEN TR AND ROOMS WITH WATER (RESTROOMS, BREAK ROOMS, KITCHENS, ETC.)
A11	NEW ACT SYSTEM
A12	CARD READER, MOUNT 3'-6" TO B.O. READER, SEE TELECOMMUNICATIONS DRAWINGS
A13	PROVIDE A SEMI RECESSED FEC WITH A DRY AGENT FIRE EXTINGUISHER WITHIN 75' FROM TR BUT IN TR. VA TO VERIFY AND FINALIZE THE FINAL LOCATION OF THE FEC.
A14	ADD RATED FURRING WALL.
A15	PROVIDE BLACK-OUT WINDOW FILM. STATION GC TO CONFIRM THE TYPE OF THE FILM.
B25	PATCH AND REPAIR EXTERIOR WALL AT NEW MECHANICAL PENETRATIONS
D01	REMOVE EXISTING FLOOR. PREP FLOOR TO RECEIVE FLOOR FINISH SPECIFIED
D02	REMOVE EXISTING CEILING, CEILING SUPPORT, ALL FASTENERS, LIGHTING FIXTURES, VENTS, AND MEANS OF ATTACHMENT BACK TO STRUCTURE
D04	REMOVE DOOR AND FRAME, SALVAGE ALL DOOR HARDWARE AND TURN OVER TO VA. VERIFY FRAMING AND PROVIDE MODIFICATIONS NECESSARY IF DOOR INCREASES IN SIZE. PATCH ADJACENT FINISHES TO MATCH EXISTING. PAINT AFFECTED WALL TO CLOSEST CORNER.
D05	REMOVE GYPSUM BOARD AND METAL FRAMING
D06	REMOVE EXISTING GYPSUM WALLBOARD FINISH
D07	REMOVE WINDOW AND INFILL OPENING
D08	REMOVE EXISTING PARTITION AT AREA OF NEW DOOR
D09	REMOVE EXISTING CMU WALL
D10	PROVIDE WALK OFF MATS AND PLASTIC SHEETING (VISQUEEN) AT CONSTRUCTION AREAS.
D11	PROVIDE 1 HOUR TEMPORARY CONSTRUCTION BARRIER, REFER TO TEMPORARY CONSTRUCTION BARRIER DETAIL IN 00-G0001.
E01	ELECTRICAL EQUIPMENT, SEE ELECTRICAL DRAWINGS
E02	LIGHTING FIXTURES, SEE ELECTRICAL DRAWINGS
M01	MECHANICAL EQUIPMENT, SEE MECHANICAL DRAWINGS
T01	BONDING BUS BAR, SEE TELECOMMUNICATIONS DRAWINGS
T03	TELECOMMUNICATIONS RACK SYSTEM, SEE TELECOMMUNICATIONS DRAWINGS
T04	HORIZONTAL CABLE TRAY, SEE TELECOMMUNICATIONS DRAWINGS

TR LEGEND

TR (DECOMMISSIONED)	TR (EXISTING)
TR (NEW)	TR (EXPANDED)
DATA CENTER (EXISTING)	DATA CENTER (NEW)
TE (NEW)	ER (NEW)

PARTITION LEGEND

FIRE BARRIER, 2 HR
FIRE BARRIER, 1 HR
SMOKE BARRIER, 1/2 HR
SMOKE RESISTIVE HAZARDOUS
PATIENT SUIT/ NON SLEEPING

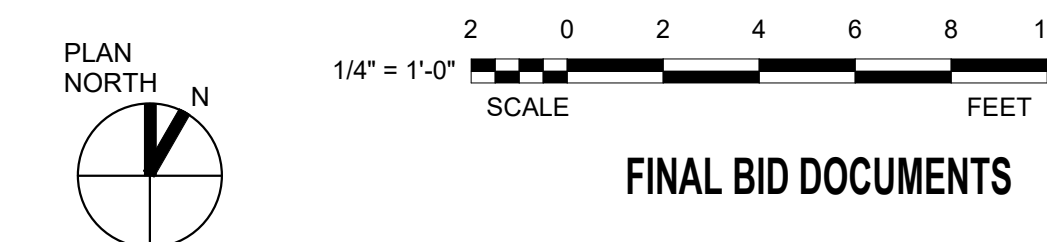

FINAL BID DOCUMENTS

ARCHITECT/ENGINEER OF RECORD



A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314

STAMP



Facilities
Management
Services



Drawing Title
ENLARGED FLOOR PLAN - BASEMENT
(DATA CENTER)

Approved:

FOR OFFICIAL USE ONLY

Phase
FINAL BID DOCUMENTS

FULLY SPRINKLERED

Project Title
EHRM INFRASTRUCTURE
UPGRADES

Location
1100 TUNNEL ROAD
ASHEVILLE, NC 28805
Issue Date
12.19.2025


Checked
Drawn

Project Number
637-22-700
Building Number
47
Drawing Number
47-AE400B
SHEET 316 of 559

12/19/2025 11:38:57 AM

AutoCAD Doc: Nashville EHRM_V23037-22-700.047.ASH - EHRM.dwg

VA FORM 08 - 6231

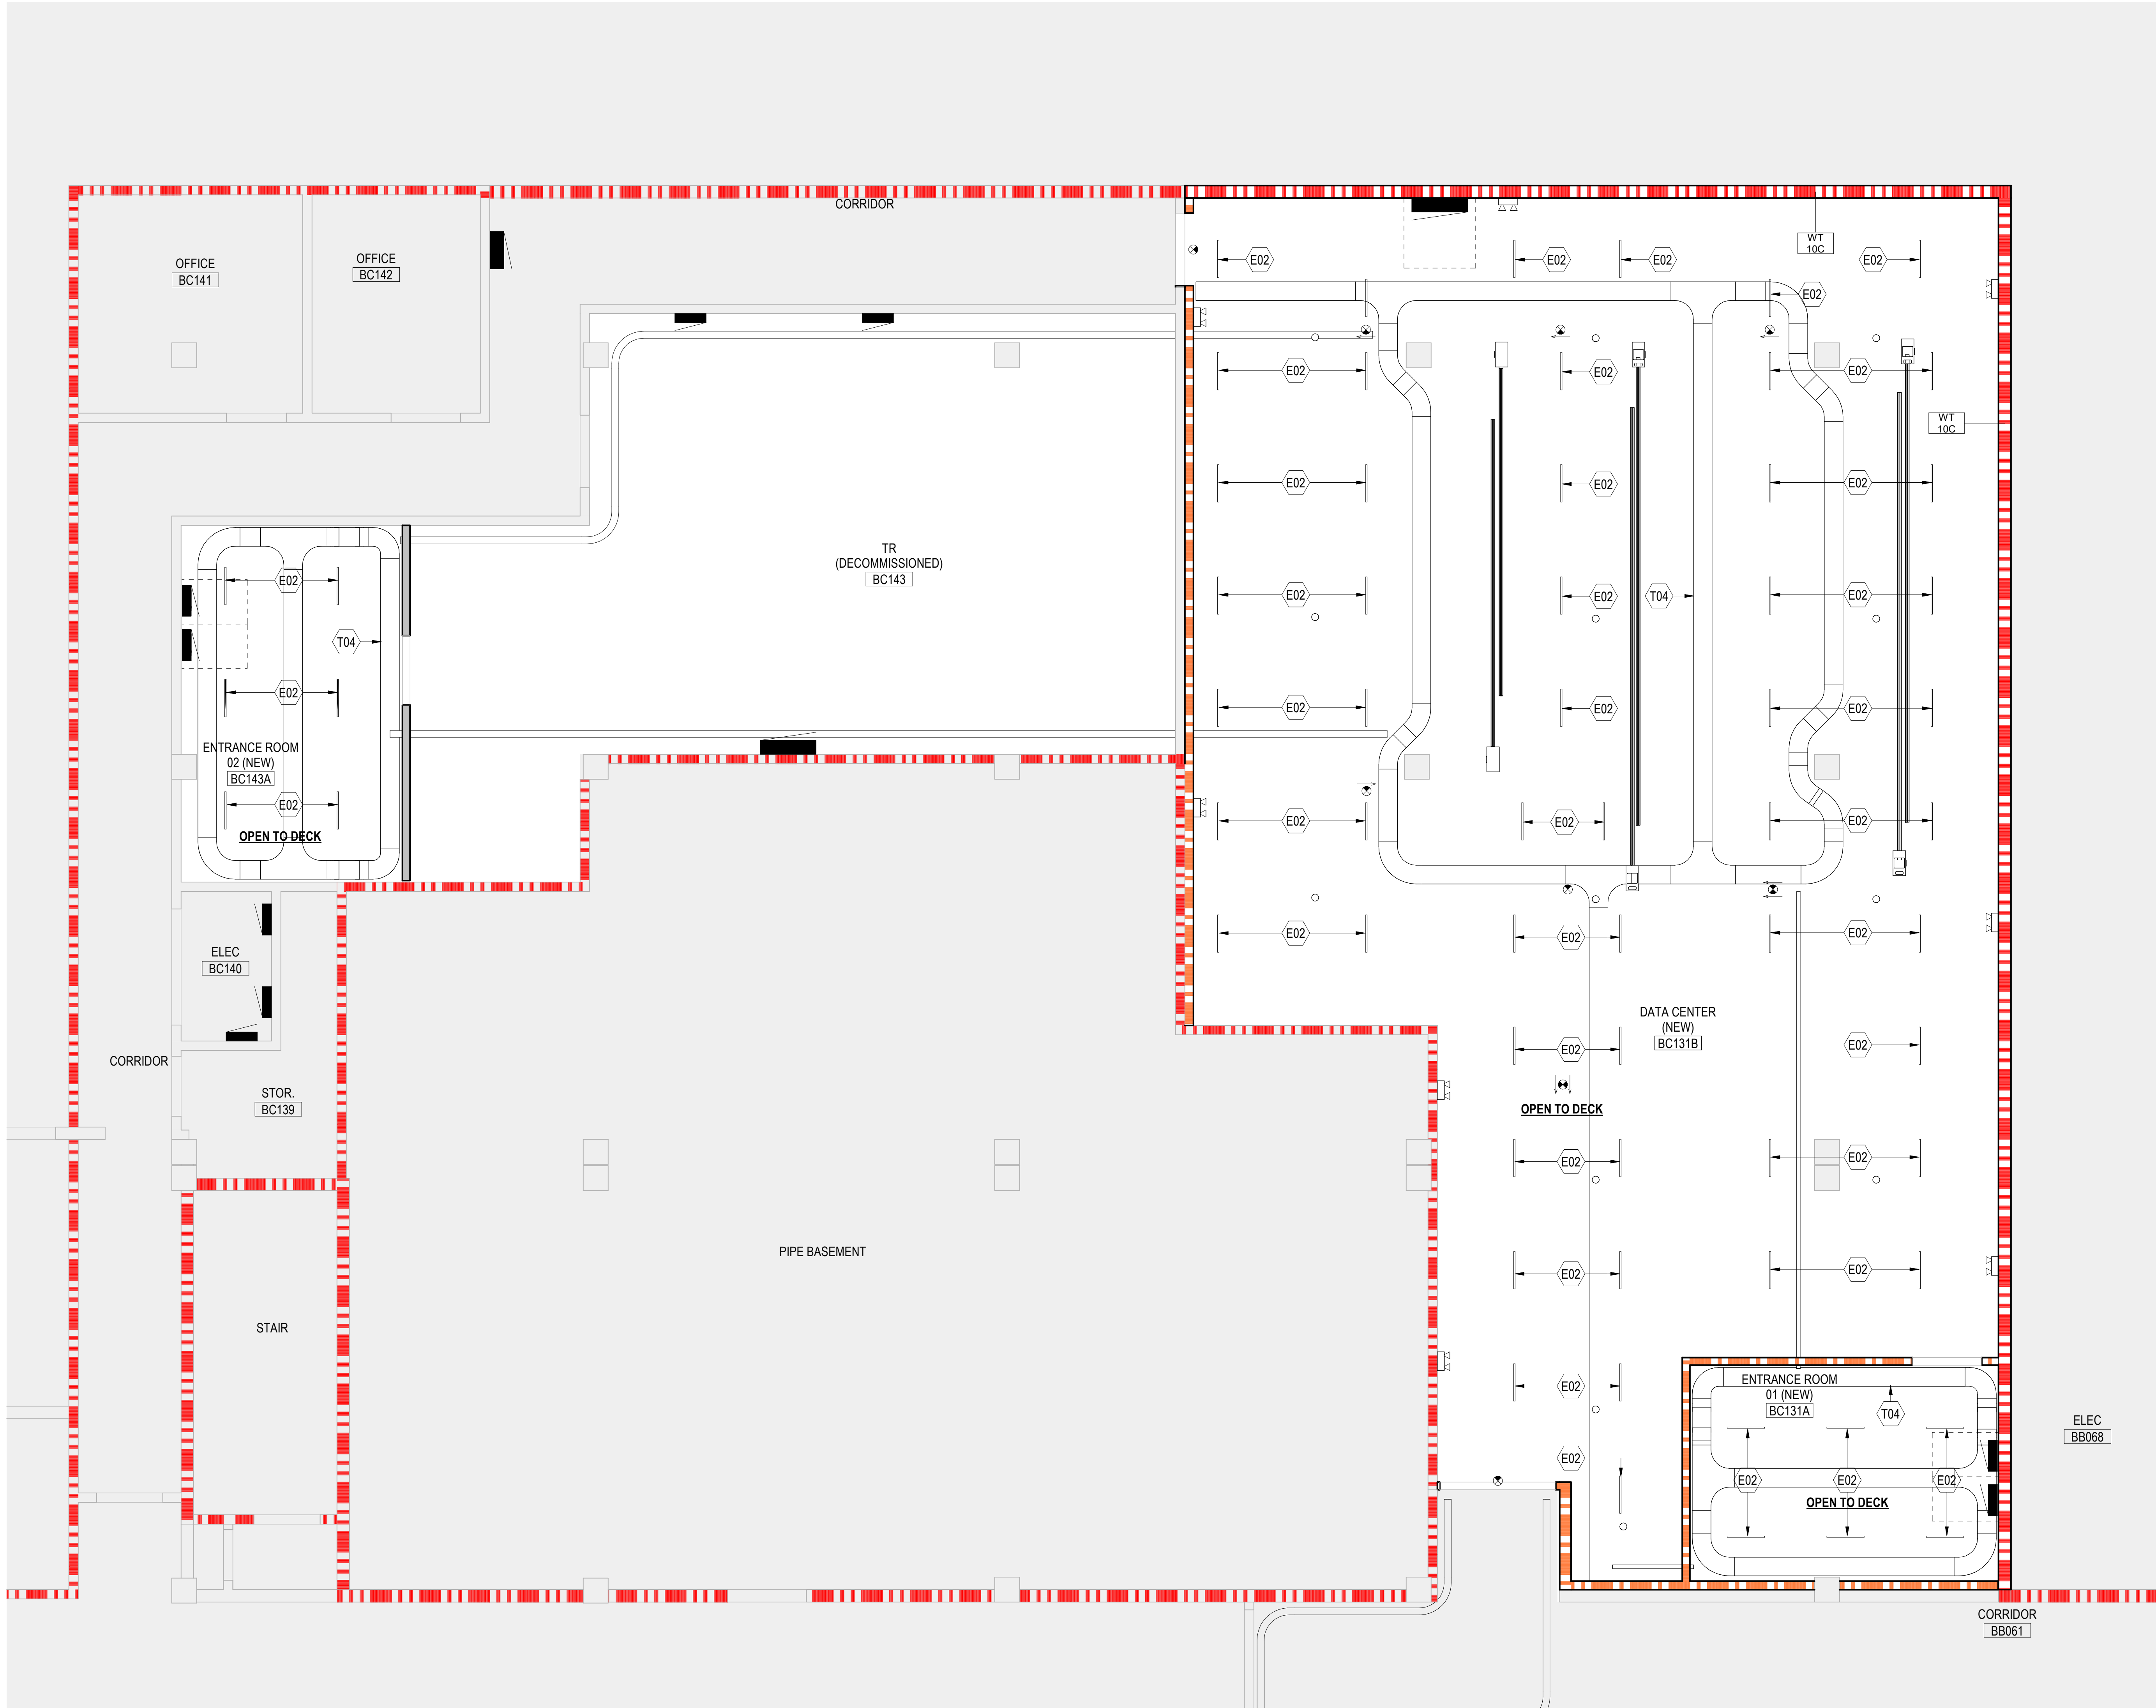

1 ENLARGED RCP - BASEMENT (BC131)
1/4" = 1'-0"

ENLARGED PLAN SHEET NOTES

- THESE DOCUMENTS DO NOT INDICATE ALL MINOR AREAS AFFECTED BY SELECTIVE DEMOLITION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR QUANTIFYING THE MATERIAL AND LABOR COSTS TO DEMOLISH. PATCH, REPAIR ADJACENT AREAS AFFECTED BY THE CONSTRUCTION INDICATED TO A "LIKE NEW" CONDITION.
- COORDINATE WITH FIRE PROTECTION, MECHANICAL, ELECTRICAL, PLUMBING, TELECOMMUNICATIONS AND SECURITY PLANS FOR ADDITIONAL SELECTIVE DEMOLITION REQUIREMENTS NOT SHOWN ON THIS DRAWING.
- SOME SHEET KEYNOTES LISTED BELOW MAY NOT APPLY TO THIS SHEET.
- DIMENSIONS PRECEDED BY A TILDE (~) ARE APPROXIMATE, SUBJECT TO FIELD VERIFICATION.
- ALL NEW INTERIOR PARTITIONS ARE TYPE 01, UNLESS OTHERWISE NOTED.

ENLARGED PLAN KEYNOTES


KEY TAG	DESCRIPTION
A01	STATIC DISSIPATING FLUID-APPLIED ESD EPOXY FLOORING
A02	EXTEND FULL-HEIGHT PARTITION TO DECK (VERIFY IN FIELD)
A03	4'-0" x 8'-0" AC GRADE 3/4" TRADE SIZE FIRE-RATED BACKBOARD PAINTED HIGH-GLOSS WHITE WITH TWO COATS OF FIRE-RESISTANT PAINT
A04	12" DEDICATED SPACE TO ACCOMMODATE SERVICE PROVIDER, SECURITY, VIDEO, ETC. EQUIPMENT MOUNTED TO BACKBOARDS
A05	DOOR AS SCHEDULED, REFER TO DOOR SCHEDULE
A06	BASE TRIM AS SCHEDULED, REFER TO SHEET AE601
A07	NEW GYPSUM WALLBOARD FINISH ON EXISTING FRAMING
A08	NEW METAL STUD PARTITION TO DECK
A09	EXISTING CEILING TO REMAIN
A10	WATER BARRIER BETWEEN TR AND ROOMS WITH WATER (RESTROOMS, BREAK ROOMS, KITCHENS, ETC.)
A11	NEW ACT SYSTEM
A12	CARD READER, MOUNT 3'-6" TO B.O. READER, SEE TELECOMMUNICATIONS DRAWINGS
A13	PROVIDE A SEMI RECESSED FEC WITH A DRY AGENT FIRE EXTINGUISHER WITHIN 75' FROM TR BUT IN TR. VA TO VERIFY AND FINALIZE THE FINAL LOCATION OF THE FEC.
A14	ADD RATED FURRING WALL.
A15	PROVIDE BLACK-OUT WINDOW FILM. STATION GC TO CONFIRM THE TYPE OF THE FILM.
B25	PATCH AND REPAIR EXTERIOR WALL AT NEW MECHANICAL PENETRATIONS
D01	REMOVE EXISTING FLOOR. PREP FLOOR TO RECEIVE FLOOR FINISH SPECIFIED
D02	REMOVE EXISTING CEILING, CEILING SUPPORT, ALL FASTENERS, LIGHTING FIXTURES, VENTS, AND MEANS OF ATTACHMENT BACK TO STRUCTURE
D04	REMOVE DOOR AND FRAME, SALVAGE ALL DOOR HARDWARE AND TURN OVER TO VA. VERIFY FRAMING AND PROVIDE MODIFICATIONS NECESSARY IF DOOR INCREASES IN SIZE. PATCH ADJACENT FINISHES TO MATCH EXISTING. PAINT AFFECTED WALL TO CLOSEST CORNER.
D05	REMOVE GYPSUM BOARD AND METAL FRAMING
D06	REMOVE EXISTING GYPSUM WALLBOARD FINISH
D07	REMOVE WINDOW AND INFILL OPENING
D08	REMOVE EXISTING PARTITION AT AREA OF NEW DOOR
D09	REMOVE EXISTING CMU WALL
D10	PROVIDE WALK OFF MATS AND PLASTIC SHEETING (VISQUEEN) AT CONSTRUCTION AREAS.
D11	PROVIDE 1 HOUR TEMPORARY CONSTRUCTION BARRIER. REFER TO TEMPORARY CONSTRUCTION BARRIER DETAIL IN 00-G0001.
E01	ELECTRICAL EQUIPMENT, SEE ELECTRICAL DRAWINGS
E02	LIGHTING FIXTURES, SEE ELECTRICAL DRAWINGS
M01	MECHANICAL EQUIPMENT, SEE MECHANICAL DRAWINGS
T01	BONDING BUS BAR, SEE TELECOMMUNICATIONS DRAWINGS
T03	TELECOMMUNICATIONS RACK SYSTEM, SEE TELECOMMUNICATIONS DRAWINGS
T04	HORIZONTAL CABLE TRAY, SEE TELECOMMUNICATION DRAWINGS

TR LEGEND

TR (DECOMMISSIONED)	TR (EXISTING)
TR (NEW)	TR (EXPANDED)
DATA CENTER (EXISTING)	DATA CENTER (NEW)
TE (NEW)	ER (NEW)

PARTITION LEGEND

FIRE BARRIER, 2 HR
FIRE BARRIER, 1 HR
SMOKE BARRIER, 1/2 HR
SMOKE RESISTIVE HAZARDOUS
PATIENT SUIT/ NON SLEEPING

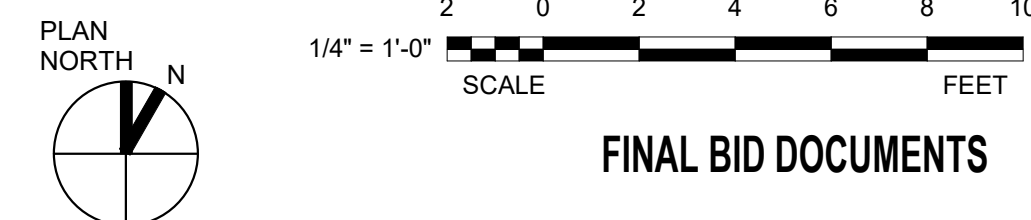

ARCHITECT/ENGINEER OF RECORD



A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314

STAMP



Facilities
Management
Services



U.S. Department
of Veterans
Affairs

Drawing Title

ENLARGED RC PLAN - BASEMENT
(DATA CENTER)

Approved:

FOR OFFICIAL USE ONLY

Phase

FINAL BID DOCUMENTS

FULLY SPRINKLERED

Project Title

EHRM INFRASTRUCTURE
UPGRADES

Location

1100 TUNNEL ROAD
ASHEVILLE, NC 28805


Issue Date

12.19.2025


Checked

Drawn


Project Number	637-22-700
Building Number	47
Drawing Number	47-AE400C
SHEET 317 OF 559	

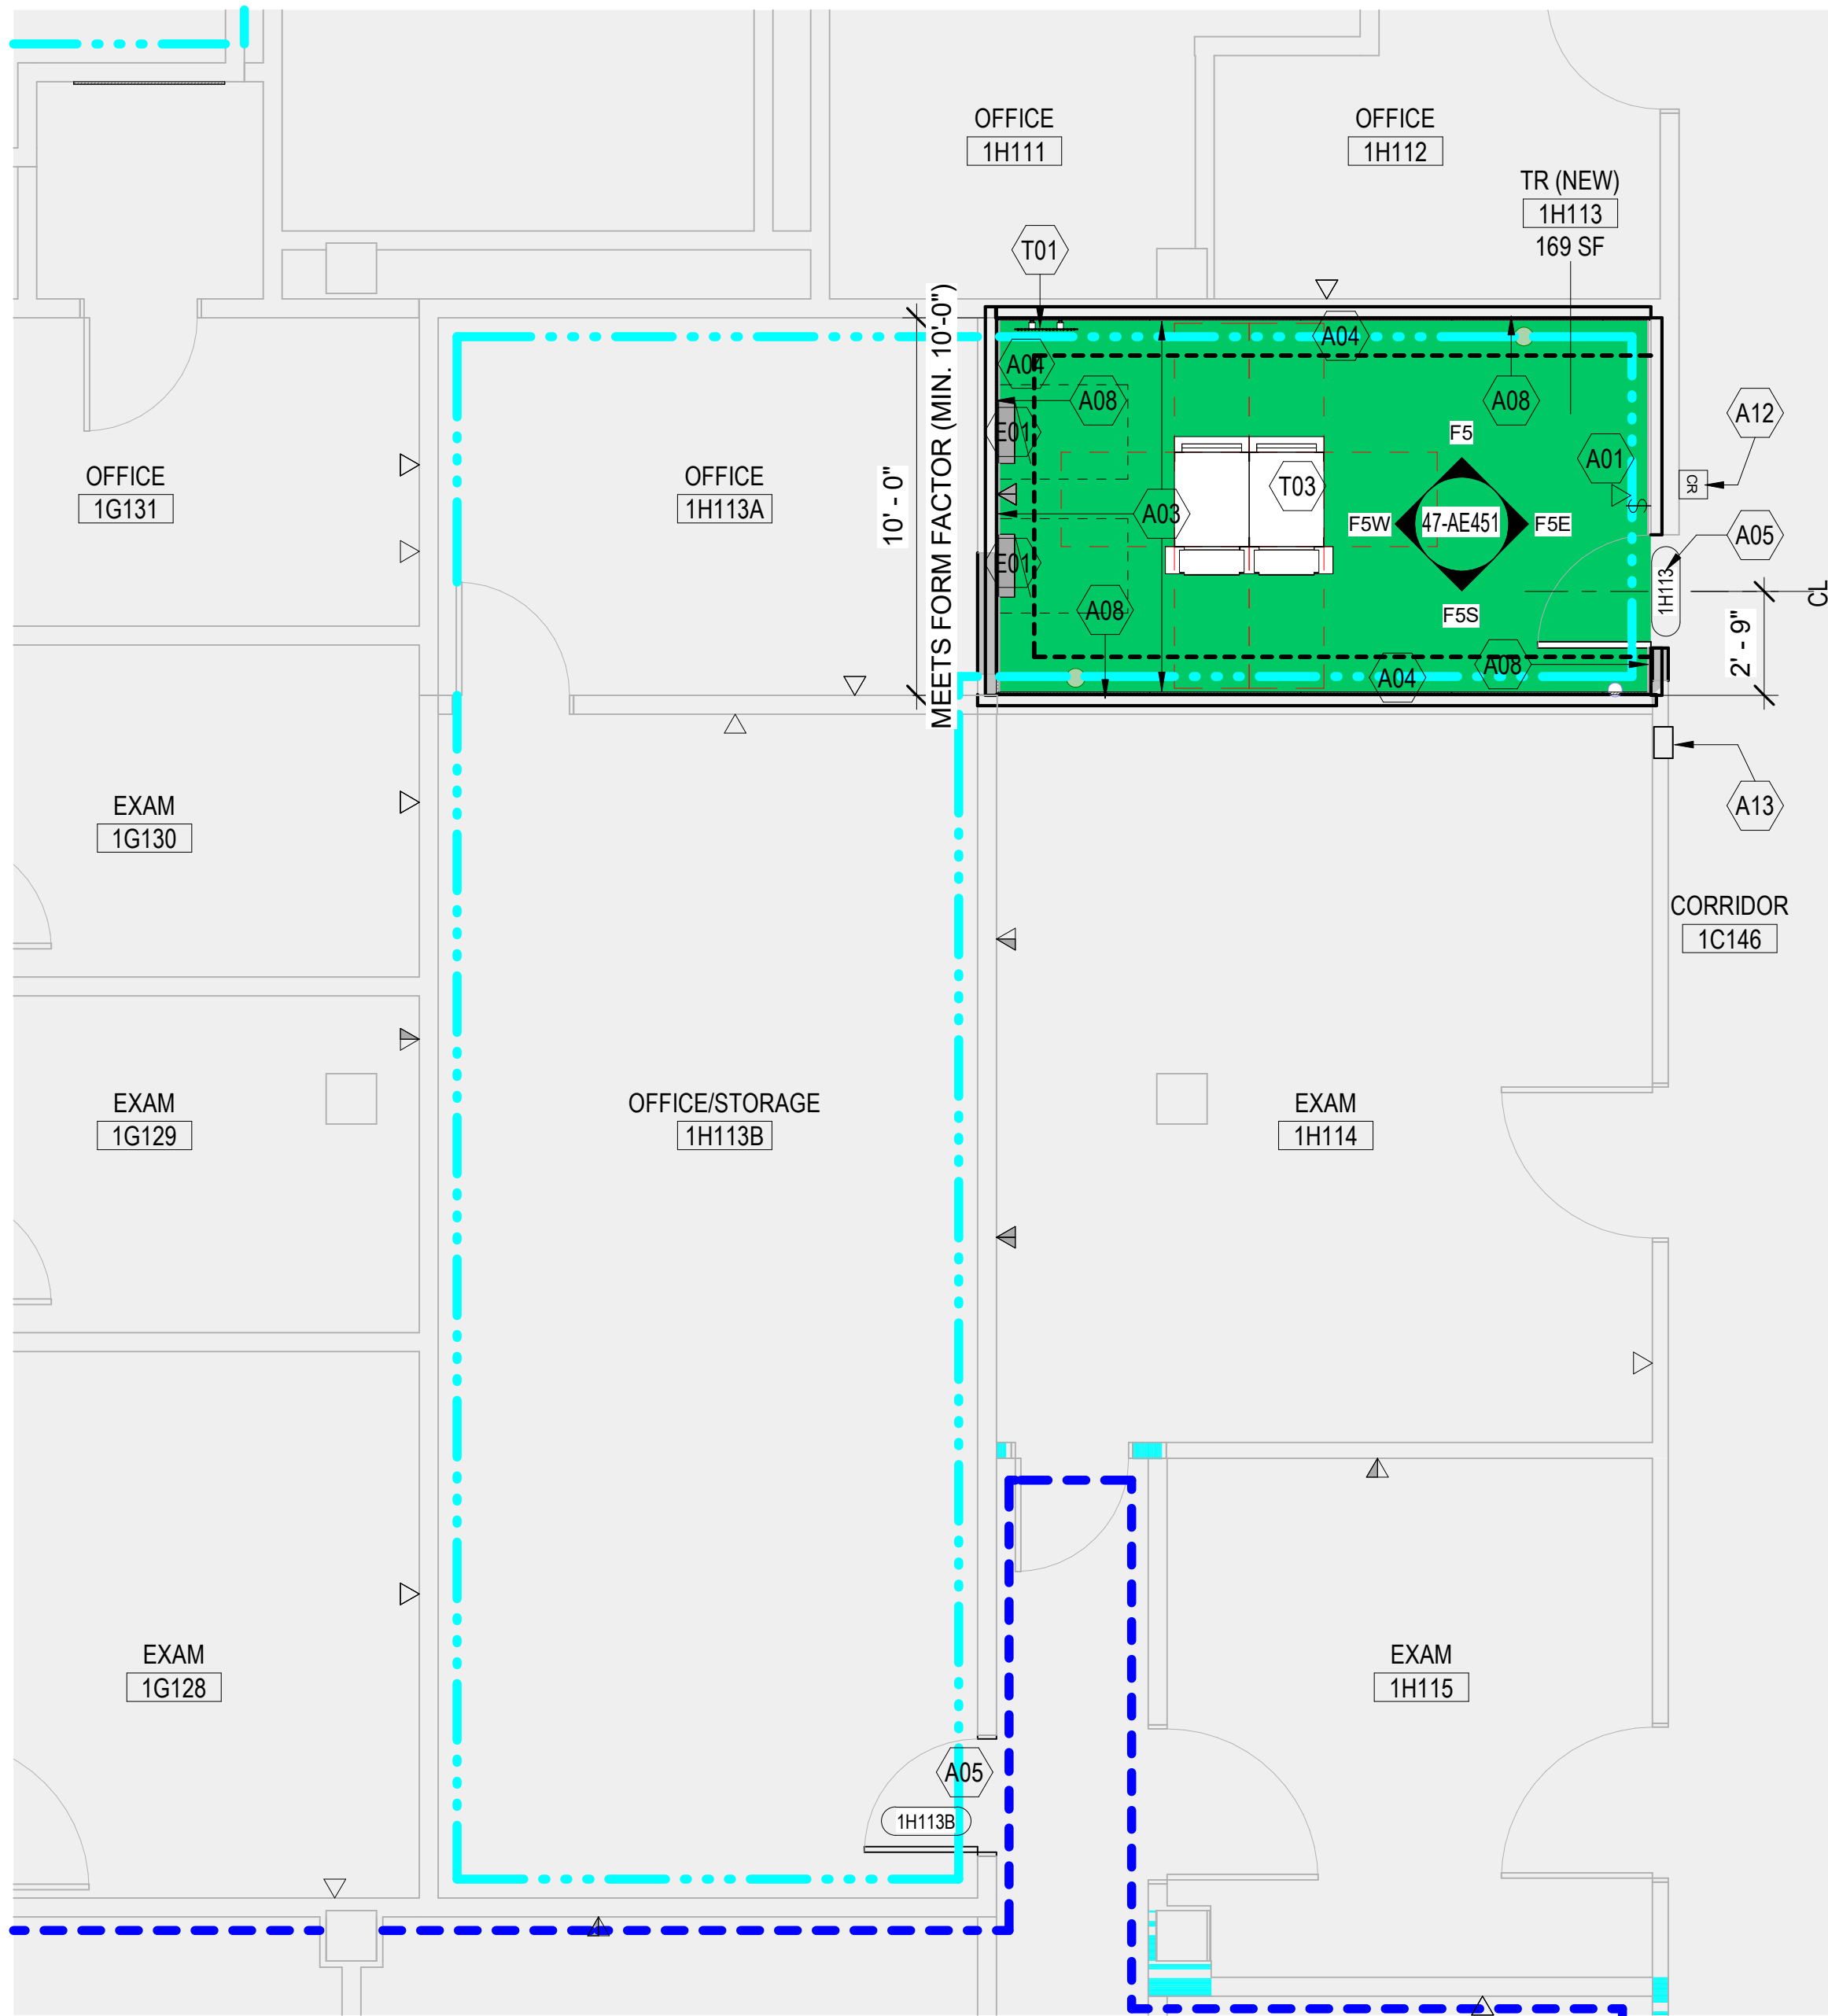


1 ENLARGED FLOOR PLAN - 1ST FLOOR (1H113)
1/4" = 1'-0"

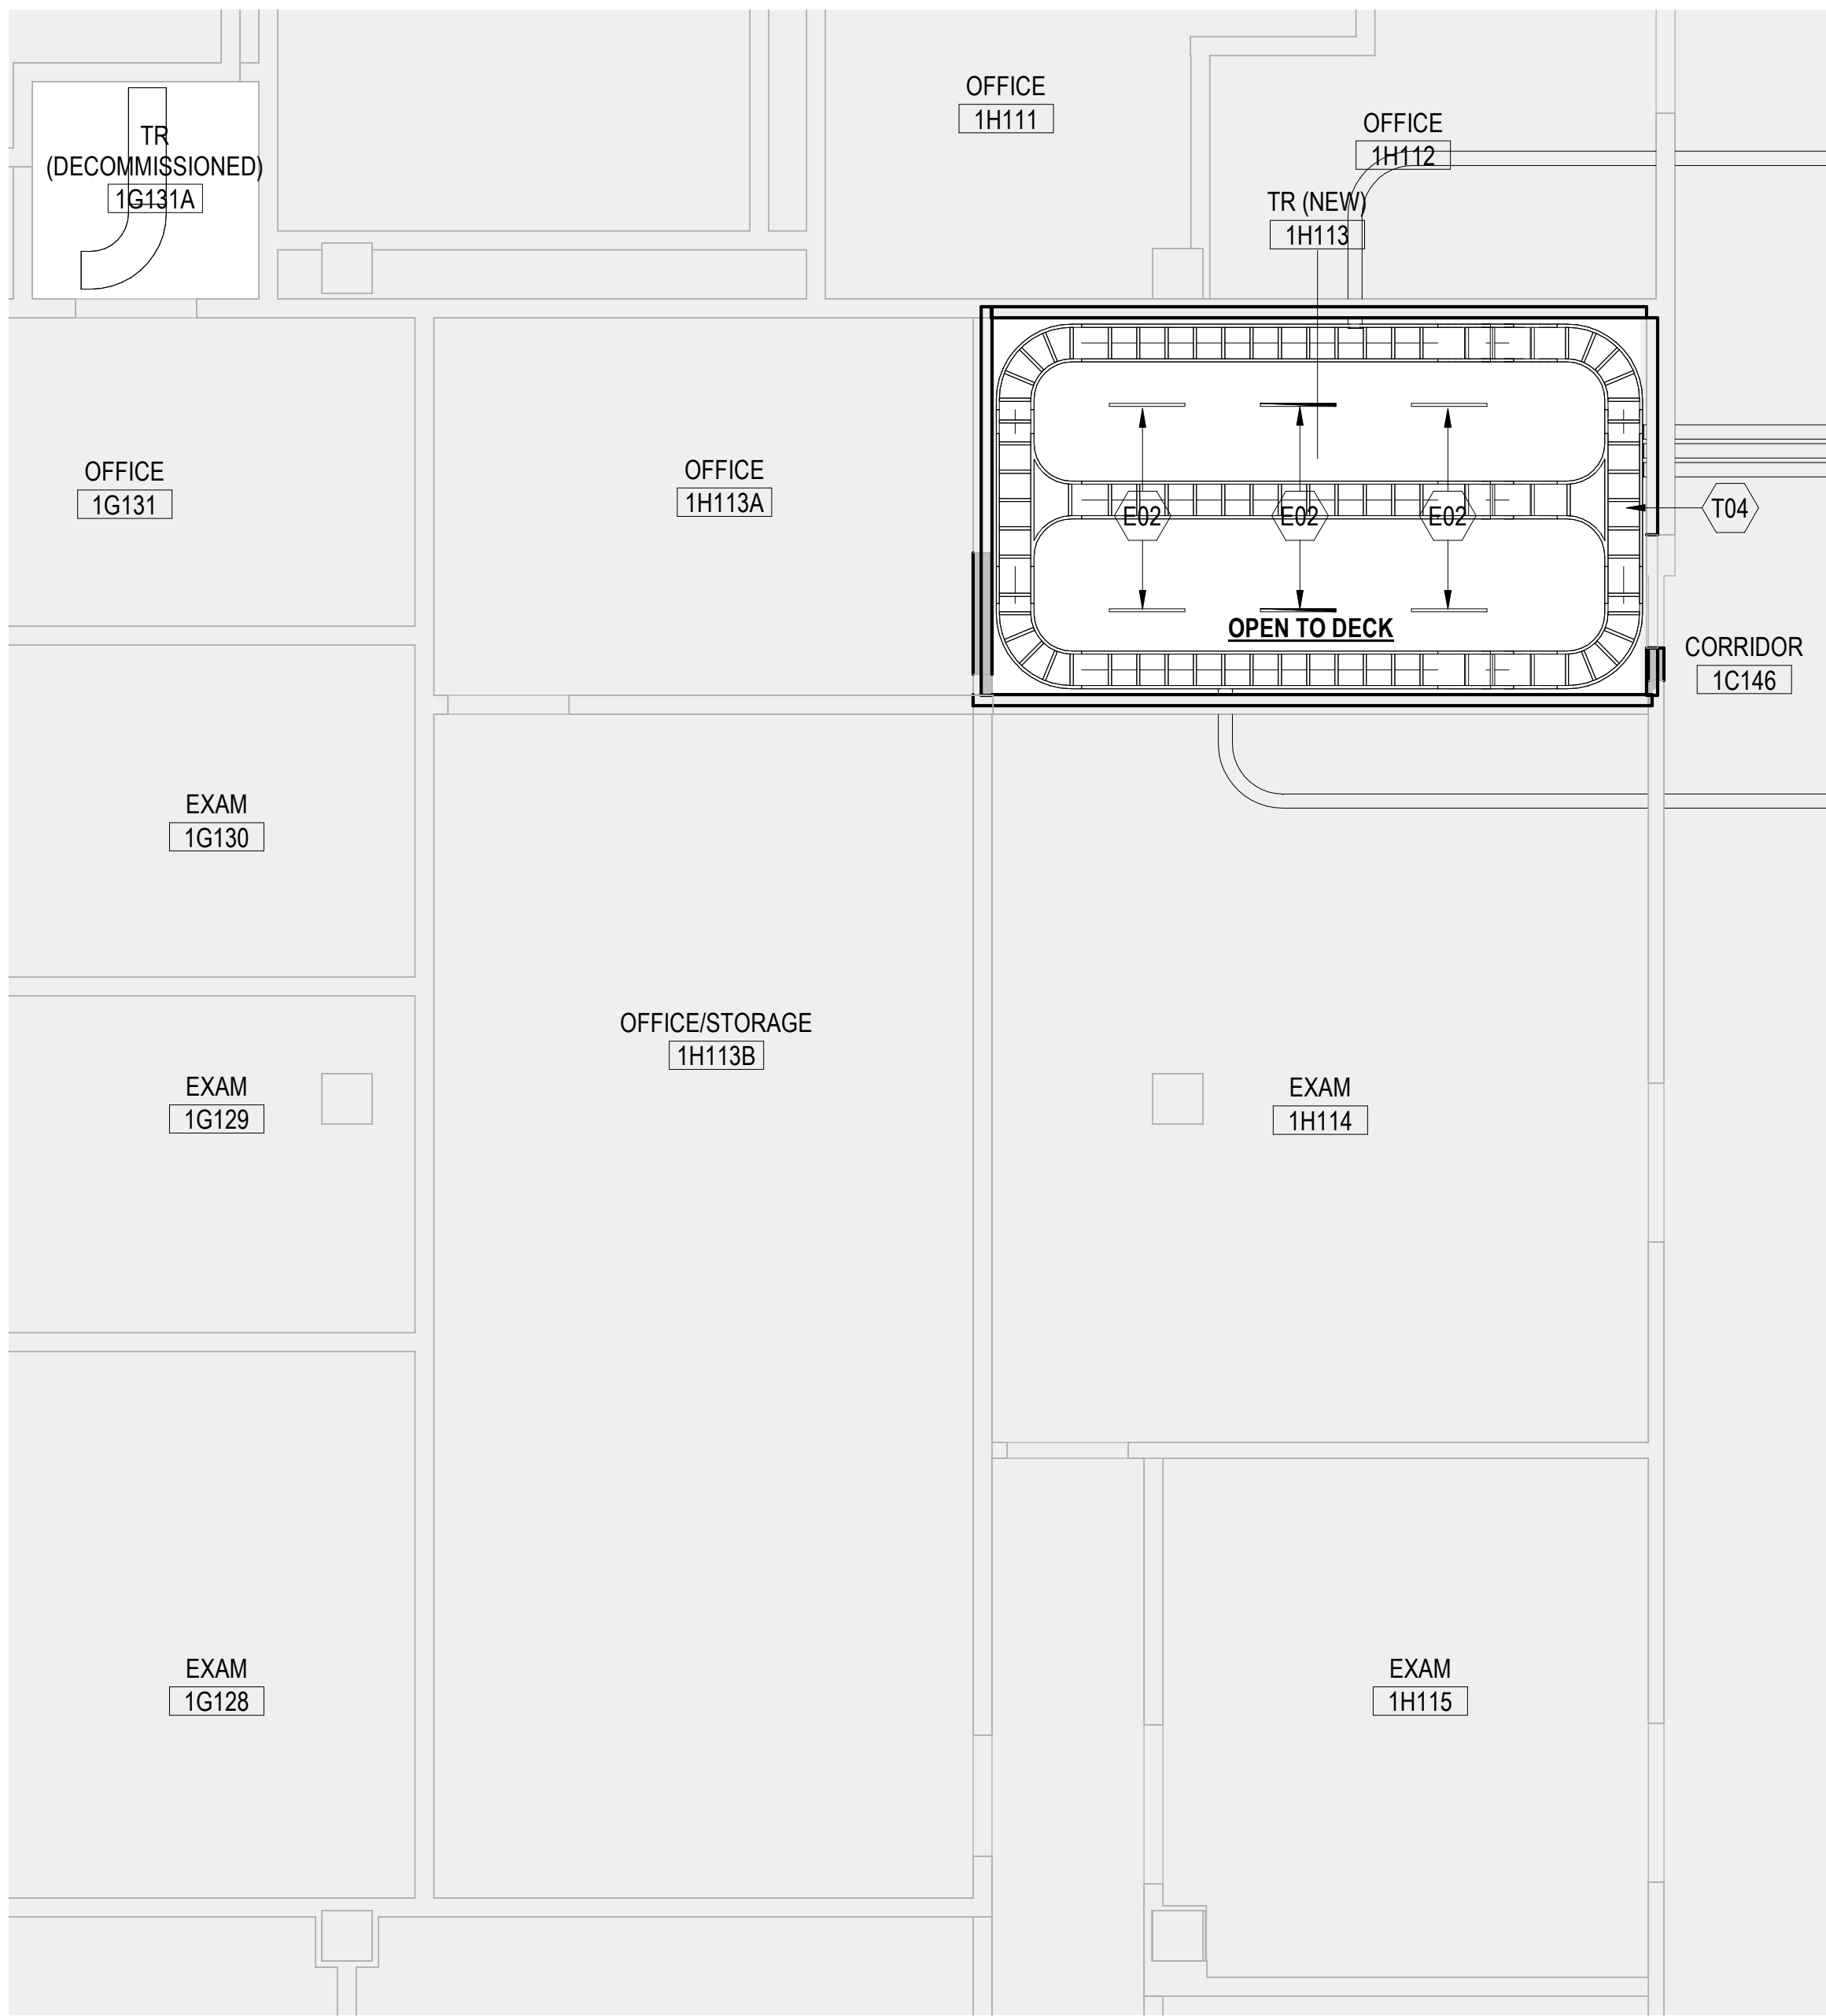


2 ENLARGED RCP - 1ST FLOOR (1H113)
1/4" = 1'-0"

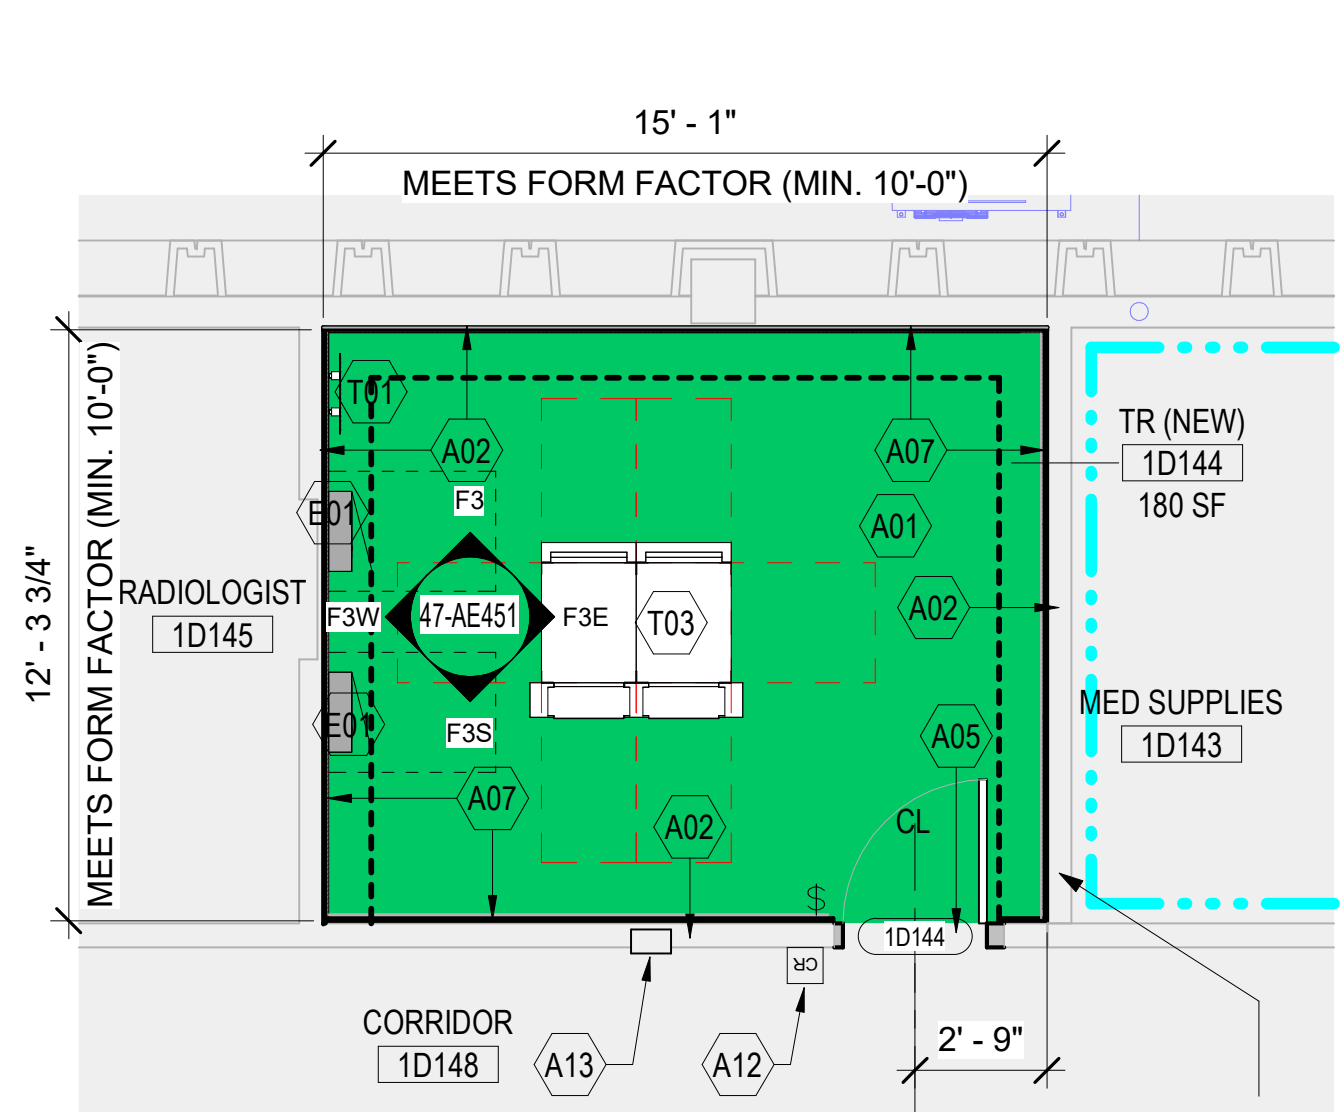


3 ENLARGED FLOOR PLAN - 1ST FLOOR (1D144)
1/4" = 1'-0"

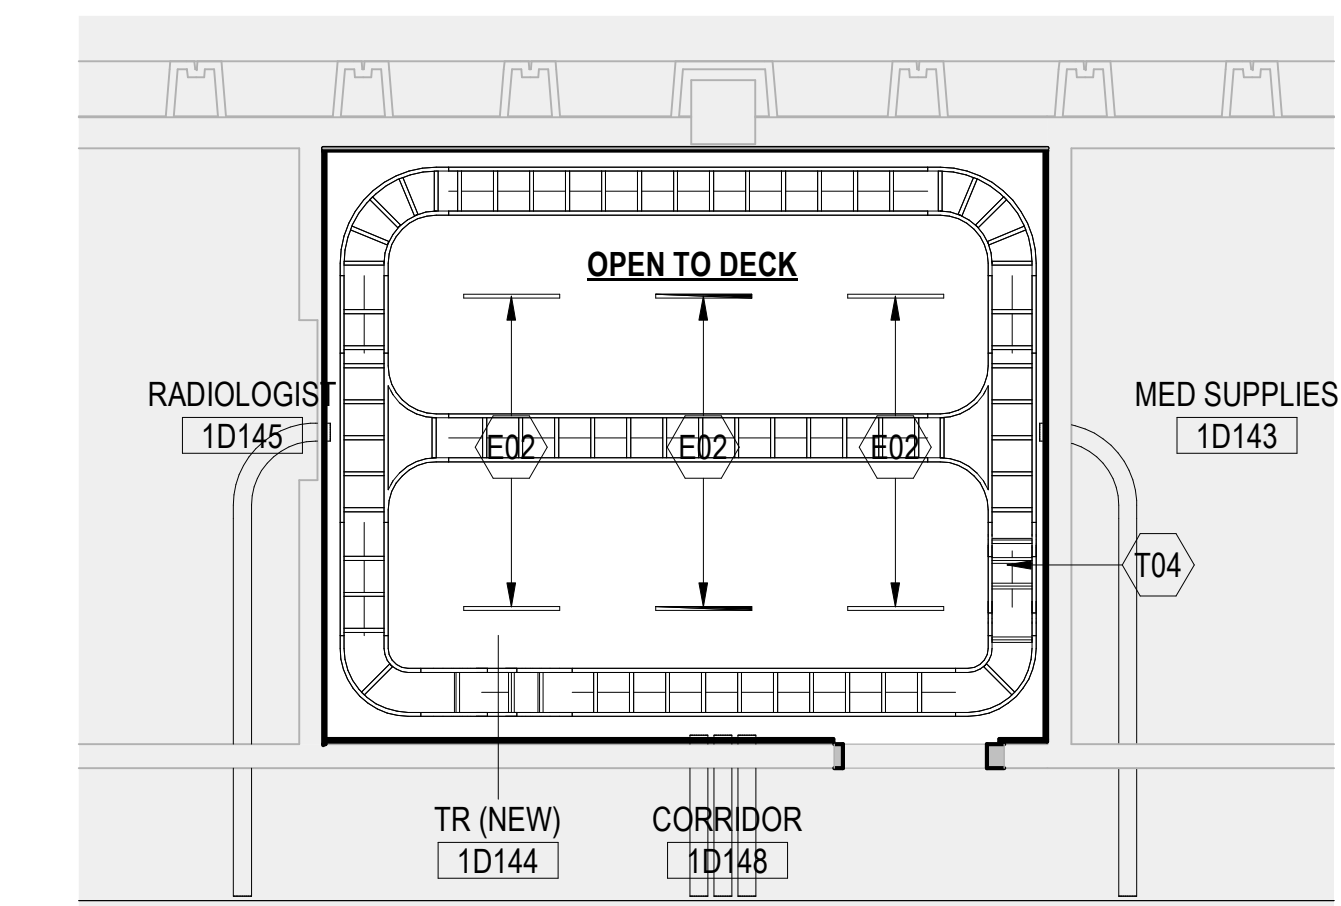


4 ENLARGED RCP - 1ST FLOOR (1D144)
1/4" = 1'-0"

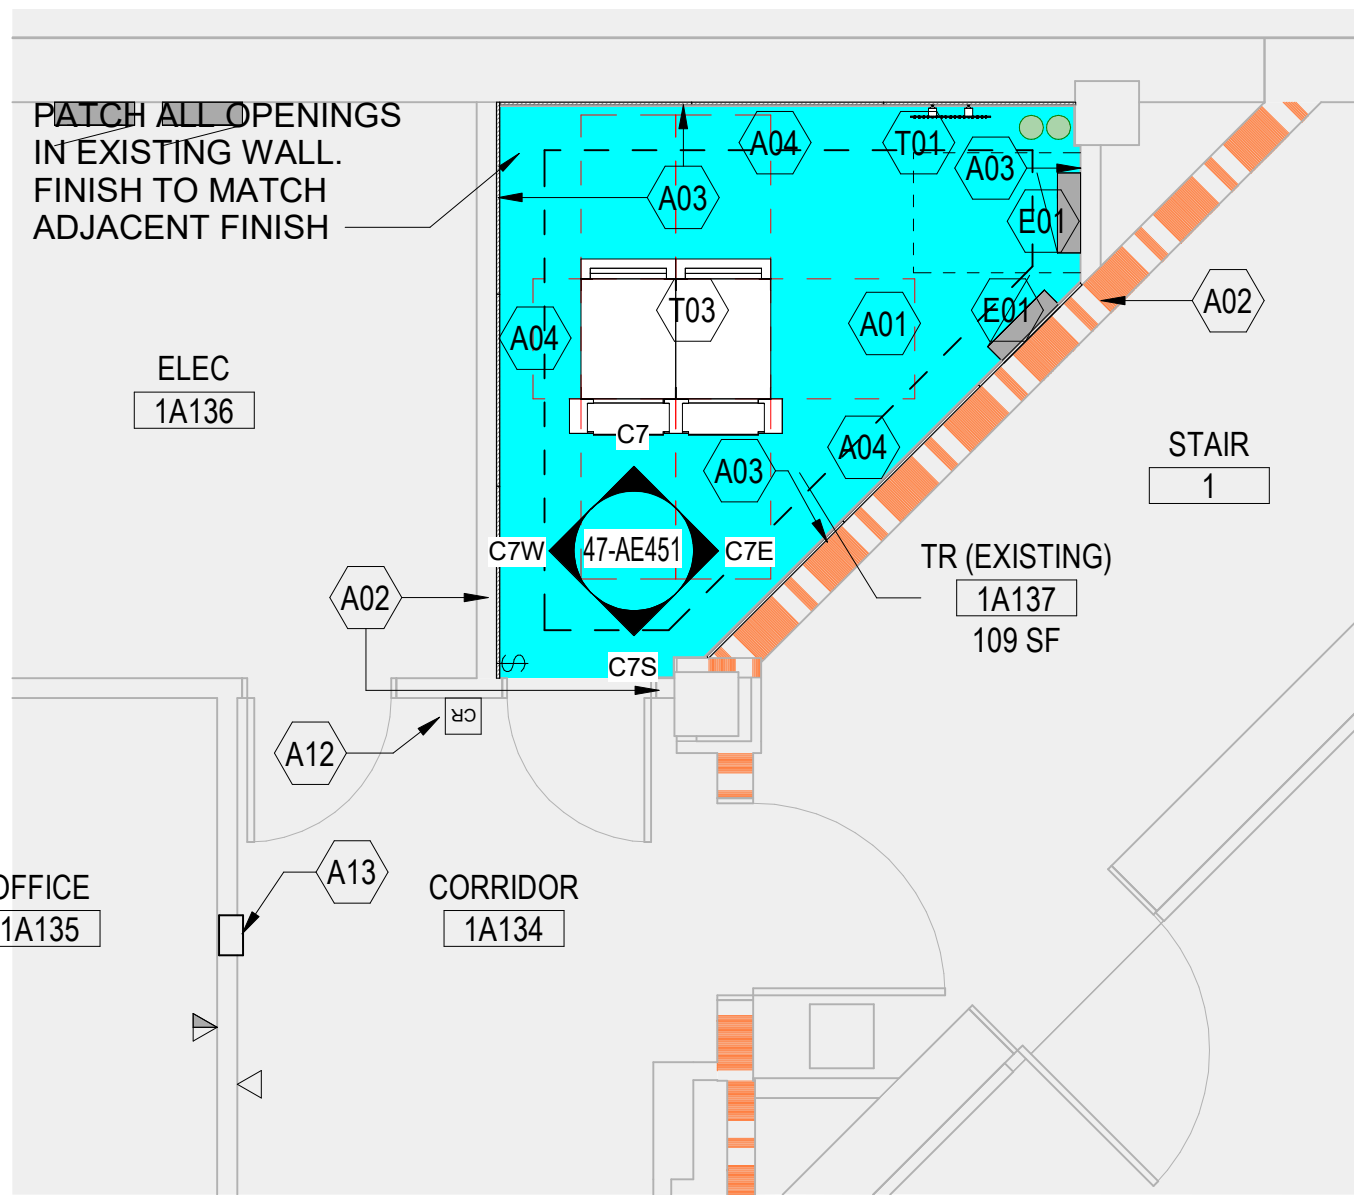


5 ENLARGED FLOOR PLAN - 1ST FLOOR (1A137)
1/4" = 1'-0"

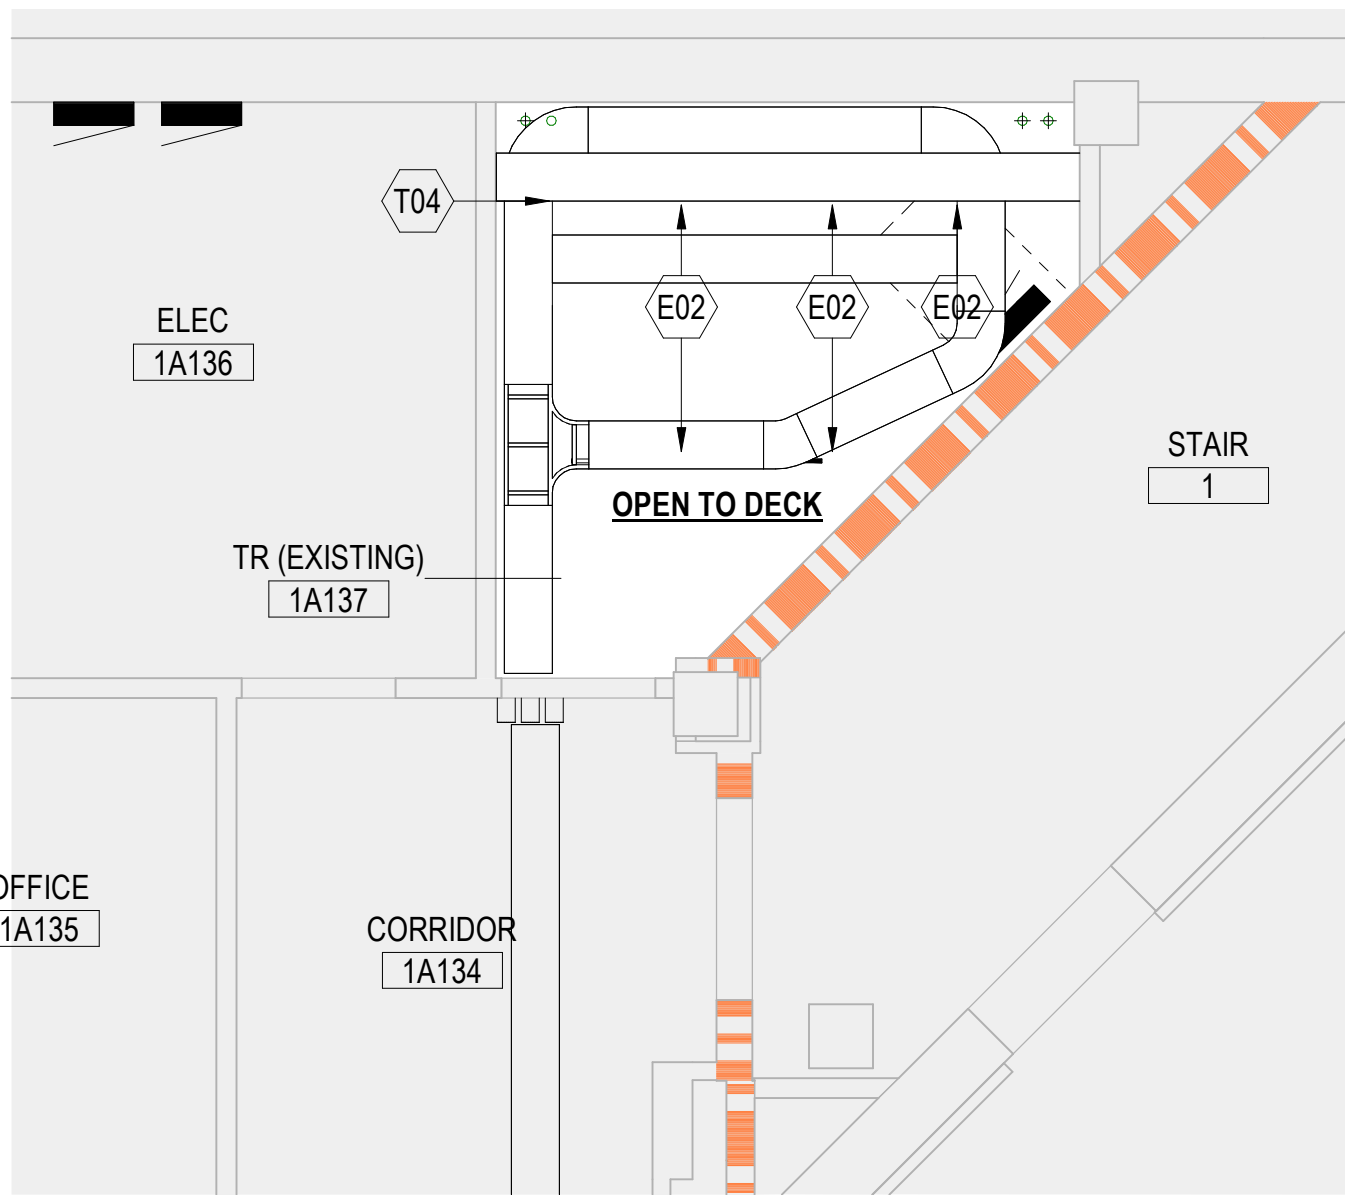

6 ENLARGED RCP - 1ST FLOOR (1A137)
1/4" = 1'-0"

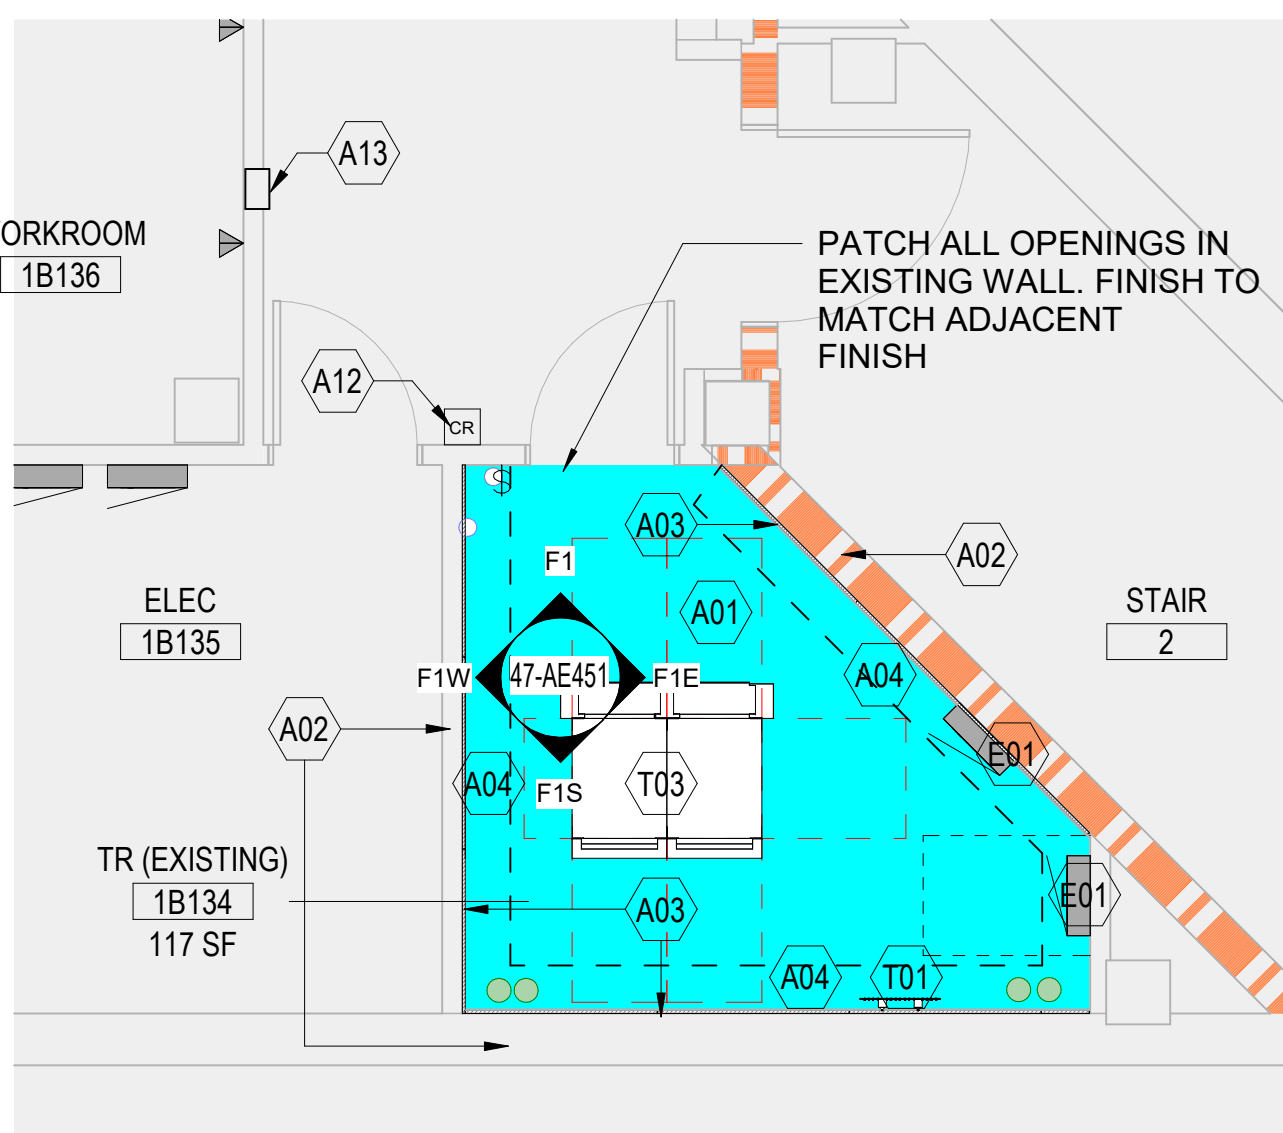

7 ENLARGED FLOOR PLAN - 1ST FLOOR (1B134)
1/4" = 1'-0"

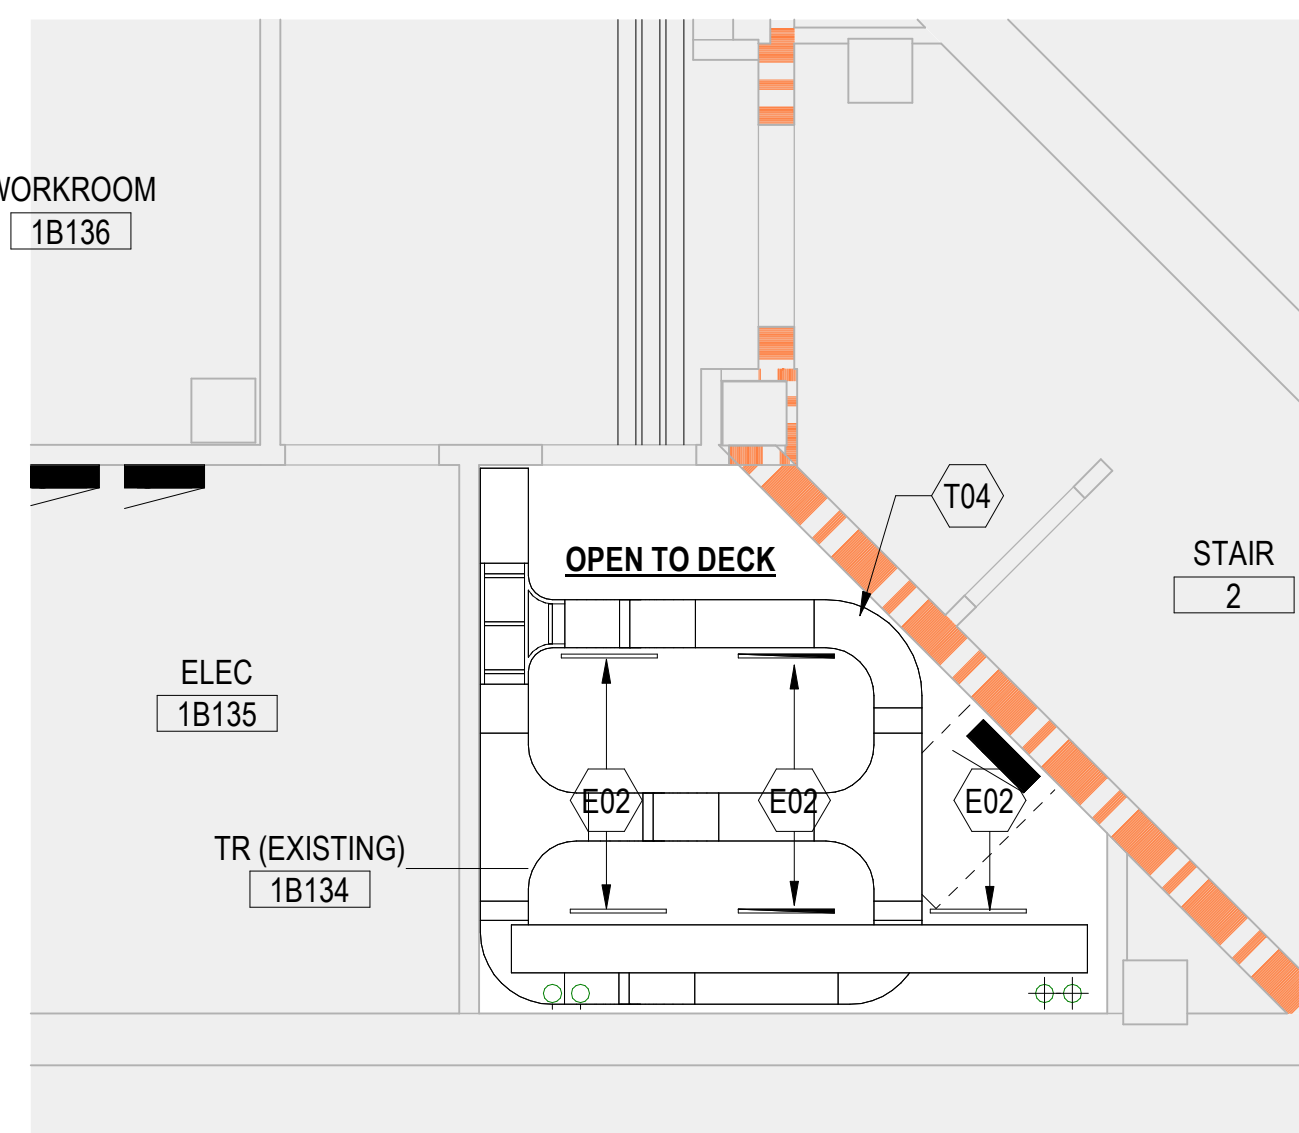

8 ENLARGED RCP - 1ST FLOOR (1B134)
1/4" = 1'-0"

ENLARGED PLAN SHEET NOTES

- THESE DOCUMENTS DO NOT INDICATE ALL MINOR AREAS AFFECTED BY SELECTIVE DEMOLITION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR QUANTIFYING THE MATERIAL AND LABOR COSTS TO DEMOLISH, PATCH, REPAIR ADJACENT AREAS AFFECTED BY THE CONSTRUCTION INDICATED TO A "LIKE NEW" CONDITION.
- COORDINATE WITH FIRE PROTECTION, MECHANICAL, ELECTRICAL, PLUMBING, TELECOMMUNICATIONS AND SECURITY PLANS FOR ADDITIONAL SELECTIVE DEMOLITION REQUIREMENTS NOT SHOWN ON THIS DRAWING.
- SOME SHEET KEYNOTES LISTED BELOW MAY NOT APPLY TO THIS SHEET.
- DIMENSIONS PRECEDED BY A TILDE (~) ARE APPROXIMATE, SUBJECT TO FIELD VERIFICATION.
- ALL NEW INTERIOR PARTITIONS ARE TYPE 01, UNLESS OTHERWISE NOTED.

ENLARGED PLAN KEYNOTES


KEY TAG	DESCRIPTION
A01	STATIC DISSIPATING FLUID-APPLIED ESD EPOXY FLOORING
A02	EXTEND FULL-HEIGHT PARTITION TO DECK (VERIFY IN FIELD)
A03	4'-0" x 8'-0" AC GRADE 3/4" TRADE SIZE FIRE-RATED BACKBOARD PAINTED HIGH-GLOSS WHITE WITH TWO COATS OF FIRE-RESISTANT PAINT
A04	12" DEDICATED SPACE TO ACCOMMODATE SERVICE PROVIDER, SECURITY, VIDEO, ETC. EQUIPMENT MOUNTED TO BACKBOARDS
A05	DOOR AS SCHEDULED, REFER TO DOOR SCHEDULE
A06	BASE TRIM AS SCHEDULED, REFER TO SHEET AE001
A07	NEW GYPSUM WALLBOARD FINISH ON EXISTING FRAMING
A08	NEW METAL STUD PARTITION TO DECK
A09	EXISTING CEILING TO REMAIN
A10	WATER BARRIER BETWEEN TR AND ROOMS WITH WATER (RESTROOMS, BREAK ROOMS, KITCHENS, ETC.)
A11	NEW ACT SYSTEM
A12	CARD READER, MOUNT 3'-6" TO B.O. READER, SEE TELECOMMUNICATIONS DRAWINGS
A13	PROVIDE A SEMI RECESSED FEC WITH A DRY AGENT FIRE EXTINGUISHER WITHIN 75' FROM TR BUT IN TR. VA TO VERIFY AND FINALIZE THE FINAL LOCATION OF THE FEC.
A14	ADD RATED FURRING WALL.
A15	PROVIDE BLACK-OUT WINDOW FILM. STATION GC TO CONFIRM THE TYPE OF THE FILM.
B25	PATCH AND REPAIR EXTERIOR WALL AT NEW MECHANICAL PENETRATIONS
D01	REMOVE EXISTING FLOOR. PREP FLOOR TO RECEIVE FLOOR FINISH SPECIFIED.
D02	REMOVE EXISTING CEILING, CEILING SUPPORT, ALL FASTENERS, LIGHTING FIXTURES, VENTS, AND MEANS OF ATTACHMENT BACK TO STRUCTURE
D04	REMOVE DOOR AND FRAME, SALVAGE ALL DOOR HARDWARE AND TURN OVER TO VA. VERIFY FRAMING AND PROVIDE MODIFICATIONS NECESSARY IF DOOR INCREASES IN SIZE. PATCH ADJACENT FINISHES TO MATCH EXISTING. PAINT AFFECTED WALL TO CLOSEST CORNER.
D05	REMOVE GYPSUM BOARD AND METAL FRAMING
D06	REMOVE EXISTING GYPSUM WALLBOARD FINISH
D07	REMOVE WINDOW AND INFILL OPENING
D08	REMOVE EXISTING PARTITION AT AREA OF NEW DOOR
D09	REMOVE EXISTING CMU WALL
D10	PROVIDE WALK OFF MATS AND PLASTIC SHEETING (VISQUEEN) AT CONSTRUCTION AREAS.
D11	PROVIDE 1 HOUR TEMPORARY CONSTRUCTION BARRIER. REFER TO TEMPORARY CONSTRUCTION BARRIER DETAIL IN 00-GC001.
E01	ELECTRICAL EQUIPMENT, SEE ELECTRICAL DRAWINGS
E02	LIGHTING FIXTURES, SEE ELECTRICAL DRAWINGS
M01	MECHANICAL EQUIPMENT, SEE MECHANICAL DRAWINGS
T01	BONDING BUS BAR, SEE TELECOMMUNICATIONS DRAWINGS
T03	TELECOMMUNICATIONS RACK SYSTEM, SEE TELECOMMUNICATIONS DRAWINGS
T04	HORIZONTAL CABLE TRAY, SEE TELECOMMUNICATION DRAWINGS

TR LEGEND

TR (DECOMMISSIONED)	TR (EXISTING)
TR (NEW)	TR (EXPANDED)
DATA CENTER (EXISTING)	DATA CENTER (NEW)
TE (NEW)	ER (NEW)

PARTITION LEGEND

FIRE BARRIER, 2 HR	FIRE BARRIER, 1 HR
SMOKE BARRIER, 1/2 HR	SMOKE RESISTIVE HAZARDOUS
PATIENT SUIT/ NON SLEEPING	

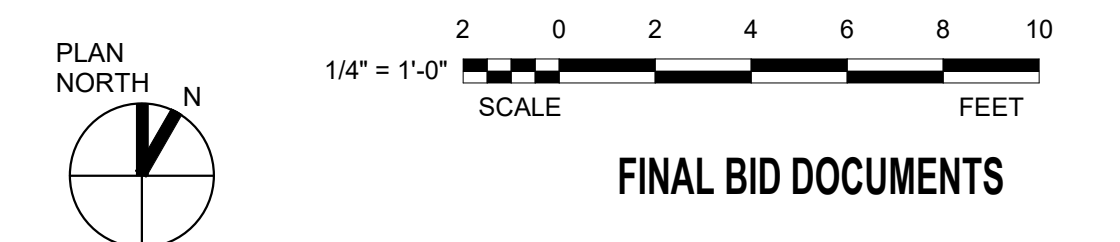

FINAL BID DOCUMENTS

ARCHITECT/ENGINEER OF RECORD



A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314

STAMP



Facilities
Management
Services



U.S. Department
of Veterans
Affairs

Drawing Title

ENLARGED FLOOR & RC PLANS - 1ST
FLOOR

Approved:

FOR OFFICIAL USE ONLY

Phase

FINAL BID DOCUMENTS

FULLY SPRINKLERED

Project Title

EHRM INFRASTRUCTURE
UPGRADES

Location

1100 TUNNEL ROAD
ASHEVILLE, NC 28805

Issue Date

12.19.2025

Checked

Drawn

Project Number

637-22-700


Building Number

47


Drawing Number

47-AE401A


SHEET 318 of 559

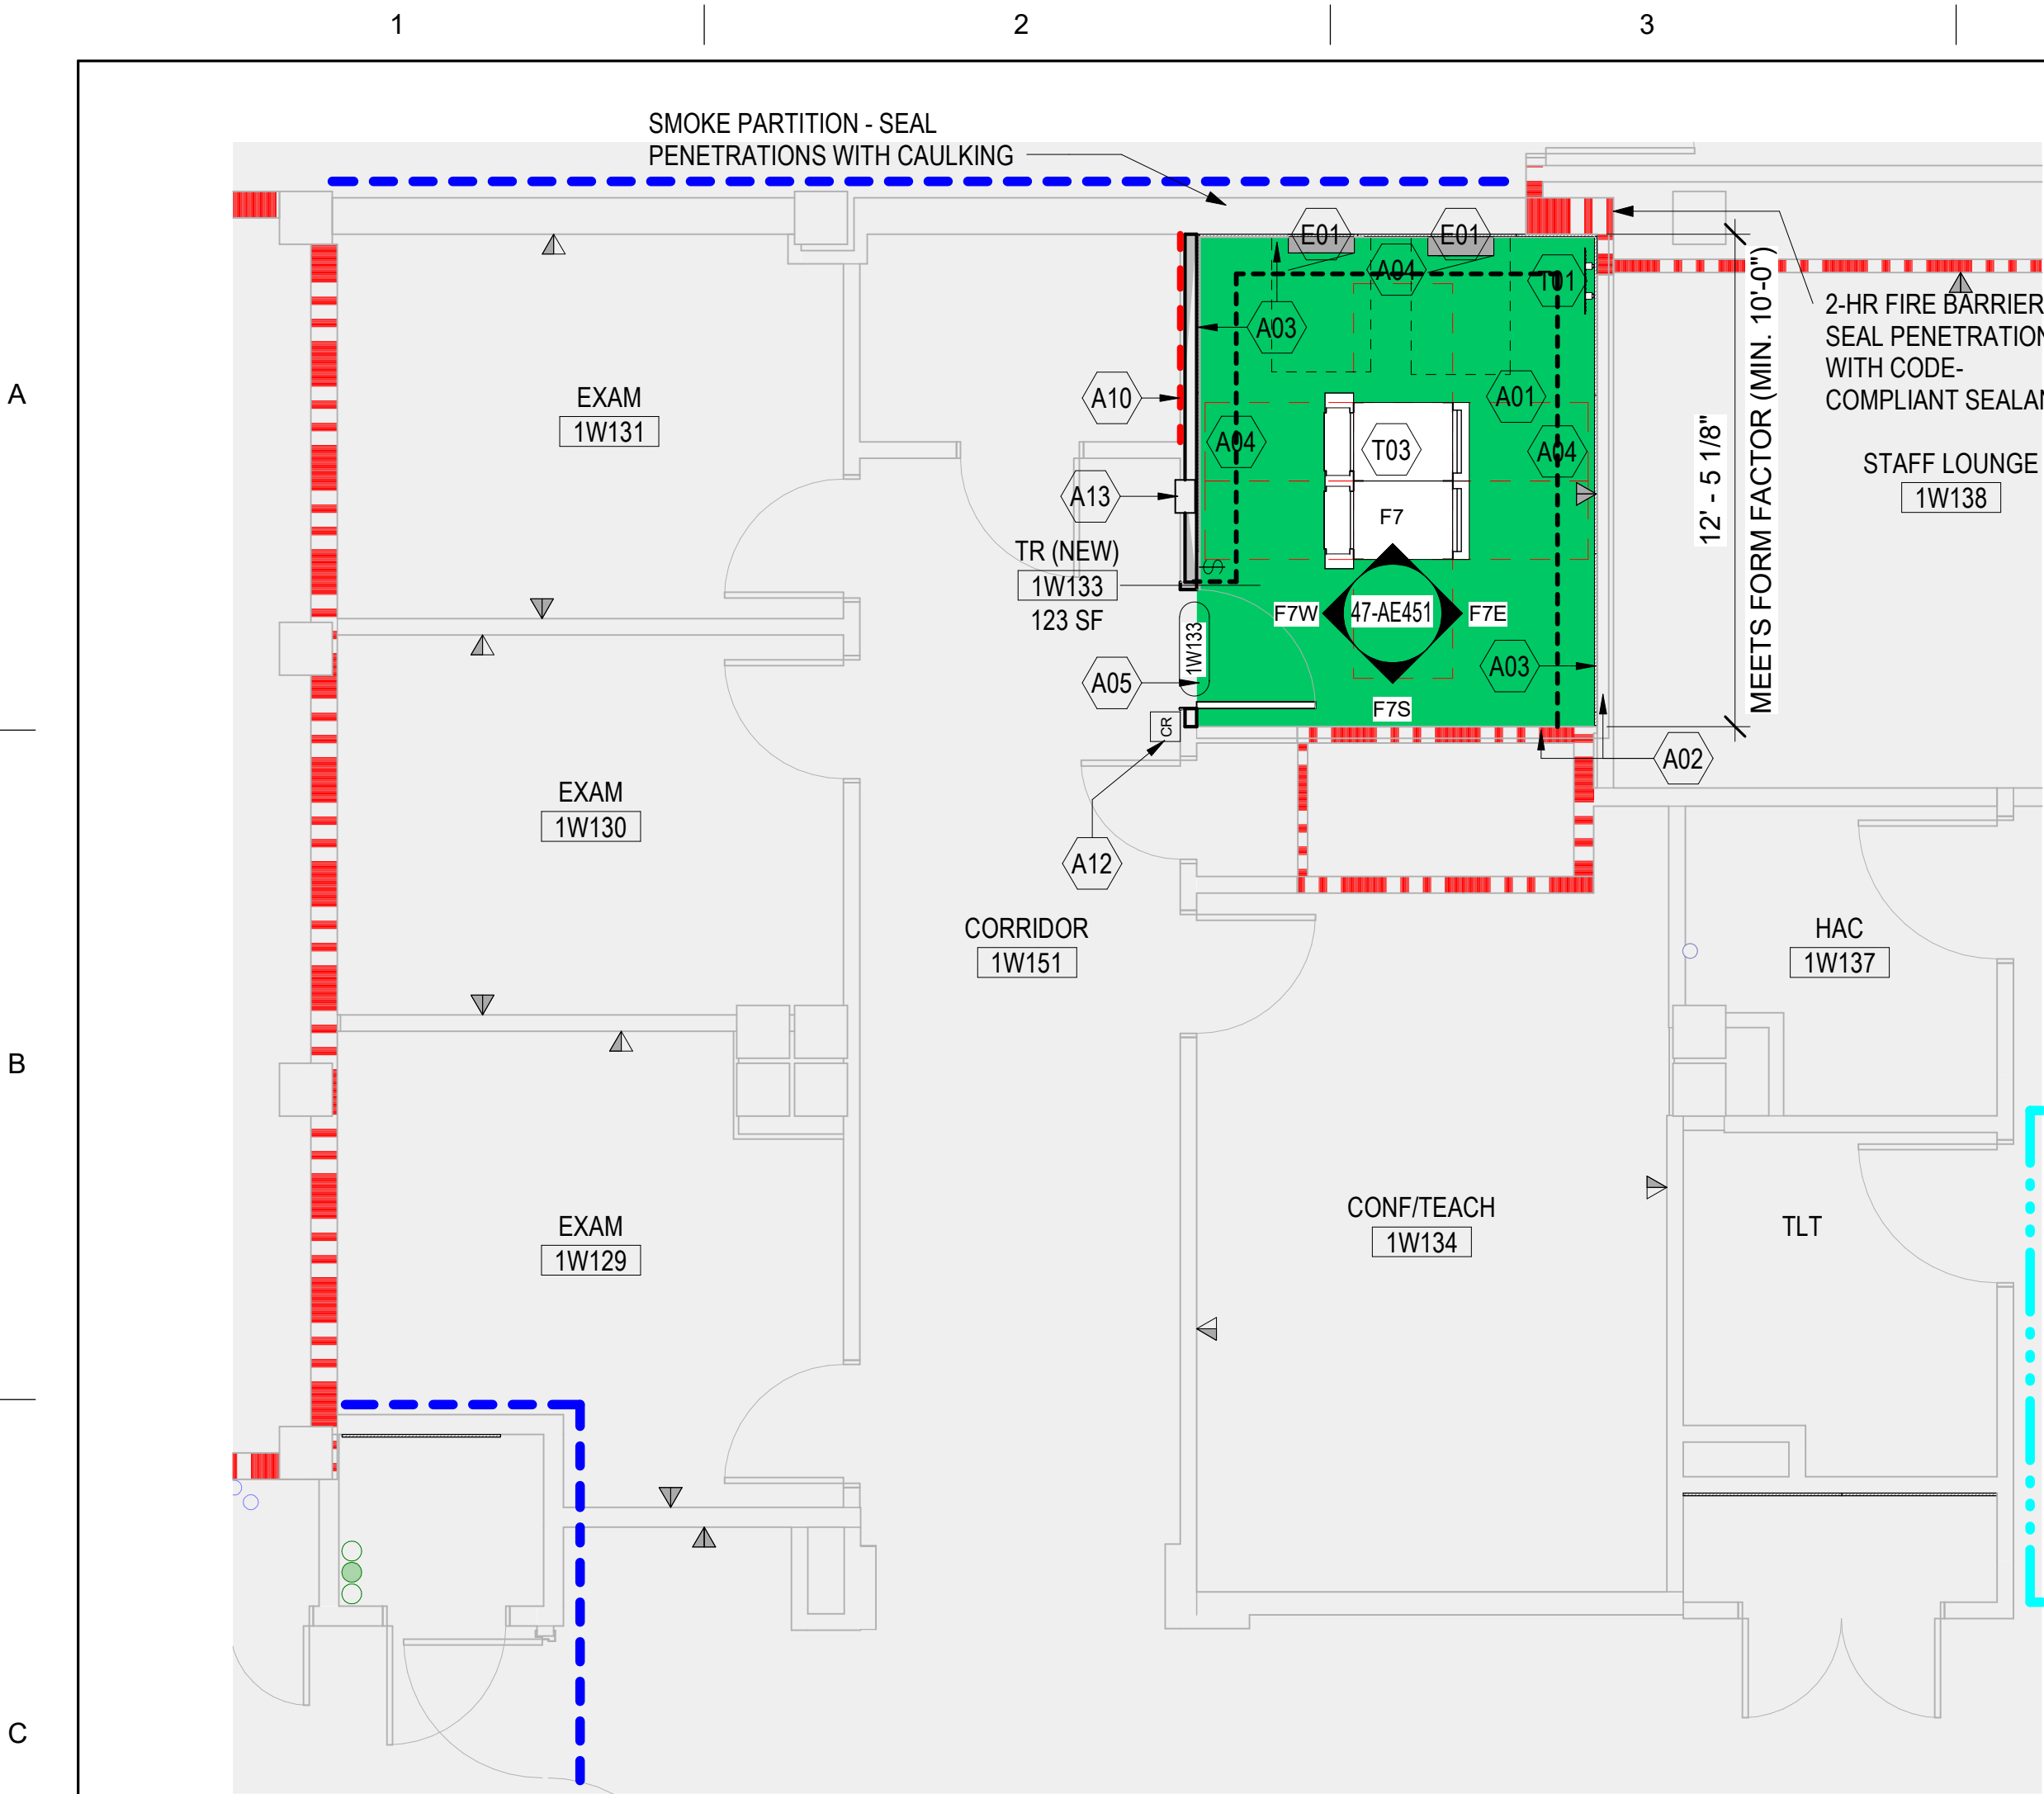

1 ENLARGED FLOOR PLAN - 1ST FLOOR (1W133)
1/4" = 1'-0"

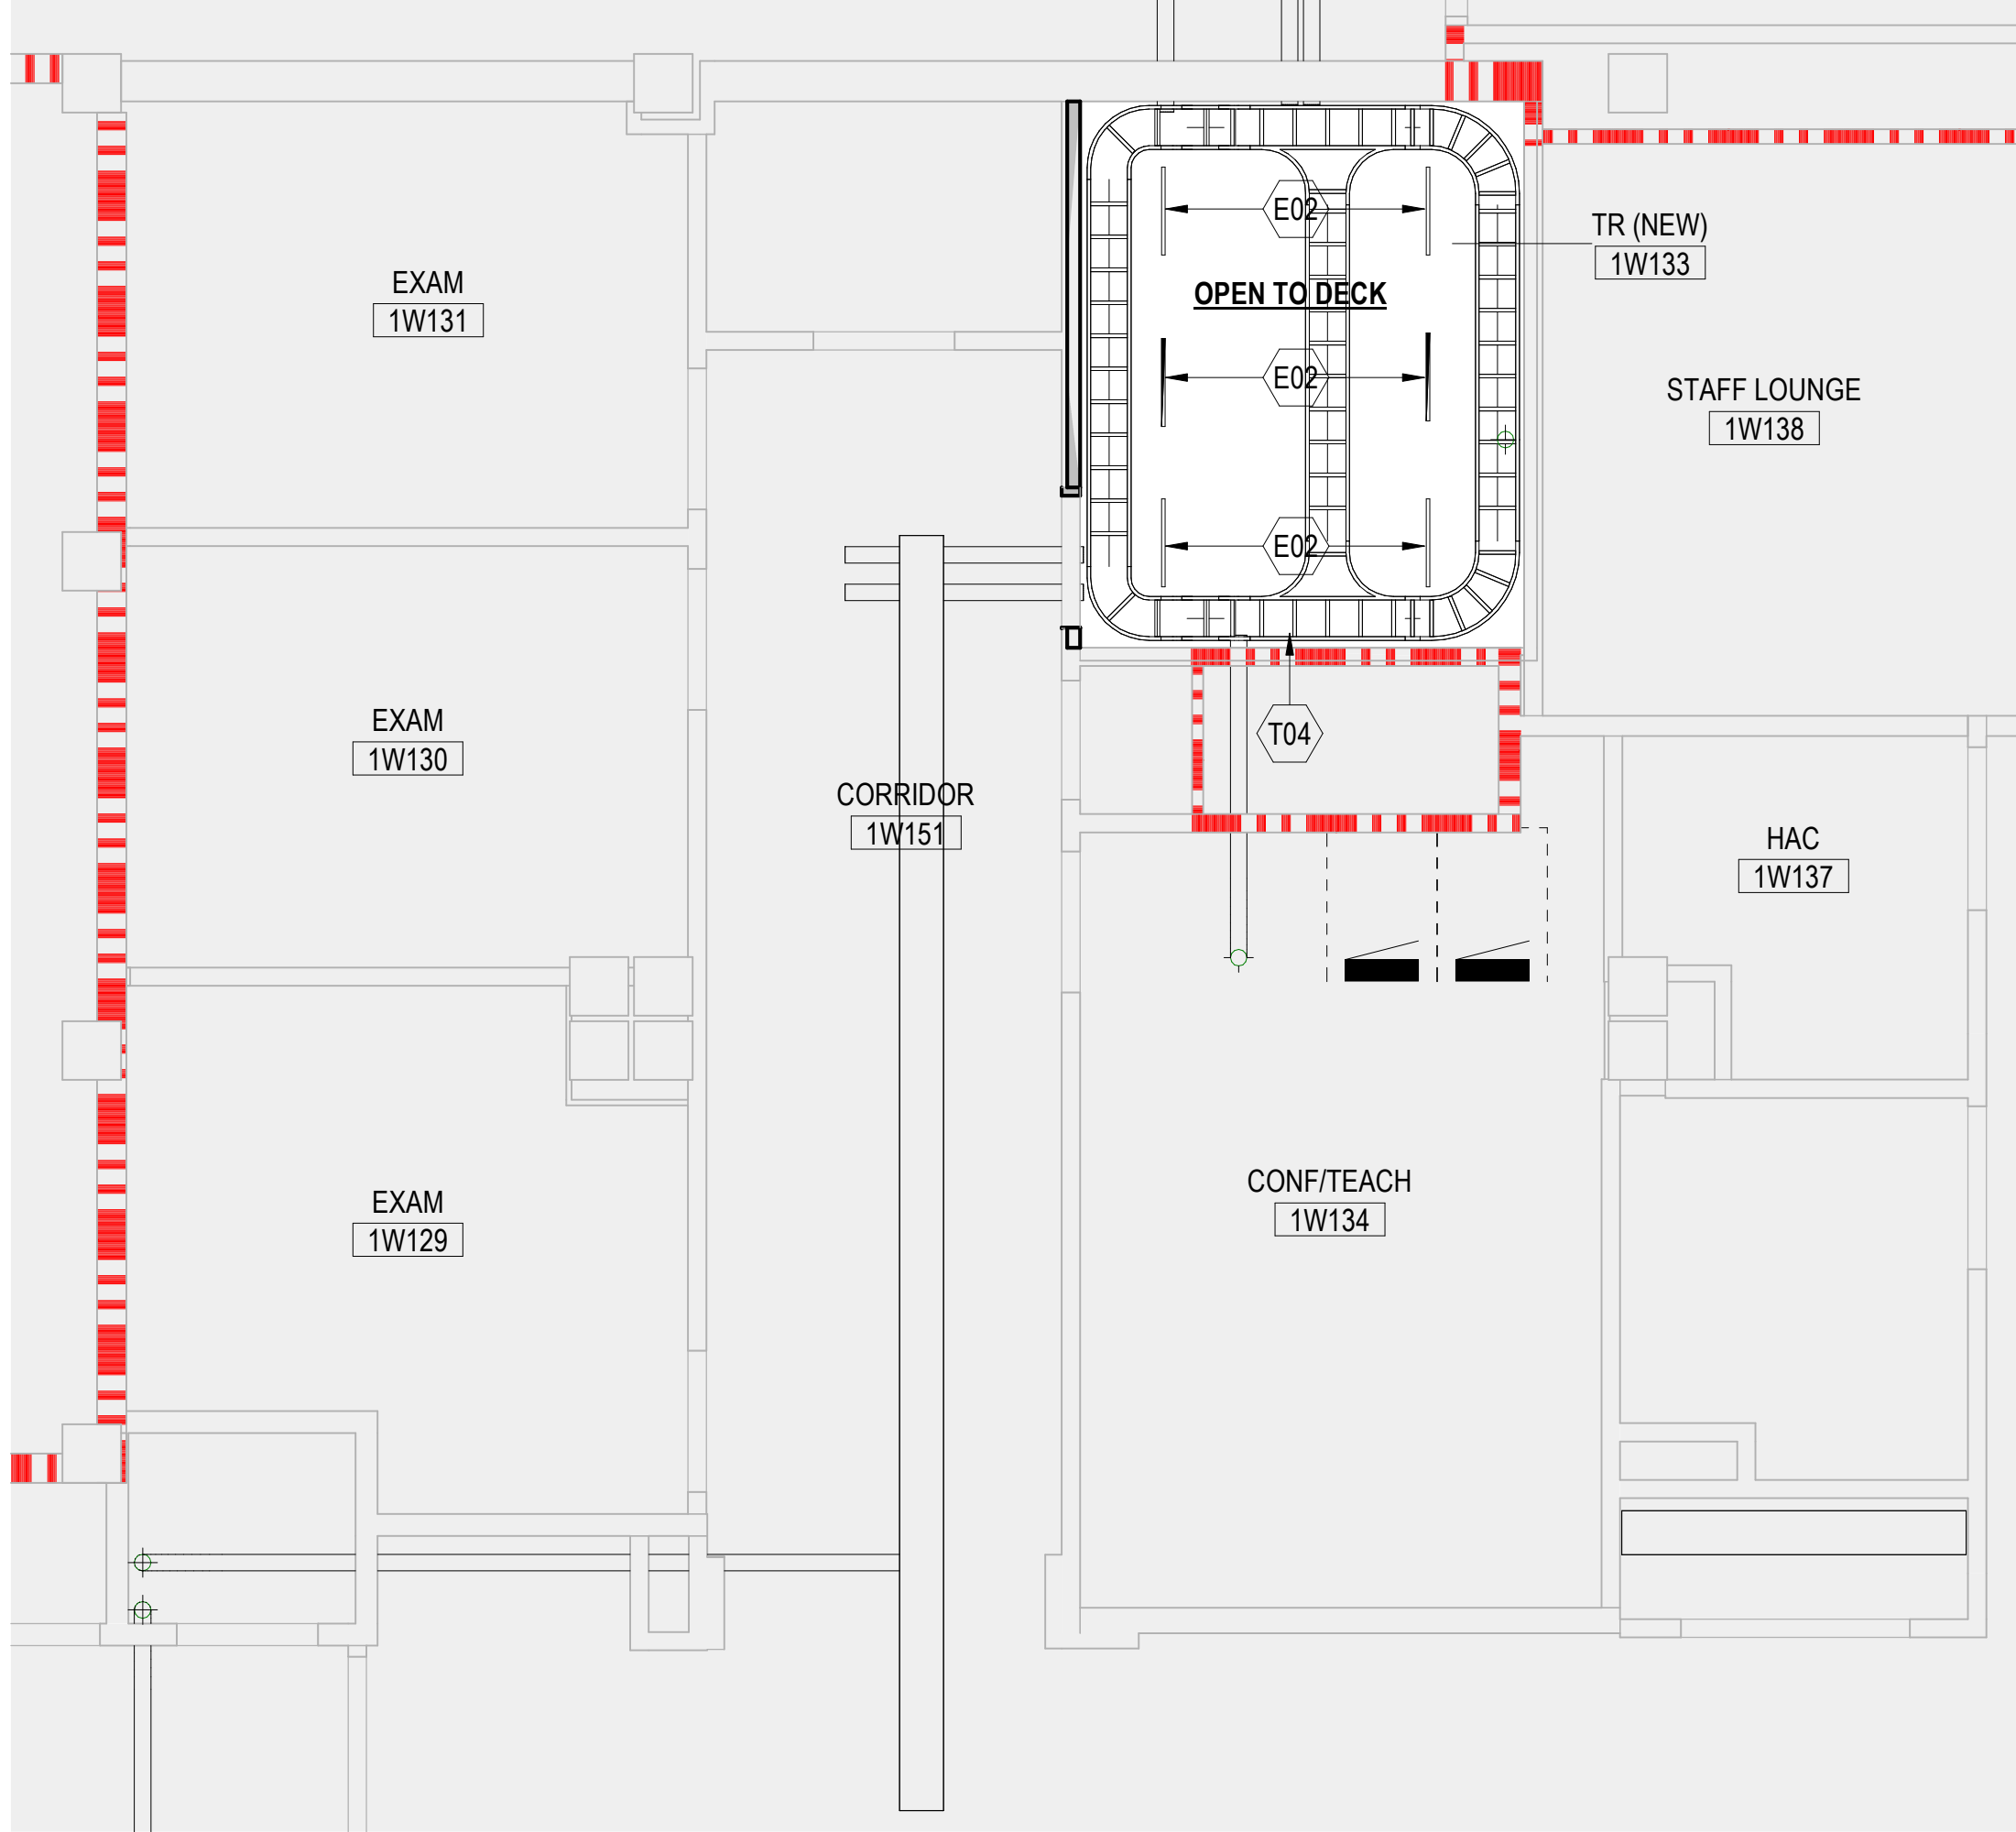

2 ENLARGED RCP - 1ST FLOOR (1W133)
1/4" = 1'-0"

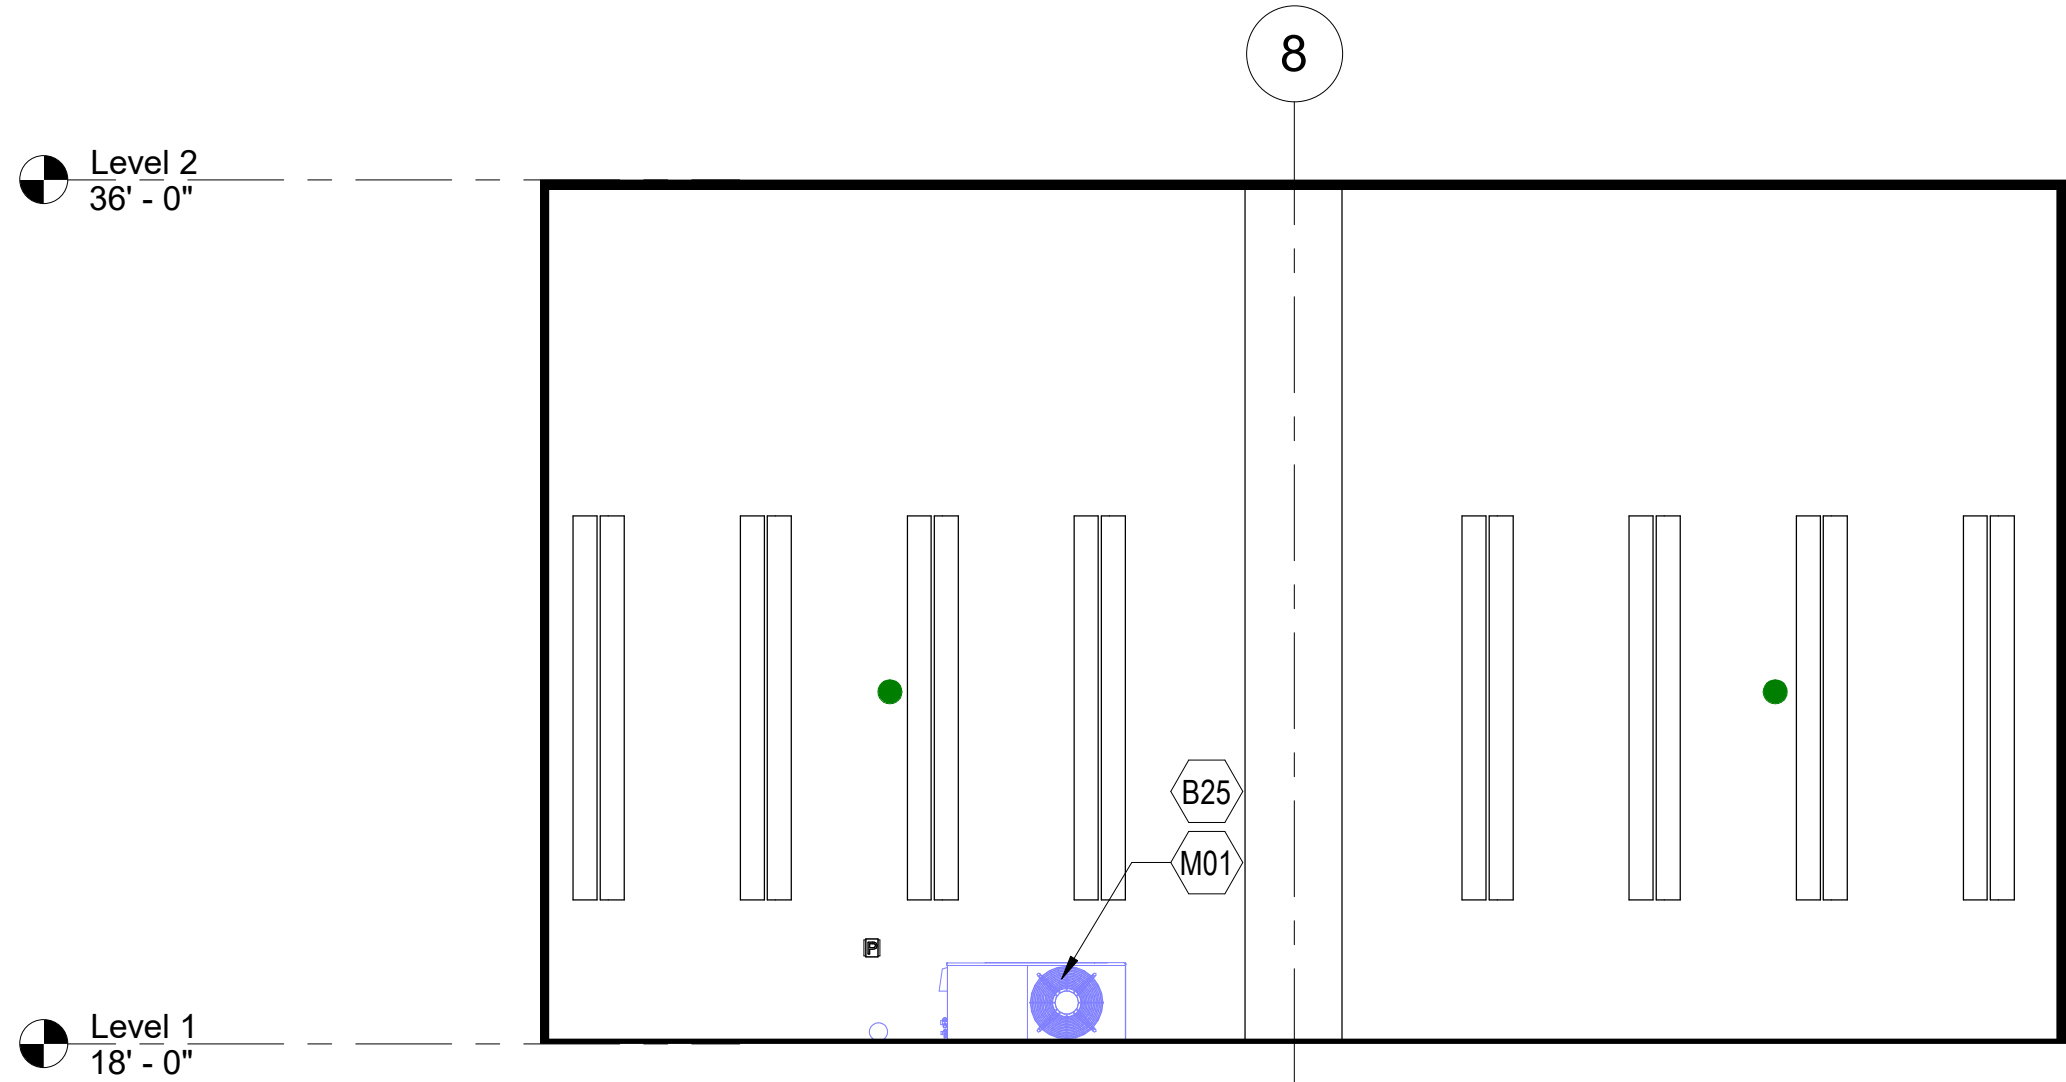

3 EXTERIOR ELEVATION AT TR 1D144
1/4" = 1'-0"

ENLARGED PLAN SHEET NOTES

- THESE DOCUMENTS DO NOT INDICATE ALL MINOR AREAS AFFECTED BY SELECTIVE DEMOLITION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR QUANTIFYING THE MATERIAL AND LABOR COSTS TO DEMOLISH. PATCH, REPAIR ADJACENT AREAS AFFECTED BY THE CONSTRUCTION INDICATED TO A "LIKE NEW" CONDITION.
- COORDINATE WITH FIRE PROTECTION, MECHANICAL, ELECTRICAL, PLUMBING, TELECOMMUNICATIONS AND SECURITY PLANS FOR ADDITIONAL SELECTIVE DEMOLITION REQUIREMENTS NOT SHOWN ON THIS DRAWING.
- SOME SHEET KEYNOTES LISTED BELOW MAY NOT APPLY TO THIS SHEET.
- DIMENSIONS PRECEDED BY A TILDE (~) ARE APPROXIMATE, SUBJECT TO FIELD VERIFICATION.
- ALL NEW INTERIOR PARTITIONS ARE TYPE 01, UNLESS OTHERWISE NOTED.

ENLARGED PLAN KEYNOTES


KEY TAG	DESCRIPTION
A01	STATIC DISSIPATING FLUID-APPLIED ESD EPOXY FLOORING
A02	EXTEND FULL-HEIGHT PARTITION TO DECK (VERIFY IN FIELD)
A03	4'-0" x 8'-0" AC GRADE 3/4" TRADE SIZE FIRE-RATED BACKBOARD PAINTED HIGH-GLOSS WHITE WITH TWO COATS OF FIRE-RESISTANT PAINT
A04	12" DEDICATED SPACE TO ACCOMMODATE SERVICE PROVIDER, SECURITY, VIDEO, ETC. EQUIPMENT MOUNTED TO BACKBOARDS
A05	DOOR AS SCHEDULED, REFER TO DOOR SCHEDULE
A06	BASE TRIM AS SCHEDULED, REFER TO SHEET AE601
A07	NEW GYPSUM WALLBOARD FINISH ON EXISTING FRAMING
A08	NEW METAL STUD PARTITION TO DECK
A09	EXISTING CEILING TO REMAIN
A10	WATER BARRIER BETWEEN TR AND ROOMS WITH WATER (RESTROOMS, BREAK ROOMS, KITCHENS, ETC.)
A11	NEW ACT SYSTEM
A12	CARD READER, MOUNT 3'-6" TO B.O. READER, SEE TELECOMMUNICATIONS DRAWINGS
A13	PROVIDE A SEMI RECESSED FEC WITH A DRY AGENT FIRE EXTINGUISHER WITHIN 75' FROM TR BUT IN TR. VA TO VERIFY AND FINALIZE THE FINAL LOCATION OF THE FEC.
A14	ADD RATED FURRING WALL.
A15	PROVIDE BLACK-OUT WINDOW FILM. STATION GC TO CONFIRM THE TYPE OF THE FILM.
B25	PATCH AND REPAIR EXTERIOR WALL AT NEW MECHANICAL PENETRATIONS
D01	REMOVE EXISTING FLOOR. PREP FLOOR TO RECEIVE FLOOR FINISH SPECIFIED
D02	REMOVE EXISTING CEILING, CEILING SUPPORT, ALL FASTENERS, LIGHTING FIXTURES, VENTS, AND MEANS OF ATTACHMENT BACK TO STRUCTURE
D04	REMOVE DOOR AND FRAME, SALVAGE ALL DOOR HARDWARE AND TURN OVER TO VA. VERIFY FRAMING AND PROVIDE MODIFICATIONS NECESSARY IF DOOR INCREASES IN SIZE. PATCH ADJACENT FINISHES TO MATCH EXISTING. PAINT AFFECTED WALL TO CLOSEST CORNER.
D05	REMOVE GYPSUM BOARD AND METAL FRAMING
D06	REMOVE EXISTING GYPSUM WALLBOARD FINISH
D07	REMOVE WINDOW AND INFILL OPENING
D08	REMOVE EXISTING PARTITION AT AREA OF NEW DOOR
D09	REMOVE EXISTING CMU WALL
D10	PROVIDE WALK OFF MATS AND PLASTIC SHEETING (VISQUEEN) AT CONSTRUCTION AREAS.
D11	PROVIDE 1 HOUR TEMPORARY CONSTRUCTION BARRIER, REFER TO TEMPORARY CONSTRUCTION BARRIER DETAIL IN 00-G0001.
E01	ELECTRICAL EQUIPMENT, SEE ELECTRICAL DRAWINGS
E02	LIGHTING FIXTURES, SEE ELECTRICAL DRAWINGS
M01	MECHANICAL EQUIPMENT, SEE MECHANICAL DRAWINGS
T01	BONDING BUS BAR, SEE TELECOMMUNICATIONS DRAWINGS
T03	TELECOMMUNICATIONS RACK SYSTEM, SEE TELECOMMUNICATIONS DRAWINGS
T04	HORIZONTAL CABLE TRAY, SEE TELECOMMUNICATION DRAWINGS

TR LEGEND

TR (DECOMMISSIONED)	TR (EXISTING)
TR (NEW)	TR (EXPANDED)
DATA CENTER (EXISTING)	DATA CENTER (NEW)
TE (NEW)	ER (NEW)

PARTITION LEGEND

FIRE BARRIER, 2 HR	FIRE BARRIER, 1 HR
SMOKE BARRIER, 1/2 HR	SMOKE RESISTIVE HAZARDOUS
PATIENT SUIT/ NON SLEEPING	

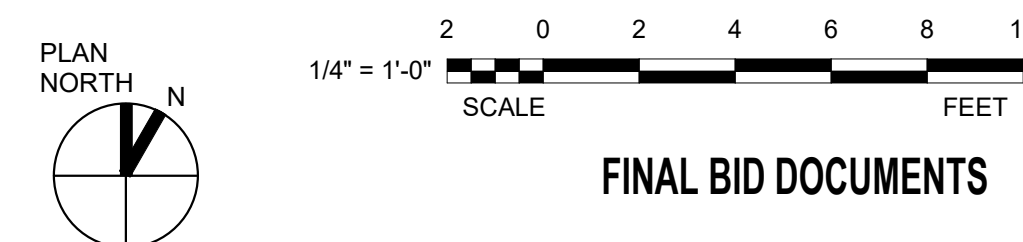

FINAL BID DOCUMENTS

Revisions:	Date:

ARCHITECT/ENGINEER OF RECORD



A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314

STAMP



Facilities
Management
Services



U.S. Department
of Veterans
Affairs

Drawing Title

ENLARGED FLOOR & RC PLANS - 1ST
FLOOR

Approved:

FOR OFFICIAL USE ONLY

Phase

FINAL BID DOCUMENTS

FULLY SPRINKLERED

Project Title

EHRM INFRASTRUCTURE
UPGRADES

Location
1100 TUNNEL ROAD
ASHEVILLE, NC 28805

Issue Date
12.19.2025

Checked

Drawn

Project Number

637-22-700


Building Number

47


Drawing Number

47-AE401B


SHEET 319 OF 559

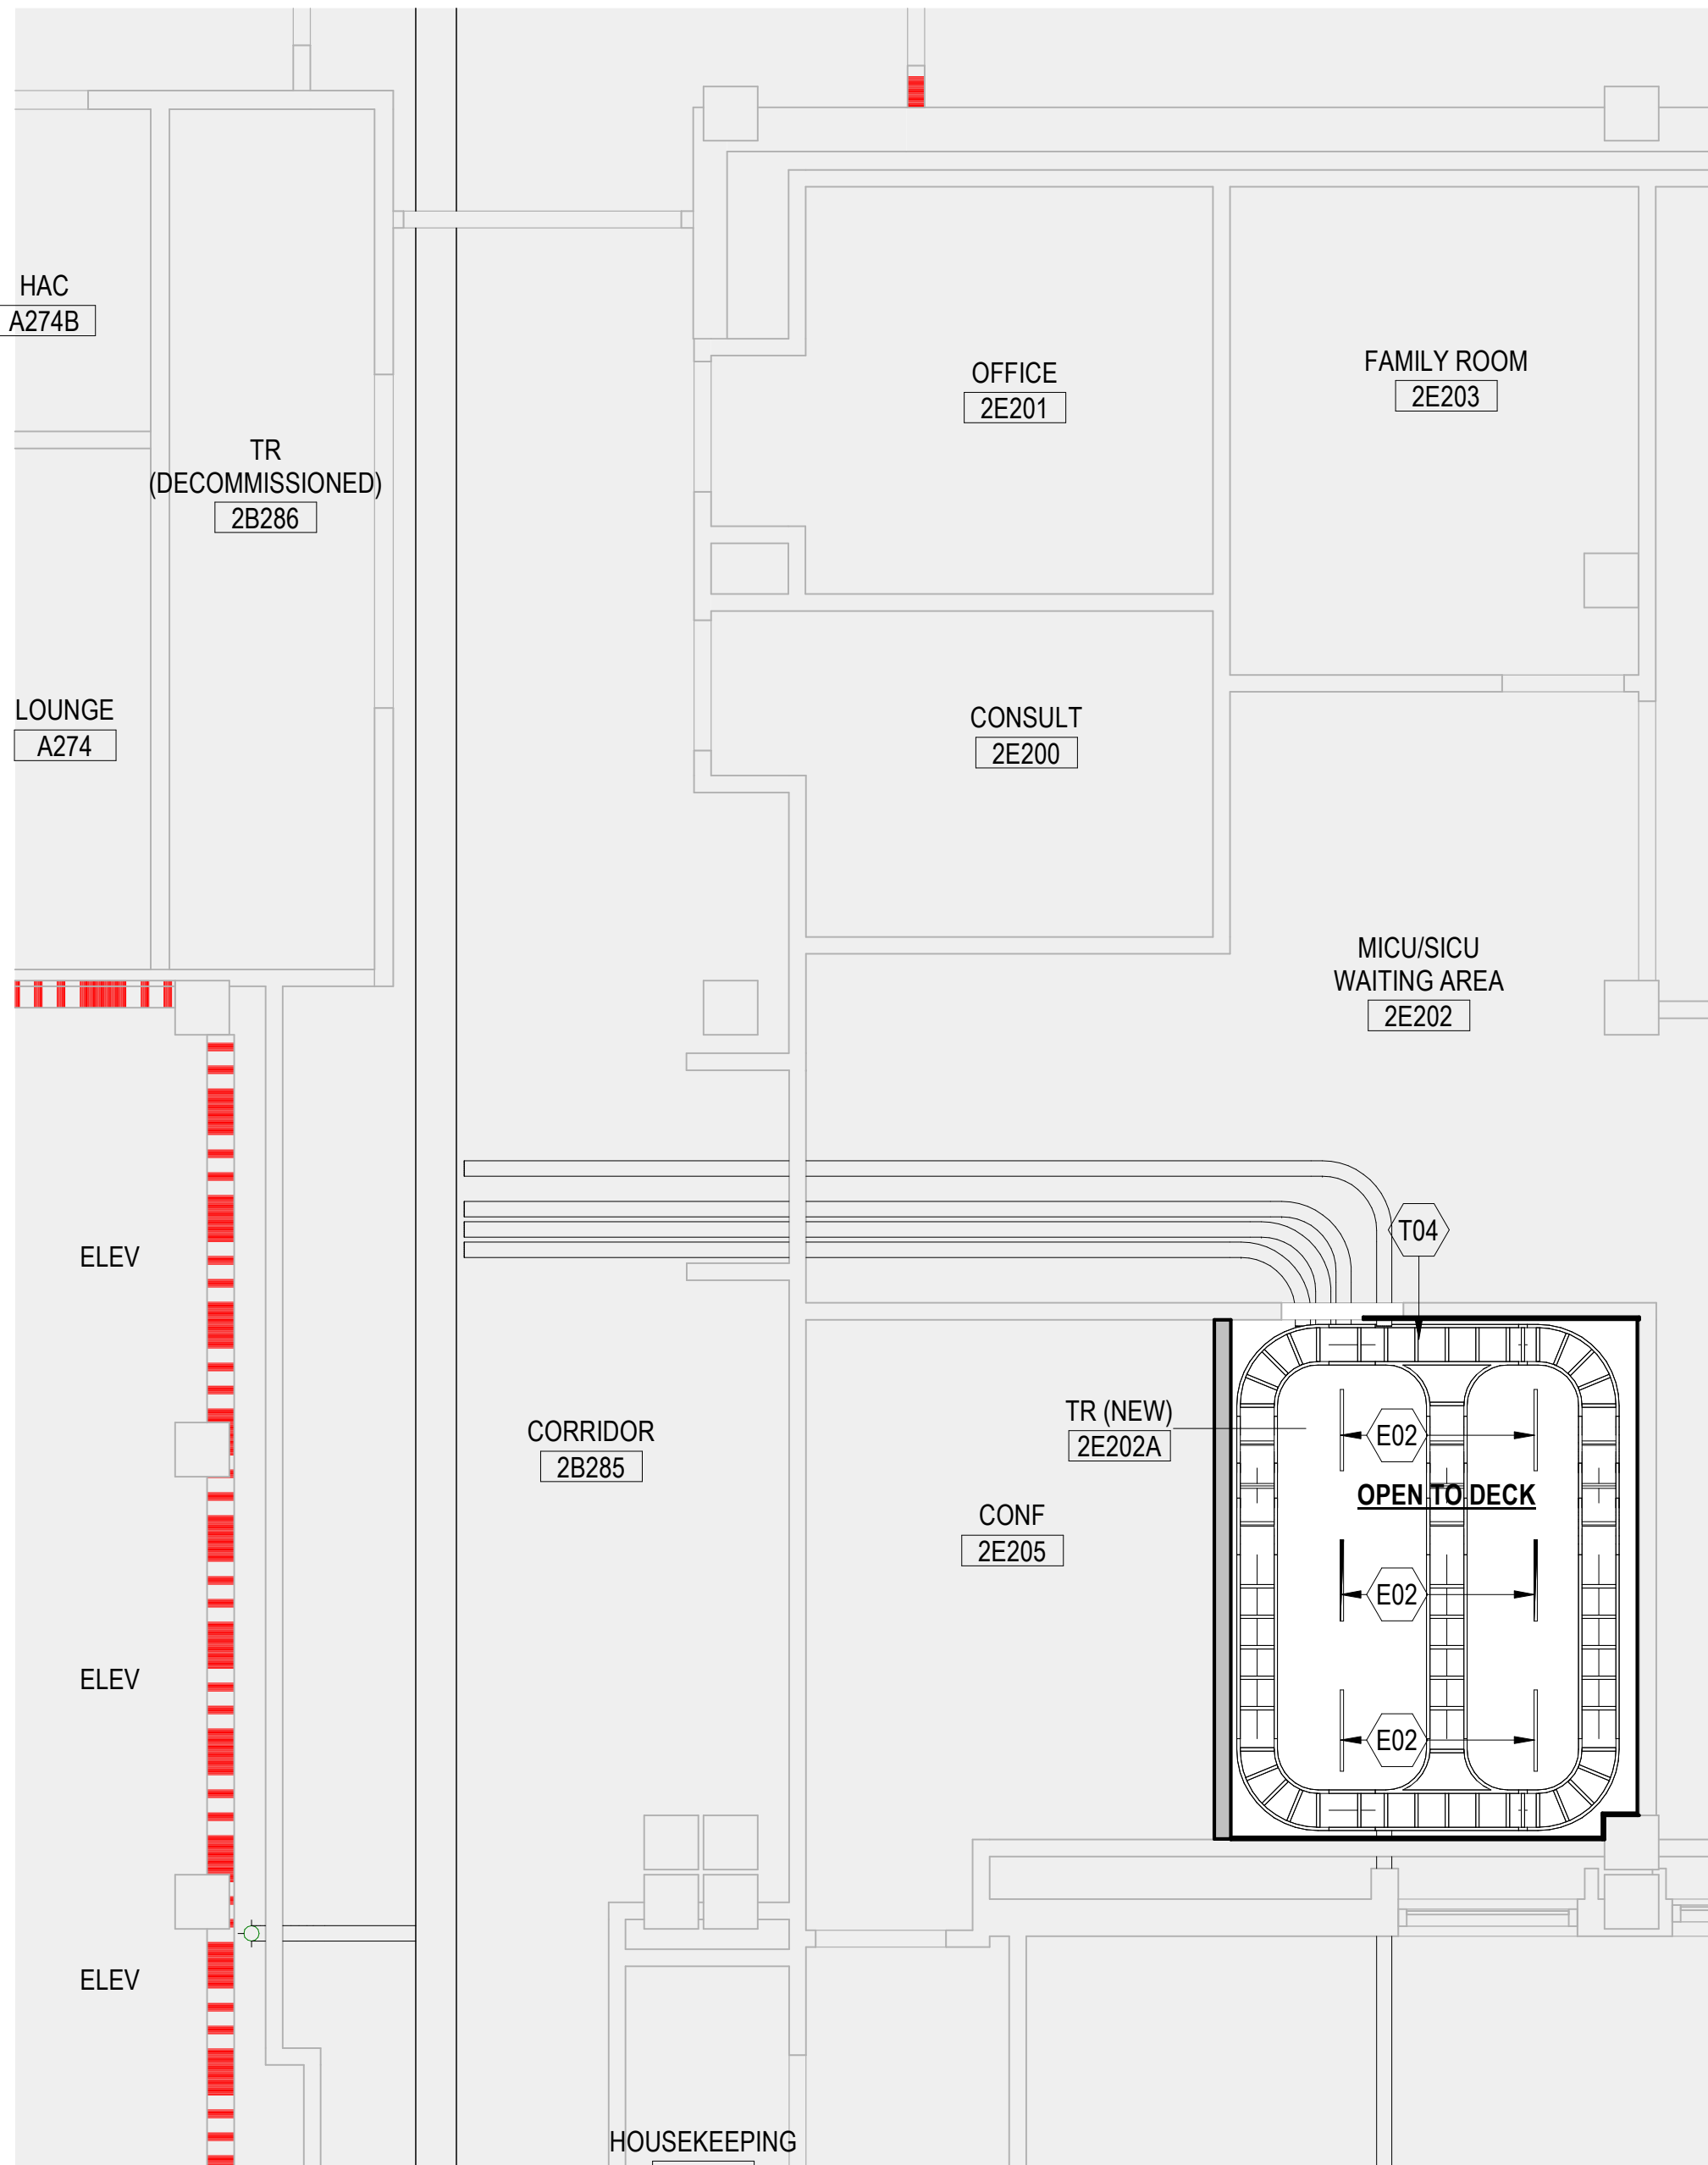

2 ENLARGED RCP - 2ND FLOOR (2E202A)

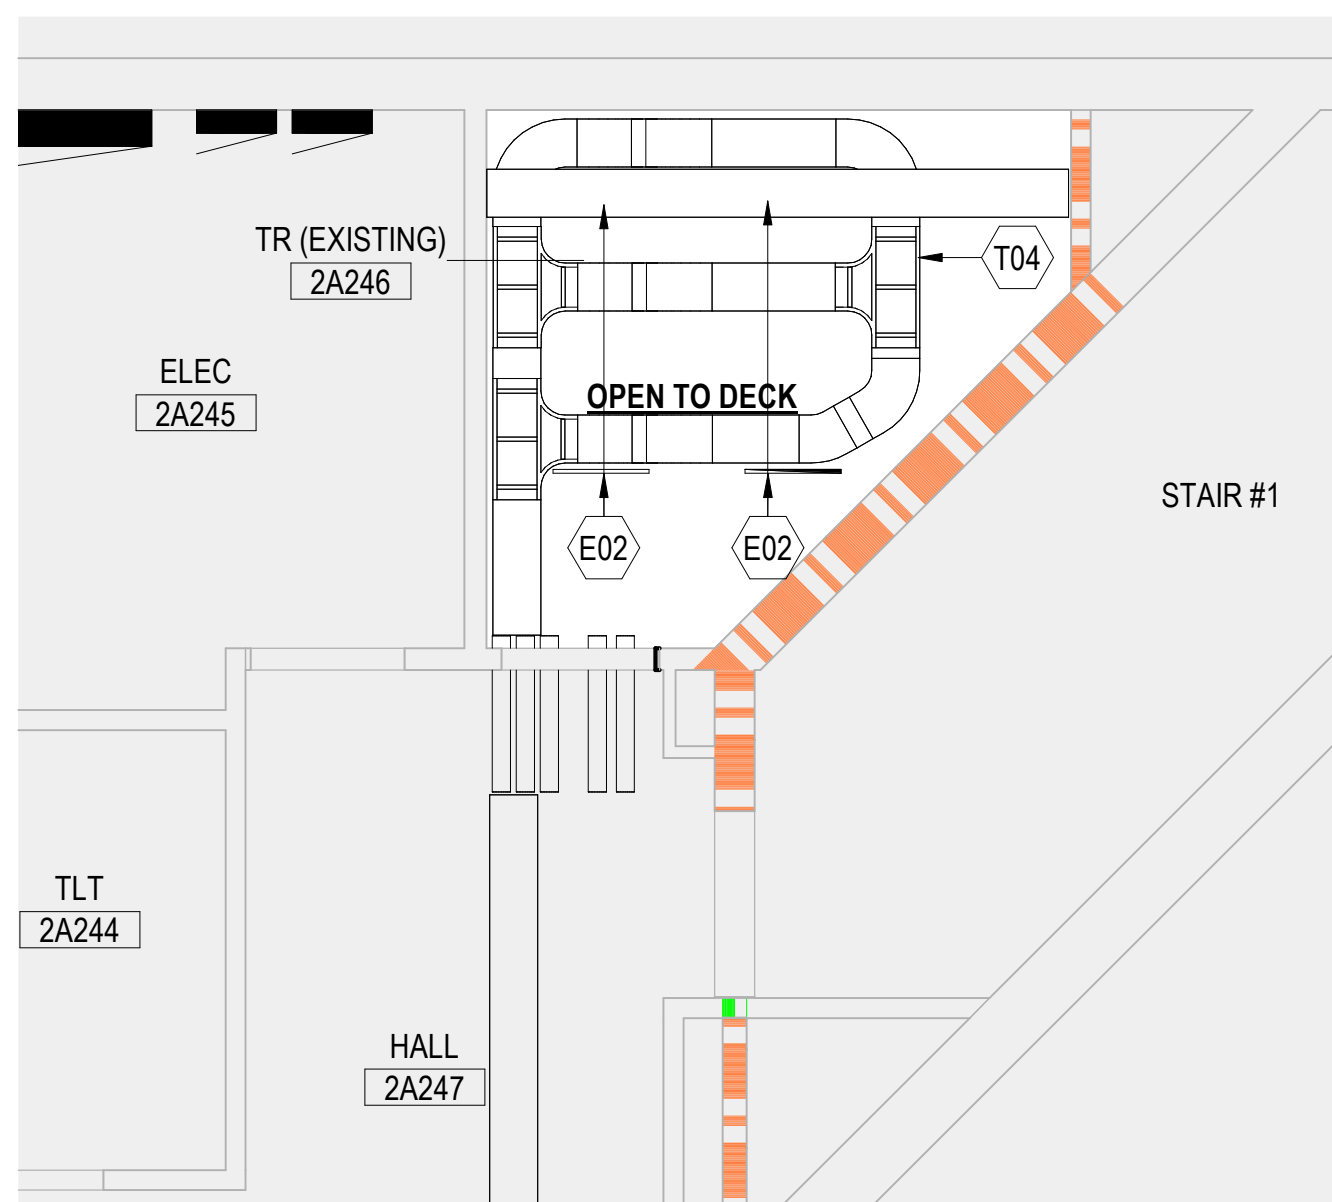

4 ENLARGED RCP - 2ND FLOOR (2A246)

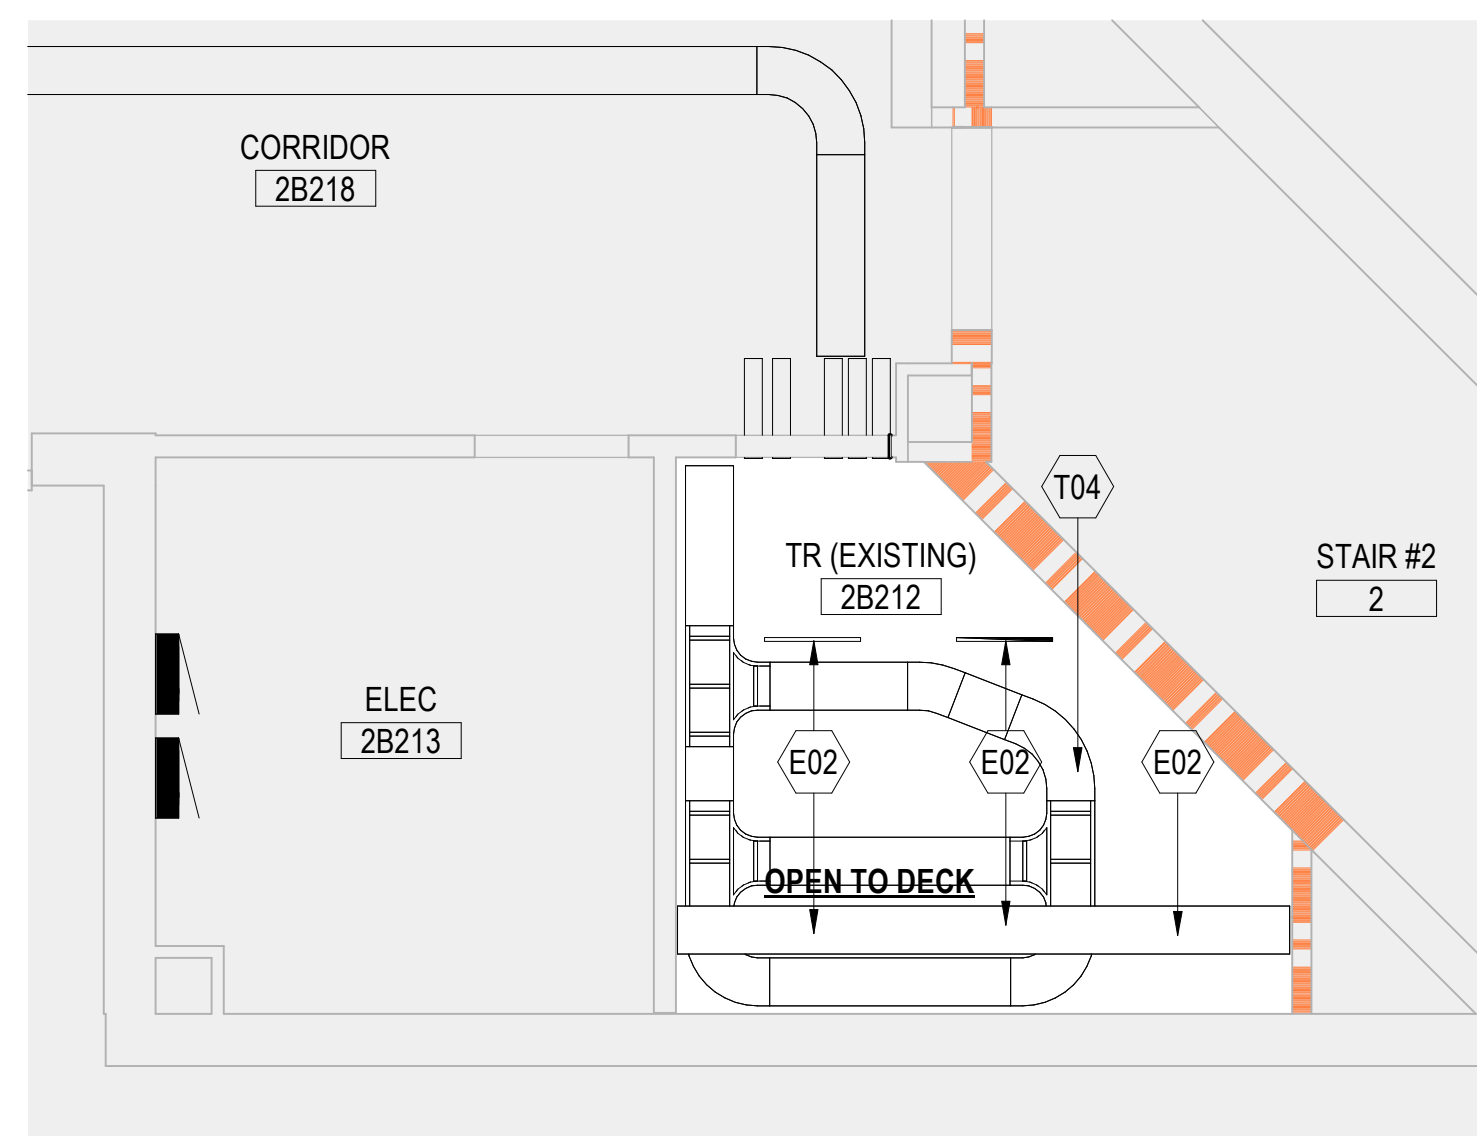


6 ENLARGED RCP - 2ND FLOOR (2B212)

ENLARGED PLAN KEYNOTES

- | KEY TAG | DESCRIPTION |
|---------|--|
| A01 | STATIC DISSIPATING FLUID-APPLIED ES2 EPOXY FLOORING |
| A02 | EXTEND FULL-HEIGHT PARTITION TO DECK (VERIFY IN FIELD) |
| A03 | 4'-0" X 8'-0" AC GRADE 3/4" TRADE SIZE FIRE-RATED BACKBOARD
PAINTED HIGH-GLOSS WHITE WITH TWO COATS OF FIRE-RESISTANT
PAINT |
| A04 | 12" DESIGNATED SPACE TO ACCOMMODATE SERVICE PROVIDER,
SECURITY, VIDEO, ETC. EQUIPMENT MOUNTED TO BACKBOARDS |
| A05 | DOOR AS SCHEDULED, REFER TO DOOR SCHEDULE |
| A06 | BASE TRIM AS SCHEDULED, REFER TO SHEET AE601 |
| A07 | NEW GYPSUM WALLBOARD FINISH ON EXISTING FRAMING |
| A08 | NEW METAL STUD PARTITION TO DECK |
| A09 | EXISTING CEILING TO REMAIN |
| A10 | WATER BARRIER BETWEEN TR AND ROOMS WITH WATER (RESTROOM
BREAK ROOMS, KITCHENS, ETC.) |
| A11 | NEW ACIST SYSTEM |
| A12 | CARD READER, MOUNT 3'-6" TO B.O. READER, SEE
TELECOMMUNICATIONS DRAWINGS |
| A13 | PROVIDE A SEMI RECESSED FEG WITH A DRY AGENT FIRE
EXTINGUISHER WITHIN 7'5" FROM TR BUT IN TR. VA TO VERIFY AND
FINALIZE THE FINAL LOCATION OF THE FEG. |
| A14 | ADD RATED FURRING WALL. |
| A15 | PROVIDE BLACK-OUT WINDOW FILM. STATION GC TO CONFIRM THE
TYPE OF THE FILM. |
| B25 | PATCH AND REPAIR EXTERIOR WALL AT NEW MECHANICAL
PENETRATIONS |
| D01 | REMOVE EXISTING FLOOR. PREP FLOOR TO RECEIVE FLOOR FINISH
SPECIFIED. |
| D02 | REMOVE EXISTING CEILING, CEILING SUPPORT, ALL FASTENERS,
LIGHTING FIXTURES, VENTS, AND MEANS OF ATTACHMENT BACK TO
STRUCTURE |
| D04 | REMOVE DOOR AND FRAME, SALVAGE ALL DOOR HARDWARE AND
TURN OVER TO VA. VERIFY FRAMING AND PROVIDE MODIFICATION
NECESSARY IF DOOR INCREASES IN SIZE. PATCH ADJACENT FINISH
TO MATCH EXISTING. PAINT AFFECTED WALL TO CLOSEST CORNER |
| D05 | REMOVE GYPSUM BOARD AND METAL FRAMING |
| D06 | REMOVE EXISTING GYPSUM WALLBOARD FINISH |
| D07 | REMOVE WINDOW AND INFILL OPENING |
| D08 | REMOVE EXISTING PARTITION AT AREA OF NEW DOOR |
| D09 | REMOVE EXISTING CMU WALL |
| D10 | PROVIDE WALK OFF MATS AND PLASTIC SHEETING (VISQUEEN) AT
CONSTRUCTION AREAS. |
| D11 | PROVIDE 1 HOUR TEMPORARY CONSTRUCTION BARRIER. REFER TO
TEMPORARY CONSTRUCTION BARRIER DETAIL IN 00-GC001. |
| E01 | ELECTRICAL EQUIPMENT, SEE ELECTRICAL DRAWINGS |
| E02 | LIGHTING FIXTURES, SEE ELECTRICAL DRAWINGS |
| M01 | MECHANICAL EQUIPMENT, SEE MECHANICAL DRAWINGS |
| T01 | BONDING BUS BAR, SEE TELECOMMUNICATIONS DRAWINGS |
| T03 | TELECOMMUNICATIONS RACK SYSTEM, SEE TELECOMMUNICATIONS
DRAWINGS |
| T04 | HORIZONTAL CABLE TRAY, SEE TELECOMMUNICATIONS DRAWINGS |

PARTITION LEGEND

-  FIRE BARRIER, 2 HR
 FIRE BARRIER, 1 HR
 SMOKE BARRIER, 1/2 HR
 SMOKE RESISTIVE HAZARDOUS
 PATIENT SUIT/ NON SLEEPING

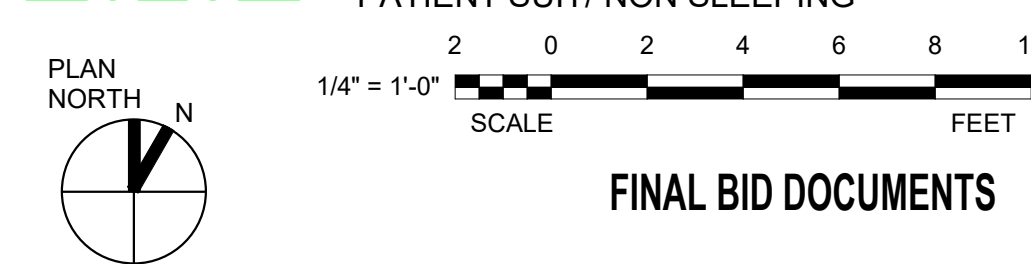

ARCHITECT/ENGINEER OF RECORD

AWEN
SOLUTIONS GROUP
ARCHITECTURE | ENGINEERING | PLANNING


A/E/
Awar
215
Alex




Drawing Title	
ENLARGED FLOOR & RC PLANS - 2ND FLOOR	
Approved:	
FOR OFFICIAL USE ONLY	

Project Title	EHRM INFRASTRUCTURE UPGRADES
---------------	---------------------------------


Location 1100 TUNNEL ROAD ASHEVILLE, NC 28805			Drawing Number 47-AE402
Issue Date 12.19.2025	Checked	Drawn	SHEET 320 of 559

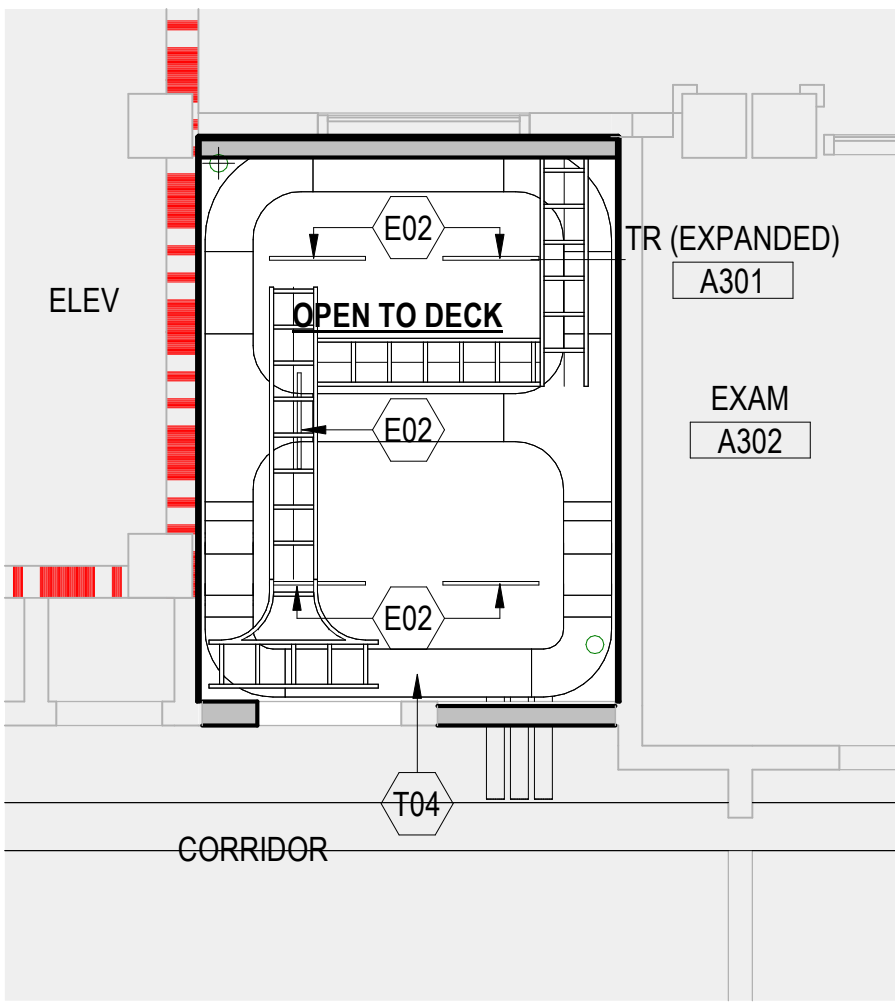

2 ENLA
1/4" = 1'-0"

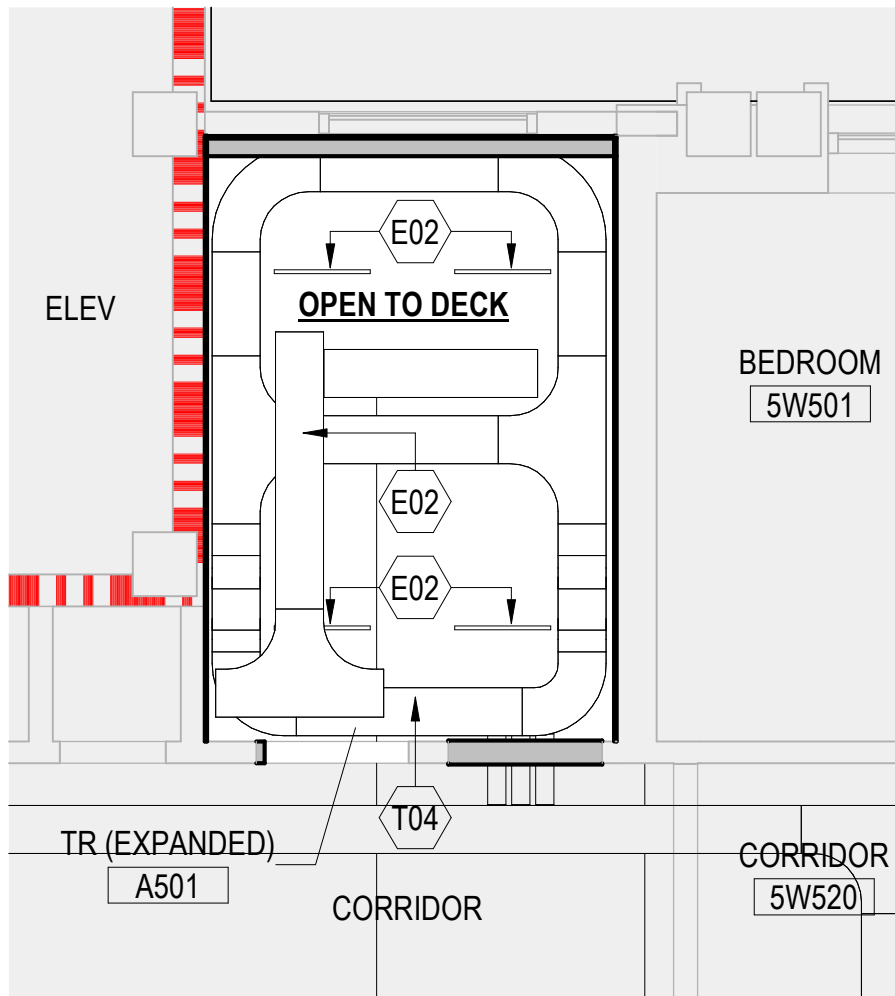

6 ENL
1/4" = 1'-0"

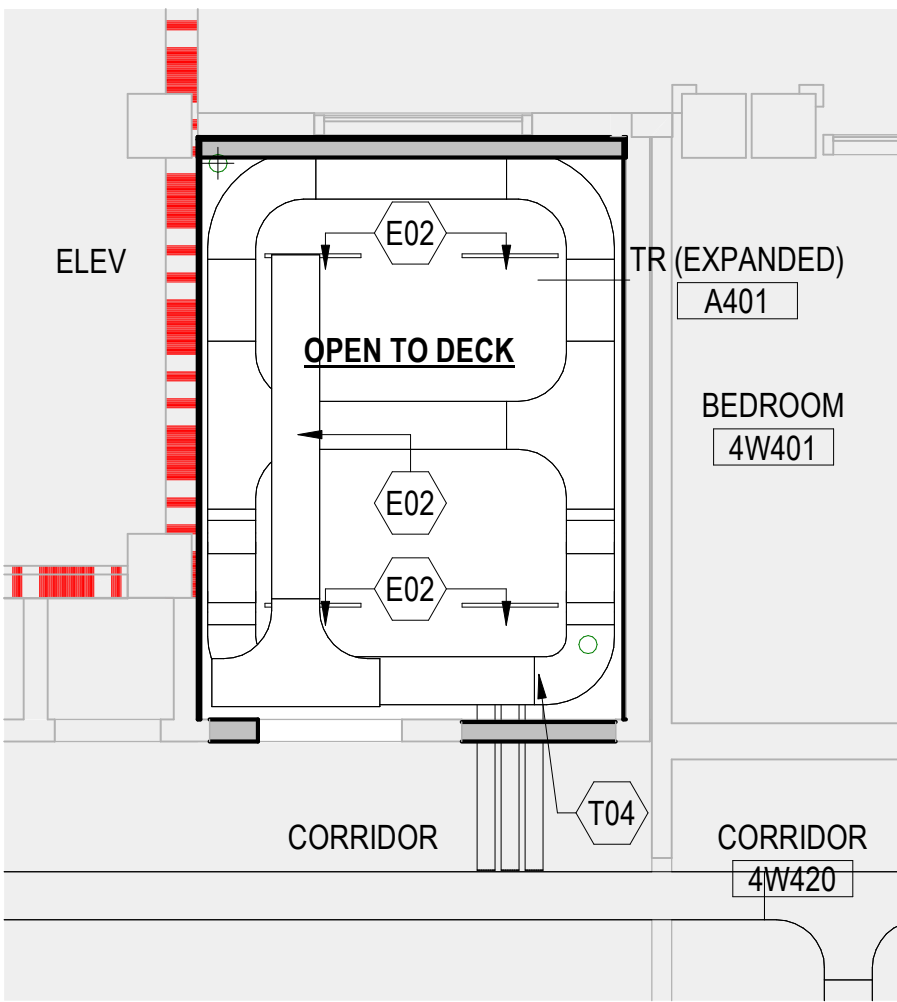

4 ENLA
1/4" = 1'-0"

1. THESE DOCUMENTS DO NOT INDICATE ALL MINOR AREAS AFFECTED BY SELECTIVE DEMOLITION, THE CONTRACTOR SHALL BE RESPONSIBLE FOR QUANTIFYING THE MATERIAL AND LABOR COSTS TO DEMOLISH, PATCH, REPAIR ADJACENT AREAS AFFECTED BY THE CONSTRUCTION INDICATED TO A "LIKE NEW" CONDITION.

2. COORDINATE WITH FIRE PROTECTION, MECHANICAL, ELECTRICAL,
PLUMBING, TELECOMMUNICATIONS AND SECURITY PLANS FOR ADDITIONAL
SELECTIVE DEMOLITION REQUIREMENTS NOT SHOWN ON THIS DRAWING

3. SOME SHEET KEYNOTES LISTED BELOW MAY NOT APPLY TO THIS SHEET

4. DIMENSIONS PRECEDED BY A TILDE (~) ARE APPROXIMATE, SUBJECT TO FIELD VERIFICATION.


5. ALL NEW INTERIOR PARTITIONS ARE TYPE 01, UNLESS OTHERWISE NOTED.

KEY TAG	DESCRIPTION
---------	-------------

TR LEGEND

	TR (DECOMMISSIONED)		TR (EXISTING)
	TR (NEW)		TR (EXPANDED)
	DATA CENTER (EXISTING)		DATA CENTER (NEW)
	TE (NEW)		ER (NEW)

	FIRE BARRIER, 2 HR
	FIRE BARRIER, 1 HR
	SMOKE BARRIER, 1/2 HR
	SMOKE RESISTIVE HAZARDOUS
	PATIENT SUIT/ NON SLEEPING

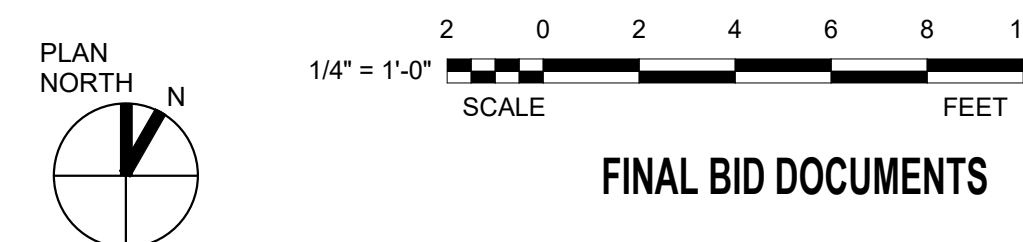

ARCHITECT/ENGINEER OF RECORD



STAMP



VA | U.S. Department
of Veterans
Affairs

Drawing Title

ENLARGED FLOOR & RC PLANS - 3RD,
4TH & 5TH FLOOR

Approved

FOR OFFICIAL USE ONLY

Phase

FINAL BID DOCUMENTS

FULLY SPRINKLERED

Project Title	Start Date	End Date	Status	Progress (%)	Budget (€)	Actual Cost (€)	Variance (€)	Risk Level	Owner	Team Lead	Contact Info
Project A	2023-01-01	2023-06-30	In Progress	75%	100000	98000	2000	Low	Jane Doe	John Smith	+353 1 234 5678
Project B	2023-02-15	2023-08-31	On Hold	10%	150000	150000	0	Medium	Mike Brown	Sarah White	+353 1 345 6789
Project C	2023-03-01	2023-09-30	Planned	0%	200000	0	200000	High	Alice Green	David Black	+353 1 456 7890
Project D	2023-04-01	2023-10-31	Pending Approval	0%	75000	0	75000	Low	Bob Grey	Eve Blue	+353 1 567 8901
Project E	2023-05-01	2023-11-30	Not Started	0%	120000	0	120000	Medium	Charlie Red	Fiona Yellow	+353 1 678 9012

EHRM INFRASTRUCTURE UPGRADES

Location
1100 TUNNEL ROAD ASHEVILLE, NC 28805
Issue Date
12.19.2025

Checked

Drawn

Project Number

637-22-700

Building Number	47
-----------------	----

Drawing Number

47-AE403

KEY TAG	DESCRIPTION
---------	-------------

DOCUMENTS		Project Title EHRM INFRASTRUCTURE UPGRADES	Project Number 6
UNCLASSIFIED		Location 1100 TUNNEL ROAD ASHEVILLE, NC 28805	Drawn By Dr
Issue Date 12.19.2025		Checked	Drawn

SHEET 322 of 559

2 0 2 4 6 8 10
1/4" = 1'-0"
SCALE FEET

Drawing Title
INTERIOR ELEVATIONS

Phase	FINAL BID DOCUMENTS
-------	---------------------

Project Title	EHRM INFRASTRUCTURE UPGRADES
---------------	------------------------------

Project Number	637-22-700
Building Number	47
Drawing Number	47-AE45

Facilities
Managemen
Services

STAMP


ARCHITECT/ENGINEER OF RECORD

A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314

[illegible]

Autodesk Docs://Asheville EHRM V23/637-22-700.047.ASH - EHRM.mt

VA FORM 08-6231

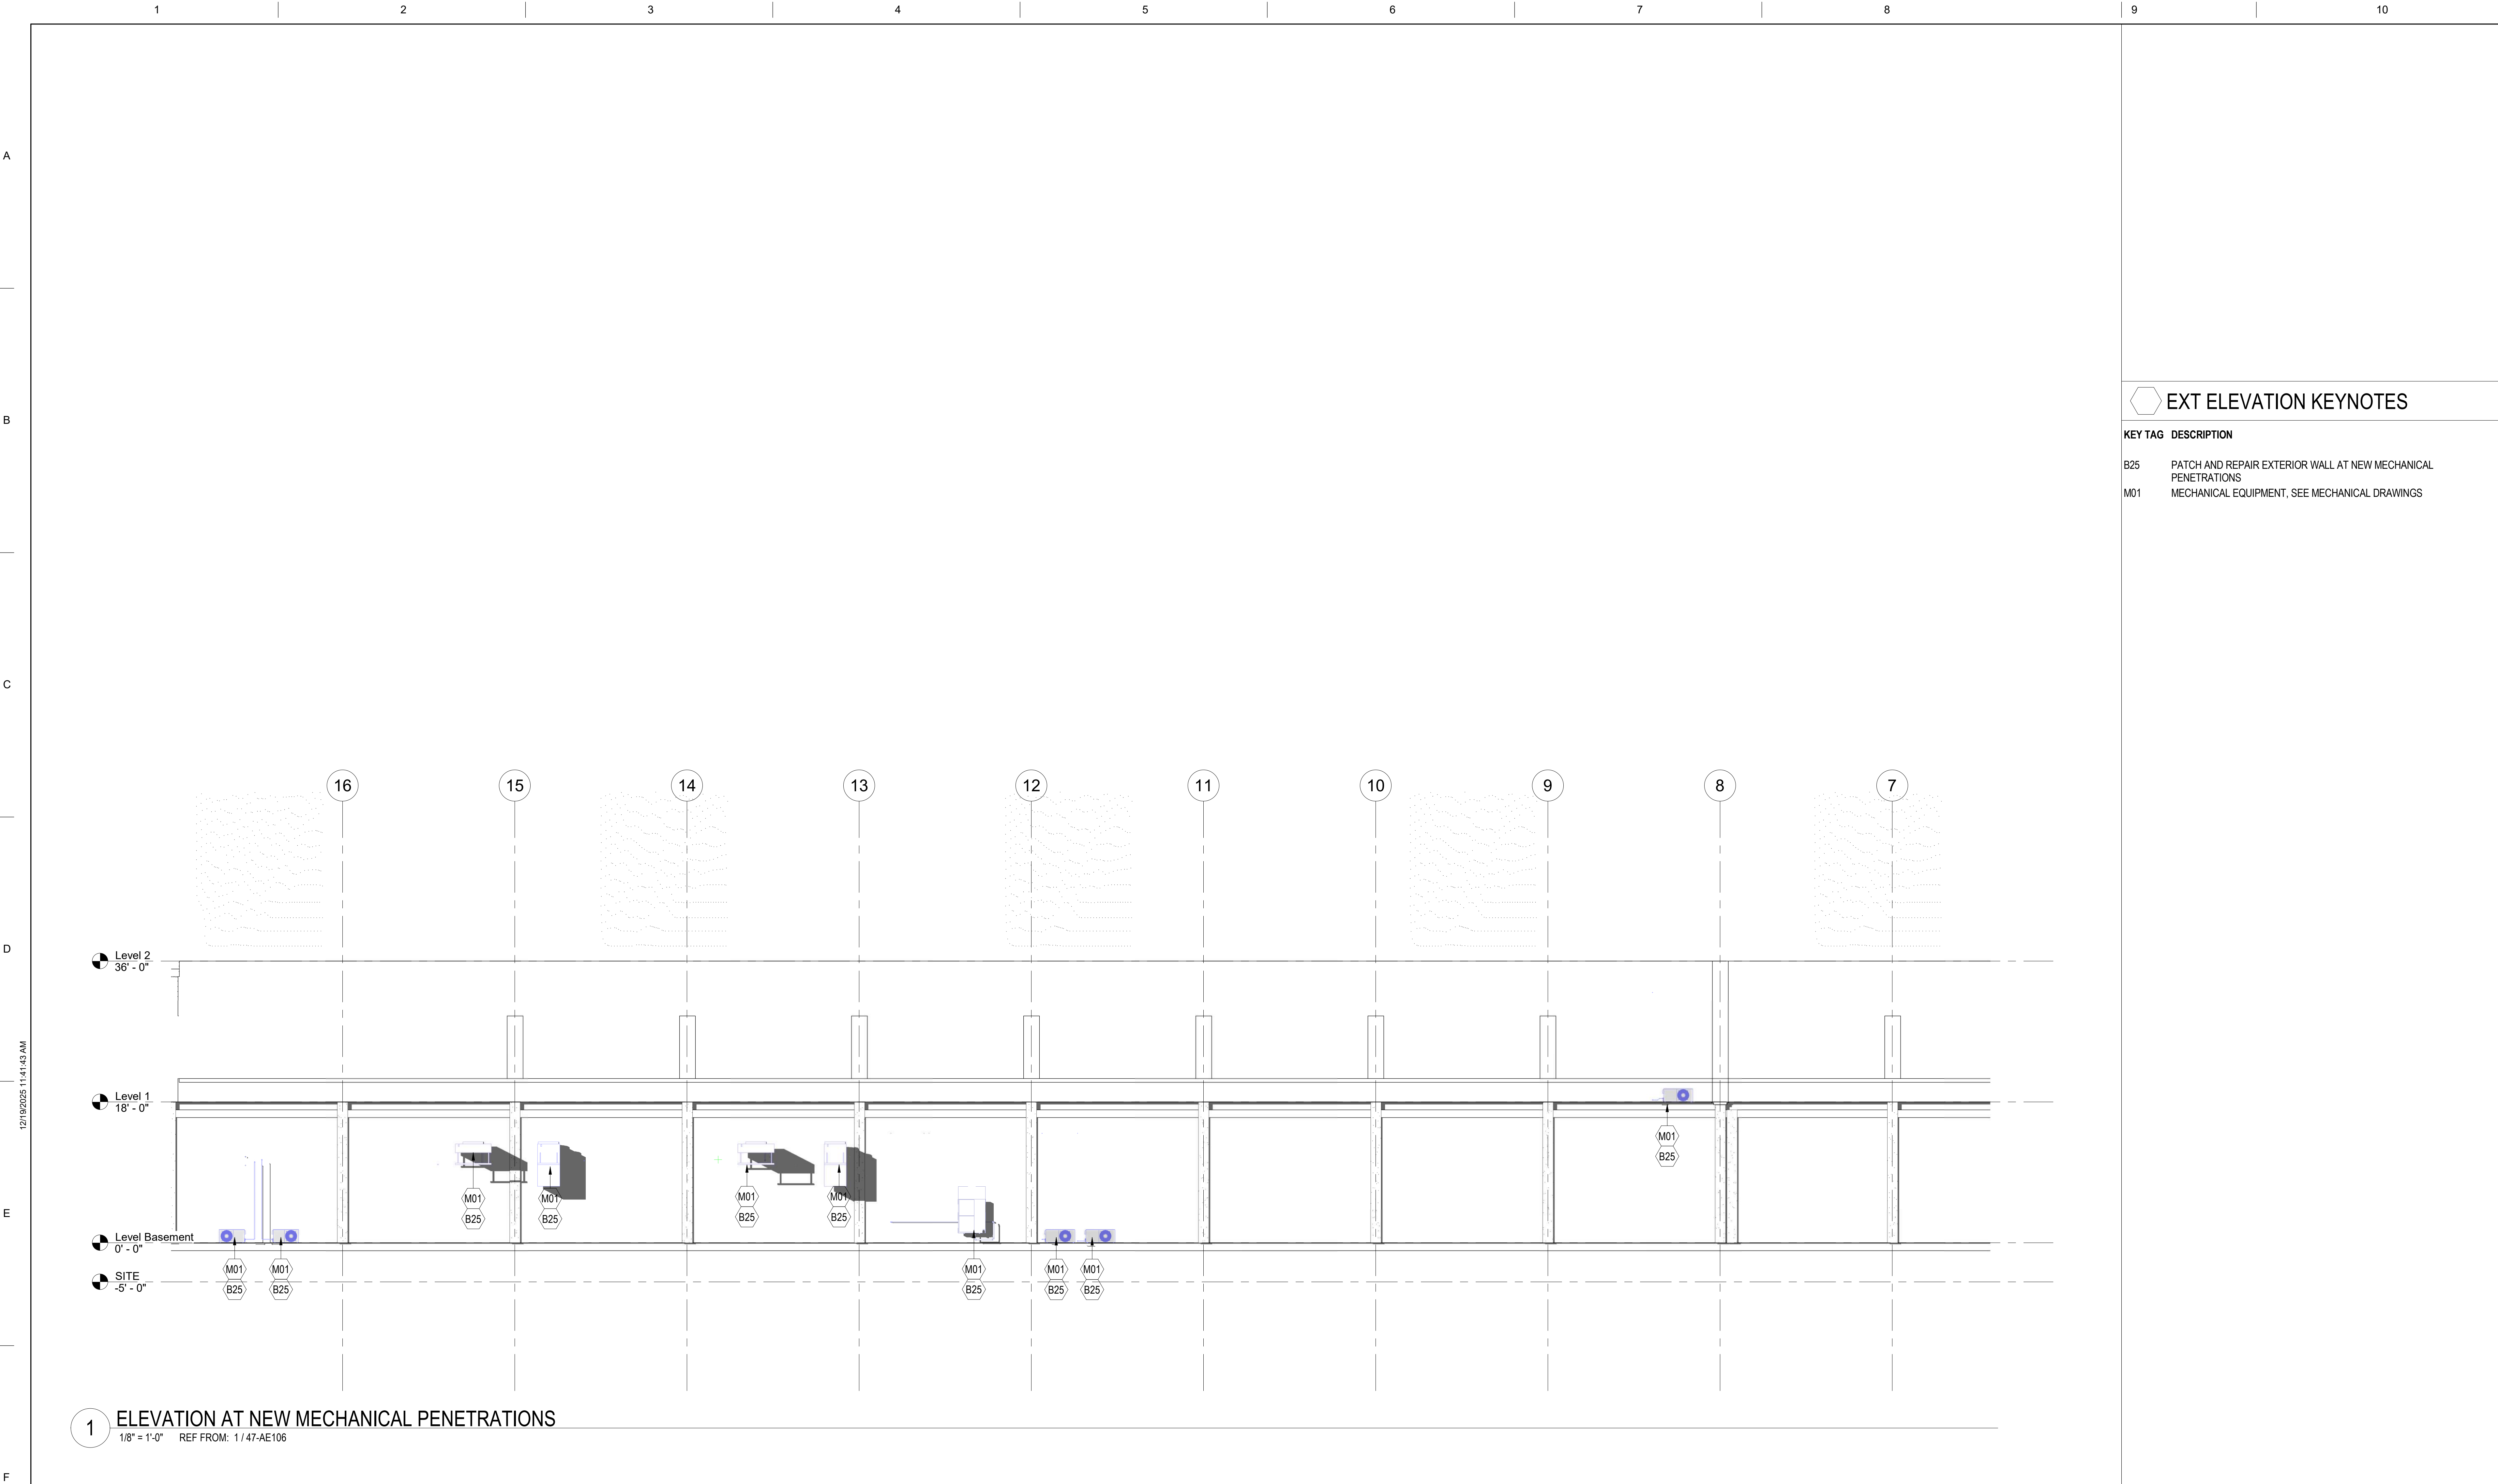


EXT ELEVATION KEYNOTES

KEY TAG	DESCRIPTION
B25	PATCH AND REPAIR EXTERIOR WALL AT NEW MECHANICAL PENETRATIONS
M01	MECHANICAL EQUIPMENT, SEE MECHANICAL DRAWINGS

1 ELEVATION AT NEW MECHANICAL PENETRATIONS

1/8" = 1'-0" REF FROM: 1 / 47-AE106

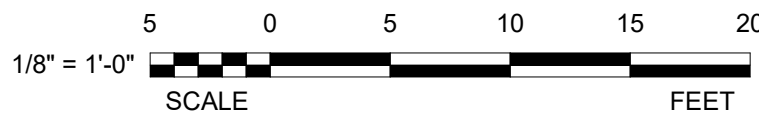

FINAL BID DOCUMENTS

Revisions: Date:	ARCHITECT/ENGINEER OF RECORD AWEN SOLUTIONS GROUP ARCHITECTURE ENGINEERING PLANNING A/E: Awen Solutions Group 215 N. Payne Street, Suite 122 Alexandria, VA 22314	STAMP LICENSED ARCHITECT GENE HAMILTON NO. C-19578 EXP. 07-31-25 STATE OF CALIFORNIA	Facilities Management Services VA U.S. Department of Veterans Affairs	Drawing Title EXTERIOR ELEVATION	Phase FINAL BID DOCUMENTS	Project Title EHRM INFRASTRUCTURE UPGRADES	Project Number 637-22-700
				Approved:	FULLY SPRINKLERED	Location 1100 TUNNEL ROAD ASHEVILLE, NC 28805	Issue Date 12.19.2025

12/19/2025 11:41:45 AM

VA FORM 08 - 6231

1

2

3

4

5

6

7

8

9

10

Level Basement

BB018	TR (EXISTING) BB018	CORRIDOR BB016	11	3' - 0"	8' - 0"	-	B	P		SDO-218	B5/AE511	D5/AE511	D3/AE511	CARD READER
BC118	TR (EXPANDED) BC118	CORRIDOR BB066	11	3' - 0"	8' - 0"	-	B	P		SDO-218	B5/AE511	D5/AE511	D3/AE511	CARD READER
BC131A	DATA CENTER (NEW) BC131	ENTRANCE ROOM 01 (NEW) BC131A	11	3' - 6"	8' - 0"	-	B	P	45 MIN	SDO-218	B5/AE511	D5/AE511	D3/AE511	CARD READER
BC131B	DATA CENTER (NEW) BC131	CORRIDOR	11	3' - 8"	8' - 0"	-	B	P	45 MIN	SDO-218	B5/AE511	D5/AE511	D3/AE511	CARD READER
BC131C	DATA CENTER (NEW) BC131	CORRIDOR BB061	11	6' - 0"	8' - 0"	-	B	P	45 MIN	SDO-218.2	B5/AE511	D5/AE511	D3/AE511	CARD READER
BC143A	DECOMMISSIONED TR BC143	NEW ENTRANCE ROOM 02 BC143A	11	3' - 6"	8' - 0"	-	B	P		SDO-218	B5/AE511	D5/AE511	D3/AE511	CARD READER
BF107	TR (EXPANDED) BF107	CORRIDOR	11	3' - 0"	8' - 0"	-	B	P		SDO-218	B5/AE511	D5/AE511	D3/AE511	CARD READER
BF108	CORRIDOR	OFFICE BF108	1	3' - 0"	7' - 0"	-	A	P	-	3E	B5/AE511	D5/AE511	D3/AE511	
BF109	CORRIDOR	LOUNGE BF109	1	3' - 0"	7' - 0"	-	A	P	-	3E	B5/AE511	D5/AE511	D3/AE511	

Level 1

1D144	TR (NEW) 1D144	CORRIDOR 1D148	11	3' - 0"	8' - 0"	-	B	P		SDO-218	B5/AE511	D5/AE511	D3/AE511	CARD READER
1H113	TR (NEW) 1H113	CORRIDOR 1C146	11	3' - 0"	8' - 0"	-	B	P		SDO-218	B5/AE511	D5/AE511	D3/AE511	CARD READER
1H113B	CORRIDOR	OFFICE/STORAGE	11	3' - 0"	7' - 0"	-	B	P	20 MIN	SDO-218	B5/AE511	D5/AE511	D3/AE511	

Level 2

2A246	TR (EXISTING) 2A246	HALL 2A247	1	3' - 0"	8' - 0"	-	A	P		SDO-218	B5/AE511	D5/AE511	D3/AE511	CARD READER
-------	---------------------	------------	---	---------	---------	---	---	---	--	---------	----------	----------	----------	-------------

Level 3

A301	TR (EXPANDED) A301	CORRIDOR	11	3' - 0"	8' - 0"	-	B	P	20 MIN	SDO-218	B5/AE511	D5/AE511	D3/AE511	CARD READER
------	--------------------	----------	----	---------	---------	---	---	---	--------	---------	----------	----------	----------	-------------

Level 4

A401	TR (EXPANDED) A401	CORRIDOR	11	3' - 0"	8' - 0"	-	B	P		SDO-218	B5/AE511	D5/AE511	D3/AE511	CARD READER
------	--------------------	----------	----	---------	---------	---	---	---	--	---------	----------	----------	----------	-------------

Level 5

A501	TR (EXPANDED) A501	CORRIDOR	11	3' - 0"	8' - 0"	-	B	P		SDO-218	B5/AE511	D5/AE511	D3/AE511	CARD READER
------	--------------------	----------	----	---------	---------	---	---	---	--	---------	----------	----------	----------	-------------

DOOR TYPES

WIDTH

HEIGHT

TYPE 1

- SOLID CORE WOOD
- RED OAK VENEER
- FACTORY FINISH

WIDTH

HEIGHT

TYPE 11

- 'C' LABEL
- SOLID CORE WOOD
- RED OAK VENEER
- FACTORY FINISH

WIDTH

HEIGHT

TYPE A

- 1.3 mm (0.053 INCH) GALV HM FRAME
- HOSPITAL TYPE STOPS
- PAINTED FRAME

WIDTH

HEIGHT

TYPE B

- 'C' LABEL
- 1.3 mm (0.053 INCH) GALV HM FRAME
- FULL STOPS
- PAINTED FRAME

FRAME TYPES

WIDTH

HEIGHT

TYPE 1

- SOLID CORE WOOD
- RED OAK VENEER
- FACTORY FINISH

WIDTH

HEIGHT

TYPE 11

- 'C' LABEL
- SOLID CORE WOOD
- RED OAK VENEER
- FACTORY FINISH

WIDTH

HEIGHT

TYPE A

- 1.3 mm (0.053 INCH) GALV HM FRAME
- HOSPITAL TYPE STOPS
- PAINTED FRAME

WIDTH

HEIGHT

TYPE B

- 'C' LABEL
- 1.3 mm (0.053 INCH) GALV HM FRAME
- FULL STOPS
- PAINTED FRAME

ABBREVIATIONS USED IN DOOR AND ROOM FINISH SCHEDULES:

ADO
AF
AT
AT (SP)

BIM
C
CBB
CLR
CMU
CP
CPT
CT
EFTR
EPY
EX
EXP
FIN
GL
GWB
HM
HT
HW

LN
LVT
MAT
MATL
NO
NR
PC

P

AUTOMATIC DOOR OPERATOR
ACCESS FLOORING
ACOUSTICAL CEILING (TILE)
(SP) ACOUSTICAL CEILING (WITH SPRAYED PLASTIC FINISH)
BUILDING INFORMATION MODEL
CONCRETE
CONCRETE BACKER BOARD
COLOR
CONCRETE MASONRY UNITS (UNIT MASONRY)
CARPET (WITHOUT CUSHION BROADLOOM)
CARPET TILE
CERAMIC TILE
EXISTING FINISH TO REMAIN
EPOXY FLOORING
EXISTING
EXPOSED
FINISH
GLASS (GLAZING)
GYPSUM WALLBOARD SYSTEMS
HOLLOW METAL
HEIGHT
HARDWARE SET (FINISH OR BUILDER'S HARDWARE)
LINOLEUM
LUXURY VINYL TILE
CARPET MAT (WALK-OFF MAT)
MATERIAL
NUMBER
NON-RATED
PRECAST (ARCHITECTURAL PRECAST CONCRETE PAVERS)
PAINT (EXTERIOR AND INTERIOR; TRANSPARENT, SEMI-TRANSPARENT, AND OPAQUE FINISHES)

PLYWD
PR
PRB
PT
QT
RAF
RB

RES
RES-W
RRF
RSF
RWC
S
SC
SD
SGL
SP
ST
SVT
TER
TT
VT
VVC
WSCOT
WD
WSF
SS

PLYWOOD
PAIR
PROFILE BASE
PORCELAIN TILE (FLOOR AND BASE)
QUARRY TILE
RESILIENT ATHLETIC FLOORING
FACTORY FORMED INSIDE AND OUTSIDE CORNERS)
RESINOUS FLOORING
RESINOUS/EPOXY WALL/CEILING RF RUBBER FLOORING
RAISED RUBBER FLOORING
RESILIENT SHEET FLOORING (CHEMICALLY WELDED SEAMS)
RIGID VINYL WALL COVERING (WALL PROTECTION - ROLL OR SHEET)
SOLID SURFACE
HIGH BUILD GLAZED COATING (SPECIAL COATING)
STATIC DISSIPATIVE
SINGLE
SPECIAL FACED
STONE (CAST)
SOLID VINYL FLOOR TILE
TERRAZZO, POURED
TERRAZZO TILE (PLASTIC MATRIX)
VINYL TILE (HIGH CONTENT VINYL)
VINYL WALL COVERING
WAINSCOT
WOOD
WELDED SEAM SHEET FLOORING (HEAT WELDED WITH ROD)
STAINLESS STEEL

ROOM FINISH SCHEDULE

LEVEL	RM NO	AREA	RM NAME	FLR	BASE		WALLS								CEILING			COMMENTS	
					MATL	HT	NORTH		EAST		SOUTH		WEST		MATL	FIN	HT		
							MATL	FIN	MATL	FIN	MATL	FIN	MATL	FIN					
Not Placed																			
Not Placed	1C154	Not Placed	TR																
Not Placed	1C164	Not Placed	IRM																
Not Placed	1C170	Not Placed	COMP ROOM																
Not Placed	1C234	Not Placed	SIGNAL																
Not Placed	1C237	Not Placed	EDUC																
Not Placed	1C281	Not Placed	SIGNAL																
Not Placed	1C406	Not Placed	TELECOM																
Not Placed	1C414	Not Placed	TELECOM FMS																
Not Placed	1C419	Not Placed	ELECTRICAL FMS																
Not Placed	B349	Not Placed	Room																
Level Basement																			
Level Basement	1C386	Redundant Room	SIGNAL																
Level Basement	BB018	126 SF	TR (EXISTING)	EX	EX	EX	EX	P	EX	P	EX	P	EX	P	EXP	P	9'-0"		
Level Basement	BC118	125 SF	TR (EXPANDED)	EPY/SD	RB	6"	EX/GWB/PLYWD	P	EX/GWB/PLYWD	P	EX	P	GWB/PLYWD	P	EXP	P	9'-0"	WATER BARRIER, SEE PLANS	
Level Basement	BC131A	191 SF	ENTRANCE ROOM 01 (NEW)	VT/SD	RB	6"	EX/PLYWD	P	EX/PLYWD	P	EX	P	GWB/PLYWD	P	EXP	P	12'-0"		
Level Basement	BC131B	2546 SF	DATA CENTER (NEW)	EPY/SD	RB	6"	EX	P	EX	P	EX	P	EX	P	EXP	P	9'-0"	WATER BARRIER, SEE PLANS	
Level Basement	BC143A	225 SF	ENTRANCE ROOM 02 (NEW)	VT/SD	RB	6"	EX/PLWD	P	GWB/PLWD	P	EX/PLWD	P	EX/PLWD	P	EXP	P	9'-0"		
Level Basement	BF107	144 SF	TR (EXPANDED)	EPY/SD	RB	6"	GWB	P	GWB/PLYWD	P	EX/PLYWD	P	EX/PLWD	P	EXP	P	9'-0"		
Level 1																			
Level 1	1A137	109 SF	TR (EXISTING)	EX	EX	EX	EX	P	EX	P	EX	P	EX	P	EXP	P	9'-0"		
Level 1	1B134	117 SF	TR (EXISTING)	EX	EX	EX	EX	P	EX	P	EX	P	EX	P	EXP	P	9'-0"		
Level 1	1C188	Redundant Room	NO ROOM NAME																
Level 1	1C263	22 SF	DATA																
Level 1	1D144	180 SF	TR (NEW)	EPY/SD	RB	6"	EX/PLYWD	P	EX/PLYWD	P	EX	P	GWB/PLYWD	P	EXP	P	9'-0"		
Level 1	1H113	169 SF	TR (NEW)	EPY/SD	RB	6"	GWB/PLYWD	P	GWB	P	GWB/PLYWD	P	GWB/PLYWD	P	EXP	P	9'-0"		
Level 1	1W133	123 SF	TR (NEW)	EPY/SD	RB	6"	GWB/PLYWD	P	GWB/PLYWD	P	GWB	P	GWB/PLYWD	P	EXP	P	9'-0"	WATER BARRIER, SEE PLANS	
Level 2																			
Level 2	2A246	106 SF	TR (EXISTING)	EX	EX	EX	EX	P	EX	P	EX	P	EX	P	EXP	P	9'-0"		
Level 2	2B212	116 SF	TR (EXISTING)	EX	EX	EX	EX	P	EX	P	EX	P	EX	P	EXP	P	9'-0"		
Level 2	2E202A	123 SF	TR (NEW)	EPY/SD	RB	6"	EX/PLYWD	P	EX/PLYWD	P	EX/PLYWD	P	GWB	P	EXP	P	9'-0"		
Level 3																			
Level 3	A301	96 SF	TR (EXPANDED)	EPY/SD	RB	6"	EX/PLYWD	P	EX/PLYWD	P	EX GWB	P	EX	P	EXP	P	9'-0"		
Level 4																			
Level 4	A401	100 SF	TR (EXPANDED)	EPY/SD	RB	6"	EX/PLYWD	P	EX/PLYWD	P	EX GWB	P	EX	P	EXP	P	9'-0"		
Level 5																			
Level 5	A501	101 SF	TR (EXPANDED)	EPY/SD	RB	6"	EX/PLYWD	P	EX/PLYWD	P	EX GWB	P	EX	P	EXP	P	9'-0"		

ARCHITECT/ENGINEER OF RECORD

AWEN

SOLUTIONS GROUP

ARCHITECTURE | ENGINEERING | PLANNING

A/E:

Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314

Revisions:

Date:

STAMP

LICENSED ARCHITECT
GENE HAMILTON
C-119578
EXPI. 07-31-25
STATE OF CALIFORNIA

Facilities Management Services

VA U.S. Department of Veterans Affairs

Drawing Title

SCHEDULES

Approved:

FOR OFFICIAL USE ONLY

Phase

FINAL BID DOCUMENTS

FULLY SPRINKLERED

Project Title

EHRM INFRASTRUCTURE UPGRADES

Location
1100 TUNNEL ROAD
ASHEVILLE, NC 28805

Issue Date
12.19.2025

Checked


Drawn

Project Number
637-22-700

Building Number
47

Drawing Number
47-AE601

SHEET 325 of 559

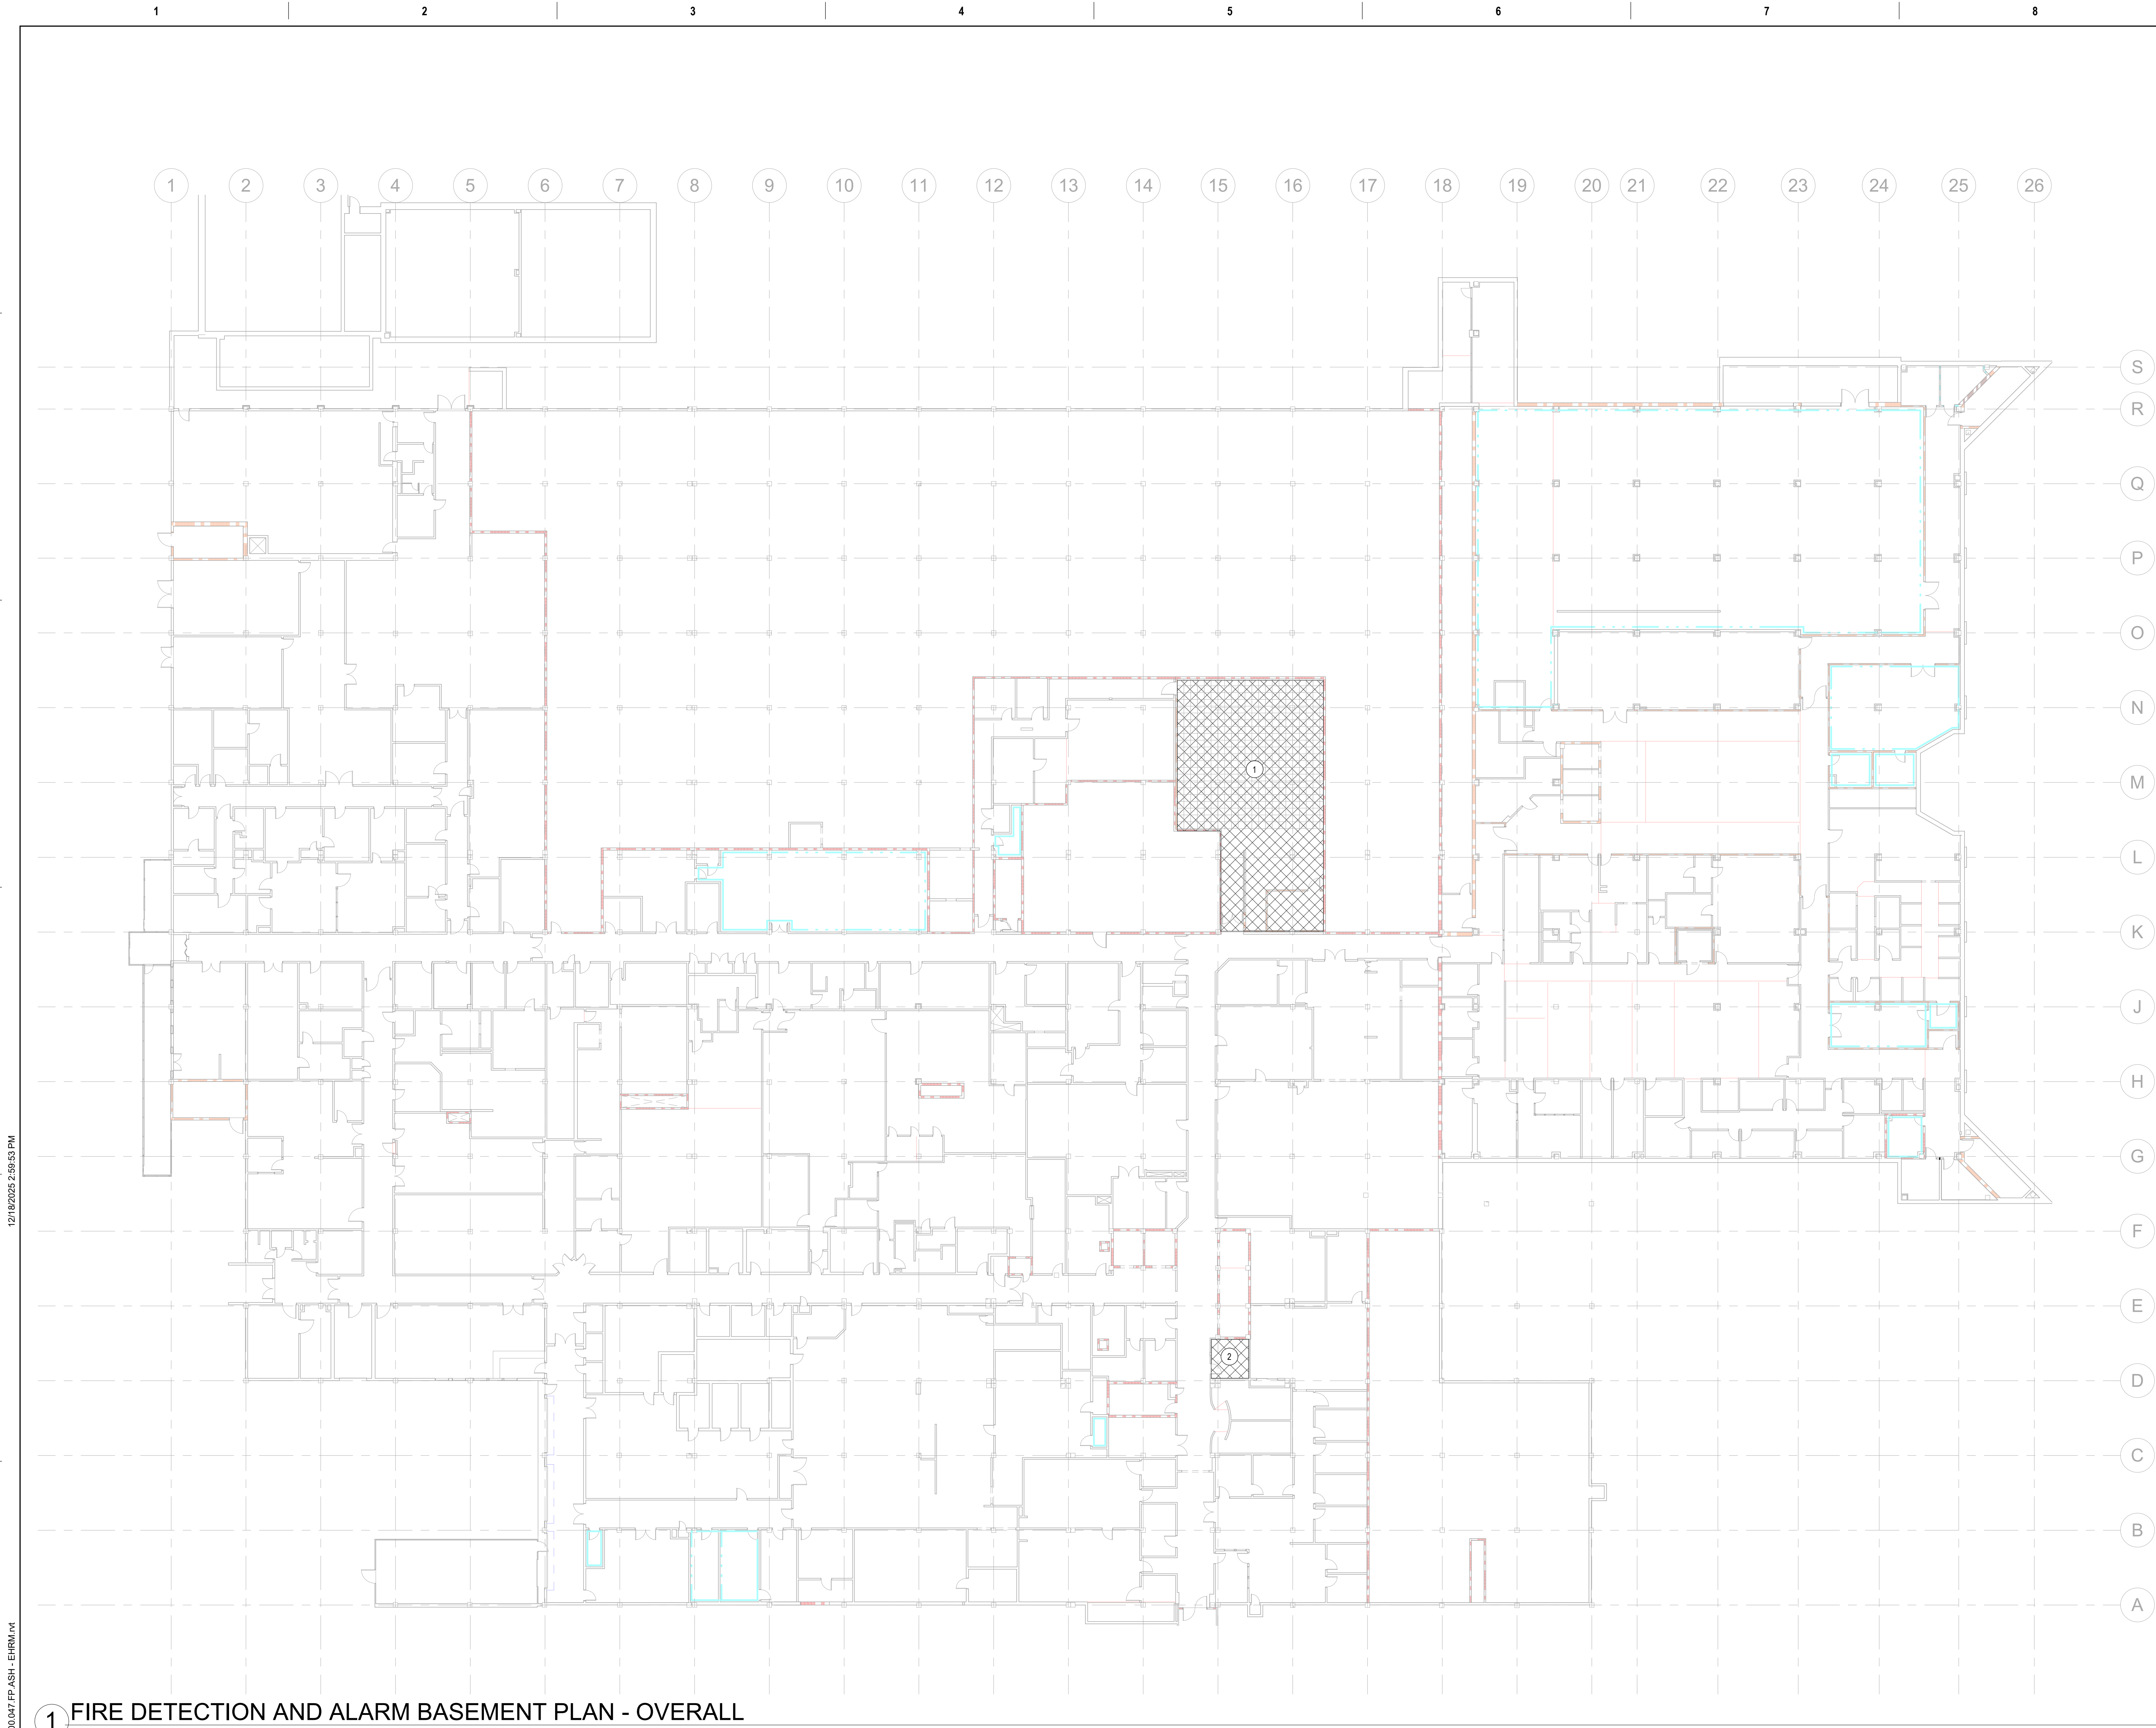


SHEET NOTES:

- 1 HATCHING INDICATES AREA IN SCOPE OF WORK. NEW DEVICES SHALL BE TIED INTO THE EXISTING FIRE ALARM SYSTEM FOR A FULLY OPERATIONAL SYSTEM IN ACCORDANCE WITH NFPA 72. SEE SHEET 47-FA107 FOR FIRE ALARM LAYOUT.
- 2 HATCHING INDICATES AREA IN SCOPE OF WORK. DEMOLISH EXISTING FIRE ALARM DEVICES. USE EXISTING BACKBOX TO TERMINATE CIRCUITS.



GENERAL NOTES:

PARTITION LEGEND

- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING

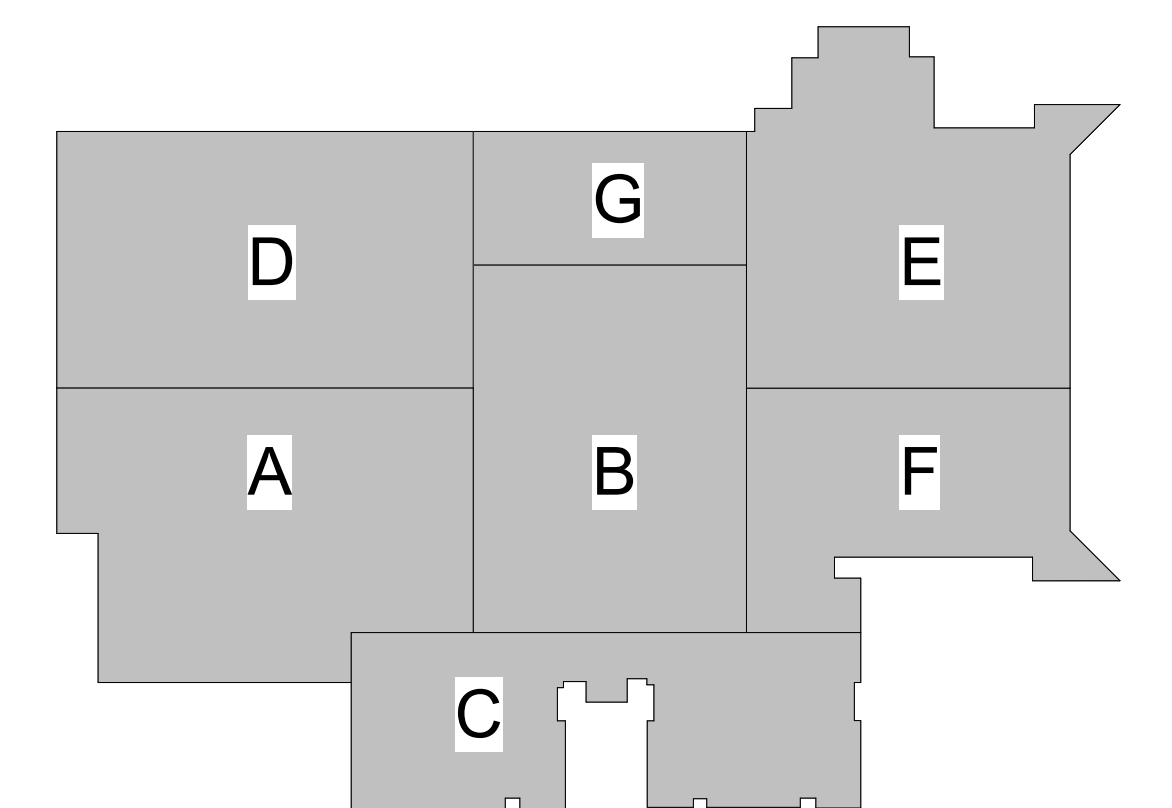

KEY PLAN

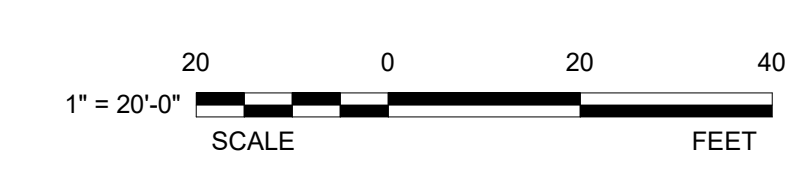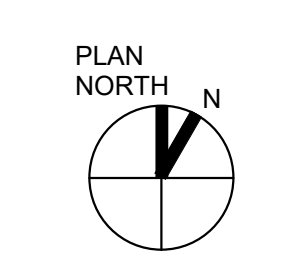

FINAL BID DOCUMENTS

1 FIRE DETECTION AND ALARM BASEMENT PLAN - OVERALL

12/18/2025 2:59:53 PM
Autodesk Docs\Asheville EHRM_V26\637-22-700\47 FA100.dwg - EHRM.dwg

Revisions:	Date:

ARCHITECT/ENGINEER OF RECORD

AWEN
SOLUTIONS GROUP
ARCHITECTURE | ENGINEERING | PLANNING

A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314

COFFMAN
ENGINEERS
701 Corporate Center Drive, Suite 410
Raleigh, NC 27607
919.374.6888
www.coffman.com

STAMP

NORTH CAROLINA
PROFESSIONAL
SEAL
MICHAEL B. LOVE
ENGINEER
12-18-2025

Facilities
Management
Services

VA U.S. Department
of Veterans
Affairs

Drawing Title
FIRE DETECTION AND ALARM
BASEMENT PLAN - OVERALL

Approved:

FOR OFFICIAL USE ONLY

Phase
FINAL BID DOCUMENTS

Project Title
EHRM INFRASTRUCTURE
UPGRADES

Location
1100 TUNNEL ROAD
ASHEVILLE, NC 28805

Issue Date
12.19.25


Checked

Drawn

Project Number
637-22-700

Building Number
BLDG 47

Drawing Number
47-FA100
SHEET 326 of 559

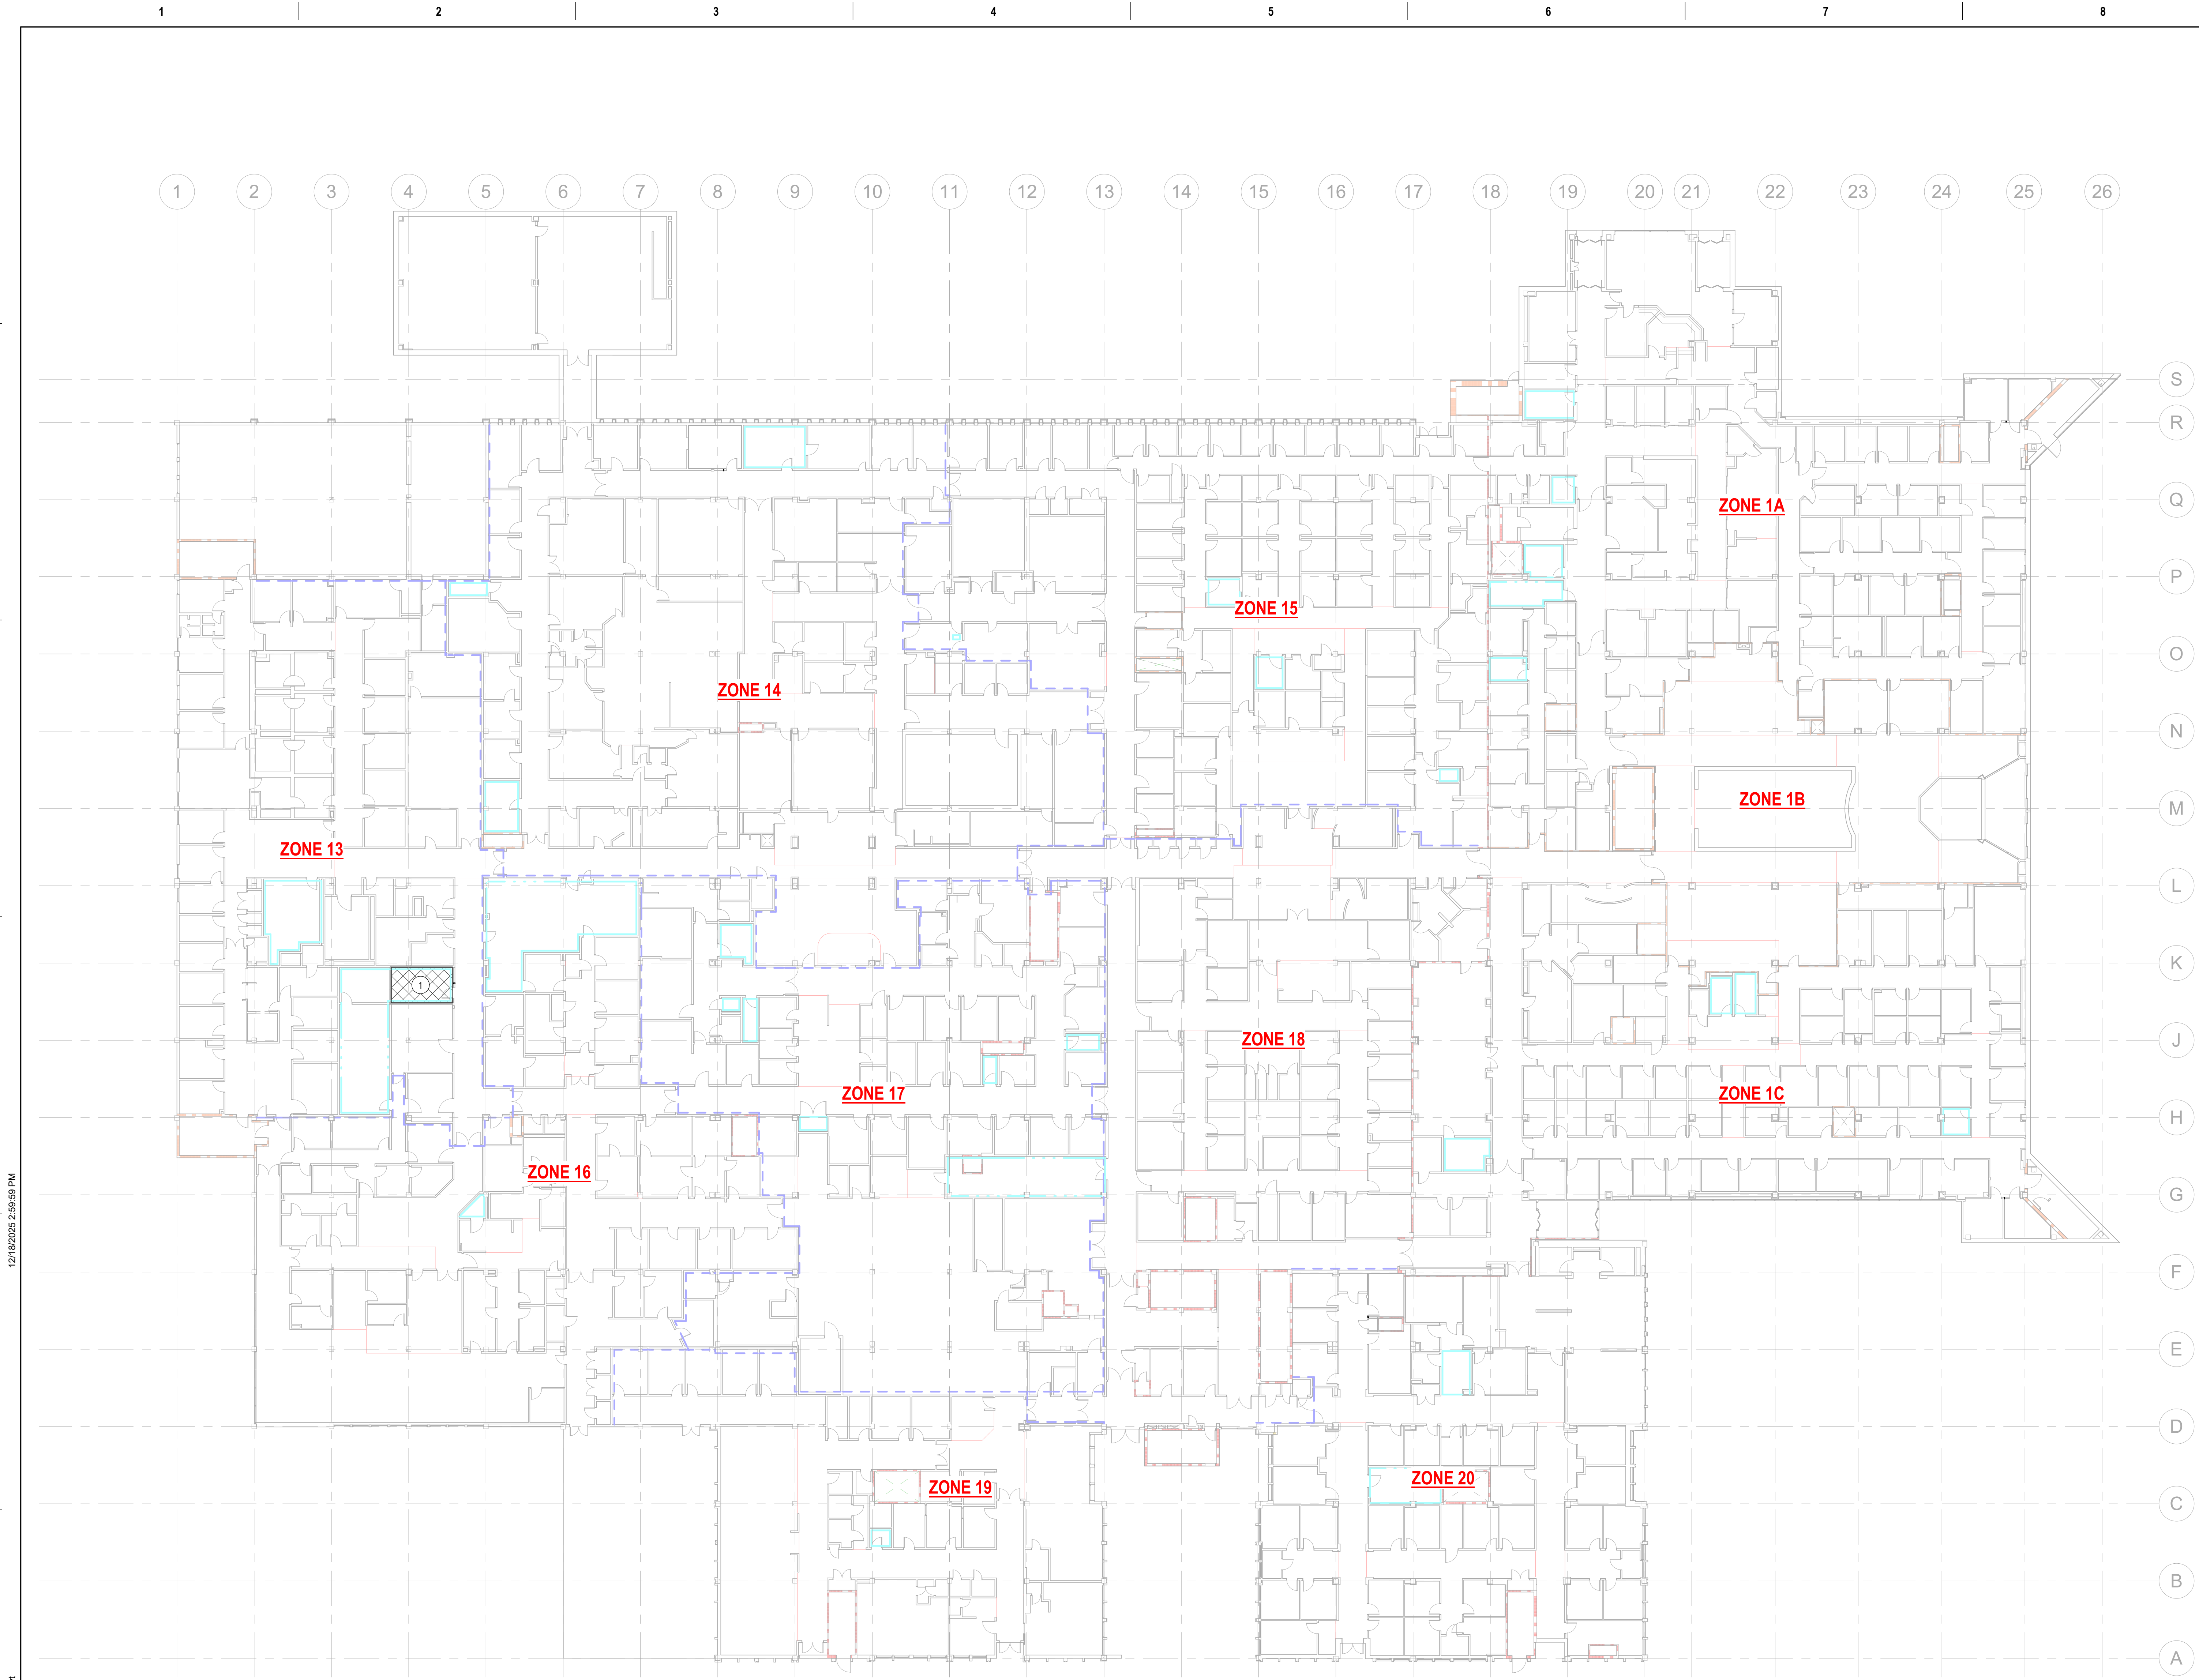


SHEET NOTES:

1 HATCHING INDICATES AREA IN SCOPE OF WORK. DEMOLISH EXISTING FIRE ALARM DEVICES. USE EXISTING BACKBOX TO TERMINATE CIRCUITS.



GENERAL NOTES:

PARTITION LEGEND

- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING

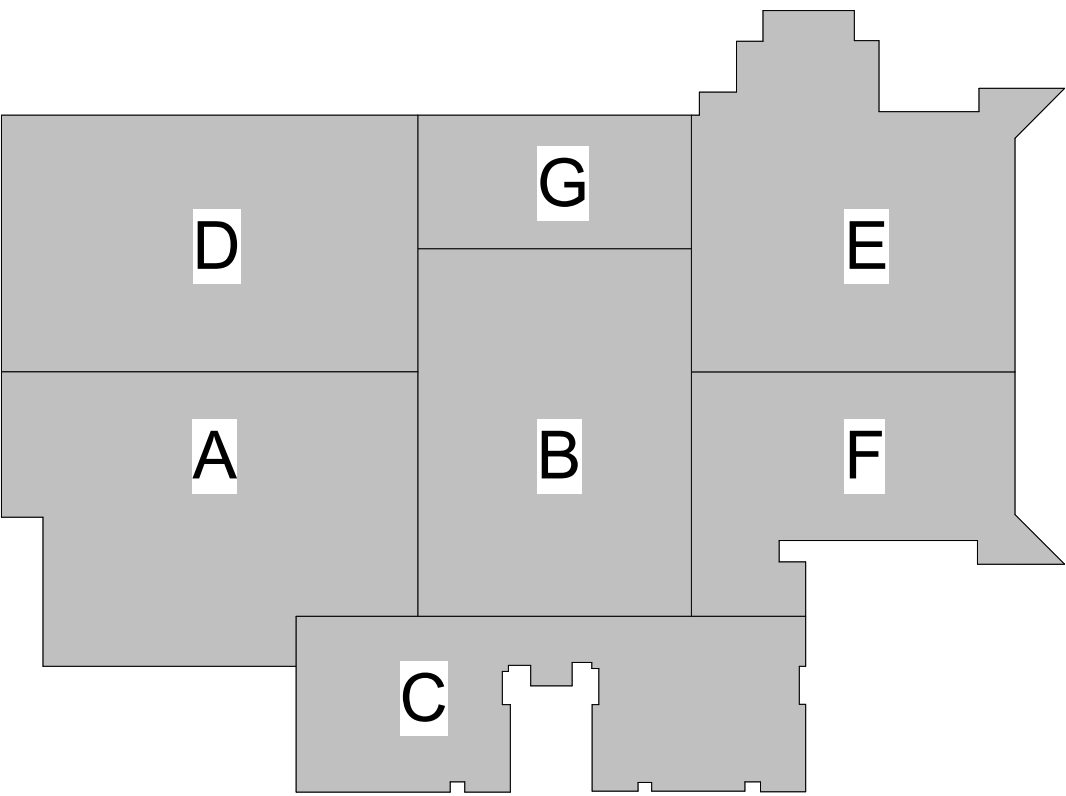

KEY PLAN

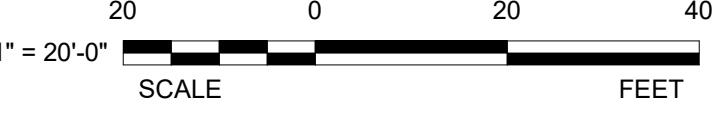

FINAL BID DOCUMENTS

1 FIRE DETECTION AND ALARM 1ST FLOOR PLAN - OVERALL
1" = 20'-0"

Revisions:	Date:

ARCHITECT/ENGINEER OF RECORD



A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314



STAMP



Facilities
Management
Services



U.S. Department
of Veterans
Affairs

Drawing Title
FIRE DETECTION AND ALARM 1ST
FLOOR PLAN - OVERALL

Approved:

FOR OFFICIAL USE ONLY

Phase
FINAL BID DOCUMENTS

Project Title
EHRM INFRASTRUCTURE
UPGRADES

Location
1100 TUNNEL ROAD
ASHEVILLE, NC 28805

Issue Date
12.19.25

Checked

Drawn

Project Number
637-22-700


Building Number
BLDG 47

Drawing Number
47-FA101

SHEET 327 of 559

Autodesk Docs | Asheville EHRM_V26.637-22-700.047.FP.ASH - EHRM.dwg
12/18/2025 2:59:58 PM

- ① FIRE ALARM RELEASING PANEL FOR THE SPACE PROTECTED BY CLEAN AGENT SUPPRESSION.
- ② MONITOR MODULE TO MONITOR CRAC UNIT.
- ③ MONITOR MODULE TO MONITOR FARP.
- ④ CONTROL MODULES FOR REPORTING OF ALARM, SUPERVISORY AND TROUBLE TO BASE BUILDING FIRE ALARM SYSTEM.

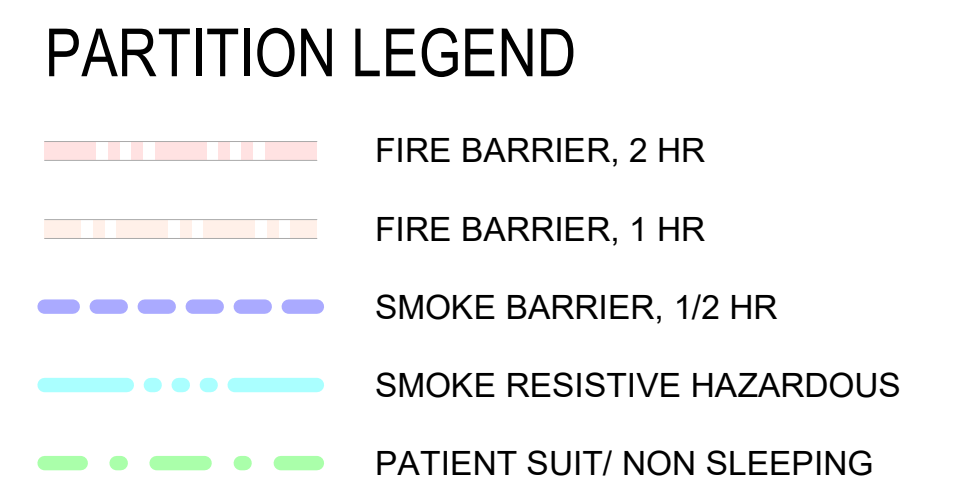

5 0 5 10 15 20

1/8" = 1'-0"

SCALE FEET

Project Number
637-22-700

Building Number
BLDG 47

Drawing Number
47-FA107

SHEET 328 of 559

ARCHITECT/ENGINEER OF RECORD

 **AWEN**
SOLUTIONS GROUP
ARCHITECTURE | ENGINEERING | PLANNING




COFFMAN
ENGINEERS

701 Corporate Center Drive, Suite 475
Raleigh, NC 27607
ph 919.314.6686
www.coffman.com



Phase	
FINAL BID DOCUMENTS	

Project Title EHRM INFRASTRUCTURE UPGRADES			
Location 1100 TUNNEL ROAD ASHEVILLE, NC 28805			
Issue Date 12.19.25	Checked	Drawn	

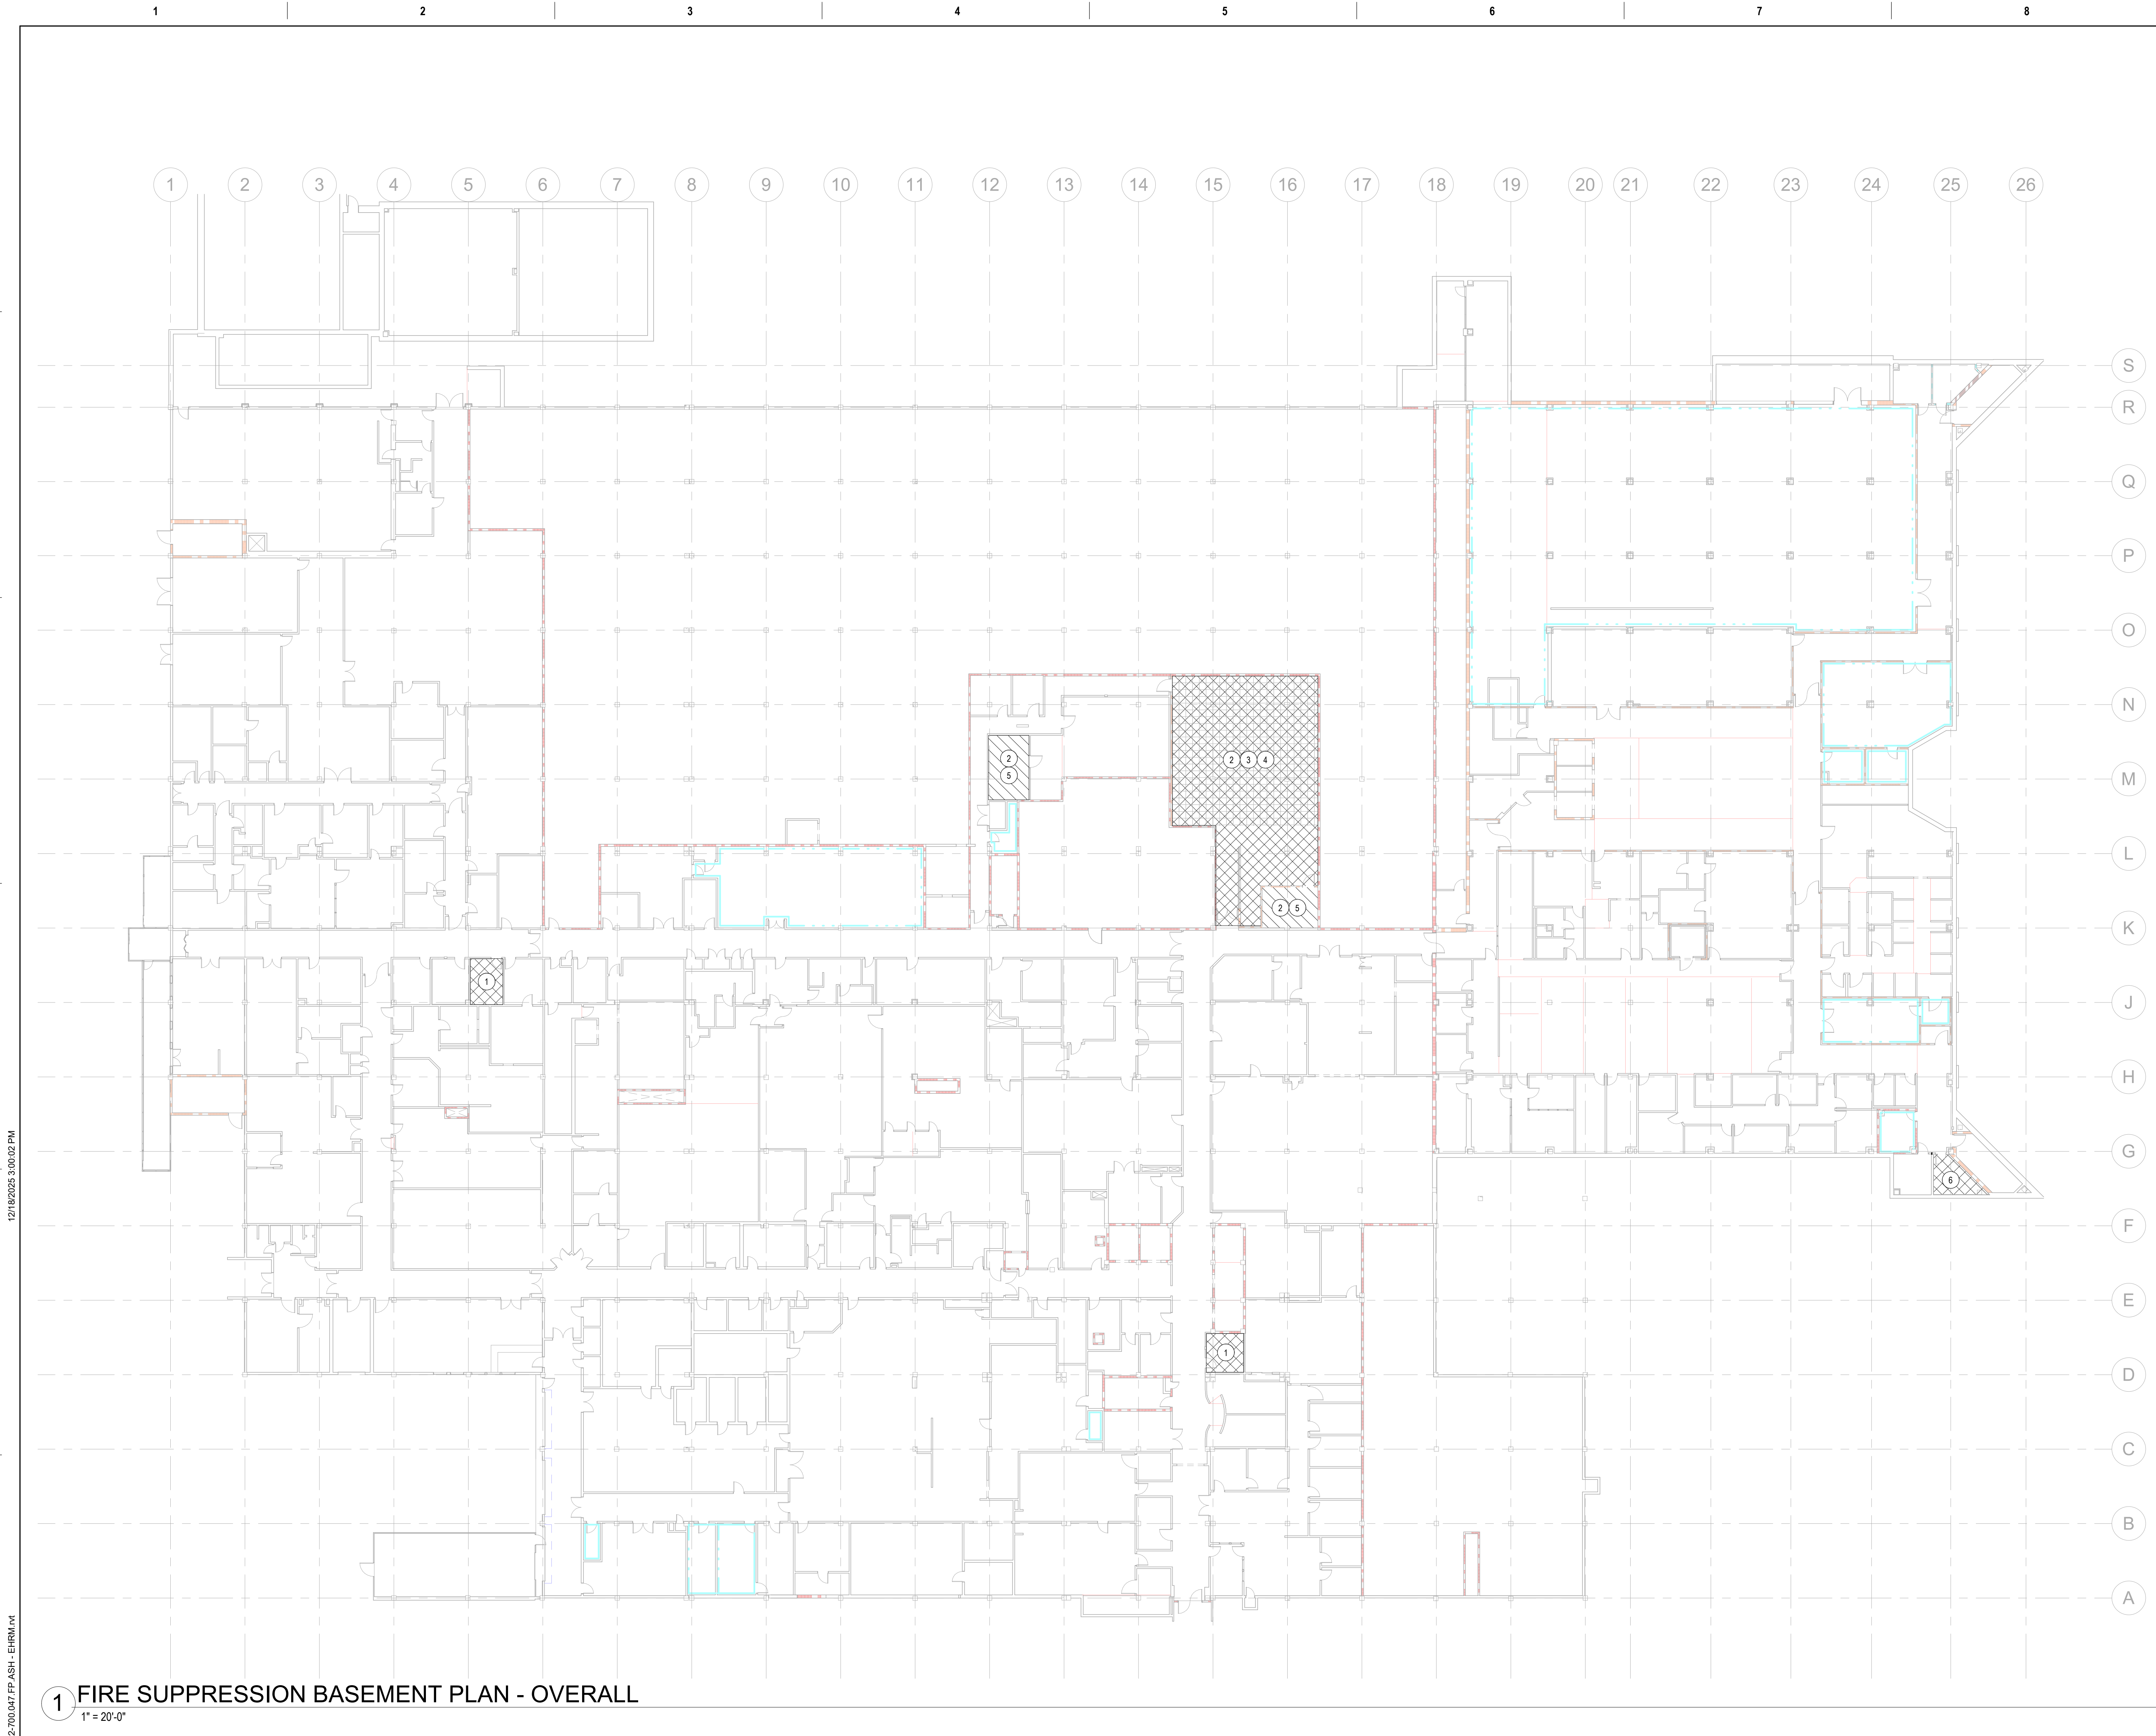


SHEET NOTES:

- HATCHING INDICATES SCOPE OF WORK. RELOCATE EXISTING SPRINKLERS AS REQUIRED TO ACCOMMODATE RECONFIGURATION OF WALLS AND REMOVAL OF EXISTING CEILING, AND NEW WORK BY OTHER TRADES TO PROVIDE COMPLIANT COVERAGE IN NEW TR. ADDITIONALLY, REPLACE EXISTING PENDANT SPRINKLER HEADS WITH UPRIGHT SPRINKLER HEADS.
- HATCHING INDICATES AREA IN SCOPE OF WORK. MODIFY EXISTING SPRINKLER SYSTEM DESIGN TO PROVIDE ORDINARY HAZARD GROUP 1 CLASSIFICATION. SEE SHEET 47-FX107.
- HATCHING INDICATES AREA IN SCOPE OF WORK. DATA CENTER TO BE PROTECTED IN ACCORDANCE WITH NFPA 75. PROVIDE CLEAN AGENT FIRE SUPPRESSION SYSTEM. SEE SHEET 47-FX108.
- PROVIDE STANDARD RESPONSE SPRINKLERS WITH PROTECTIVE CAGES IN THE DATA CENTER.
- PROVIDE UPRIGHT QUICK RESPONSE SPRINKLERS.
- HATCHING INDICATES SCOPE OF WORK. RELOCATE EXISTING SPRINKLERS AS REQUIRED TO ACCOMMODATE NEW WORK BY OTHER TRADES TO PROVIDE COMPLIANT COVERAGE IN NEW TR.



GENERAL NOTES:

PARTITION LEGEND

- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING

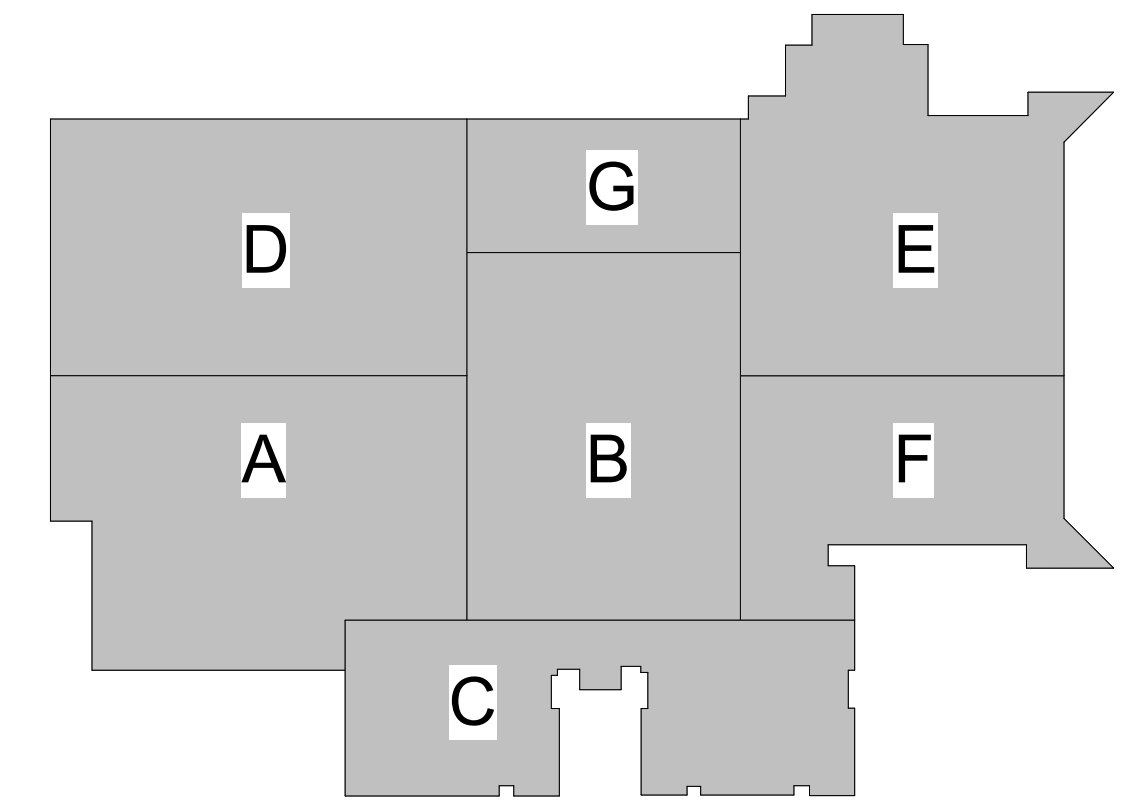

KEY PLAN

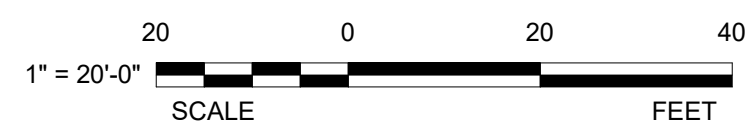

FINAL BID DOCUMENTS

1 FIRE SUPPRESSION BASEMENT PLAN - OVERALL
1" = 20'-0"

Autodesk Docs\Asheville EHRM_V26\637-22-700\47-FX100\47-FX100.dwg - EHRM.dwg
12/18/2025 3:00:02 PM

Revisions:	Date:

ARCHITECT/ENGINEER OF RECORD




ARCHITECTURE | ENGINEERING | PLANNING

A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314

COFFMAN
ENGINEERS

701 Corporate Center Drive, Suite 410
Raleigh, NC 27607
919.714.6888
www.coffman.com

STAMP

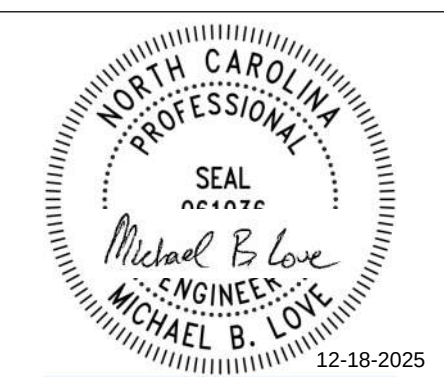

Facilities
Management
Services

VA U.S. Department
of Veterans
Affairs

Drawing Title
**FIRE SUPPRESSION BASEMENT PLAN -
OVERALL**

Approved:

FOR OFFICIAL USE ONLY

Phase
FINAL BID DOCUMENTS

Project Title
**EHRM INFRASTRUCTURE
UPGRADES**

Location
1100 TUNNEL ROAD
ASHEVILLE, NC 28805

Issue Date
12.19.25


Checked

Drawn

Project Number
637-22-700

Building Number
BLDG 47

Drawing Number
47-FX100
SHEET 329 of 559

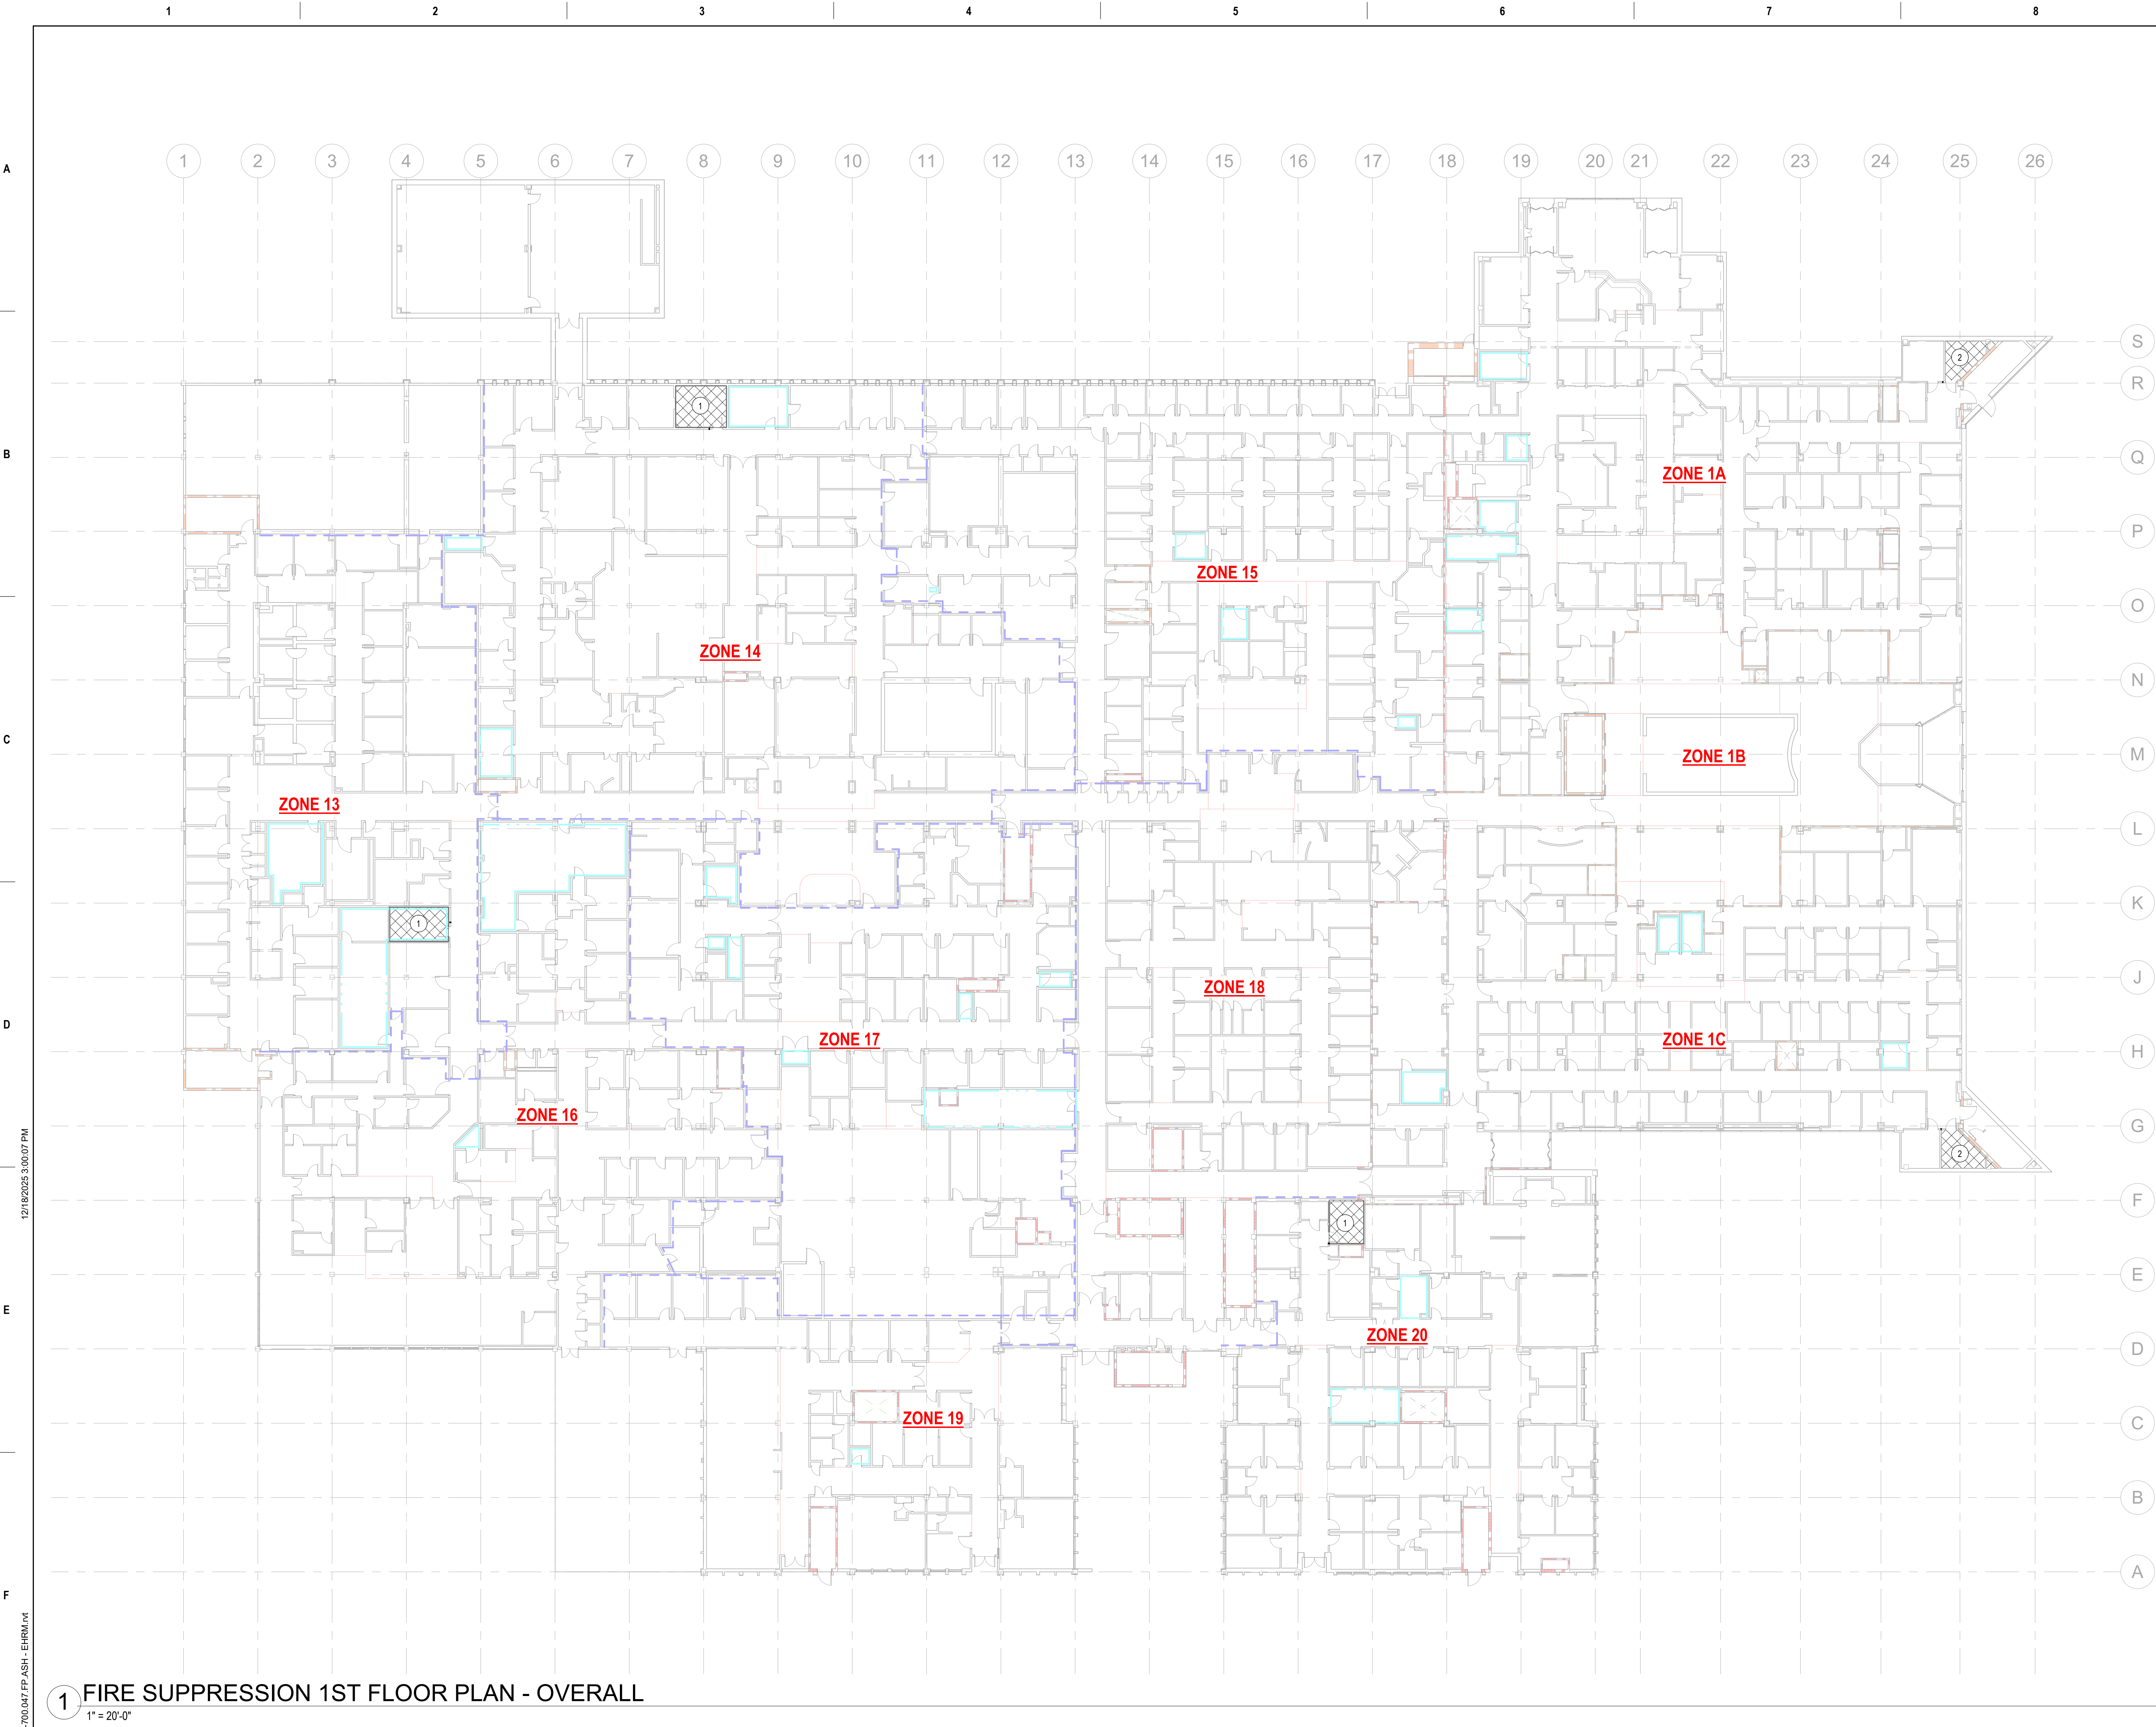

SHEET NOTES:


① HATCHING INDICATES SCOPE OF WORK. RELOCATE EXISTING SPRINKLERS AS REQUIRED TO ACCOMMODATE RECONFIGURATION OF WALLS AND REMOVAL OF EXISTING CEILING, AND NEW WORK BY OTHER TRADES TO PROVIDE COMPLIANT COVERAGE IN NEW TR. ADDITIONALLY, REPLACE EXISTING PENDENT SPRINKLER HEADS WITH UPRIGHT SPRINKLER HEAD DUE TO REMOVAL OF THE CEILING.

② HATCHING INDICATES SCOPE OF WORK. RELOCATE EXISTING SPRINKLERS AS REQUIRED TO ACCOMMODATE NEW WORK BY OTHER TRADES TO PROVIDE COMPLIANT COVERAGE IN NEW TR.



GENERAL NOTES:

PARTITION LEGEND

- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING

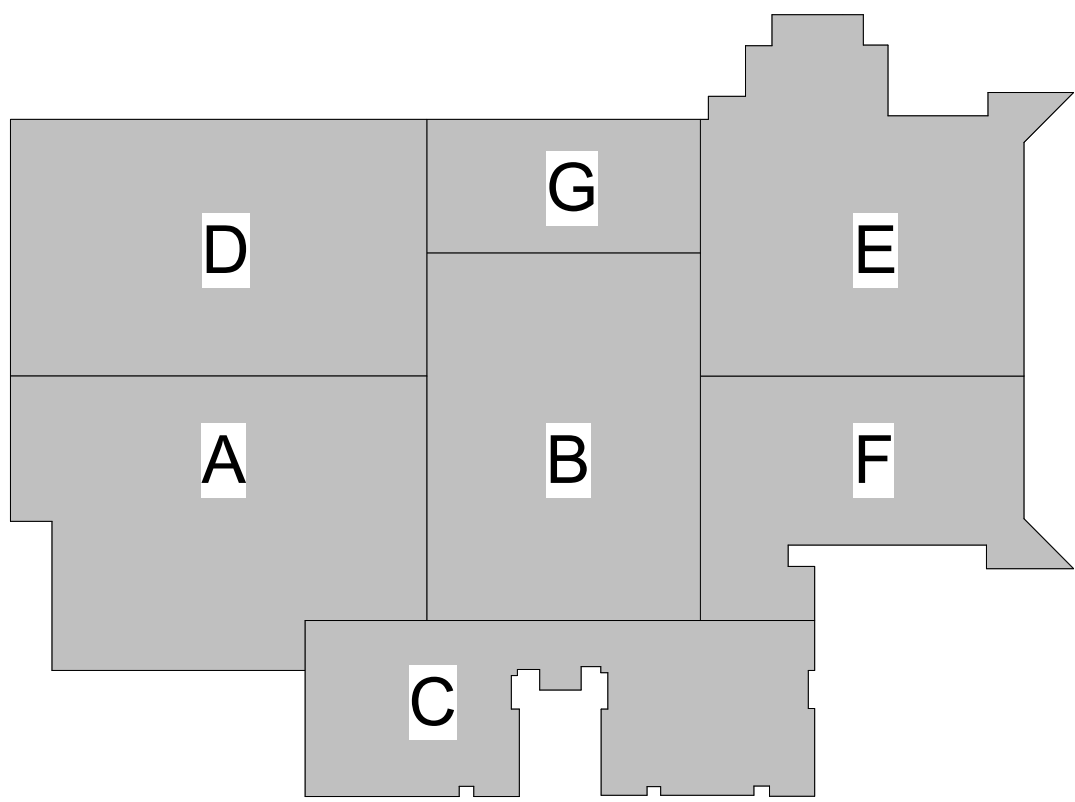

KEY PLAN

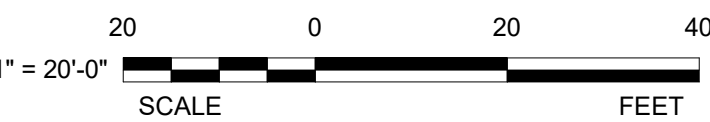

1 FIRE SUPPRESSION 1ST FLOOR PLAN - OVERALL
1" = 20'-0"

Revisions:	Date:

ARCHITECT/ENGINEER OF RECORD



A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314



STAMP



Facilities
Management
Services



U.S. Department
of Veterans
Affairs

Drawing Title
**FIRE SUPPRESSION 1ST FLOOR PLAN -
OVERALL**

Approved:

FOR OFFICIAL USE ONLY

Phase
FINAL BID DOCUMENTS

Project Title
**EHRM INFRASTRUCTURE
UPGRADES**

Location
1100 TUNNEL ROAD
ASHEVILLE, NC 28805

Issue Date
12.19.25

Checked

Drawn

Project Number
637-22-700

Building Number
BLDG 47

Drawing Number

47-FX101

SHEET 330 of 559



1 FIRE SUPPRESSION 2ND FLOOR PLAN - OVERALL
1" = 20'-0"


SHEET NOTES:

- 1 HATCHING INDICATES AREA IN SCOPE OF WORK. RELOCATE EXISTING SPRINKLERS AS REQUIRED TO ACCOMMODATE ARCHITECTURAL CHANGES AND NEW WORK BY OTHER TRADES TO PROVIDE COMPLIANT COVERAGE. HATCHING INDICATES SCOPE OF WORK. RELOCATE EXISTING SPRINKLERS AS REQUIRED TO ACCOMMODATE RECONFIGURATION OF WALLS AND REMOVAL OF EXISTING CEILING, AND NEW WORK BY OTHER TRADES TO PROVIDE COMPLIANT COVERAGE IN NEW TR. ADDITIONALLY, REPLACE EXISTING PENDENT SPRINKLER HEADS WITH UPRIGHT SPRINKLER HEADS DUE TO REMOVAL OF THE CEILING.
- 2 HATCHING INDICATES SCOPE OF WORK. RELOCATE EXISTING SPRINKLERS AS REQUIRED TO ACCOMMODATE NEW WORK BY OTHER TRADES TO PROVIDE COMPLIANT COVERAGE IN NEW TR.

GENERAL NOTES:

PARTITION LEGEND


- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING

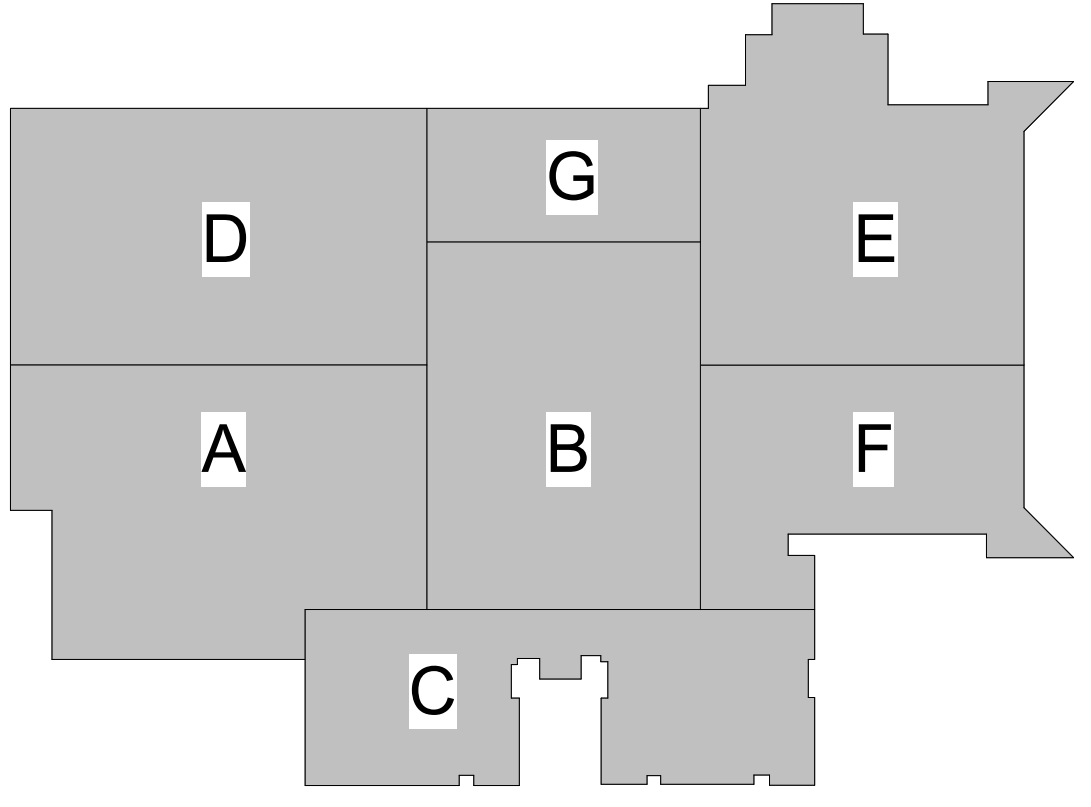

KEY PLAN

PLAN NORTH
1" = 20'-0" SCALE
20 0 20 40 FEET
FINAL BID DOCUMENTS

Revisions:	Date:	ARCHITECT/ENGINEER OF RECORD AWEN SOLUTIONS GROUP ARCHITECTURE ENGINEERING PLANNING	A/E: Awen Solutions Group 215 N. Payne Street, Suite 122 Alexandria, VA 22314	COFFMAN ENGINEERS 701 Corporate Center Drive, Suite 419 Raleigh, NC 27607 919.374.6888 www.coffman.com	STAMP NORTH CAROLINA PROFESSIONAL SEAL MICHAEL B. LOE ENGINEER 12-18-2025	Facilities Management Services VA U.S. Department of Veterans Affairs	Drawing Title FIRE SUPPRESSION 2ND FLOOR PLAN - OVERALL	Phase FINAL BID DOCUMENTS	Project Title EHRM INFRASTRUCTURE UPGRADES	Project Number 637-22-700
							Approved:			Location 1100 TUNNEL ROAD ASHEVILLE, NC 28805

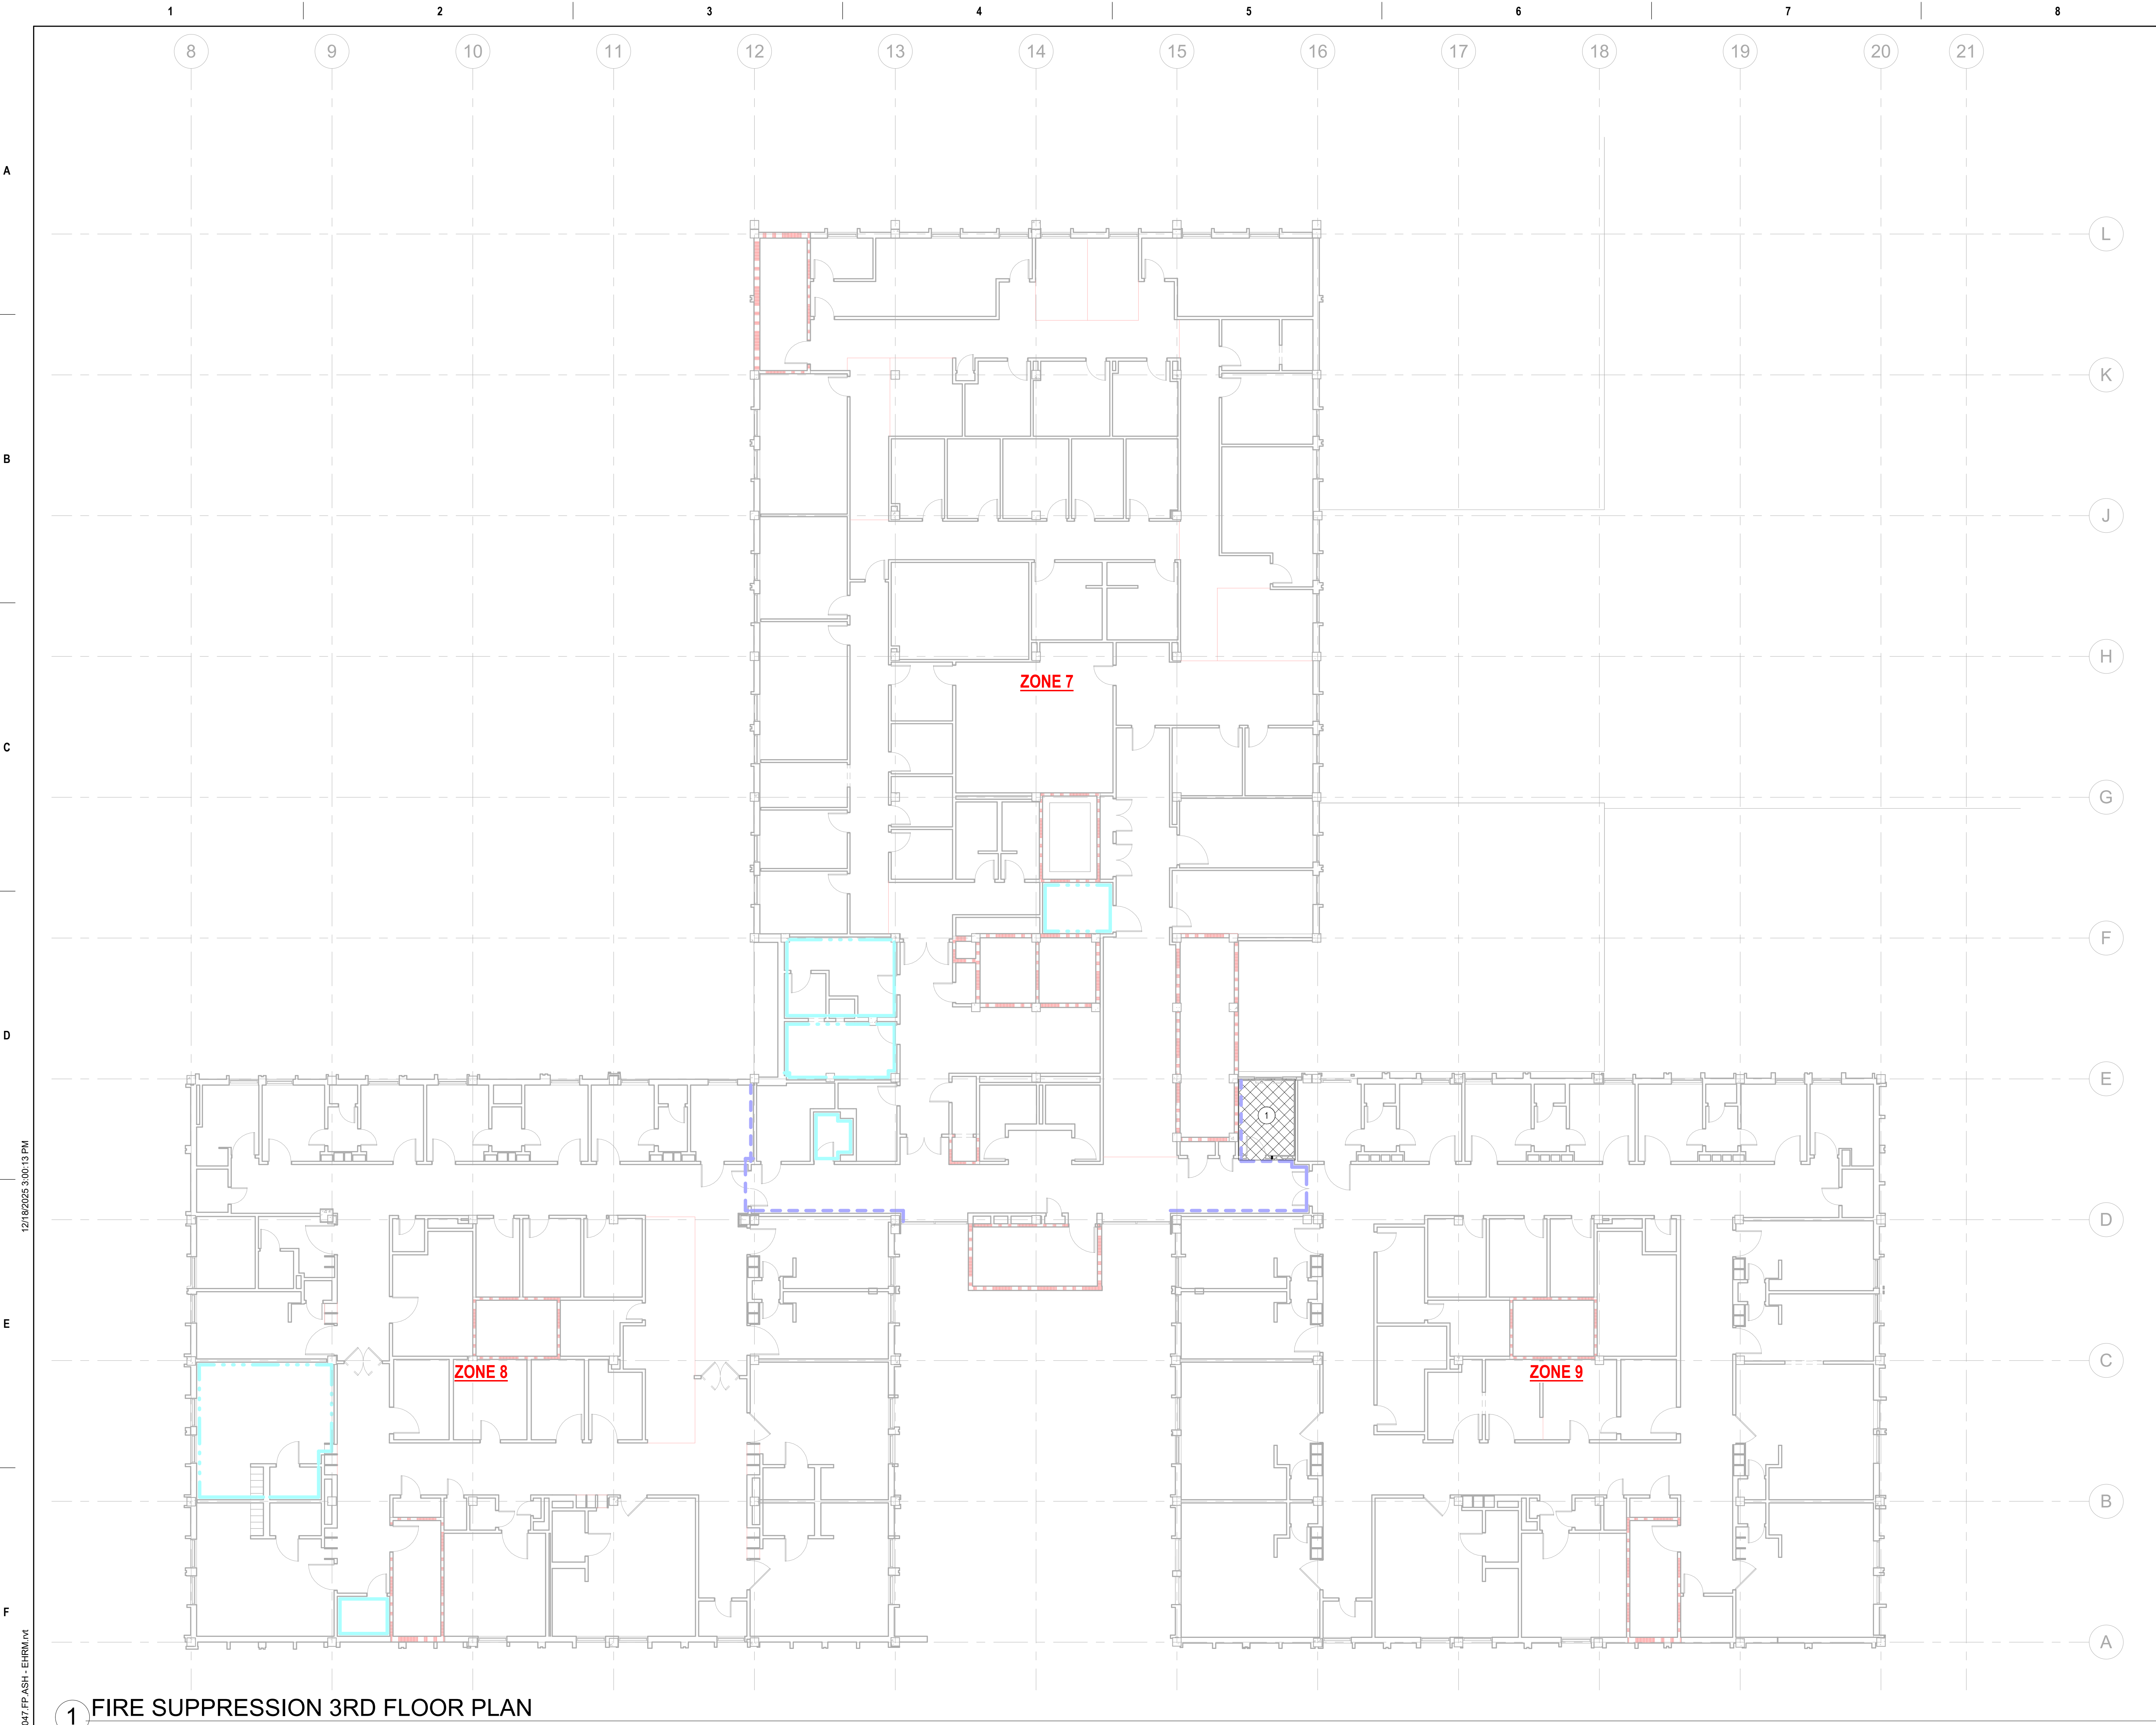


SHEET NOTES:

① HATCHING INDICATES SCOPE OF WORK. RELOCATE EXISTING SPRINKLERS AS REQUIRED TO ACCOMMODATE RECONFIGURATION OF WALLS AND REMOVAL OF EXISTING CEILING, AND NEW WORK BY OTHER TRADES TO PROVIDE COMPLIANT COVERAGE IN NEW TR. ADDITIONALLY, REPLACE EXISTING PENDENT SPRINKLER HEADS WITH UPRIGHT SPRINKLER HEADS DUE TO REMOVAL OF THE CEILING.


GENERAL NOTES:

PARTITION LEGEND

- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING

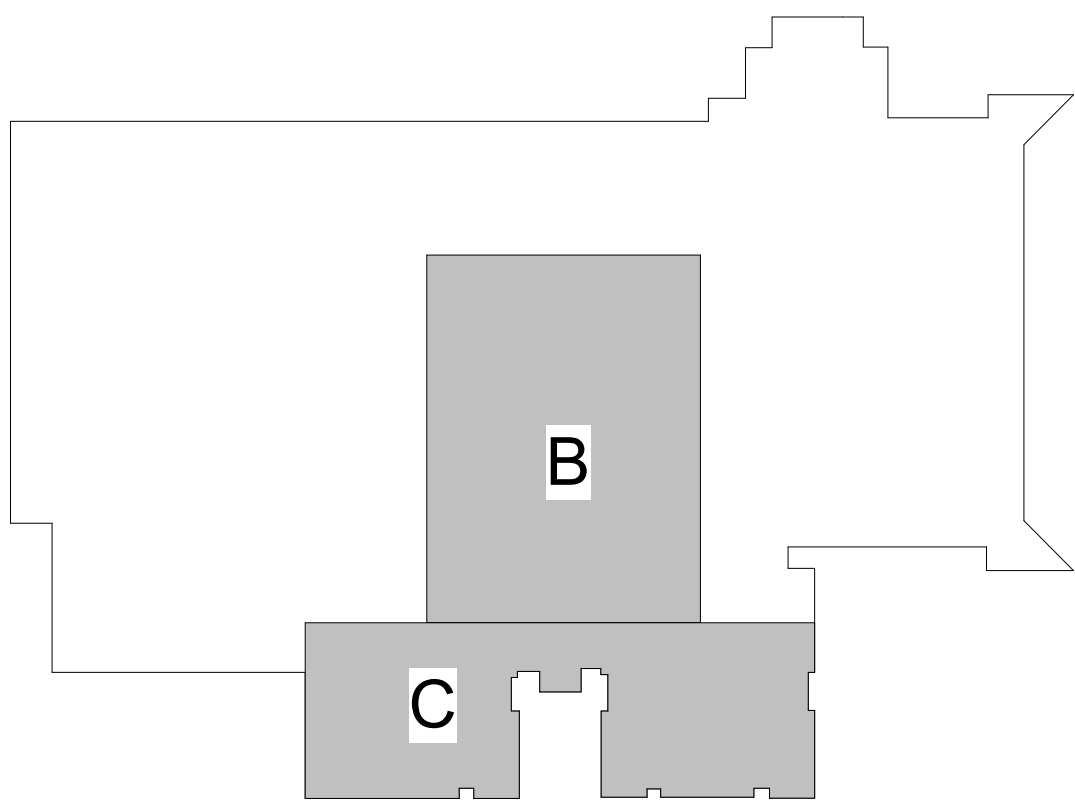

KEY PLAN



FINAL BID DOCUMENTS

① FIRE SUPPRESSION 3RD FLOOR PLAN
3/32" = 1'-0"

Revisions:	Date:

ARCHITECT/ENGINEER OF RECORD

AWEN
SOLUTIONS GROUP
ARCHITECTURE | ENGINEERING | PLANNING

A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314

COFFMAN
ENGINEERS
701 Corporate Center Drive, Suite 419
Raleigh, NC 27607
ph 919.374.6888
www.coffman.com

STAMP

SEAL
NO. 12-18-2025
MICHAEL B. LOVE
ENGINEER

Facilities
Management
Services

VA U.S. Department
of Veterans
Affairs

Drawing Title
FIRE SUPPRESSION 3RD FLOOR PLAN

Approved:

FOR OFFICIAL USE ONLY

Phase
FINAL BID DOCUMENTS

Project Title
**EHRM INFRASTRUCTURE
UPGRADES**

Location
1100 TUNNEL ROAD
ASHEVILLE, NC 28805

Issue Date
12.19.25

Checked


Drawn

Project Number
637-22-700

Building Number
BLDG 47

Drawing Number
47-FX103
SHEET 332 of 559

12/18/2025 3:00:13 PM
Autodesk Docs\Asheville EHRM_V26\637-22-700\47-FX103-FX103-EHRM.dwg
VA FORM 08 - 6231

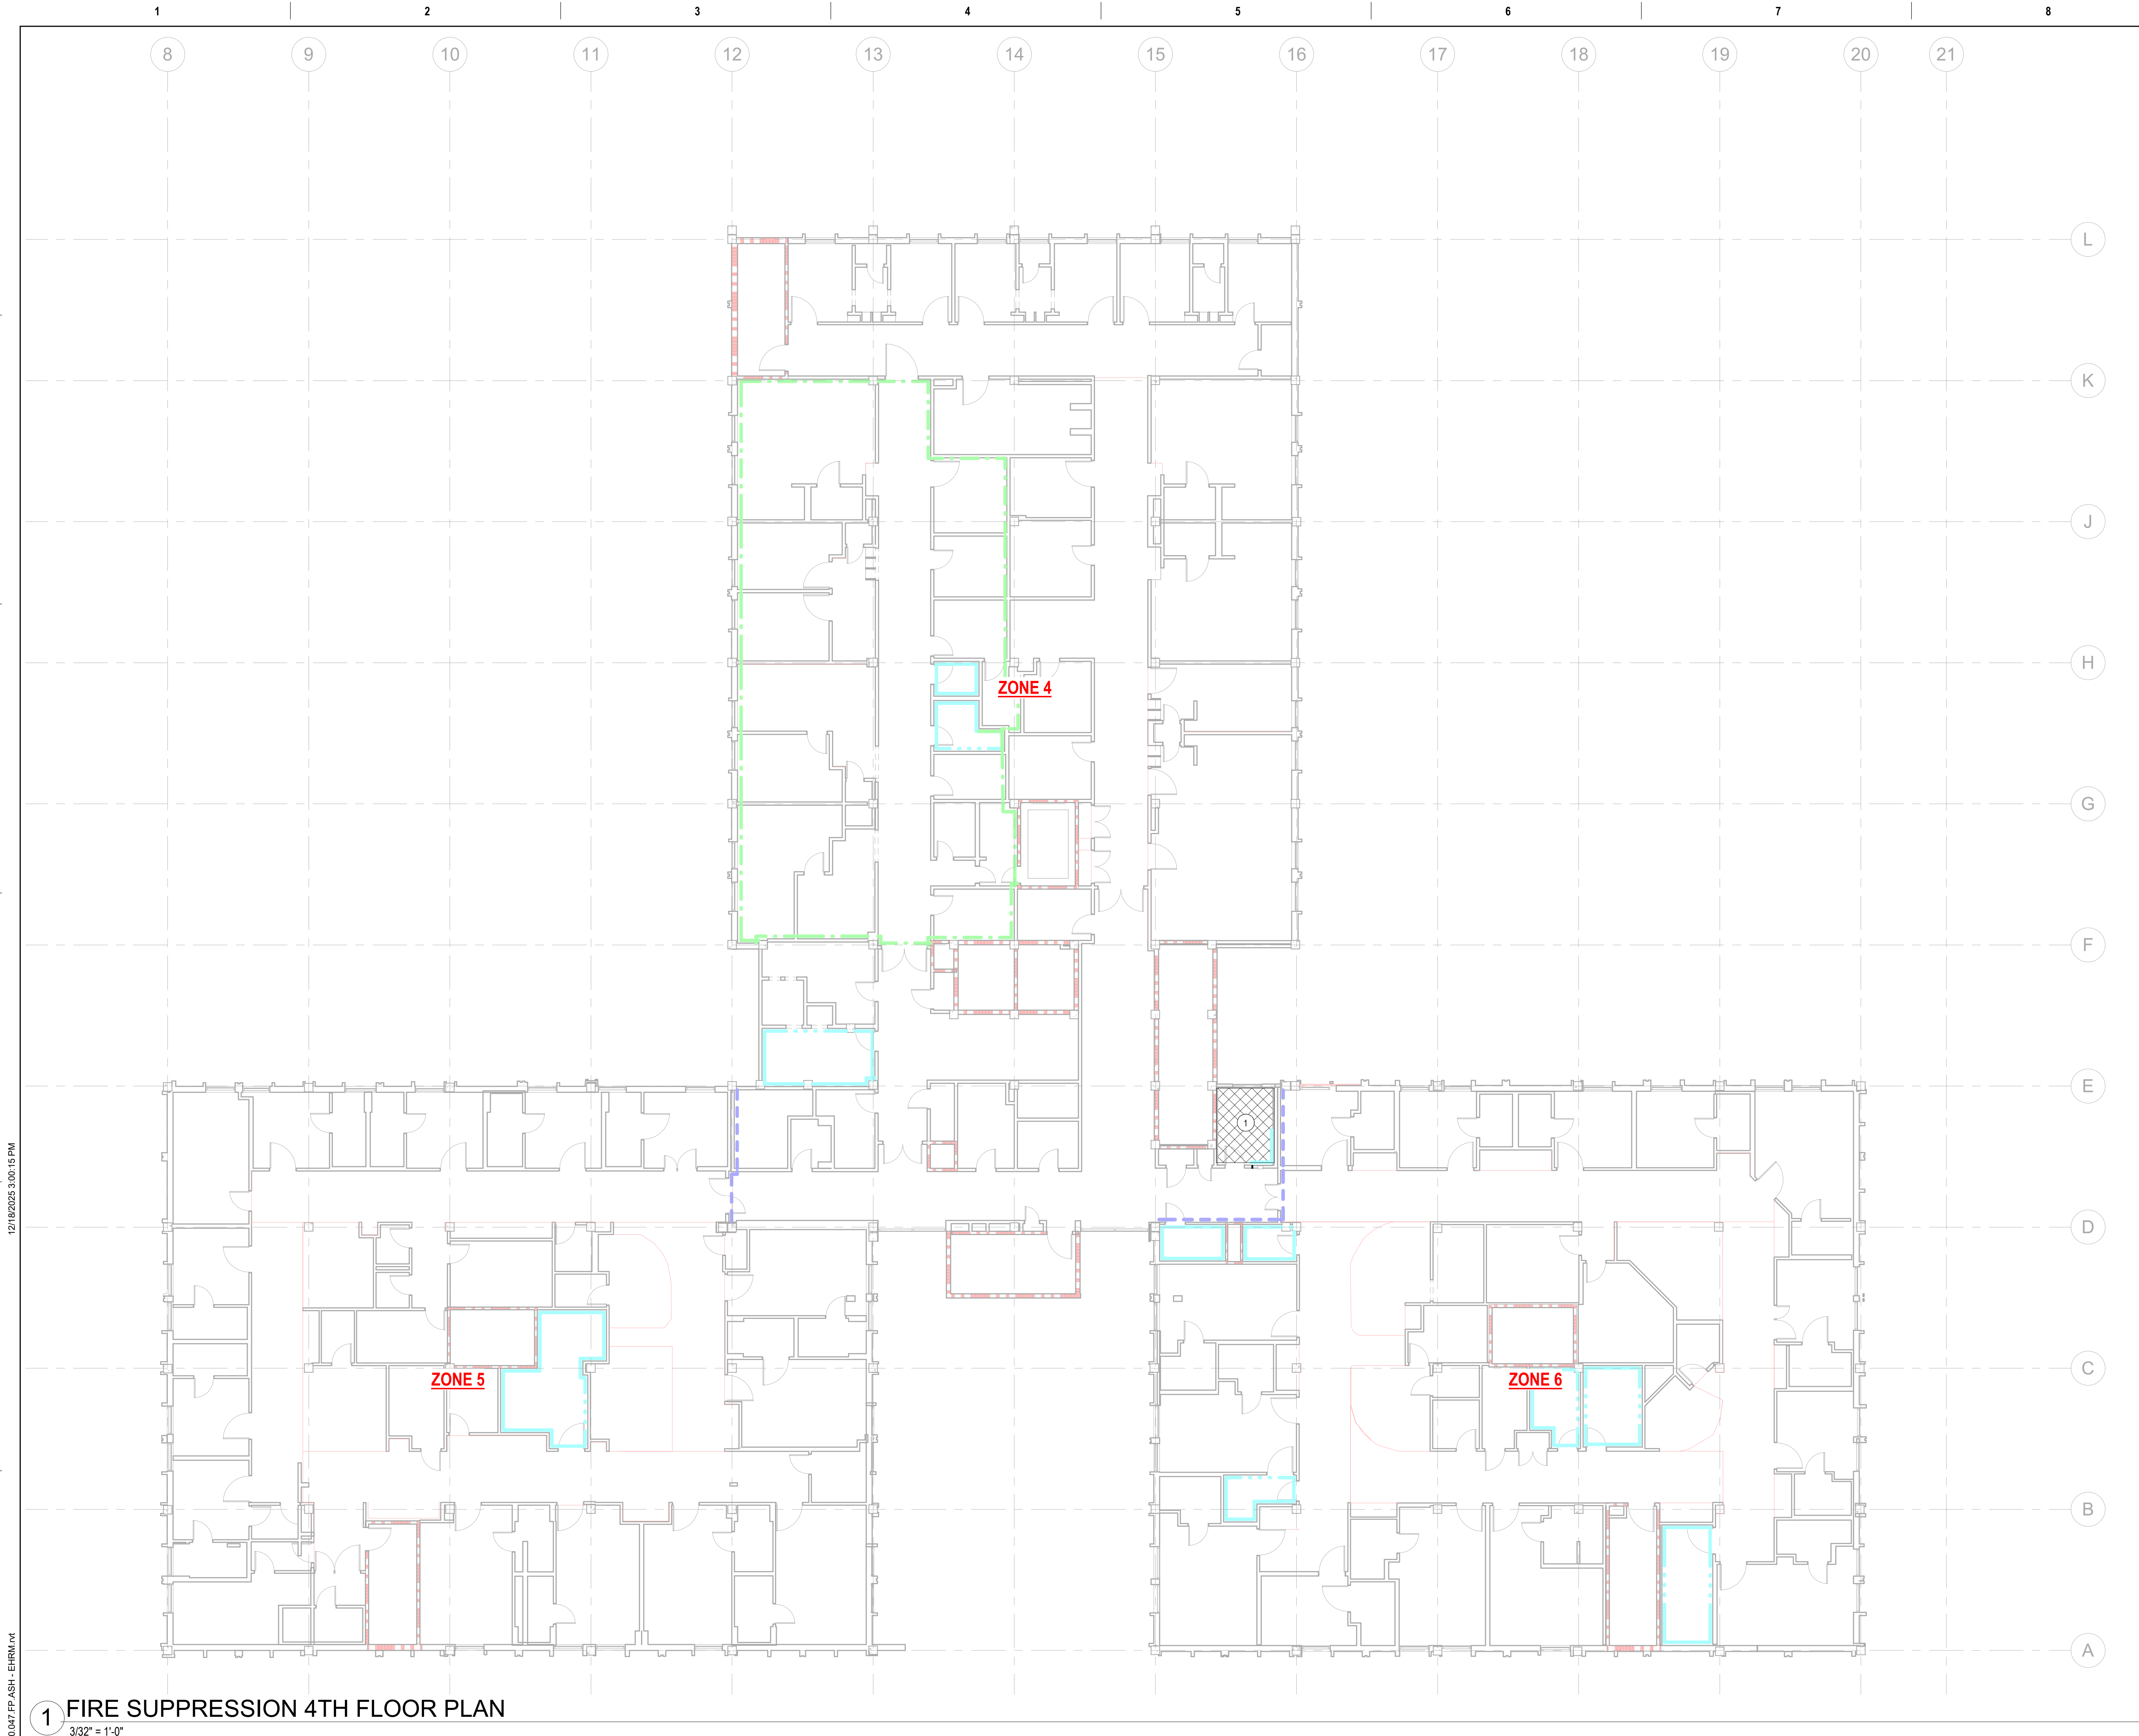



SHEET NOTES:

1 HATCHING INDICATES SCOPE OF WORK. RELOCATE EXISTING SPRINKLERS AS REQUIRED TO ACCOMMODATE RECONFIGURATION OF WALLS AND REMOVAL OF EXISTING CEILING, AND NEW WORK BY OTHER TRADES TO PROVIDE COMPLIANT COVERAGE IN NEW TR. ADDITIONALLY, REPLACE EXISTING PENDENT SPRINKLER HEADS WITH UPRIGHT SPRINKLER HEADS DUE TO REMOVAL OF THE CEILING.

GENERAL NOTES:


PARTITION LEGEND

- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING

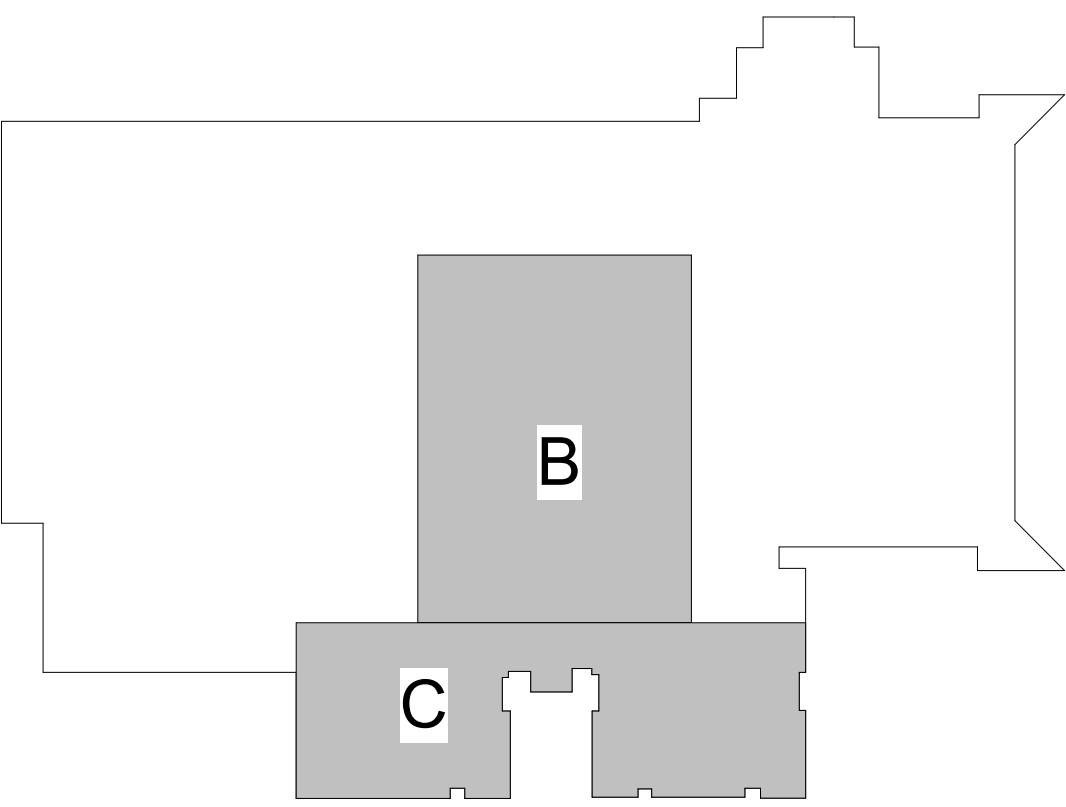

FINAL BID DOCUMENTS

Revisions: Date:		ARCHITECT/ENGINEER OF RECORD AWEN SOLUTIONS GROUP ARCHITECTURE ENGINEERING PLANNING		A/E: Awen Solutions Group 215 N. Payne Street, Suite 122 Alexandria, VA 22314		STAMP		Facilities Management Services U.S. Department of Veterans Affairs		Drawing Title FIRE SUPPRESSION 4TH FLOOR PLAN		Phase FINAL BID DOCUMENTS		Project Title EHRM INFRASTRUCTURE UPGRADES		Project Number 637-22-700	
														Building Number BLDG 47			
														Drawing Number 47-FX104			
												Location 1100 TUNNEL ROAD ASHEVILLE, NC 28805		Issue Date 12.19.25			
												Checked		Drawn			
														SHEET 333 of 559			

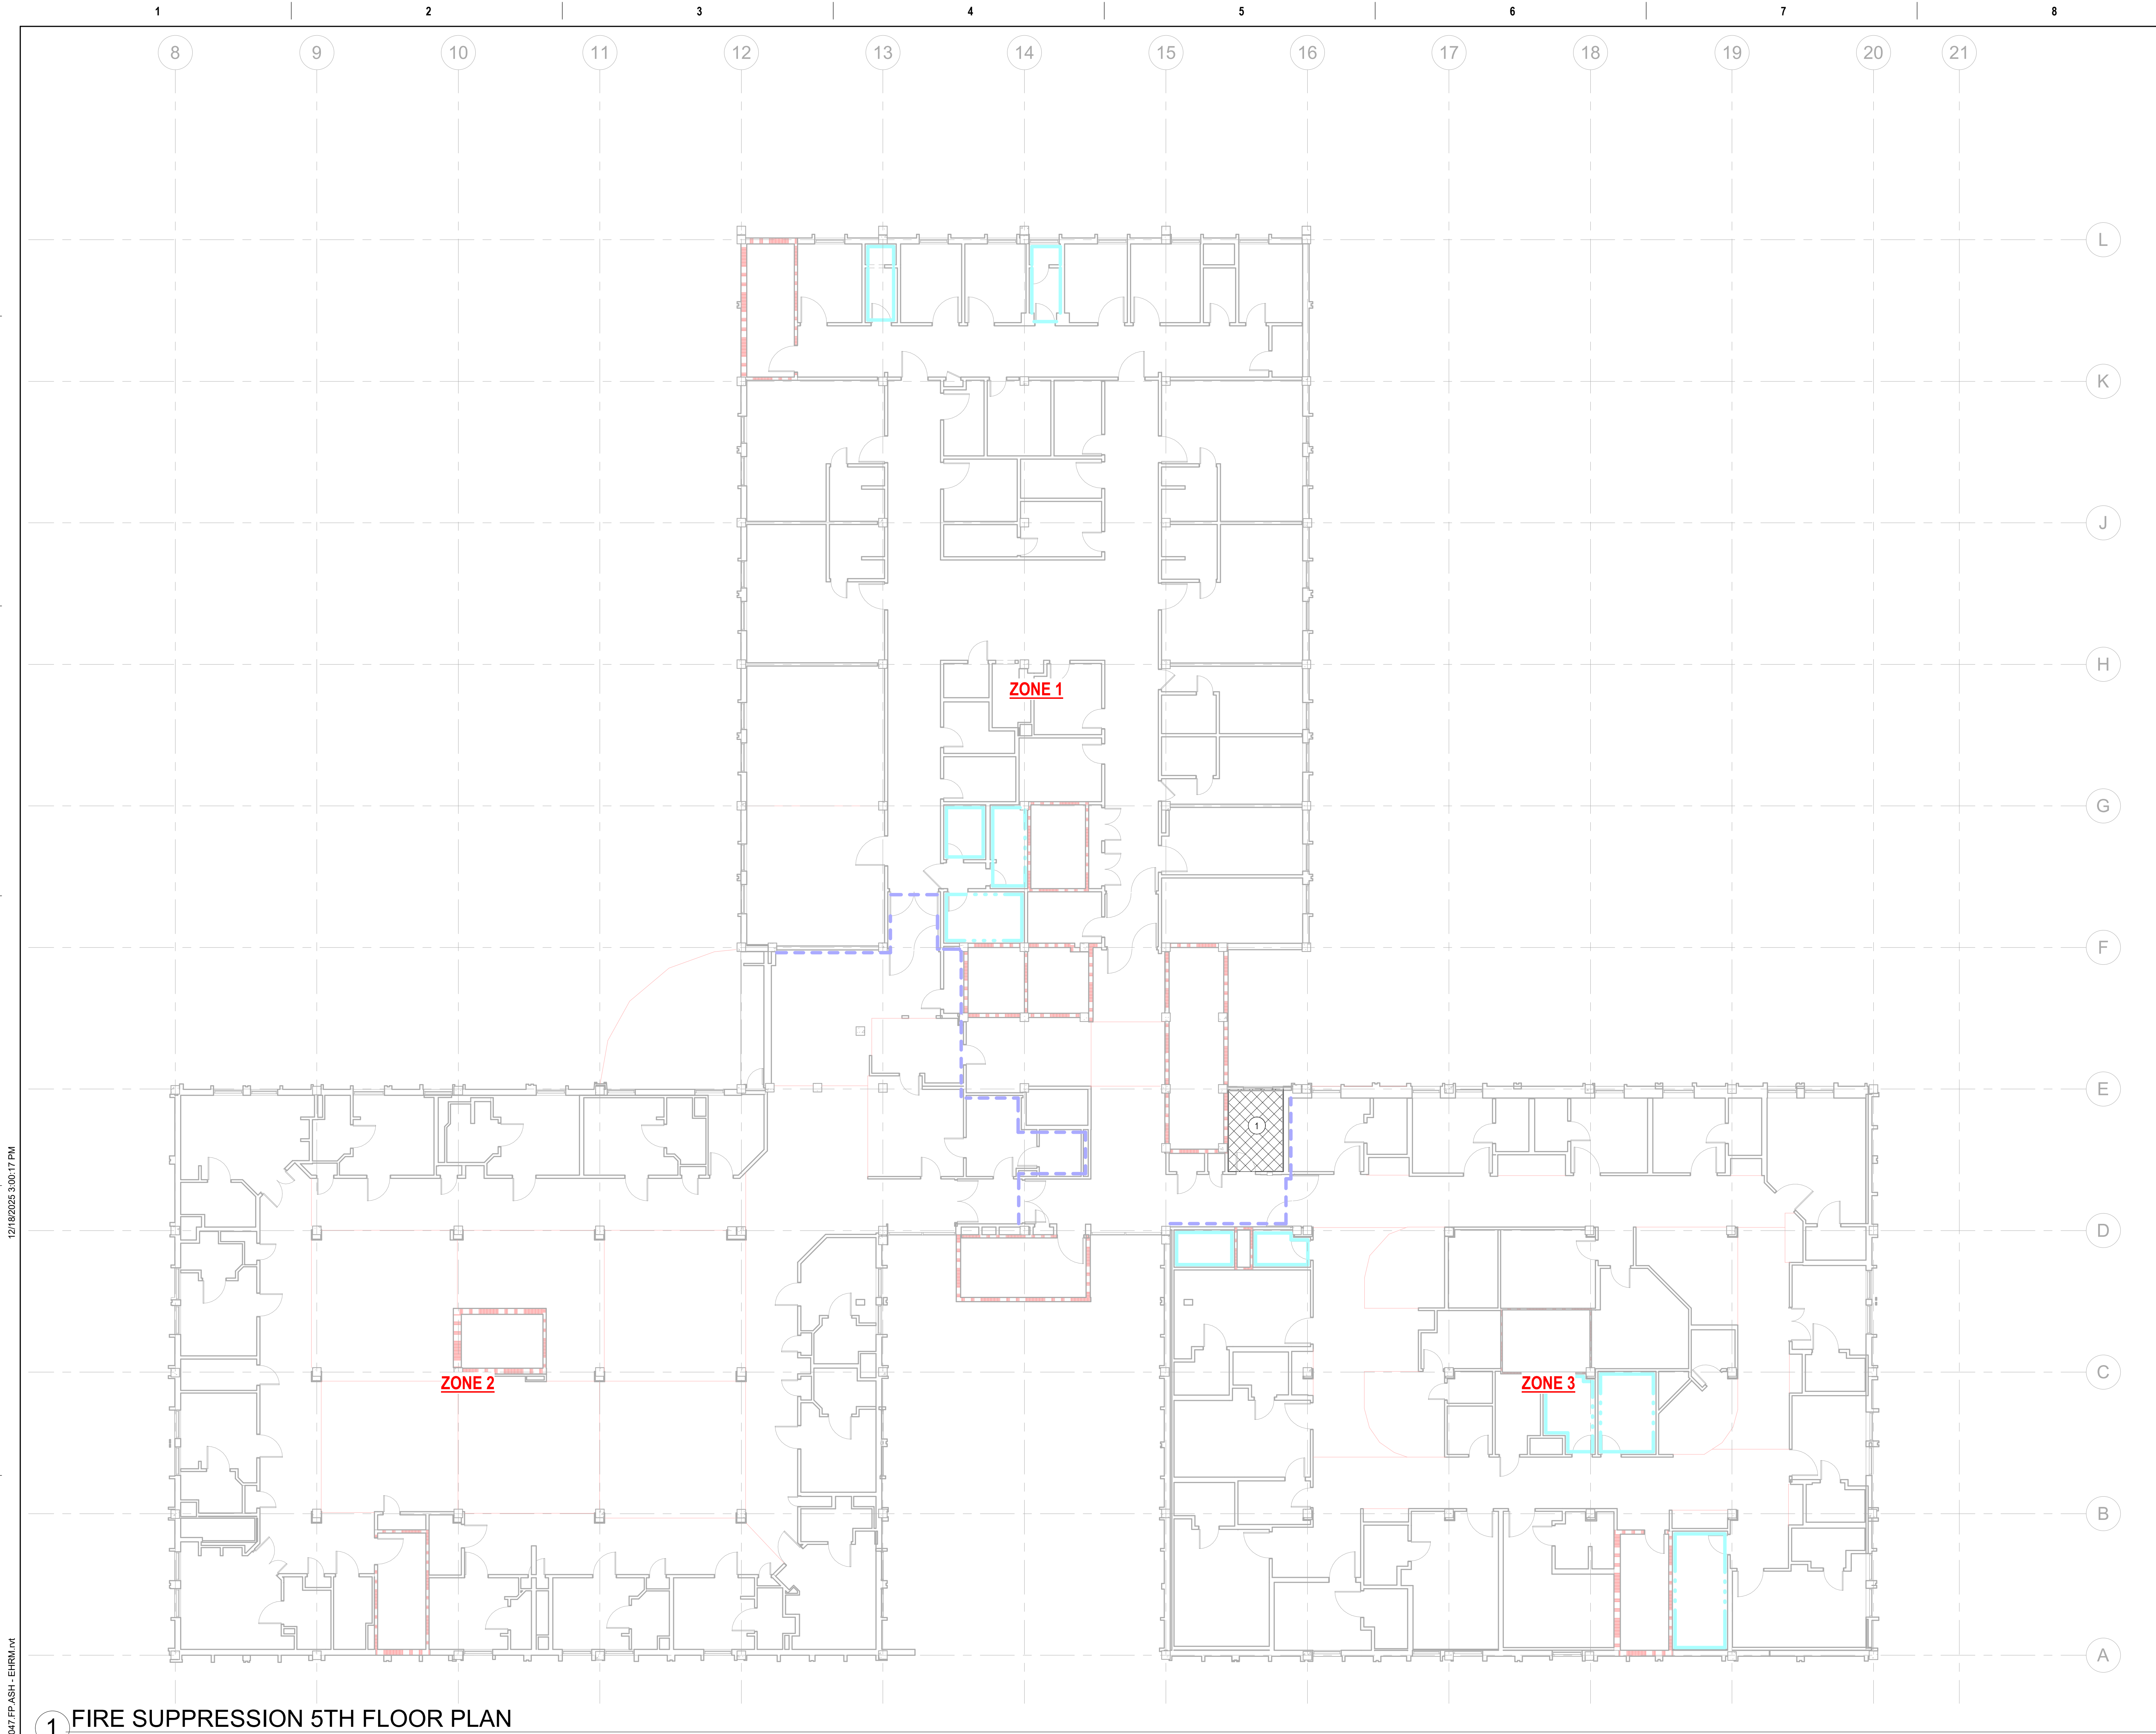

1 FIRE SUPPRESSION 5TH FLOOR PLAN
3/32" = 1'-0"


SHEET NOTES:

1 HATCHING INDICATES SCOPE OF WORK. RELOCATE EXISTING SPRINKLERS AS REQUIRED TO ACCOMMODATE RECONFIGURATION OF WALLS AND REMOVAL OF EXISTING CEILING, AND NEW WORK BY OTHER TRADES TO PROVIDE COMPLIANT COVERAGE IN NEW TR. ADDITIONALLY, REPLACE EXISTING PENDENT SPRINKLER HEADS WITH UPRIGHT SPRINKLER HEADS DUE TO REMOVAL OF THE CEILING.


GENERAL NOTES:

PARTITION LEGEND

- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING

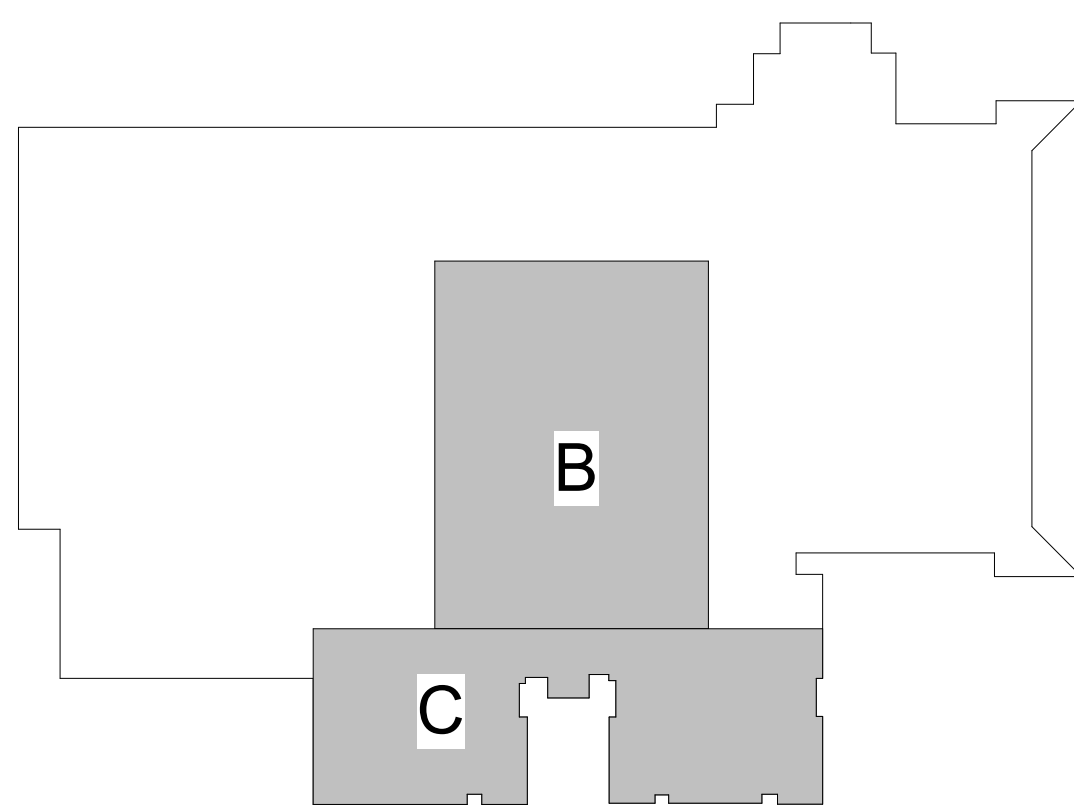

KEY PLAN



FINAL BID DOCUMENTS


Revisions:	Date:

ARCHITECT/ENGINEER OF RECORD

AWEN
SOLUTIONS GROUP
ARCHITECTURE | ENGINEERING | PLANNING

A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314

COFFMAN
ENGINEERS
791 Corporate Center Drive, Suite 419
Raleigh, NC 27607
ph 919.374.6888
www.coffman.com

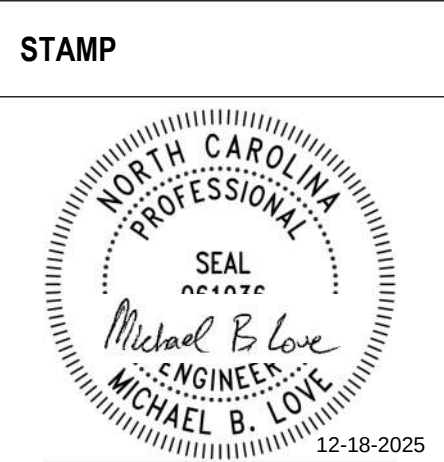

Facilities
Management
Services

VA U.S. Department
of Veterans
Affairs

Drawing Title
FIRE SUPPRESSION 5TH FLOOR PLAN

Approved:

FOR OFFICIAL USE ONLY

Phase
FINAL BID DOCUMENTS

Project Title
EHRM INFRASTRUCTURE
UPGRADES

Location
1100 TUNNEL ROAD
ASHEVILLE, NC 28805

Issue Date
12.19.25

Checked


Drawn

Project Number
637-22-700

Building Number
BLDG 47

Drawing Number

47-FX105
SHEET 334 of 559

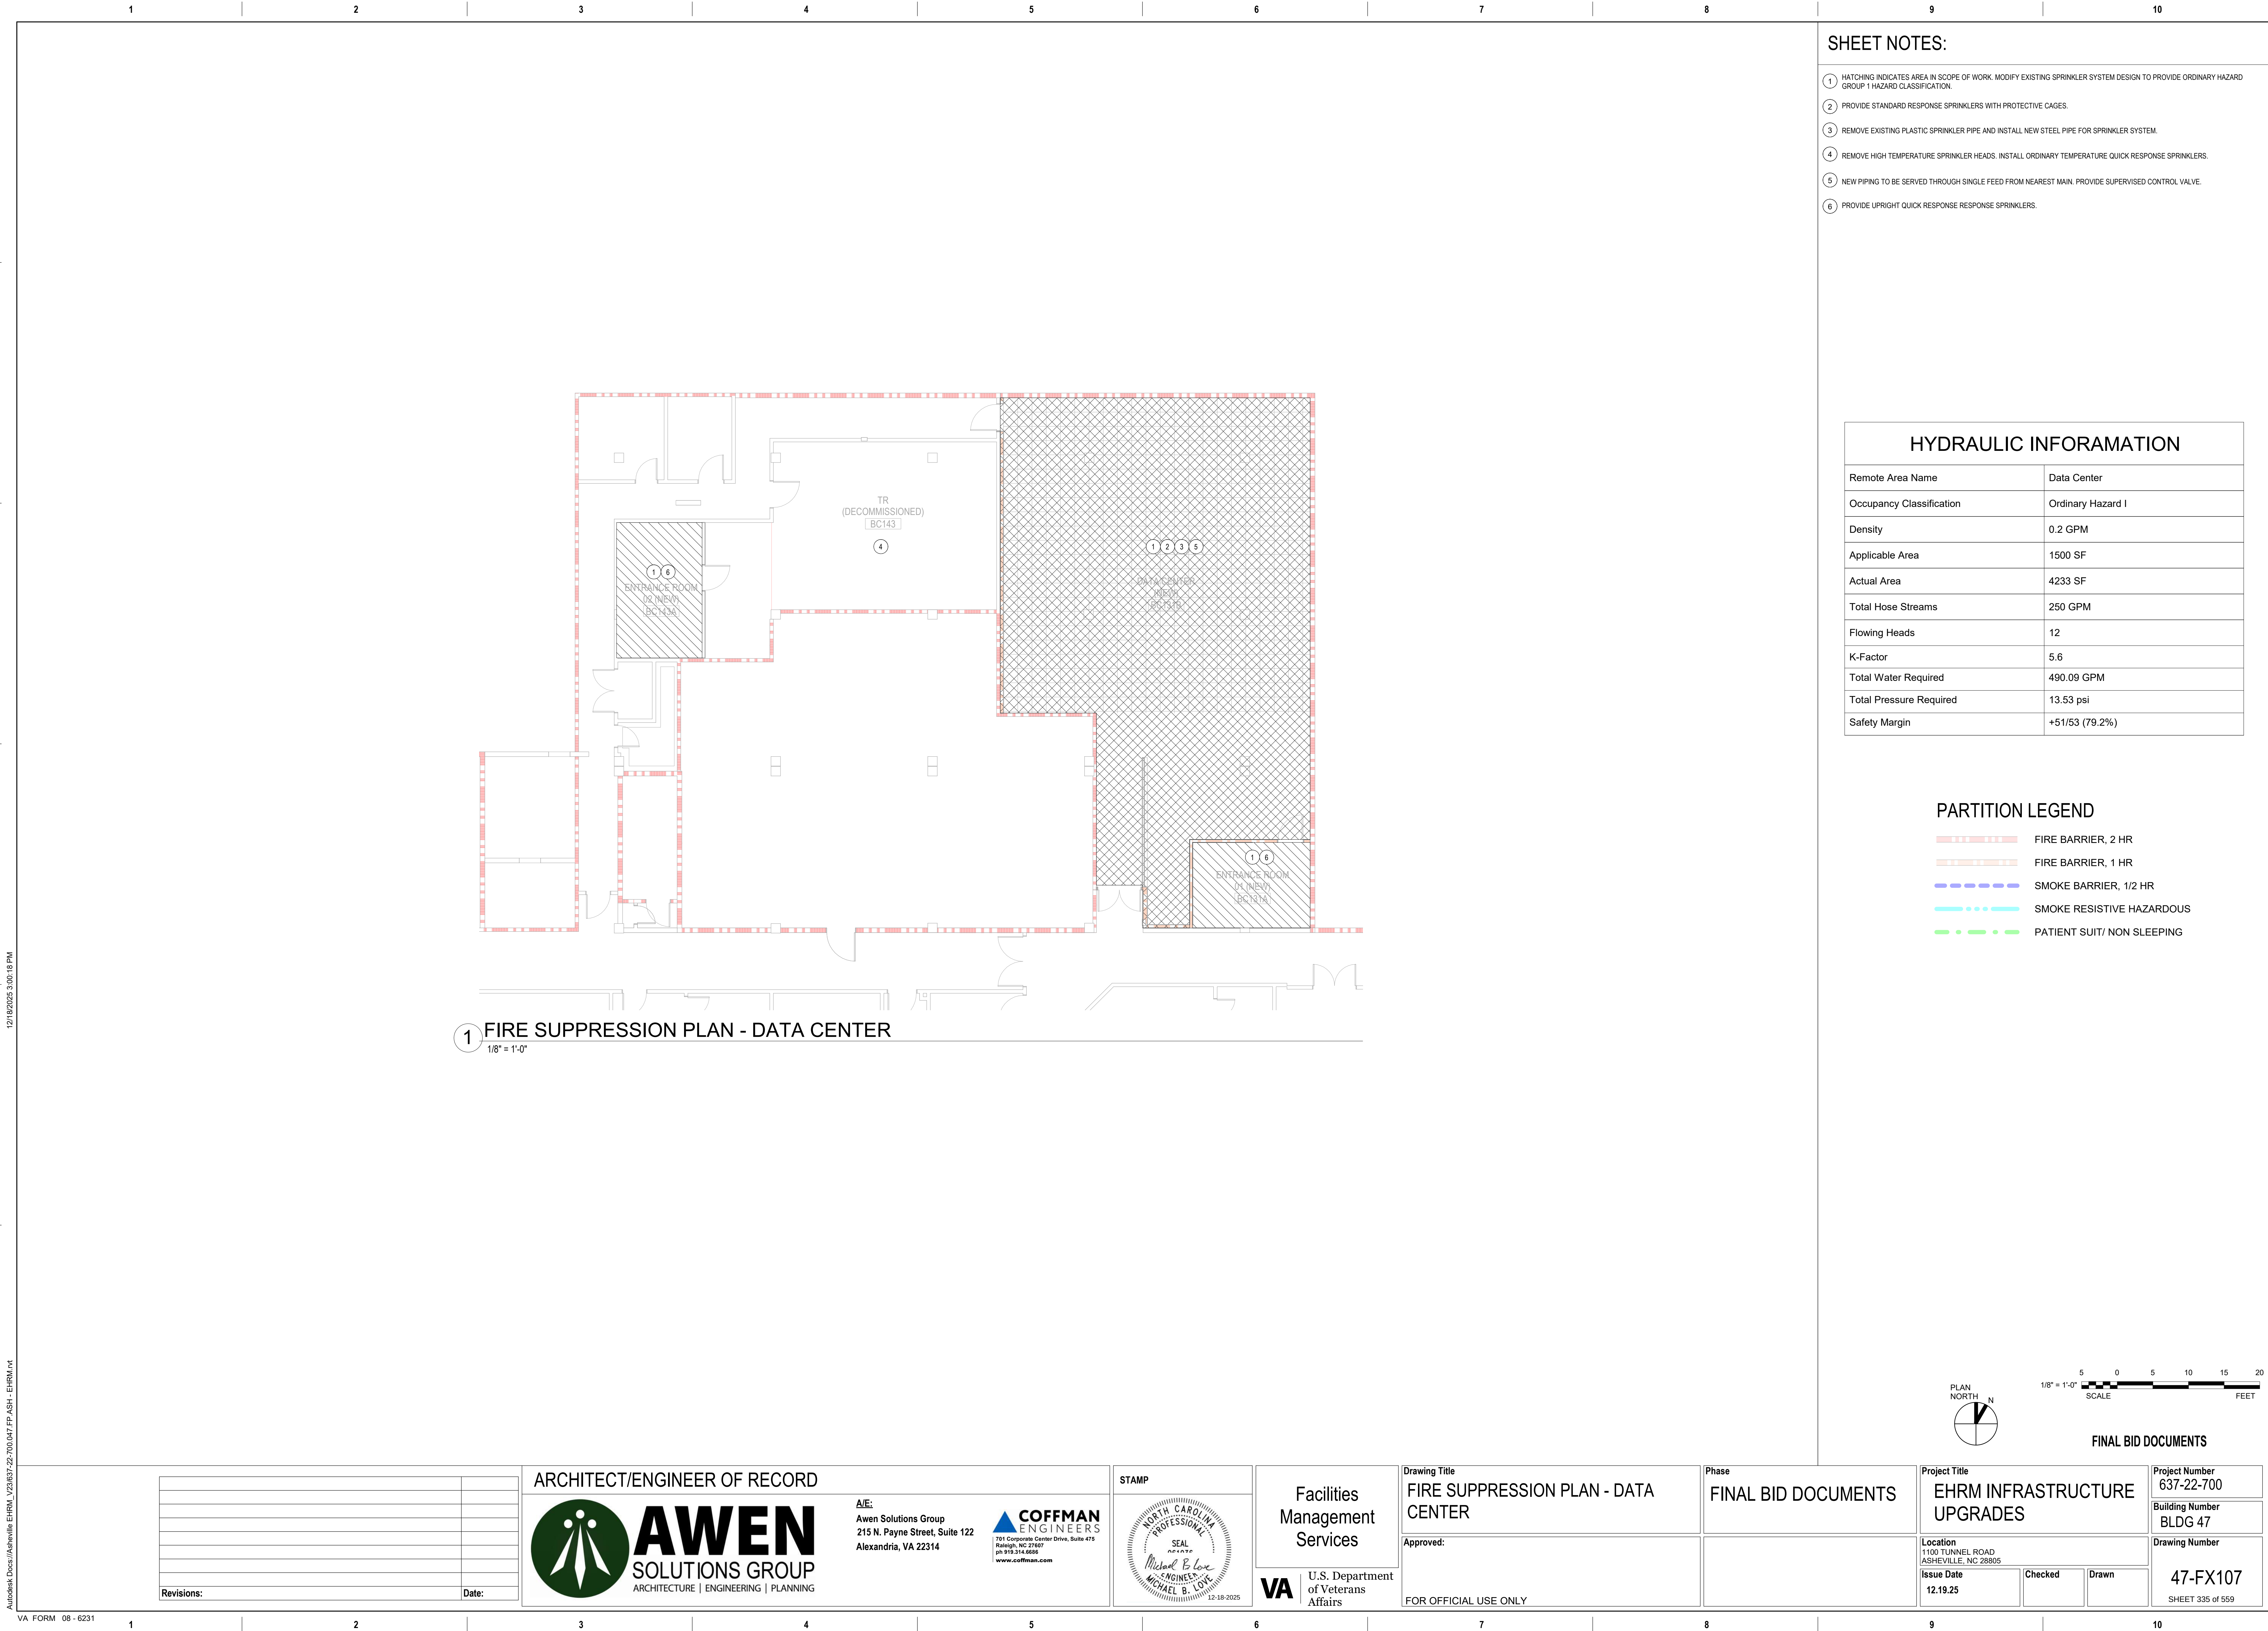

VA FORM 08-6231




2 SEQUENCE OF OPERATIONS

PLAN
NORTH

FINAL BID DOCUMENTS

47-FX108

SHEET 336 of 559

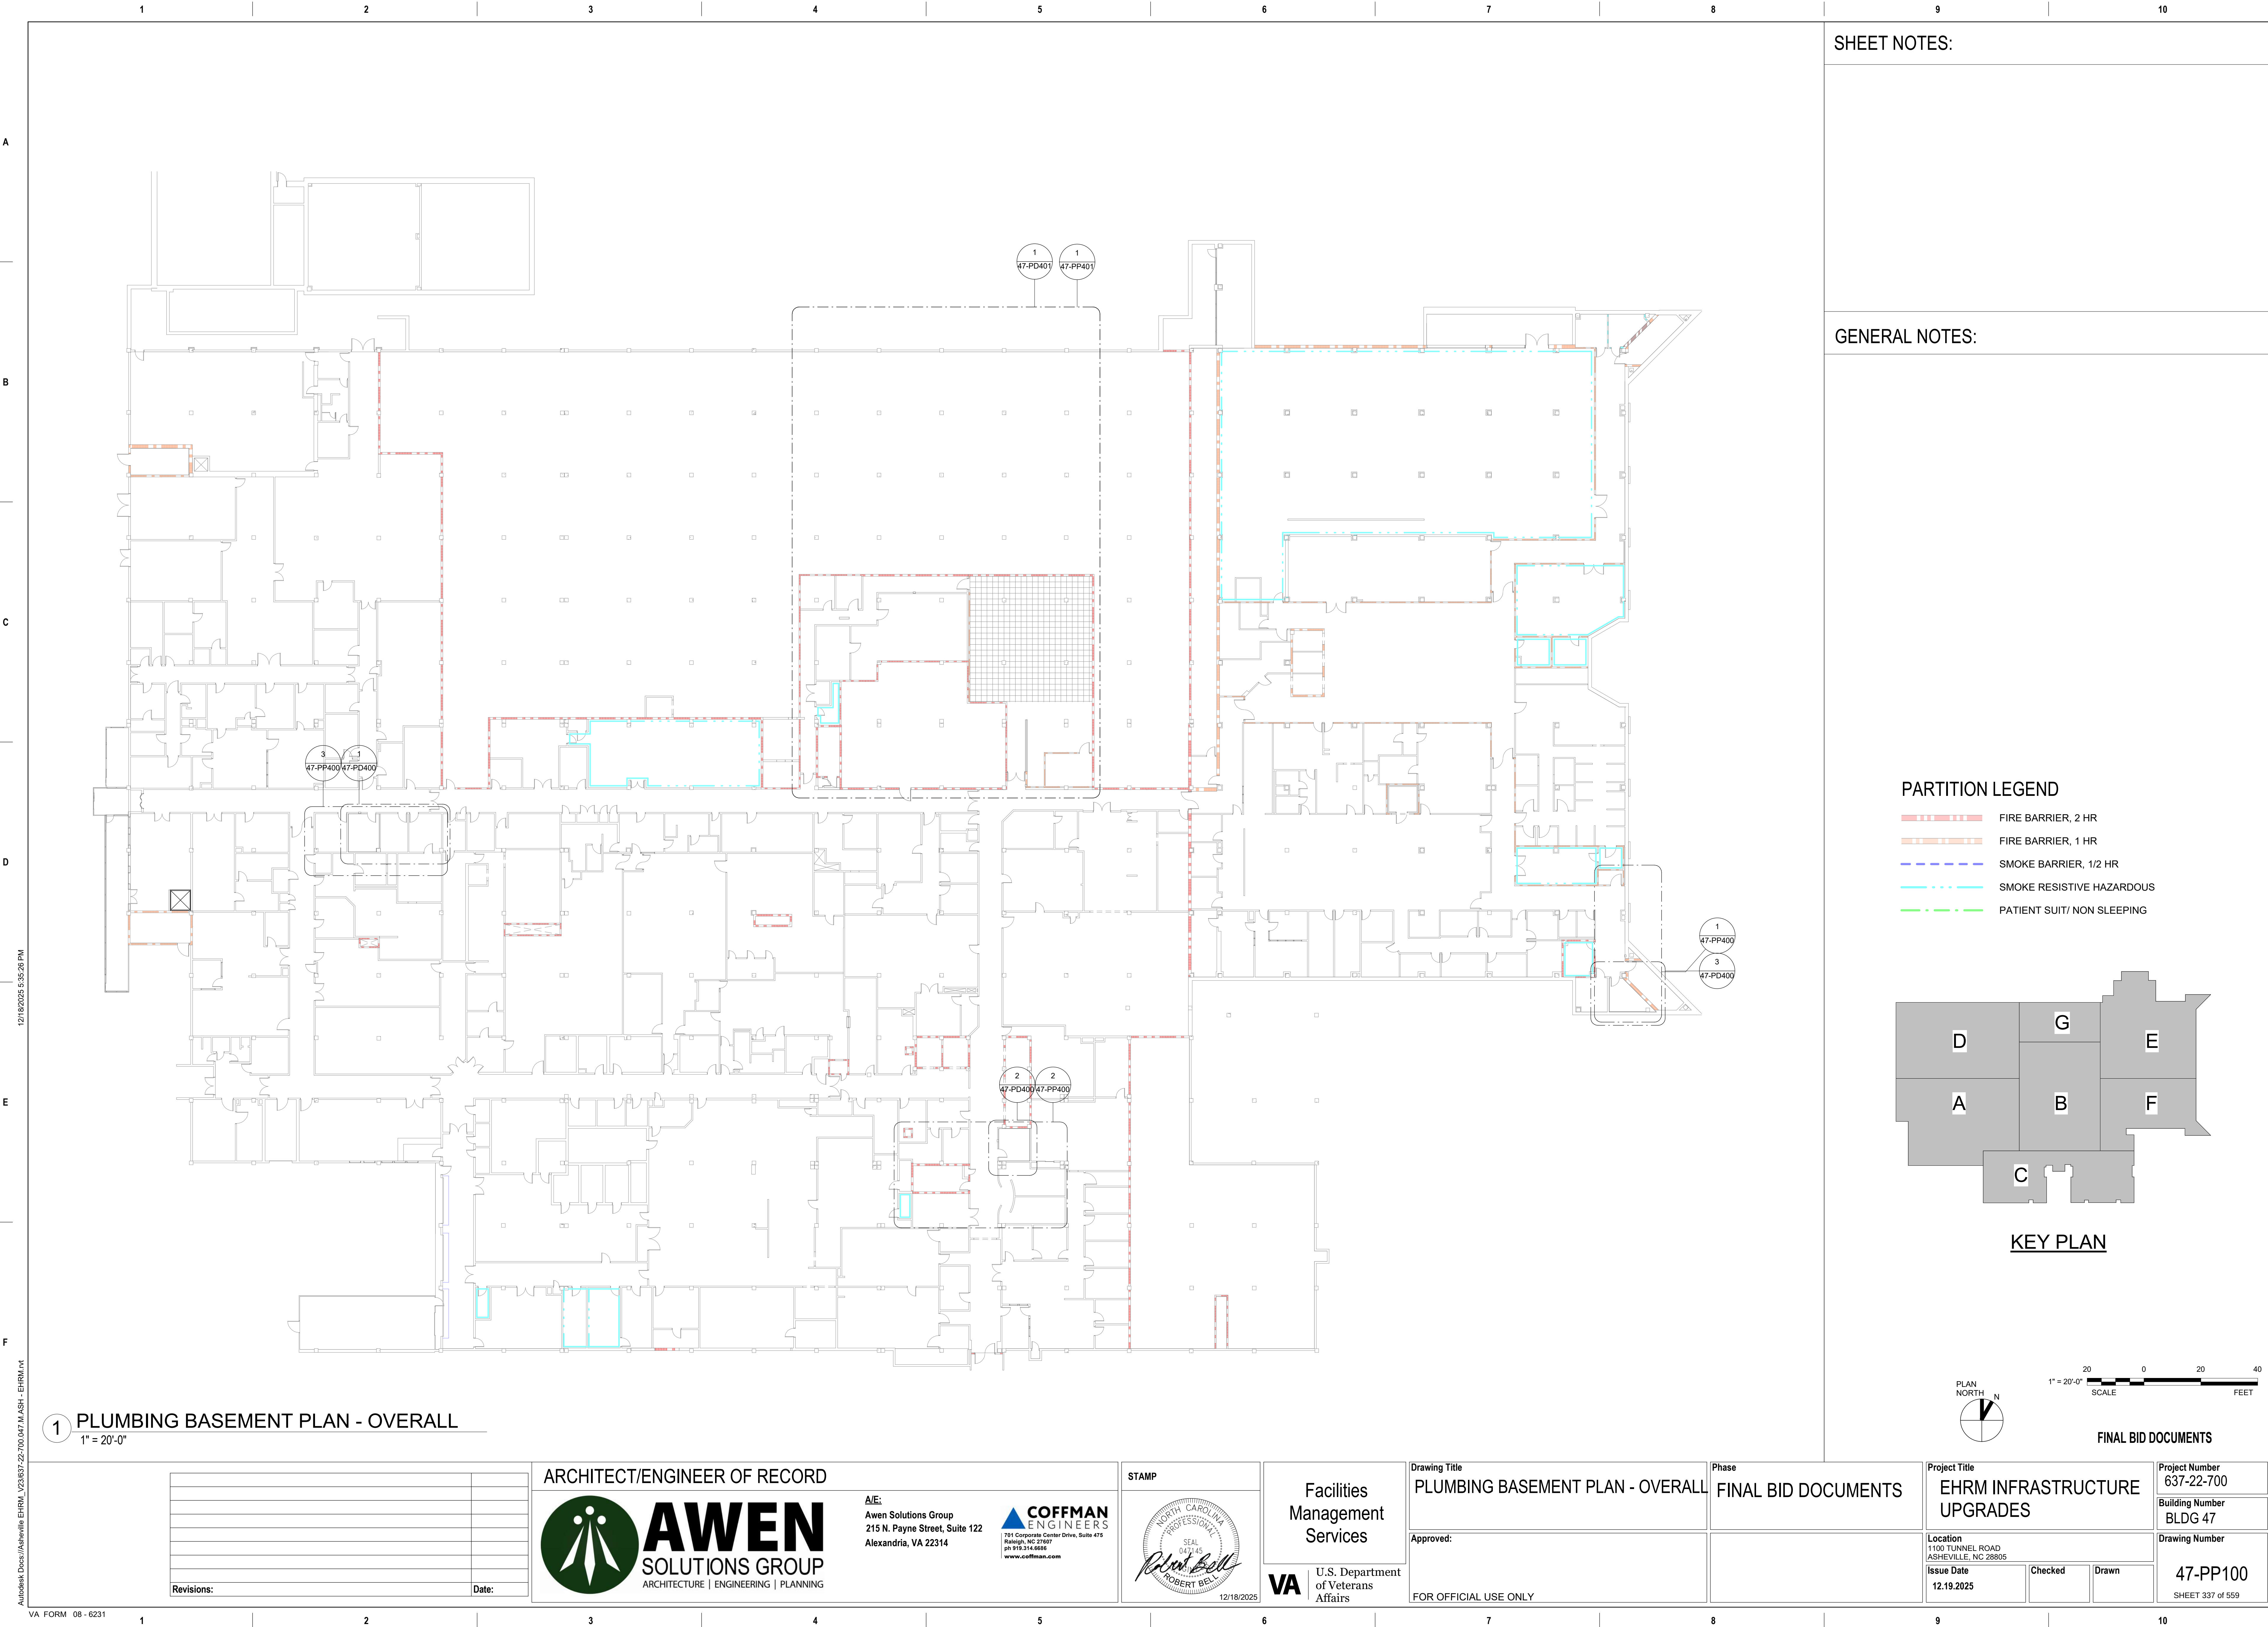


SHEET NOTES:



GENERAL NOTES:

PARTITION LEGEND


- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING

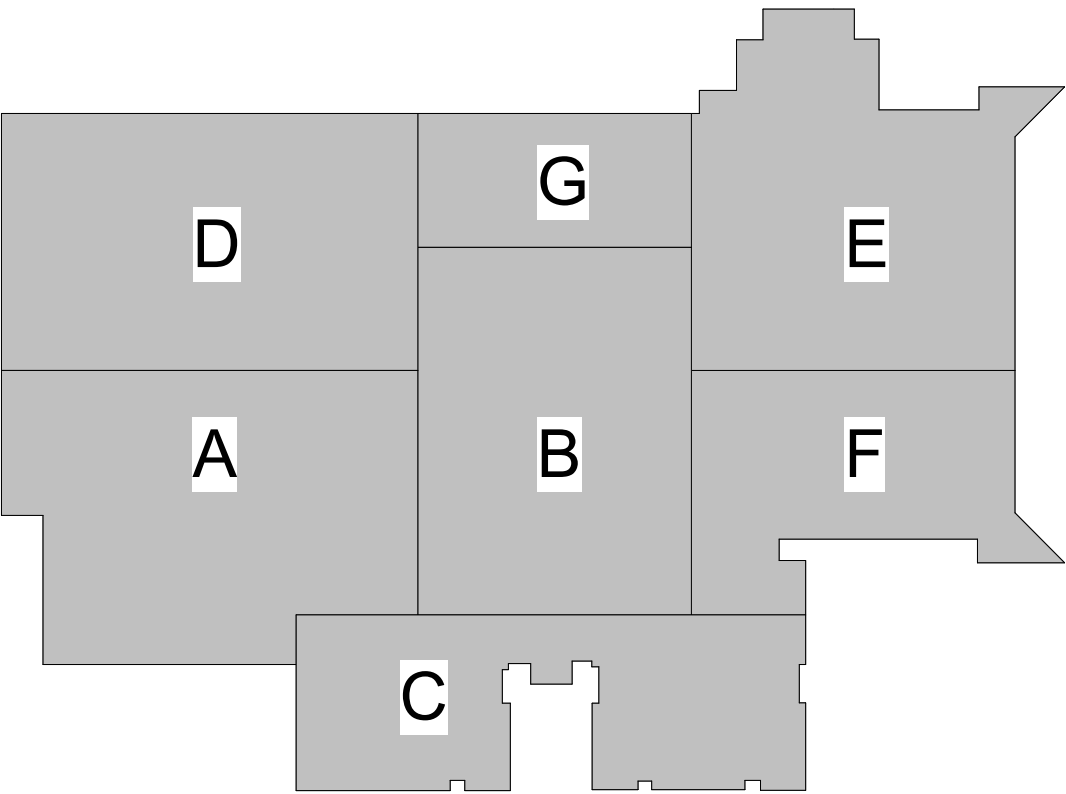

KEY PLAN

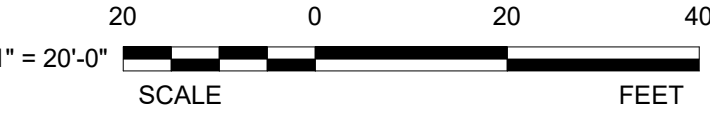


FINAL BID DOCUMENTS

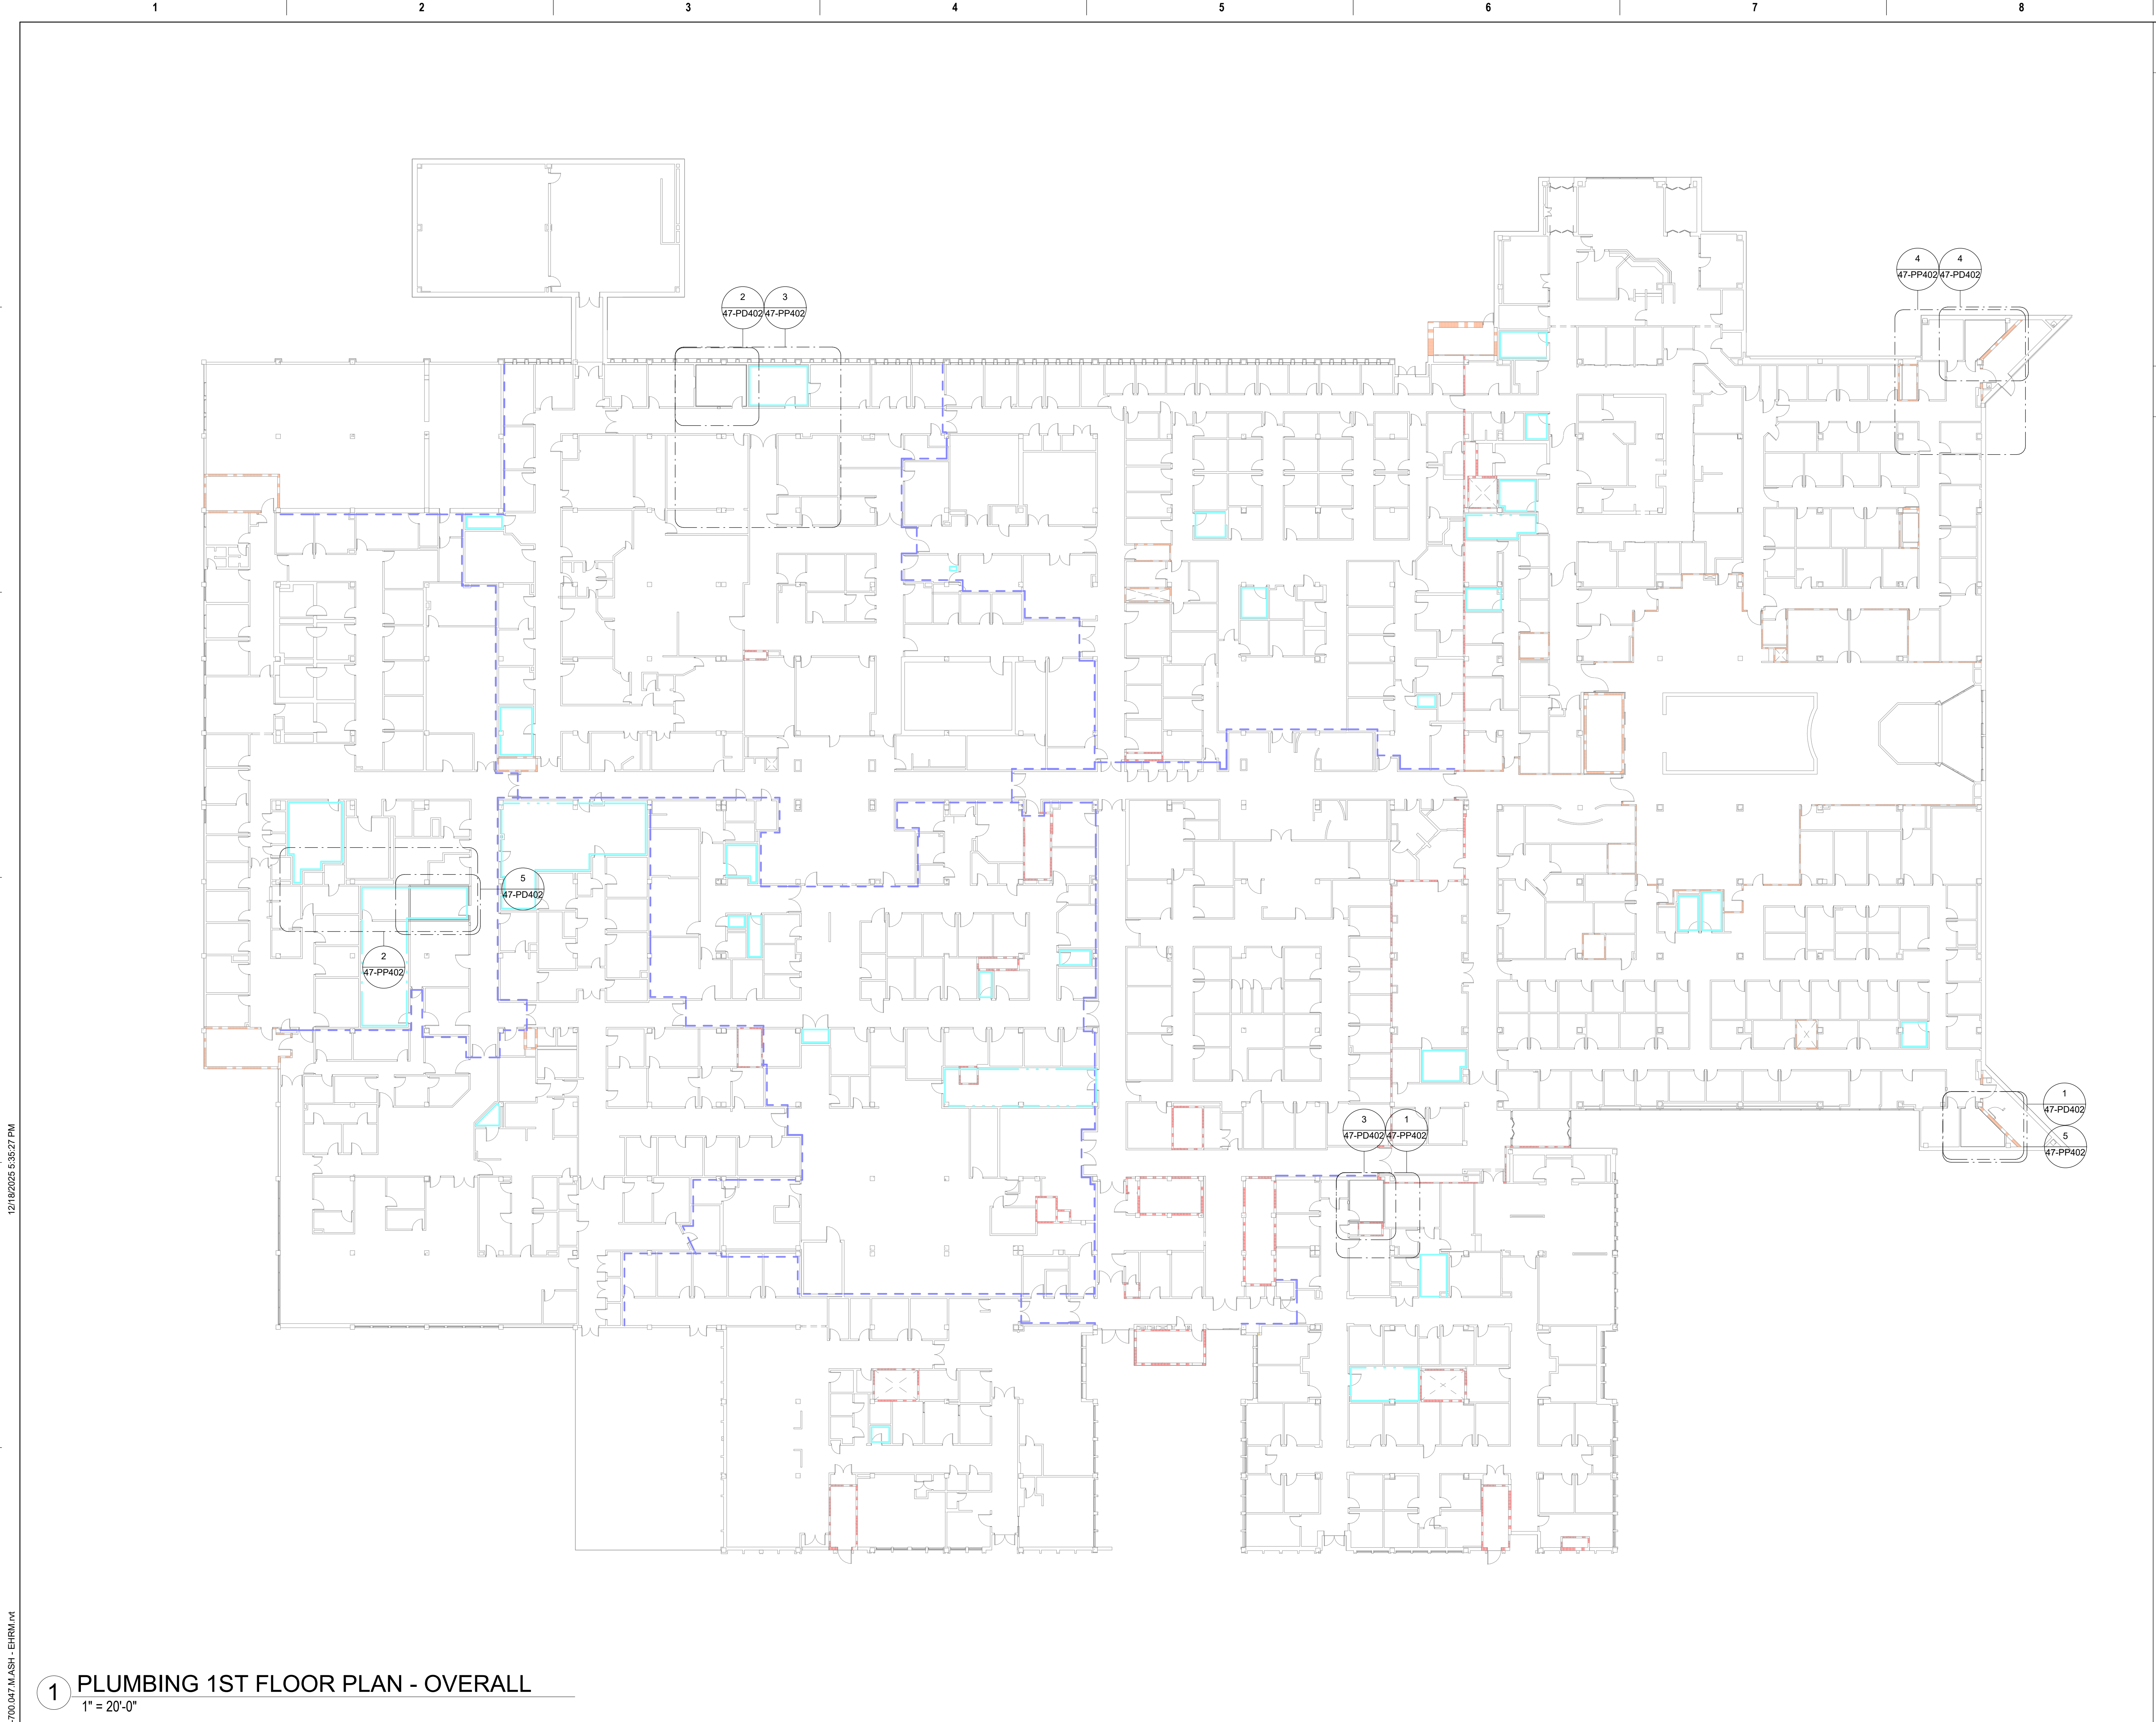

SHEET NOTES:

GENERAL NOTES:

- PARTITION LEGEND**
- FIRE BARRIER, 2 HR
 - FIRE BARRIER, 1 HR
 - SMOKE BARRIER, 1/2 HR
 - SMOKE RESISTIVE HAZARDOUS
 - PATIENT SUIT/ NON SLEEPING

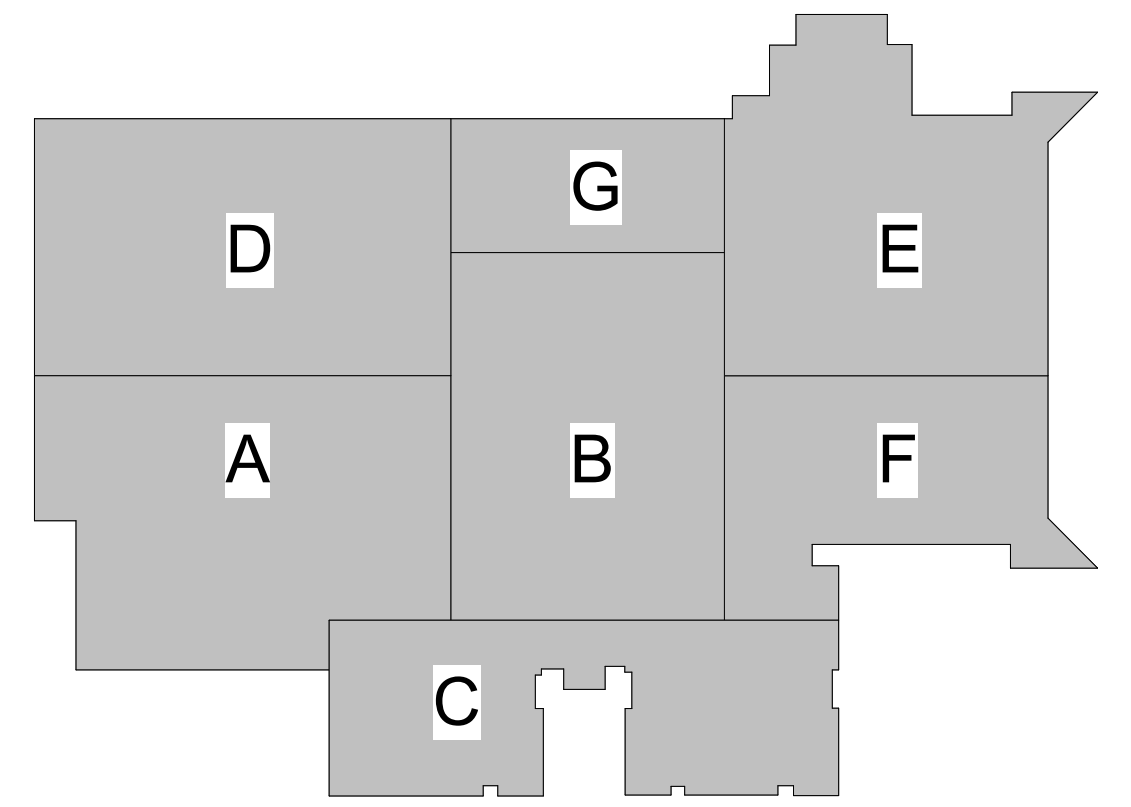



KEY PLAN



1 PLUMBING 1ST FLOOR PLAN - OVERALL
1" = 20'-0"


Revisions: <table><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr></table> Date:									ARCHITECT/ENGINEER OF RECORD AWEN SOLUTIONS GROUP ARCHITECTURE ENGINEERING PLANNING A/E: Awen Solutions Group 215 N. Payne Street, Suite 122 Alexandria, VA 22314 COFFMAN ENGINEERS 701 Corporate Center Drive, Suite 410 Raleigh, NC 27607 919.374.6888 www.coffman.com STAMP 12/18/2025 Facilities Management Services U.S. Department of Veterans Affairs Drawing Title PLUMBING 1ST FLOOR PLAN - OVERALL Approved: FOR OFFICIAL USE ONLY Phase FINAL BID DOCUMENTS Project Title EHRM INFRASTRUCTURE UPGRADES Location 1100 TUNNEL ROAD ASHEVILLE, NC 28805 Issue Date 12.19.2025 Checked Drawn Project Number 637-22-700 Building Number BLDG 47 Drawing Number 47-PP101 SHEET 338 of 559

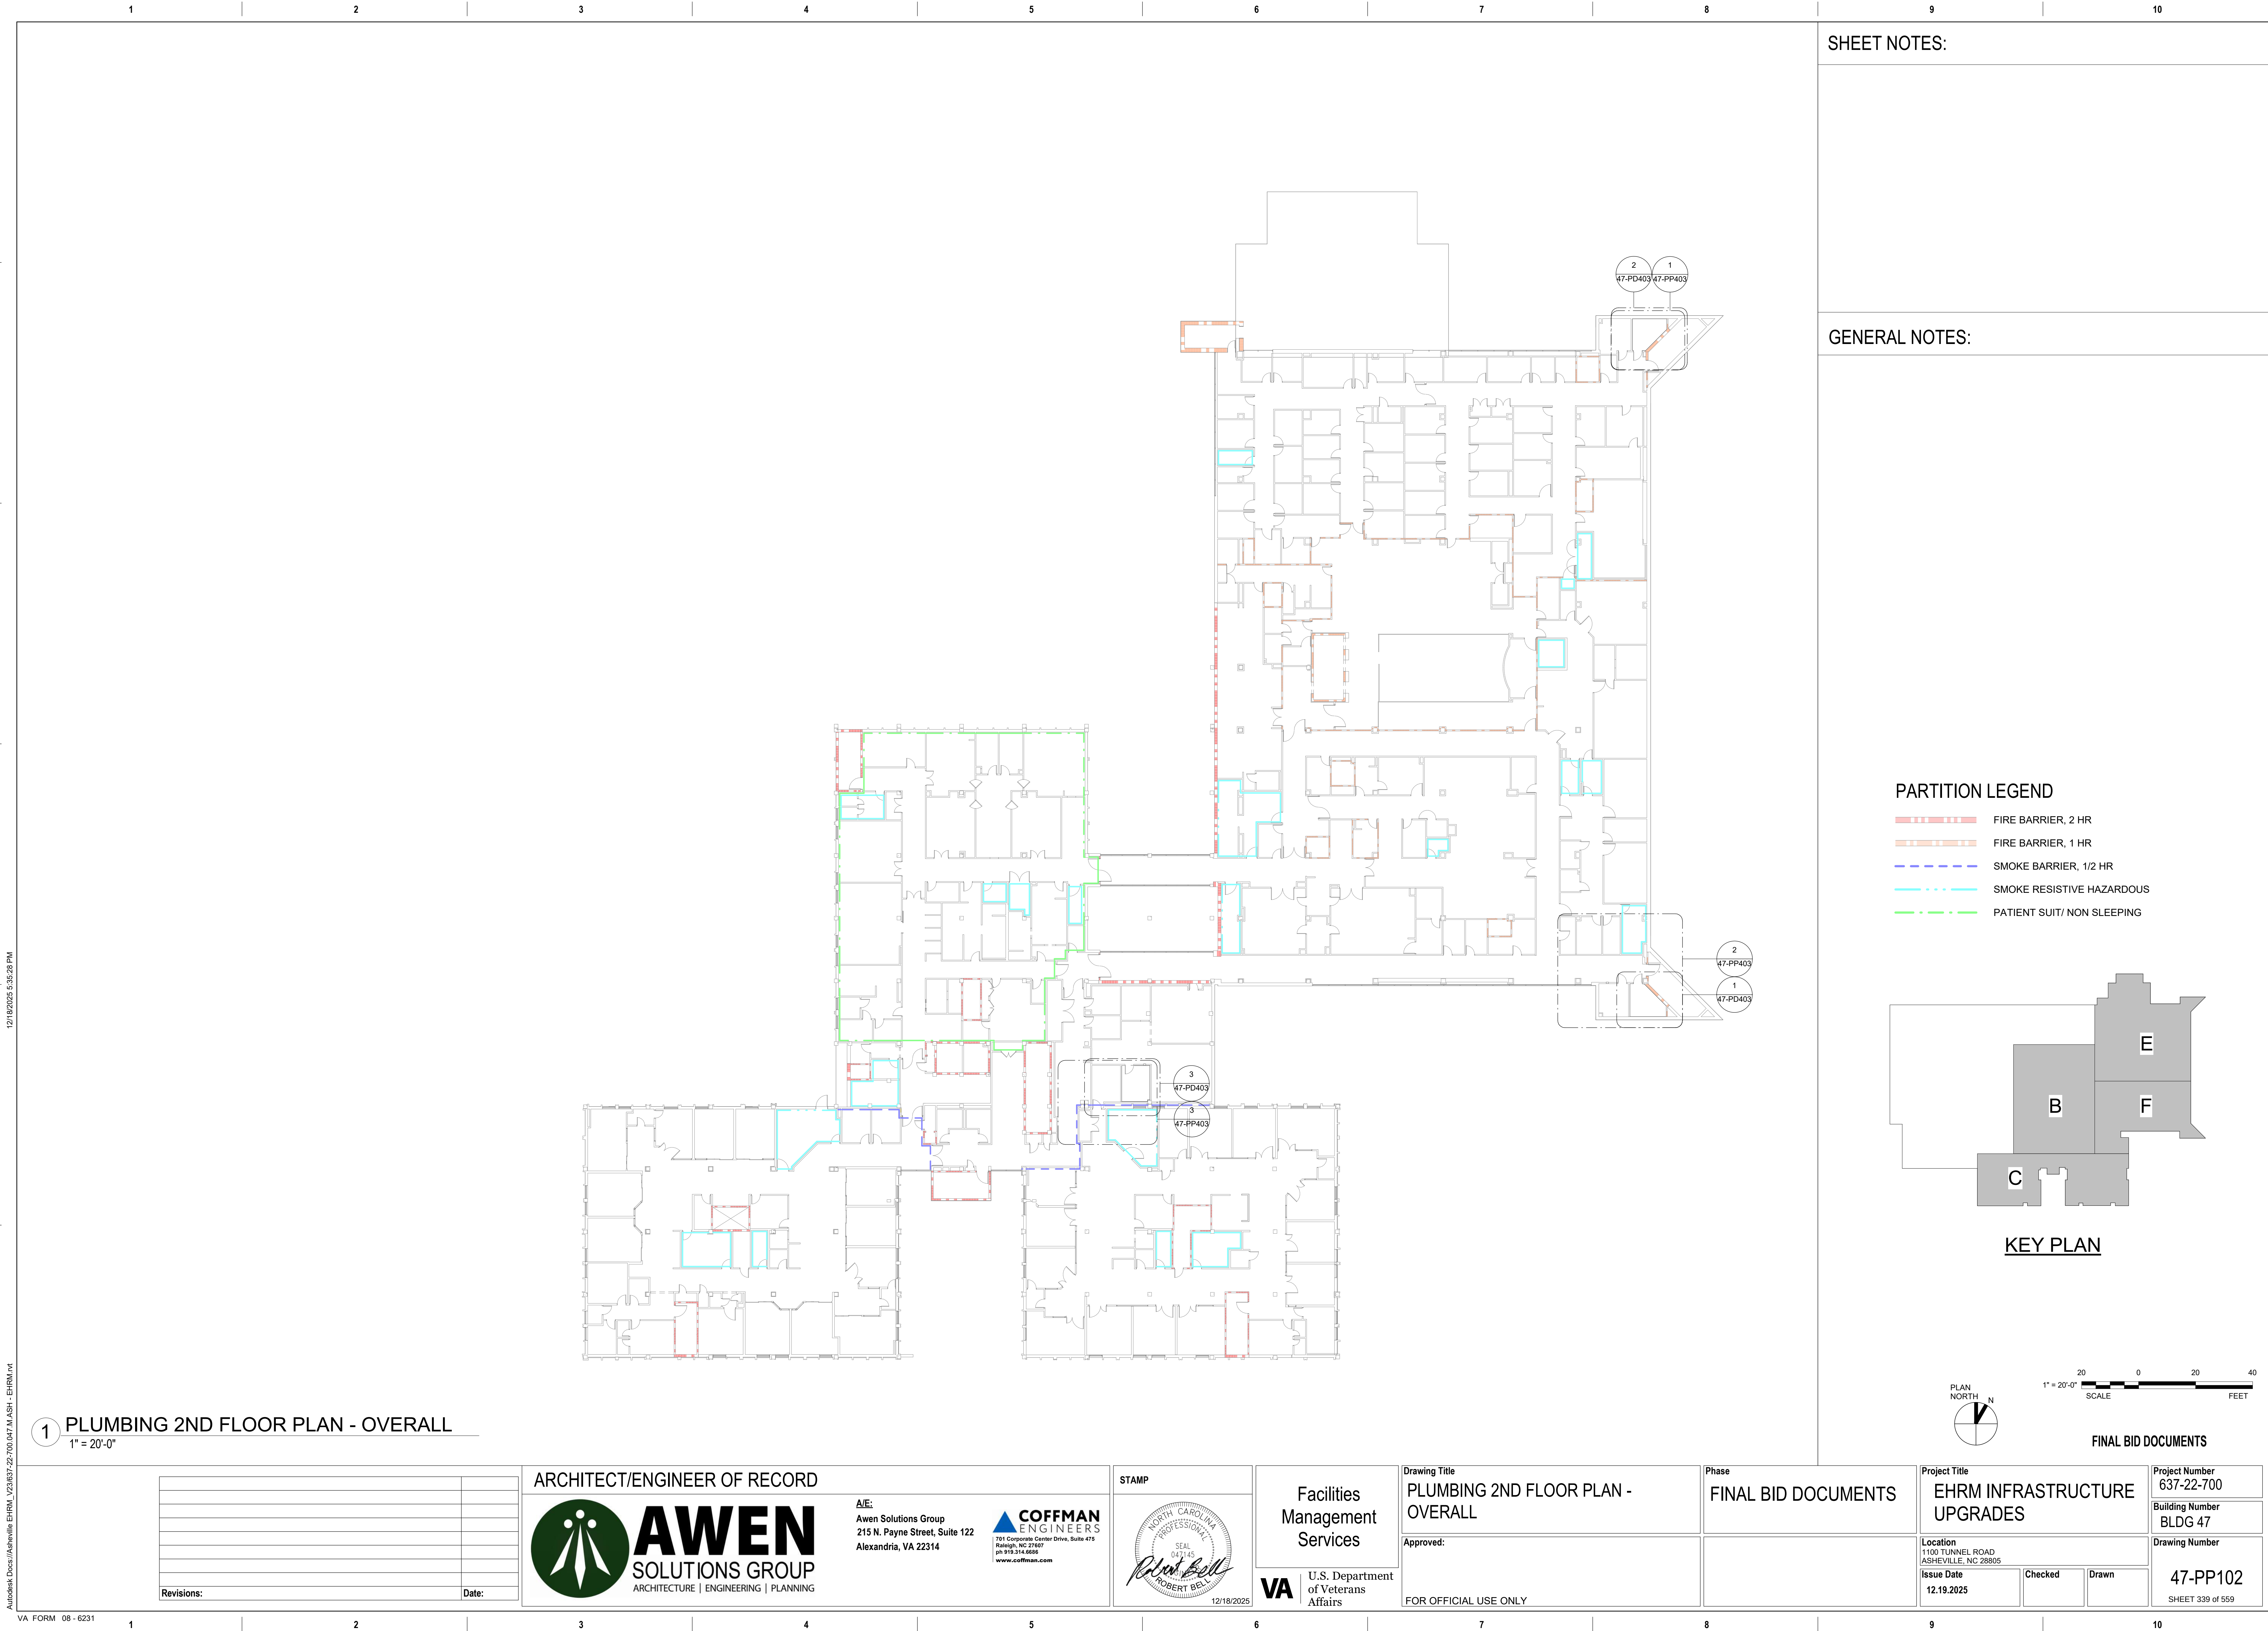

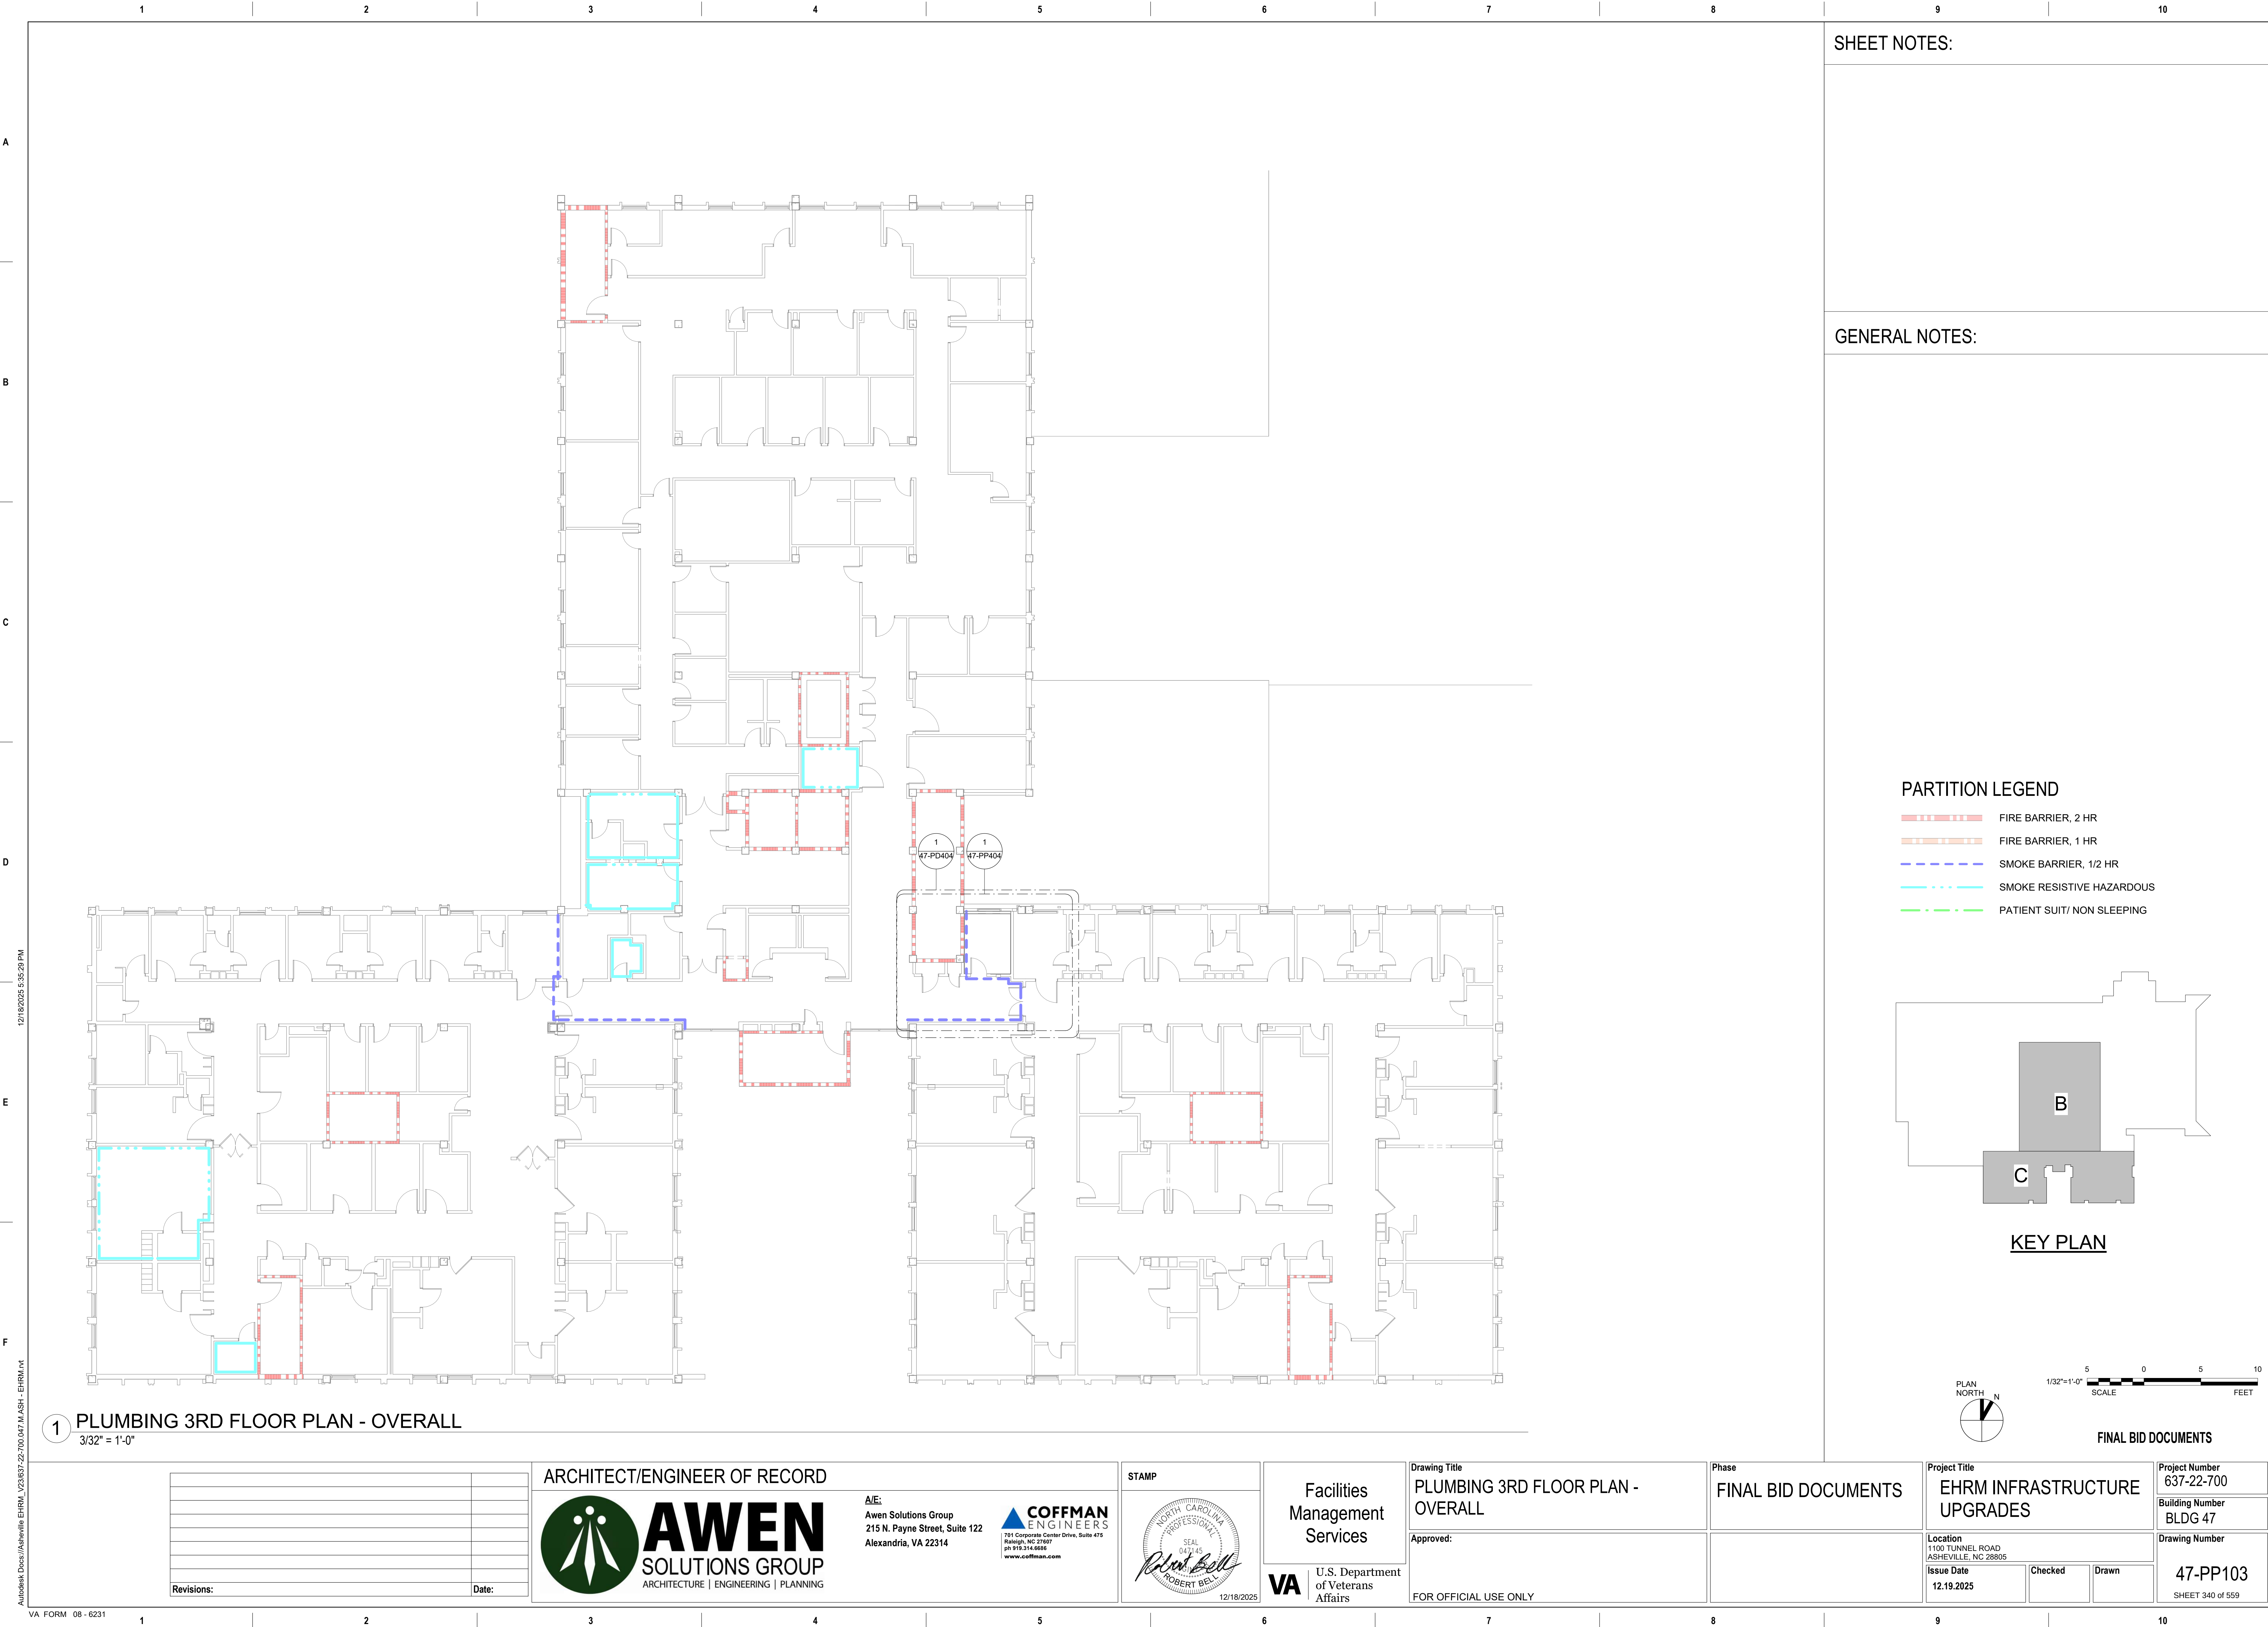


GENERAL NOTES:

	FIRE BARRIER, 2 HR
	FIRE BARRIER, 1 HR
	SMOKE BARRIER, 1/2 HR
	SMOKE RESISTIVE HAZARDOUS
	PATIENT SUIT/ NON SLEEPING

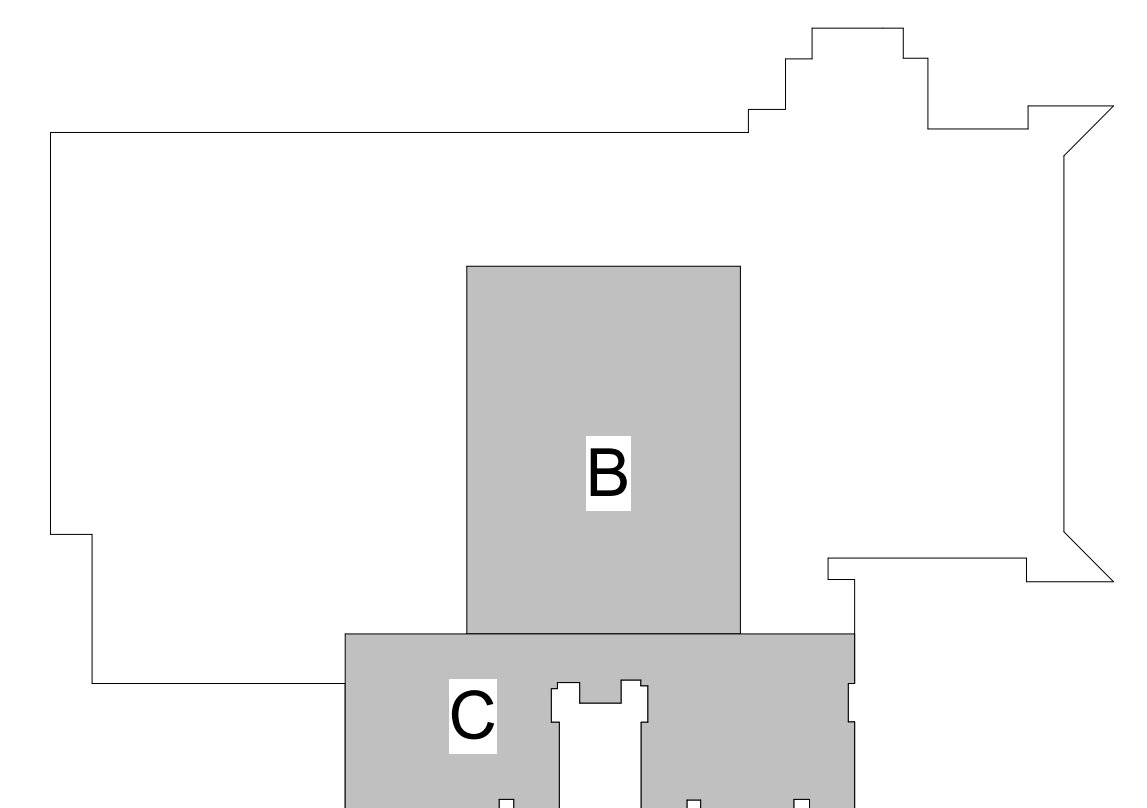

KEY PLAN



FINAL BID DOCUMENTS

1 PLUMBING 4TH FLOOR PLAN - OVERALL
3/32" = 1'-0"

Revisions:	Date:



AWEN
SOLUTIONS GROUP
ARCHITECTURE | ENGINEERING | PLANNING



COFFMAN
ENGINEERS
701 Corporate Center Drive, Suite 475
Raleigh, NC 27607
ph 919.314.6686
www.coffman.com



VA | U.S. Department
of Veterans
Affairs

FOR OFFICIAL USE ONLY

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Drawn

47-PP104


SHEET 341 of 559




SHEET NOTES:

1 NOTE ANY PLUMBING PIPING RUNNING DIRECTLY OVER THE LOCATION OF THE NEW TELECOM RACKS AND INFORM THE EOR OF ANY OCCURANCE.


GENERAL NOTES:

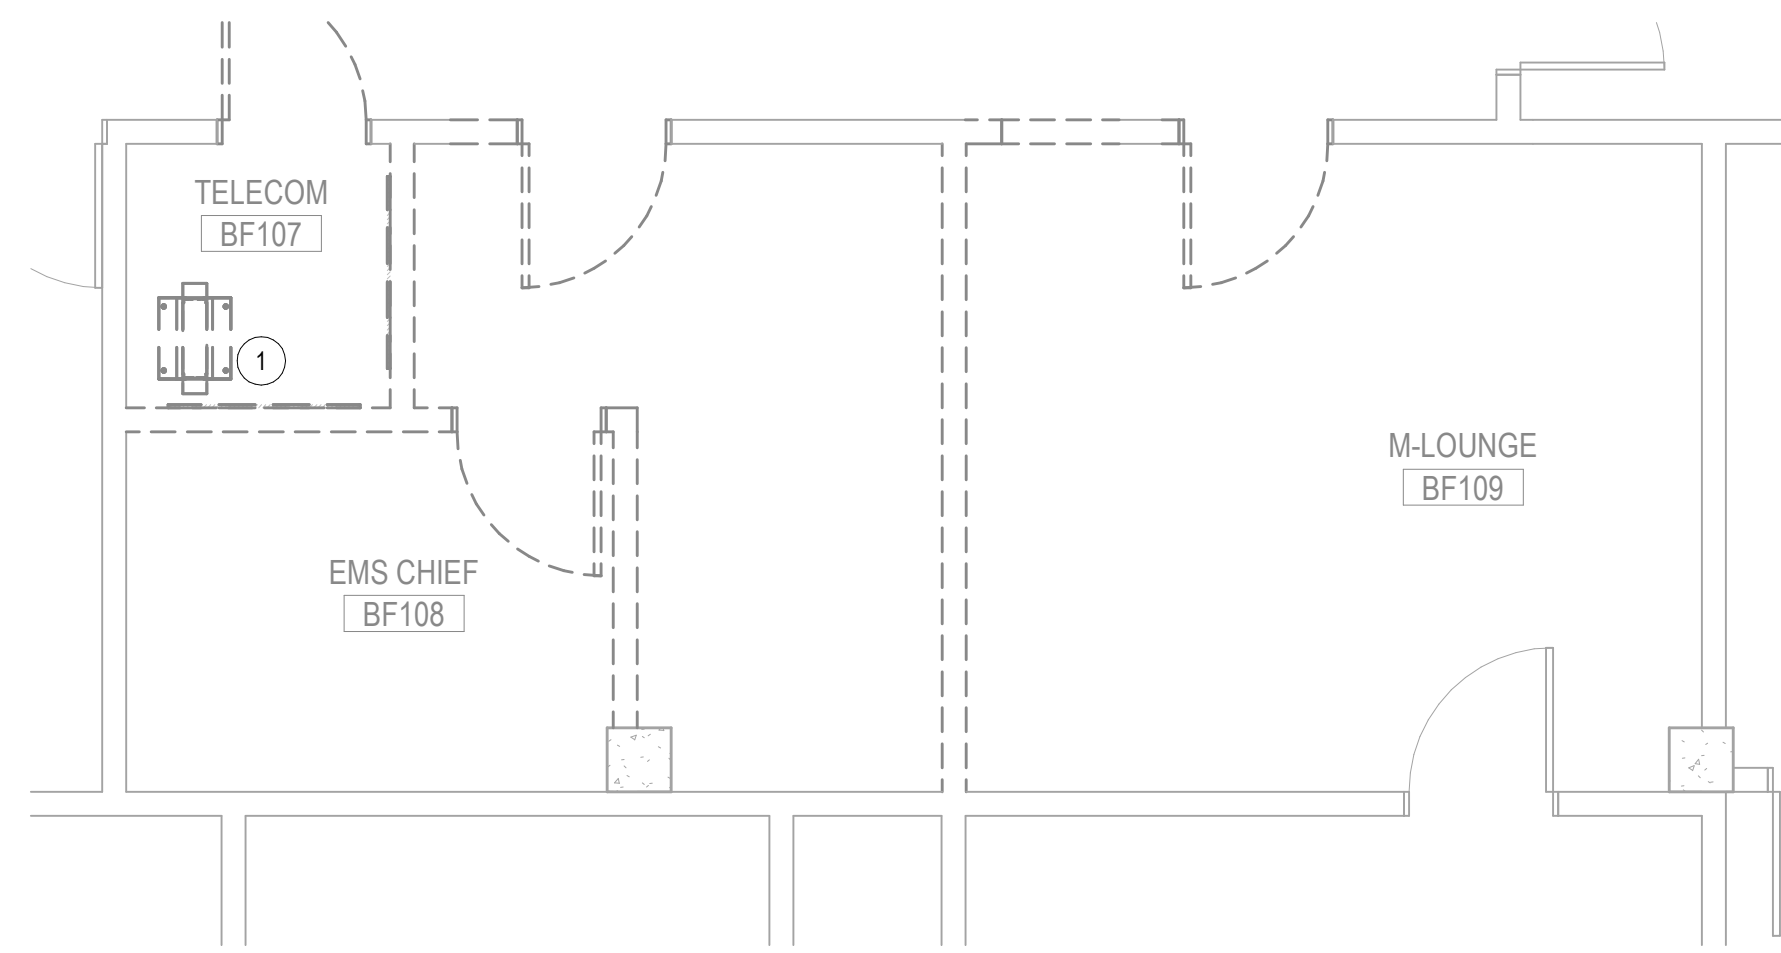


1 BF107 - PLUMBING DEMOLITION PLAN
1/4" = 1'-0"

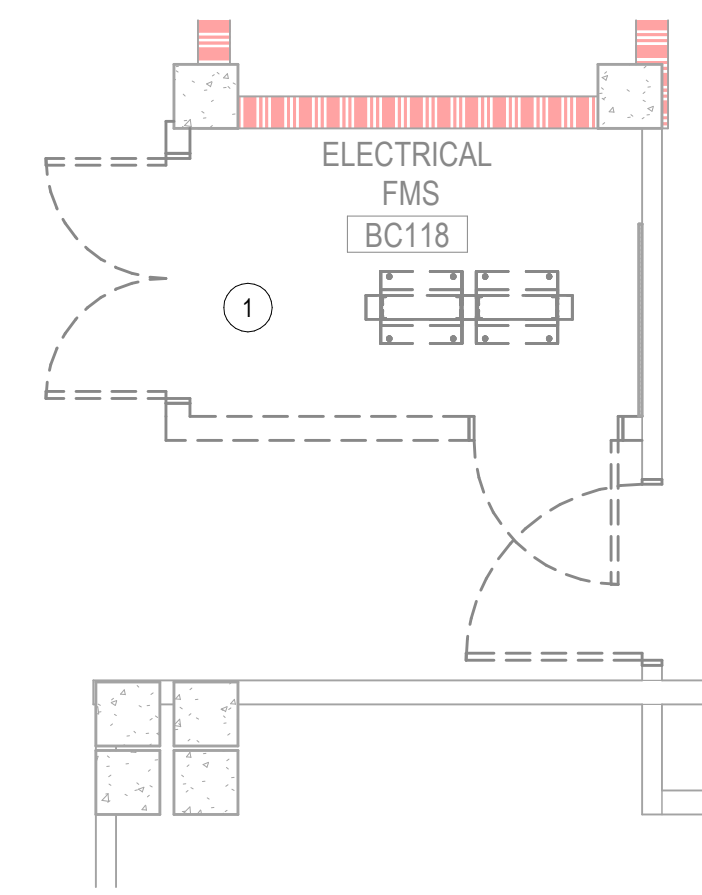


2 BC118 - PLUMBING DEMOLITION PLAN
1/4" = 1'-0"

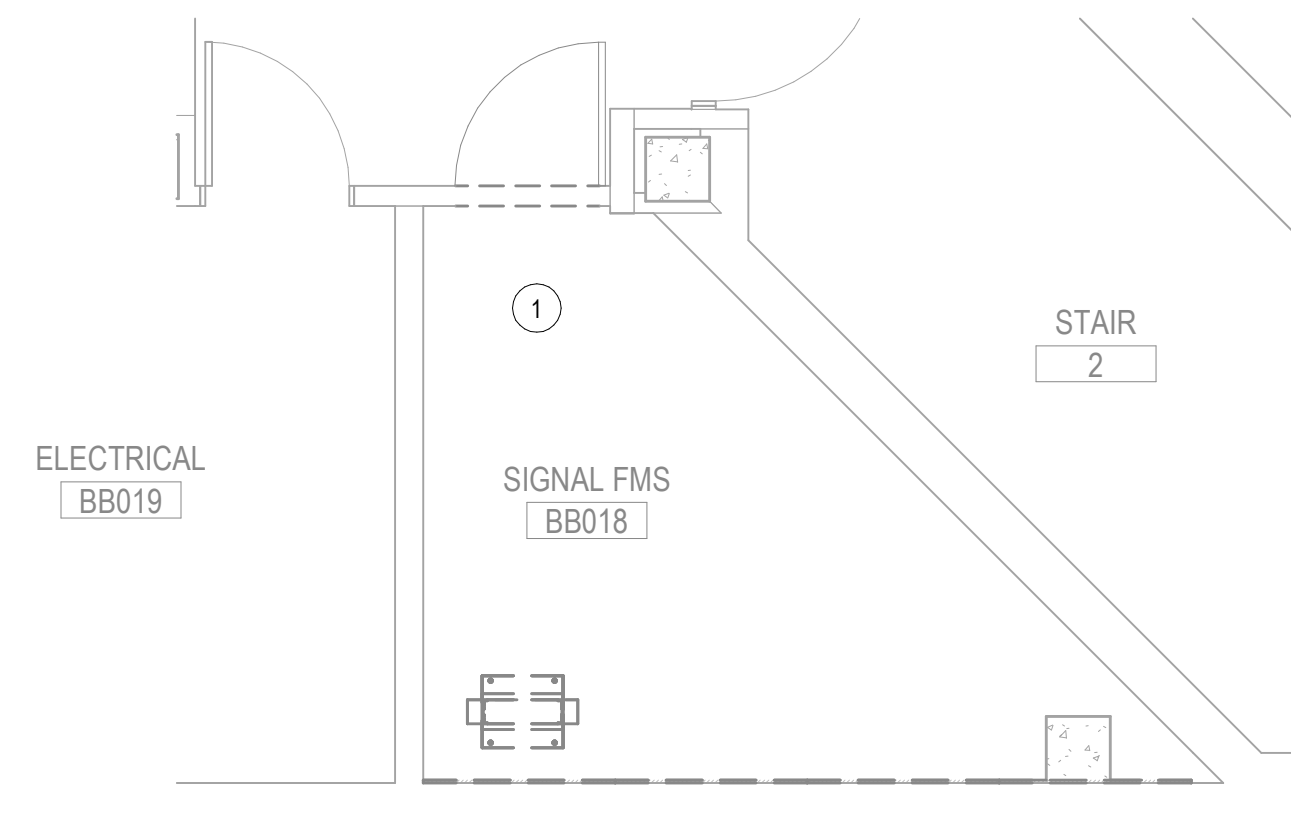

3 BB018 - PLUMBING DEMOLITION PLAN
1/4" = 1'-0"

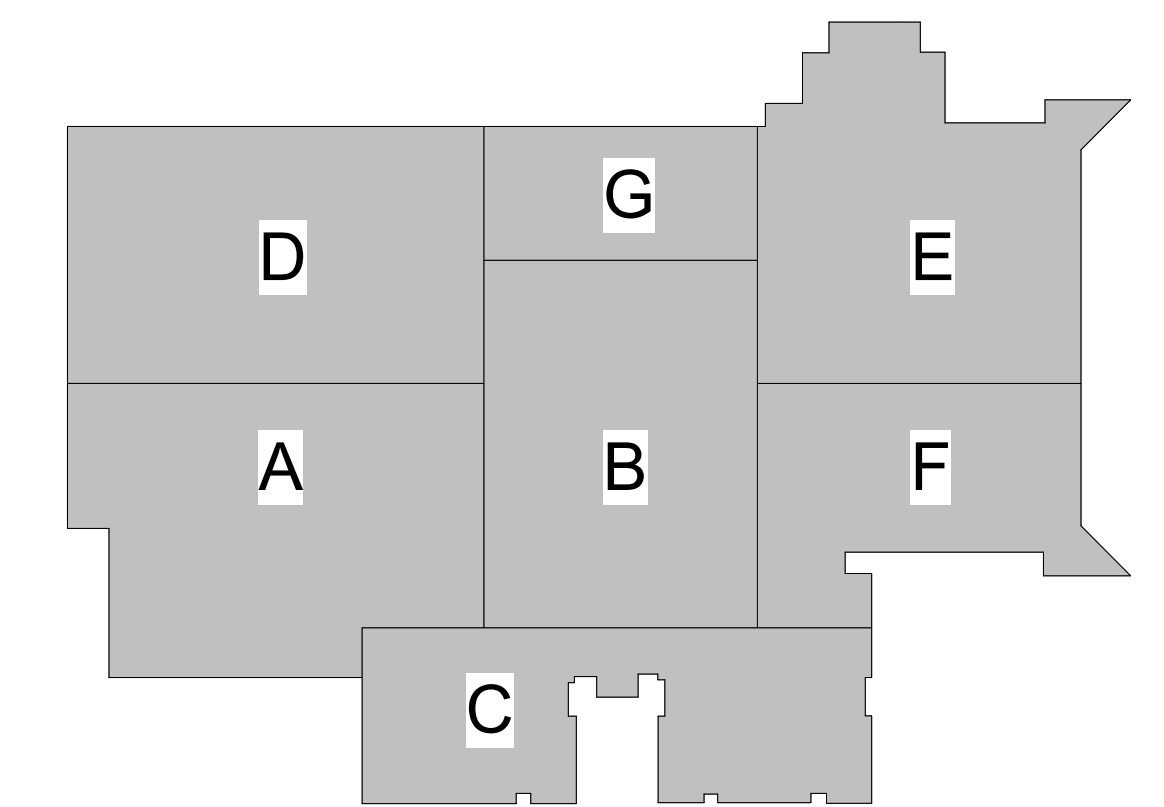

KEY PLAN



2 0 2 4 6 8 10
1/4" = 1'-0"
SCALE FEET

FINAL BID DOCUMENTS

[illegible]


ARCHITECT/ENGINEER OF RECORD



A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314



STAMP

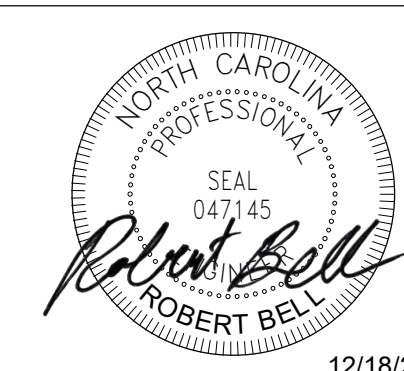

Facilities
Management
Services



U.S. Department
of Veterans
Affairs

Drawing Title
ENLARGED PLUMBING BASEMENT
DEMOLITION PLANS

Approved:

FOR OFFICIAL USE ONLY

	Phase
1	Phase 1
2	Phase 2
3	Phase 3
4	Phase 4
5	Phase 5
6	Phase 6
7	Phase 7
8	Phase 8
9	Phase 9
10	Phase 10
11	Phase 11
12	Phase 12
13	Phase 13
14	Phase 14
15	Phase 15
16	Phase 16
17	Phase 17
18	Phase 18
19	Phase 19
20	Phase 20
21	Phase 21
22	Phase 22
23	Phase 23
24	Phase 24
25	Phase 25
26	Phase 26
27	Phase 27
28	Phase 28
29	Phase 29
30	Phase 30
31	Phase 31
32	Phase 32
33	Phase 33
34	Phase 34
35	Phase 35
36	Phase 36
37	Phase 37
38	Phase 38
39	Phase 39
40	Phase 40
41	Phase 41
42	Phase 42
43	Phase 43
44	Phase 44
45	Phase 45
46	Phase 46
47	Phase 47
48	Phase 48
49	Phase 49
50	Phase 50
51	Phase 51
52	Phase 52
53	Phase 53
54	Phase 54
55	Phase 55
56	Phase 56
57	Phase 57
58	Phase 58
59	Phase 59
60	Phase 60
61	Phase 61
62	Phase 62
63	Phase 63
64	Phase 64
65	Phase 65
66	Phase 66
67	Phase 67
68	Phase 68
69	Phase 69
70	Phase 70
71	Phase 71
72	Phase 72
73	Phase 73
74	Phase 74
75	Phase 75
76	Phase 76
77	Phase 77
78	Phase 78
79	Phase 79
80	Phase 80
81	Phase 81
82	Phase 82
83	Phase 83
84	Phase 84
85	Phase 85
86	Phase 86
87	Phase 87
88	Phase 88
89	Phase 89
90	Phase 90
91	Phase 91
92	Phase 92
93	Phase 93
94	Phase 94
95	Phase 95
96	Phase 96
97	Phase 97
98	Phase 98
99	Phase 99
100	Phase 100

FINAL BID DOCUMENTS

	Project Title
--	----------------------

EHRM INFRASTRUCTURE UPGRADES

	Location 1100 TUNNEL ROAD ASHEVILLE NC 28805
--	---

☒ **Checked**

Drawn

Project Number
637-22-700


Building Number
BLDG 47

Drawing Number

47-PD400

SHEET 343 of 559

- 1 EXISTING CONDENSATE PIPING FROM EXISTING CRAC UNIT TO BE REMOVED AND DISPOSED AFTER NEW EQUIPMENT AND ASSOCIATED PIPING HAS BEEN INSTALLED AND IN OPERATION. COORDINATE WITH MECHANICAL CONTRACTOR. SEE 147-PP401.
- 2 EXISTING CONDENSATE PIPING FROM EXISTING CRAC UNIT TO BE REMOVED AND DISPOSED. COORDINATE WITH MECHANICAL CONTRACTOR.
- 3 NOTE ANY EXISTING PLUMBING PIPING RUNNING DIRECTLY OVER THE LOCATION OF THE NEW SERVER RACKS, UPS'S, AND OTHER ELECTRICAL EQUIPMENT AND INFORM THE EOR OF ANY OCCURRENCE. SEE 147-PP401.

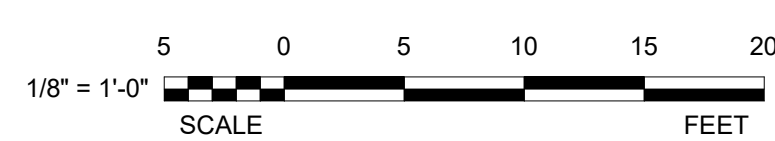

Project Title		Project Number	
EHRM INFRASTRUCTURE UPGRADES		637-22-700	
		Building Number	
Location		Drawing Number	
1100 TUNNEL ROAD ASHEVILLE, NC 28805		47-PD401	
Issue Date	Checked	Drawn	
12.19.2025			SHEET 344 of 559



ARCHITECT/ENGINEER OF RECORD

 **AWEN**
SOLUTIONS GROUP
ARCHITECTURE | ENGINEERING | PLANNING



COFFMAN
ENGINEERS

701 Corporate Center Drive, Suite 475
Raleigh, NC 27607
ph 919.314.6636
www.coffman.com




nt	Approved:
	FOR OFFICIAL USE ONLY


Location 1100 TUNNEL ROAD ASHEVILLE, NC 28805		
Issue Date 12.19.2025	Checked	Drawn

Project Number 637-22-700
Building Number BLDG 47
Drawing Number 47-PD401


SHEET 344 of 559

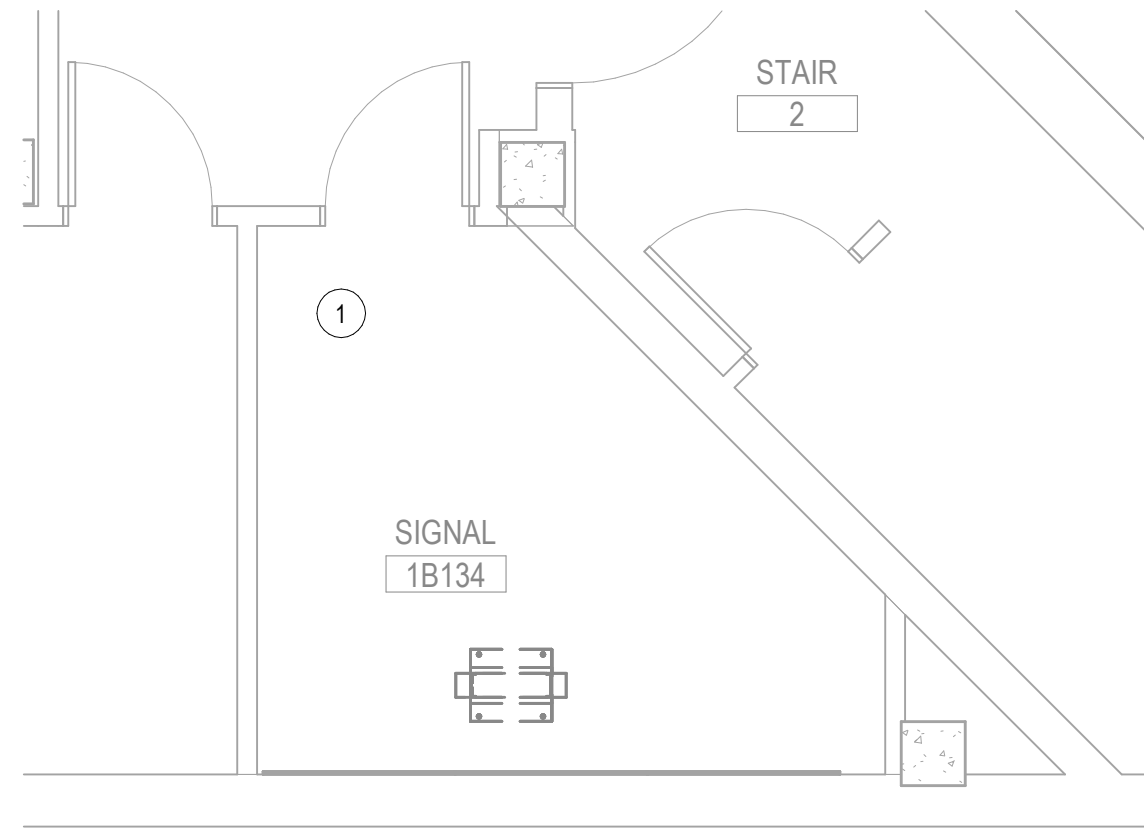


1 1B134 - PLUMBING DEMOLITION PLAN
1/4" = 1'-0"

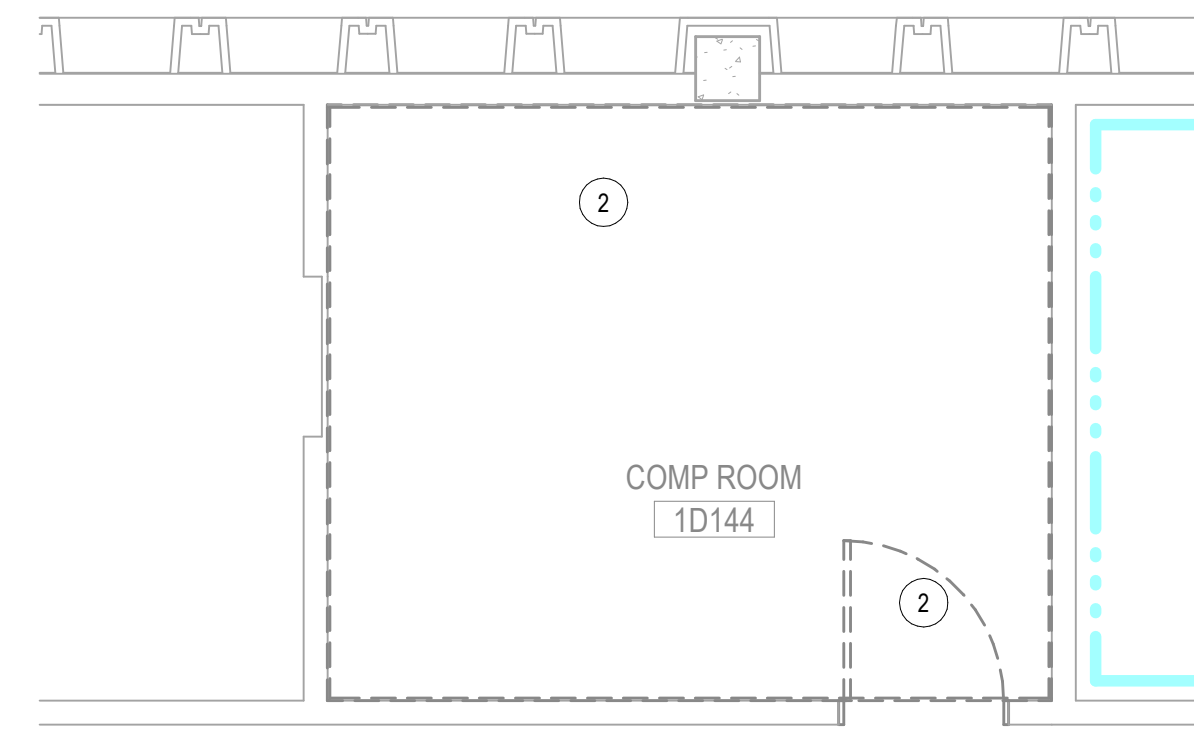


2 1D144 - PLUMBING DEMOLITION PLAN
1/4" = 1'-0"

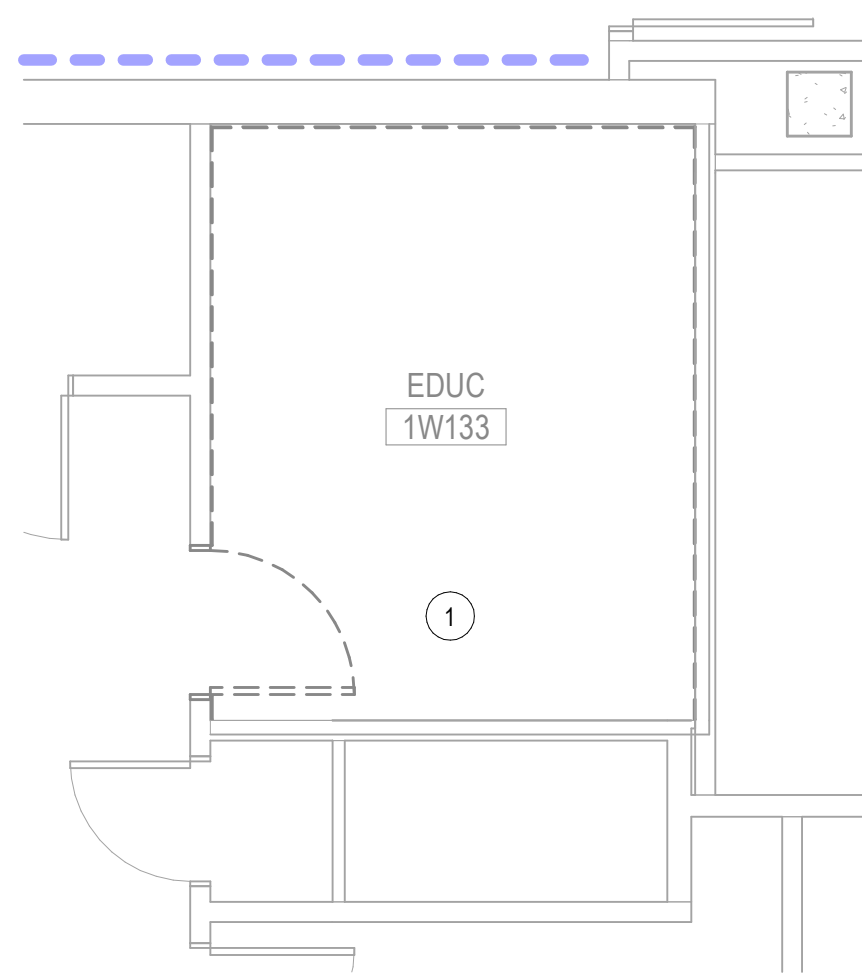

3 1W133 - PLUMBING DEMOLITION PLAN
1/4" = 1'-0"

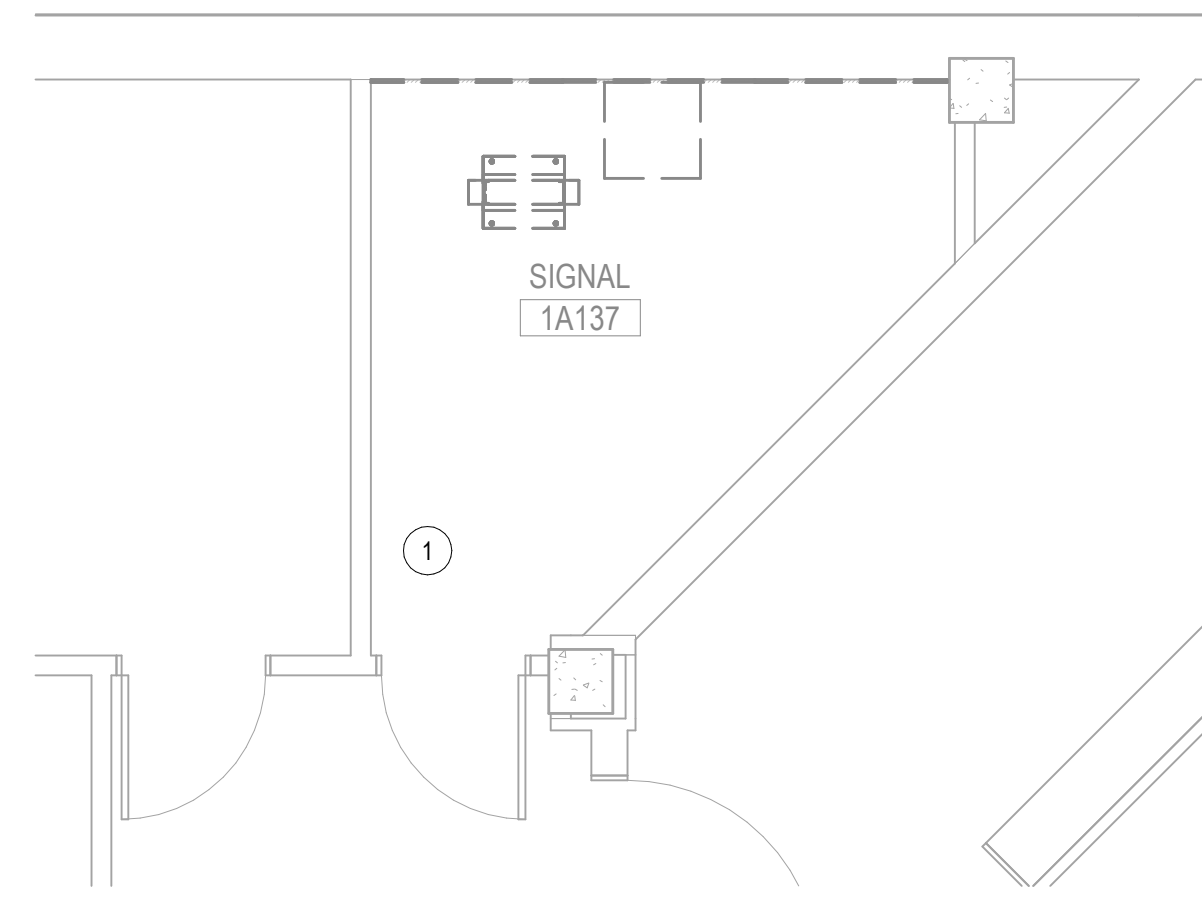

4 1A137 - PLUMBING DEMOLITION PLAN
1/4" = 1'-0"

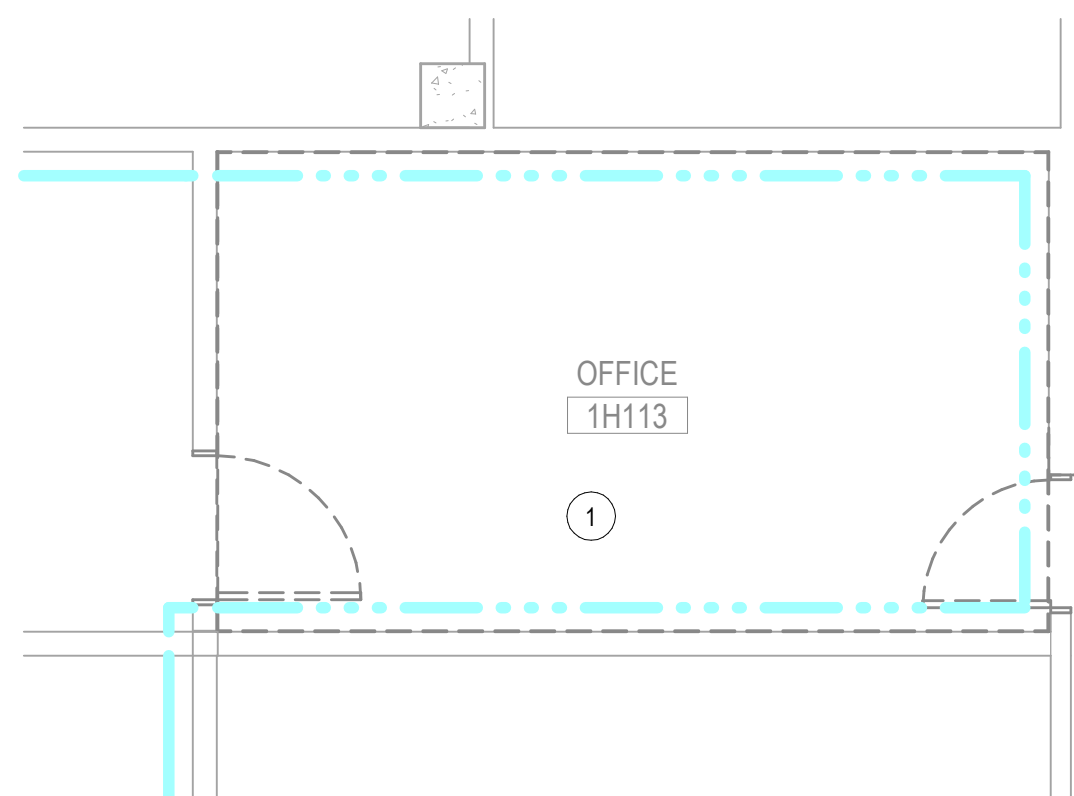


5 1H113 - PLUMBING DEMOLITION PLAN
1/4" = 1'-0"


SHEET NOTES:

- ① NOTE ANY PLUMBING PIPING RUNNING DIRECTLY OVER THE LOCATION OF THE NEW TELECOM RACKS AND INFORM THE EOR OF ANY OCCURRENCE.
- ② ALL CONDENSATE PIPING TO BE REMOVED AND DISPOSED. SEE 2/47-MP402 AND COORDINATE WITH MECHANICAL CONTRACTOR.

GENERAL NOTES:

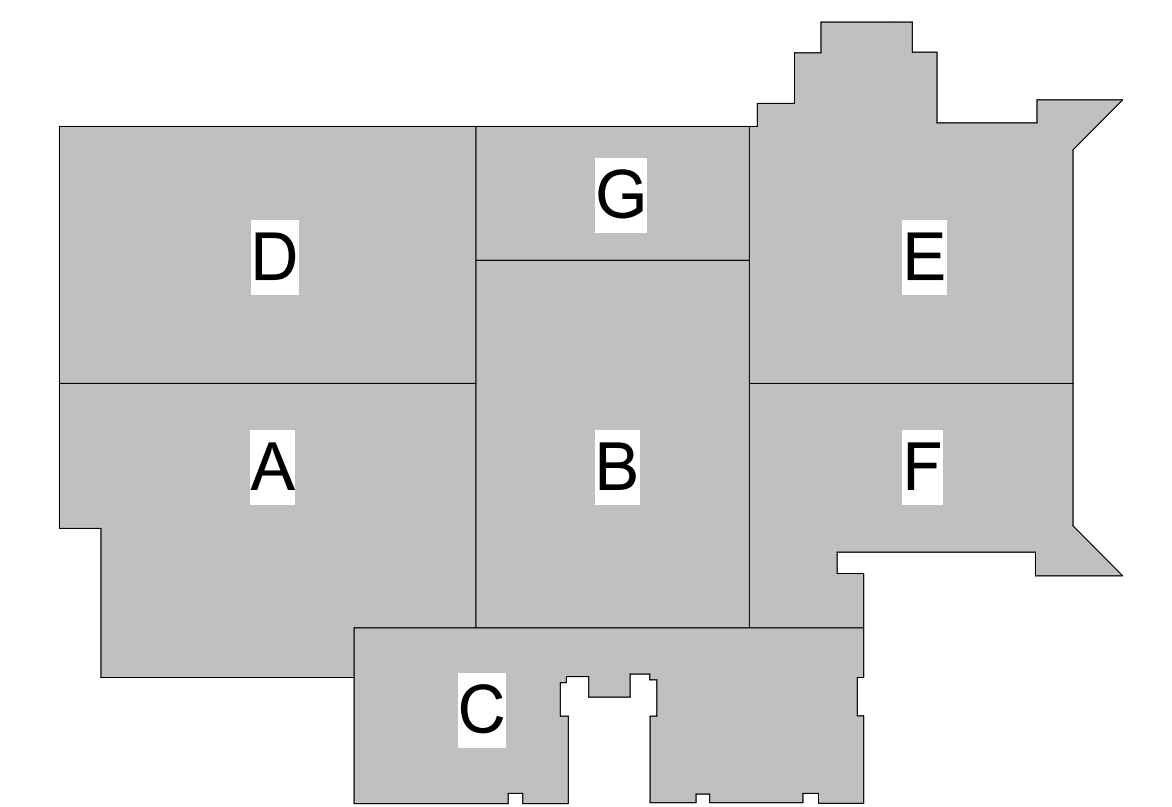

KEY PLAN



2 0 2 4 6 8 10
1/4" = 1'-0"
SCALE FEET

FINAL BID DOCUMENTS[illegible]

ARCHITECT/ENGINEER OF RECORD



A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314



STAMP



Facilities
Management
Services



U.S. Department
of Veterans
Affairs

Drawing Title	ENLARGED PLUMBING 1ST FLOOR DEMOLITION PLANS
---------------	---

Approved:

FOR OFFICIAL USE ONLY

Phase

FINAL BID DOCUMENTS

	Project Title
--	----------------------

EHRM INFRASTRUCTURE UPGRADES

Location	1100 TUNNEL ROAD ASHEVILLE, NC 28805
----------	---

☒ **Checked**

Drawn

Project Number
637-22-700


Building Number
BLDG 47

Drawing Number

47-PD402

SHEET 345 of 559

1 NOTE ANY PLUMBING PIPING RUNNING DIRECTLY OVER THE LOCATION OF THE NEW TELECOM RACKS AND INFORM THE EOR OF ANY OCCURRENCE.

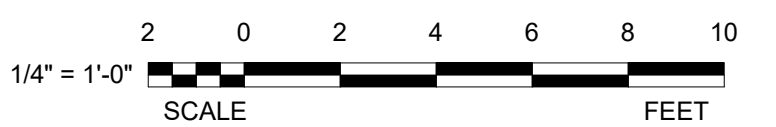

	Project Number
--	-----------------------

Project Number
637-22-700

Building Number
BLDG 47


Drawing Number
47-PD403

SHEET 346 of 559


1 NOTE ANY PLUMBING PIPING RUNNING DIRECTLY OVER THE LOCATION OF THE NEW TELECOM RACKS AND INFORM THE EOR OF ANY OCCURRENCE.

2 ALL CONDENSATE PIPING FROM EXISTING FAN COIL UNITS TO BE REMOVED AND DISPOSED. SEE SHEET 47-MD404. COORDINATE WITH MECHANICAL CONTRACTOR.

- 1 NOTE ANY PLUMBING PIPING RUNNING DIRECTLY OVER THE LOCATION OF THE NEW TELECOM RACKS AND INFORM THE EOR OF ANY OCCURRENCE.
- 2 ALL CONDENSATE PIPING FROM EXISTING FAN COIL UNITS TO BE REMOVED AND DISPOSED. SEE SHEET 47-MD404. COORDINATE WITH MECHANICAL CONTRACTOR.

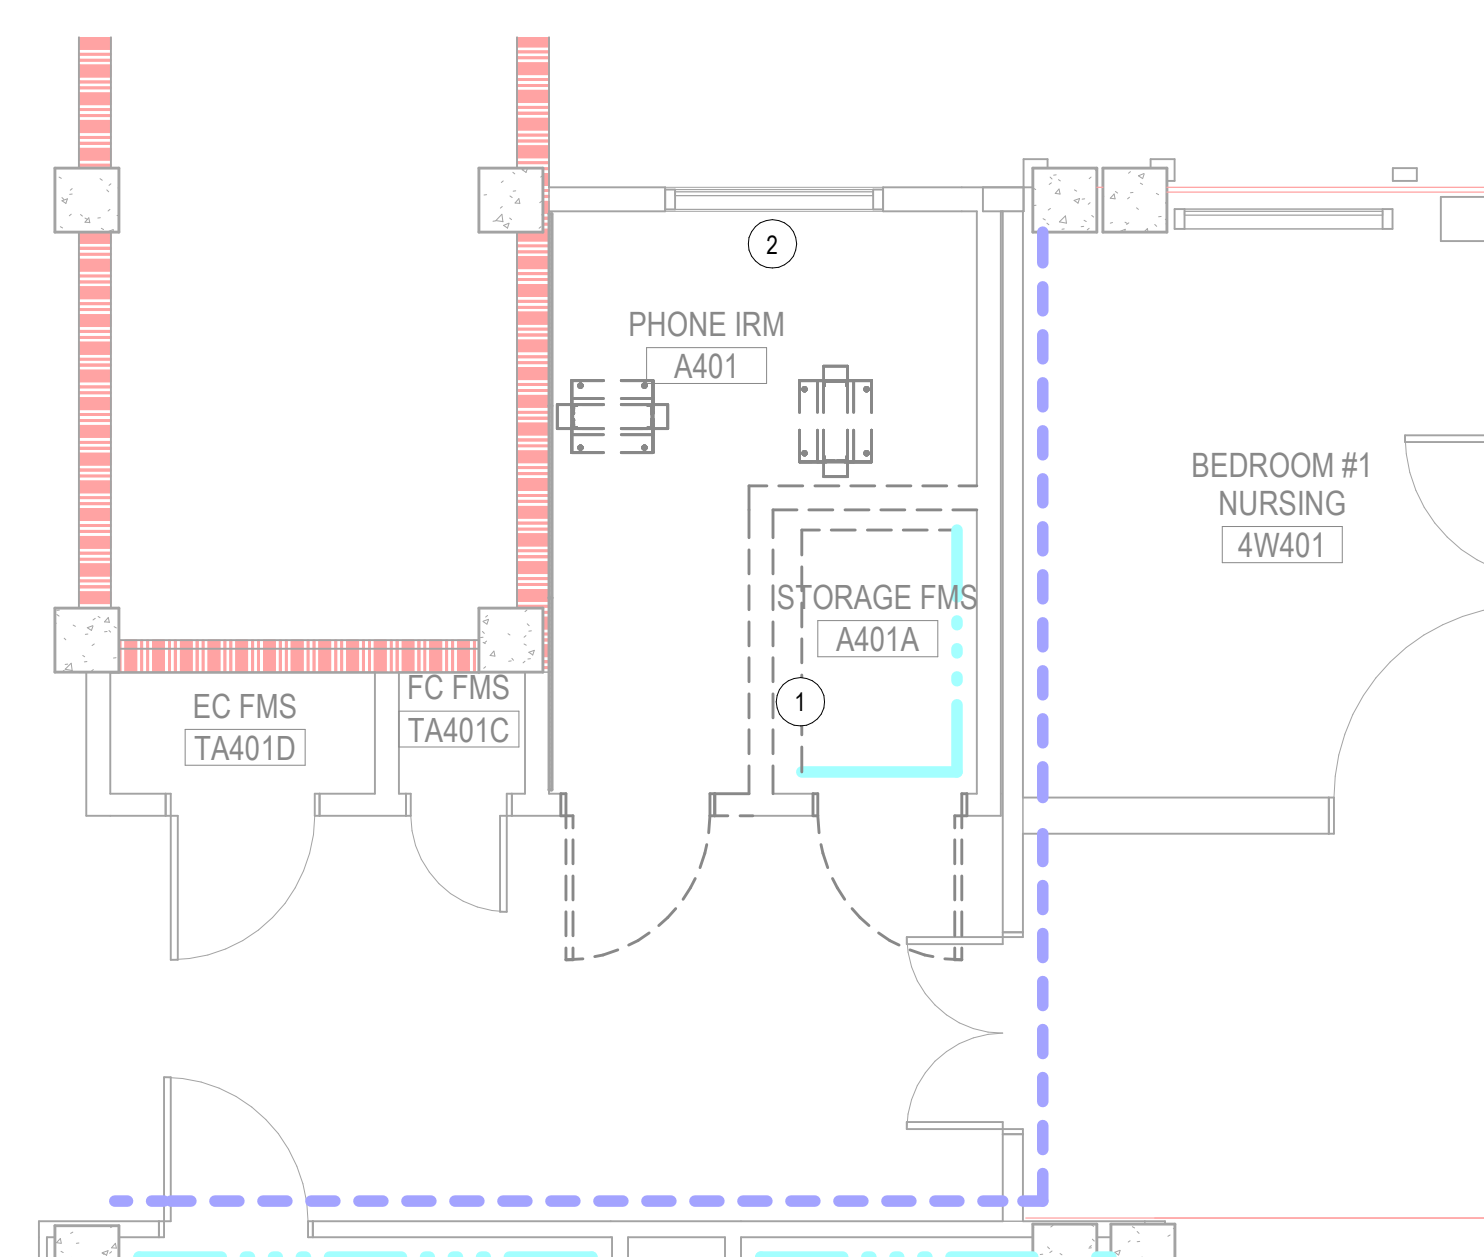

2 A401 - PLUMBING DEMOLITION PLAN
1/4" = 1'-0"

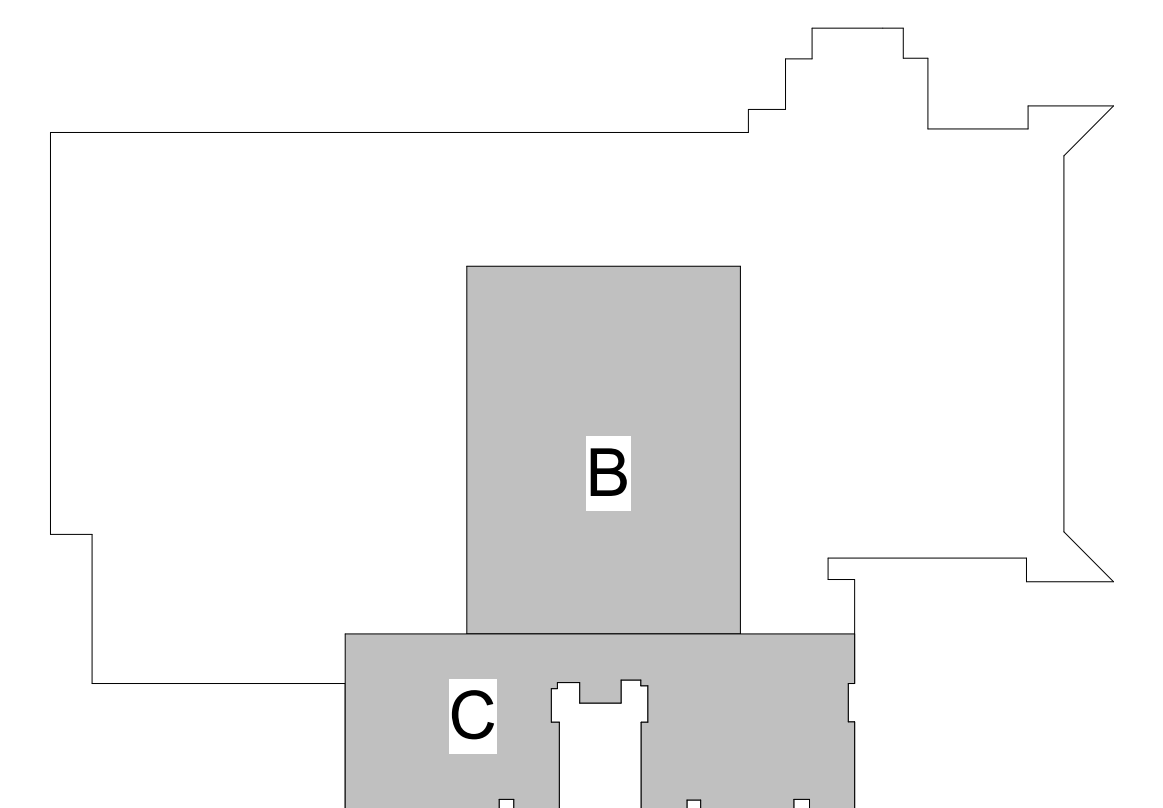

KEY PLAN



PROJECT NUMBER	637-22-700
----------------	------------

ARCHITECT/ENGINEER OF RECORD

 **AWEN**
SOLUTIONS GROUP
ARCHITECTURE | ENGINEERING | PLANNING



COFFMAN
ENGINEERS

701 Corporate Center Drive, Suite 475
Raleigh, NC 27607
ph 919.314.6636
www.coffman.com



FOR OFFICIAL USE ONLY

Location	1100 TUNNEL ROAD ASHEVILLE, NC 28805
-----------------	---

Drawing Number

47-PD404


SHEET 347 of 559

- ① 3/4" CD PUMPED UP TO ABOVE DROP CEILING. SEE DETAIL 300-P501.
- ② 3/4" CD DOWN TO EXISTING MOP SINK. SEE DETAIL 300-P501.
- ③ AVOID ROUTING CONDENSATE PIPING OVER ELECTRICAL EQUIPMENT.
- ④ 3/4" CD DOWN FROM IDU-1P134 ABOVE. REFER TO 547-PP402. COMBINE COIL CONDENSATE DRAINAGE PIPING WITH THAT FROM IDU-BB018 AND ROUTE ABOVE CEILING TO DISCHARGE INTO EXISTING MOP SINK IN HAC. ADD CLEANOUT AT BEGINNING OF CONDENSATE MAIN. SEE DETAIL 300-P501.

1. CONDENSATE DRAINAGE PIPING SLOPED AT 1/8" PER FOOT.
2. PLUMBING SCOPE OF WORK IS TO PROVIDE CONDENSATE DRAIN DRAINAGE, WHEN REQUIRED, FOR ALL NEW MECHANICAL EQUIPMENT IN TELECOM ROOMS.
3. ALL ROUTING IS DIAGRAMMATIC. ACCOUNT FOR FIELD CONDITIONS DURING CONSTRUCTION.
4. CONDENSATE DRAINS SHALL NOT DISCHARGE TO CLINIC/ EXAM/TREATMENT SINKS OR LAVATORIES IN PATIENT BED ROOMS.
5. PROVIDE FIRE-STOPPING WHERE PIPING PENETRATES FIRE-RATED WALLS. RATED WALLS ARE INDICATED ON PLANS.
6. IT RACKS SHOWN FOR REFERENCE ONLY. DASHED LINES INDICATE PLACEHOLDER FOR FUTURE RACK, NOT IN CONTRACT. SEE TELECOM DRAWINGS FOR MORE INFORMATION.



	FIRE BARRIER, 2 HR
	FIRE BARRIER, 1 HR
	SMOKE BARRIER, 1/2 HR
	SMOKE RESISTIVE HAZARDOUS
	PATIENT SUIT/ NON SLEEPING

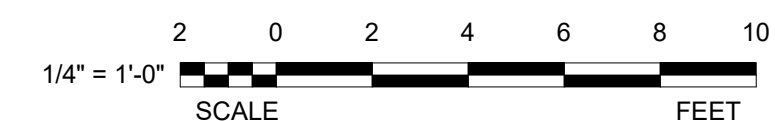

AWEN
SOLUTIONS GROUP
ARCHITECTURE | ENGINEERING | PLANNING



COFFMAN
ENGINEERS

701 Corporate Center Drive, Suite 475
Raleigh, NC 27607
ph 919.314.6686
www.coffman.com

VA | U.S. Department
of Veterans
Affairs

FOR OFFICIAL USE ONLY

Issue Date	Checked	Drawn
12.19.2025		


	Location 1100 TUNNEL ROAD ASHEVILLE, NC 28805

Drawing Number

47-PP400

SHEET 348 of 559


12/18/2025 5:35:37 PM
AutoSave Docs\\Asheville EHRM\\V26\\637-22-700-047 MASH - EHRM.rvt

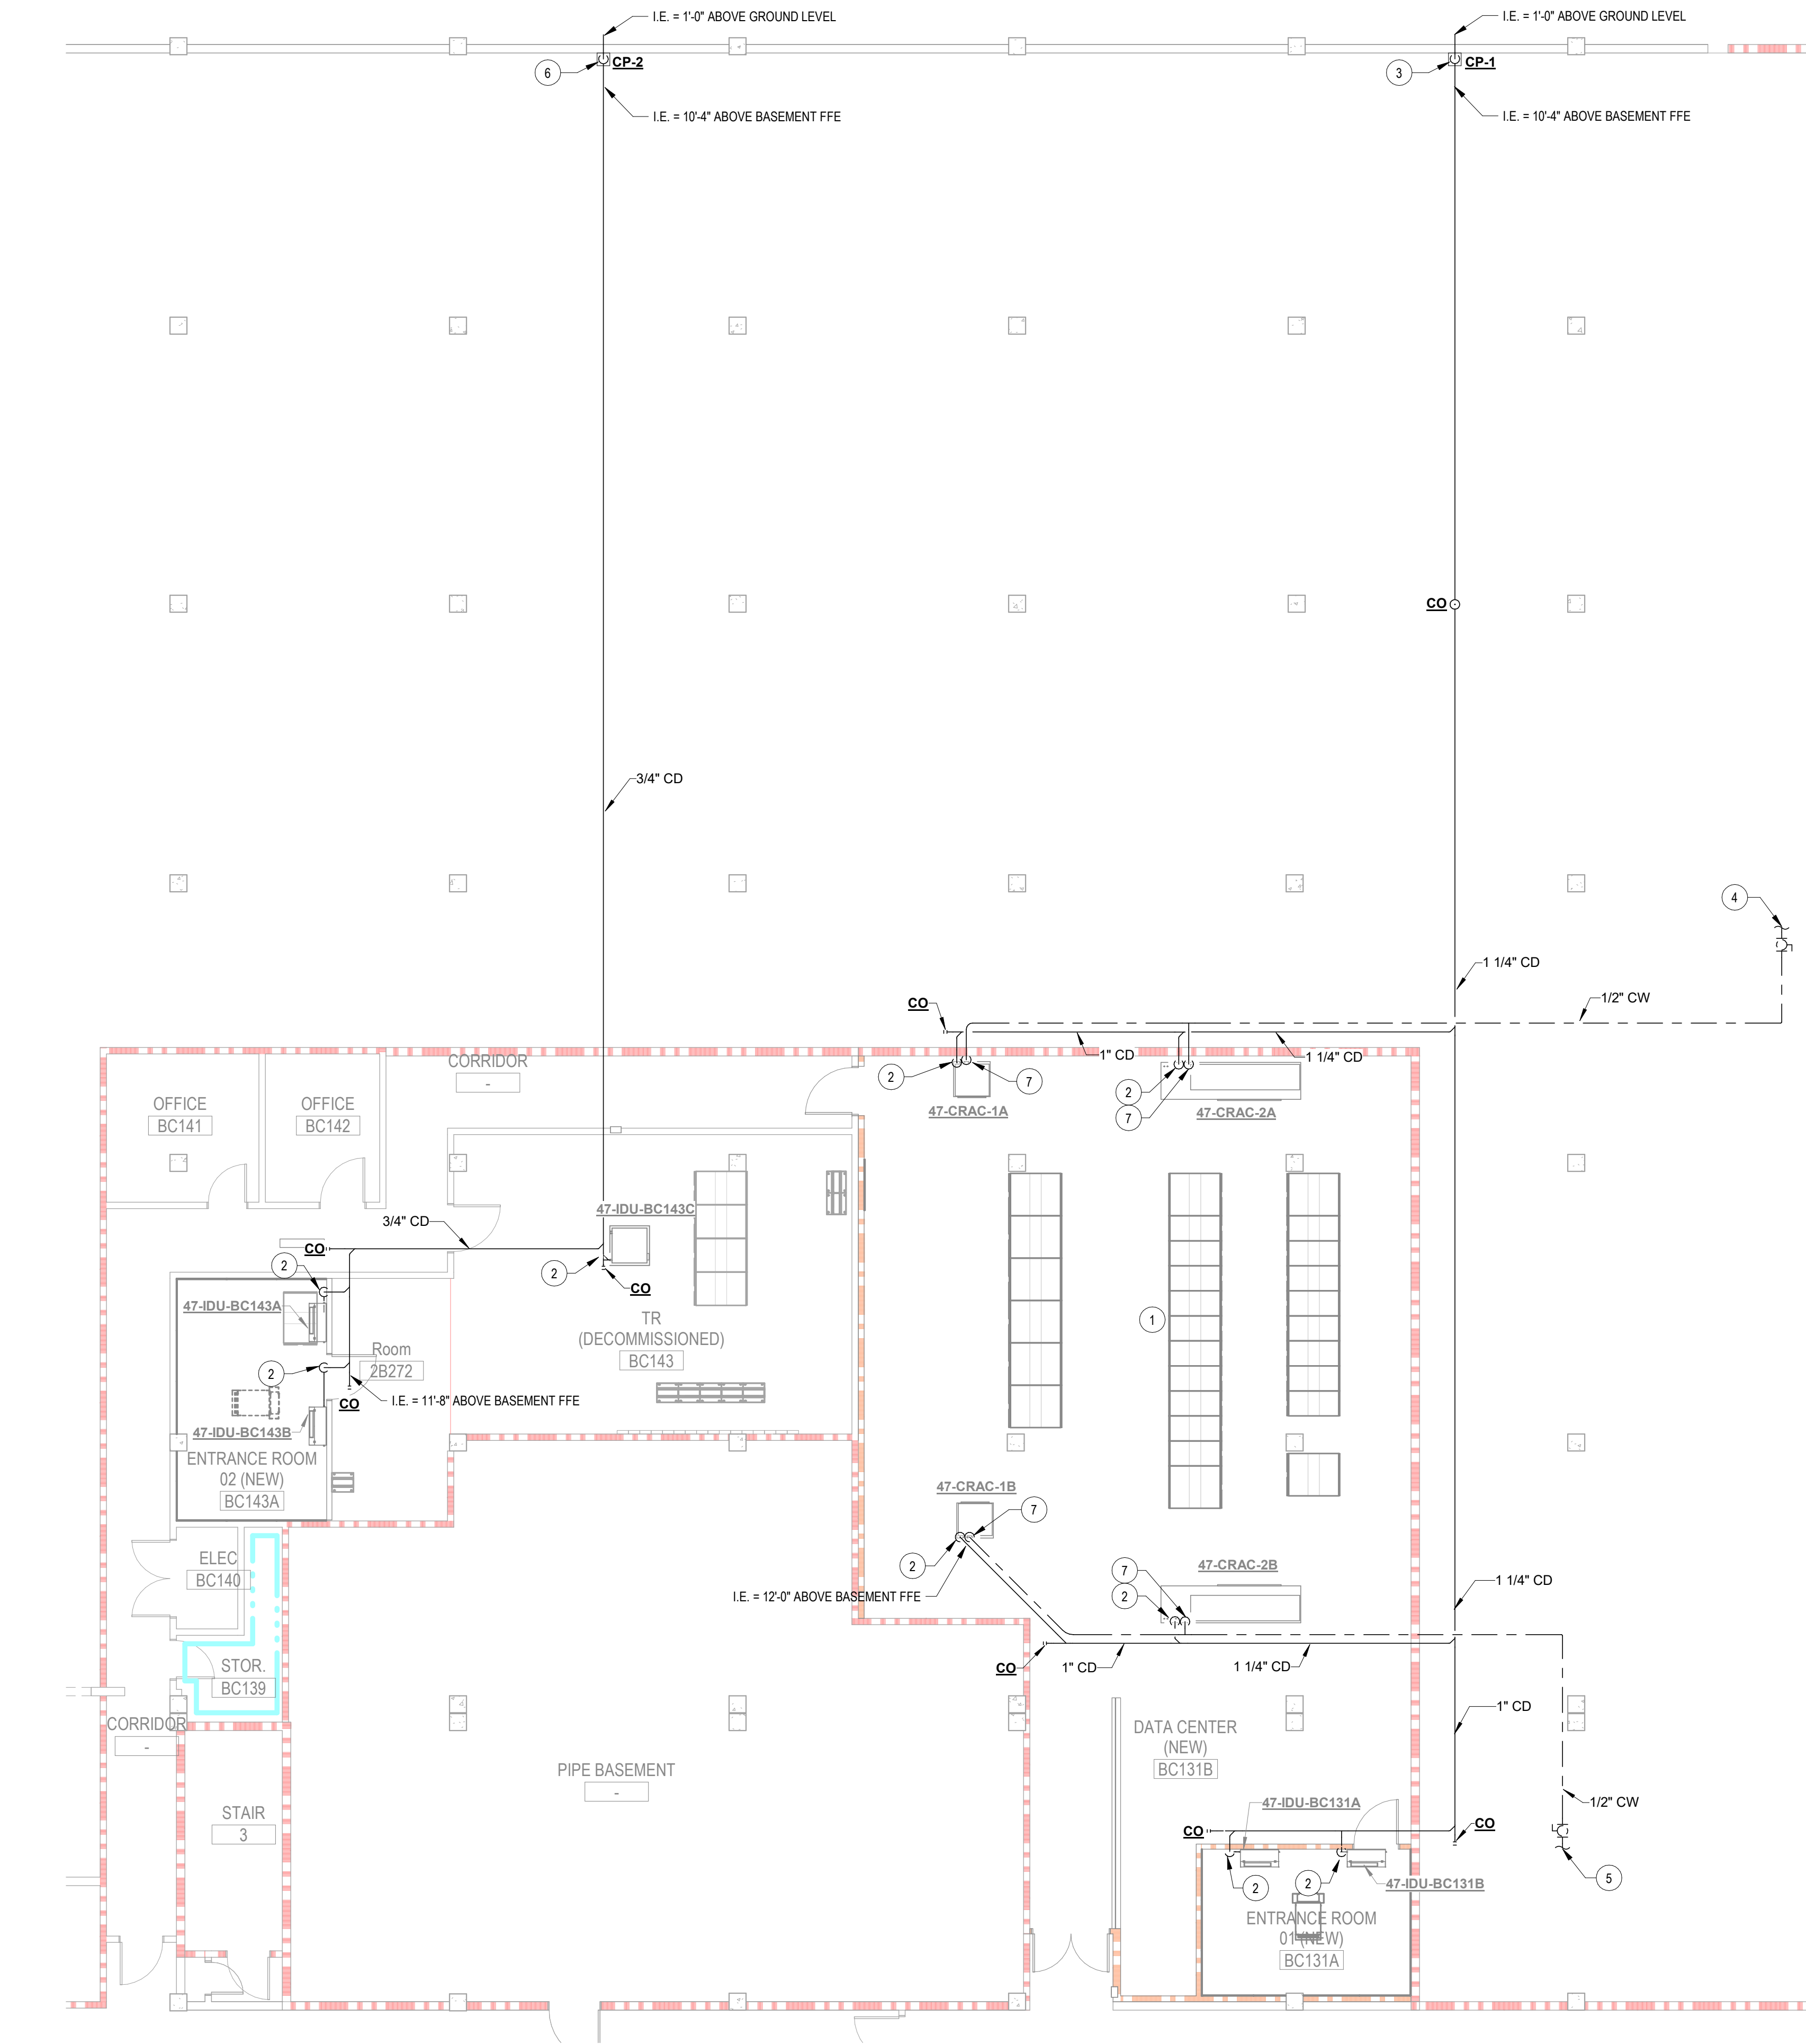


1 DATA CENTER - PLUMBING PLAN
1/8" = 1'-0"

PARTITION LEGEND

- FIRE BARRIER, 2 HR
- FIRE BARRIER, 1 HR
- SMOKE BARRIER, 1/2 HR
- SMOKE RESISTIVE HAZARDOUS
- PATIENT SUIT/ NON SLEEPING

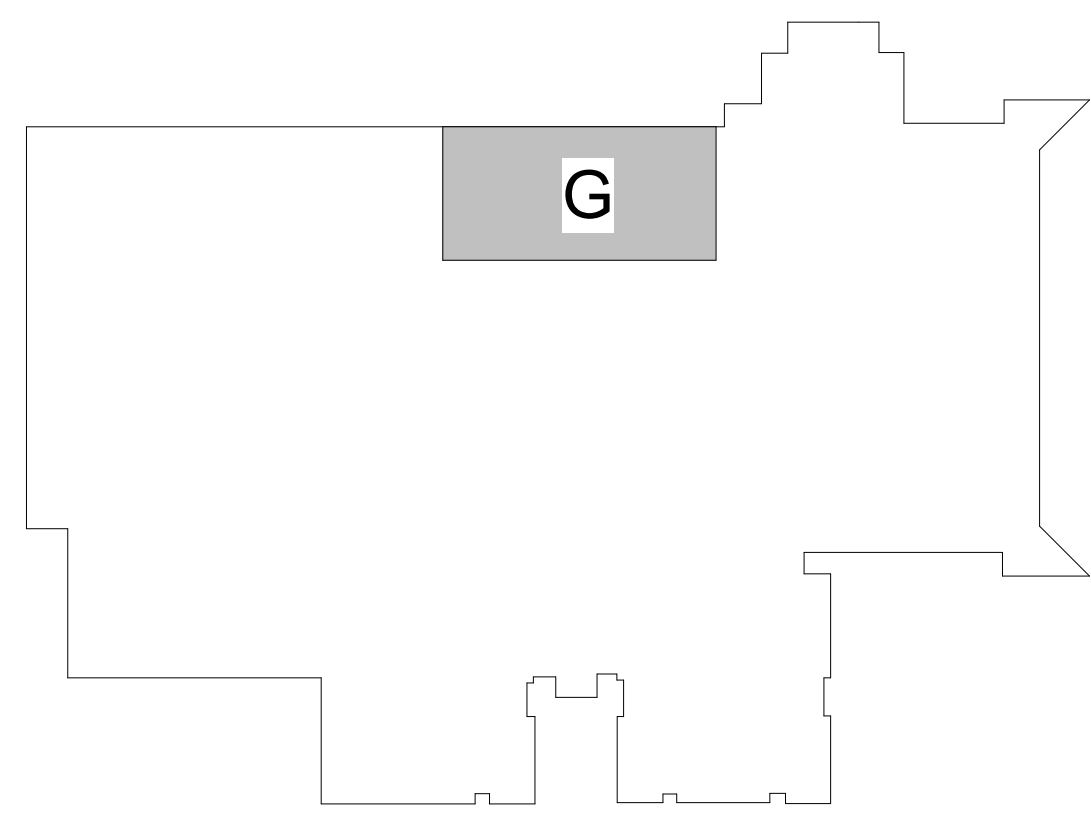

KEY PLAN



1/8" = 1'-0"
SCALE
0 5 10 15 20
FEET

FINAL BID DOCUMENTS

Revisions:	Date:

ARCHITECT/ENGINEER OF RECORD



A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314

COFFMAN
ENGINEERS
791 Corporate Center Drive, Suite 419
Raleigh, NC 27607
919.374.6888
www.coffman.com

STAMP



Facilities
Management
Services



U.S. Department
of Veterans
Affairs

Drawing Title
ENLARGED PLUMBING DATA CENTER
PLAN

Approved:

FOR OFFICIAL USE ONLY

Phase
FINAL BID DOCUMENTS

Project Title
EHRM INFRASTRUCTURE
UPGRADES

Location
1100 TUNNEL ROAD
ASHEVILLE, NC 28805

Issue Date
12.19.2025

Checked

Drawn

Project Number
637-22-700

Building Number
BLDG 47

Drawing Number

47-PP401


SHEET 349 of 559

SHEET NOTES:

- 1 AVOID ROUTING CONDENSATE PIPING OVER ELECTRONIC EQUIPMENT. INFORM THE EOR OF ANY OCCURRENCE OF PLUMBING PIPING ABOVE ELECTRONIC EQUIPMENT IN THE DATA CENTER.
- 2 3/4" CD PUMPED UP TO ABOVE CEILING AND/OR AS TIGHT AS POSSIBLE TO DECK ABOVE.
- 3 1-1/4" CD PUMPED UP TO 1FT ABOVE GROUND LEVEL. CONDENSATE TO SPILL OUTSIDE ONTO LANDSCAPED AREA.
- 4 TIE-IN TO EXISTING 3" DOMESTIC COLD WATER LINE. FIELD VERIFY EXACT LOCATION.
- 5 TIE-IN TO EXISTING 2" DOMESTIC COLD WATER LINE. FIELD VERIFY EXACT LOCATION.
- 6 3/4" CD PUMPED UP TO 1FT ABOVE GROUND LEVEL. CONDENSATE TO SPILL OUTSIDE ONTO LANDSCAPED AREA.
- 7 1/4" DOMESTIC COLD WATER CONNECTION TO INFRARED HUMIDIFIER WITH BUILT-IN 1" AIR GAP IN COMPLIANCE WITH ASME A112.1.2 SECTION 2.4.2 TO PREVENT BACKFLOW OF SUPPLY WATER. COORDINATE WITH MECHANICAL CONTRACTOR. IF ANOTHER HUMIDIFIER TYPE IS PROCURED, AN RPZ BACKFLOW PREVENTOR IS REQUIRED ON THE DOMESTIC COLD WATER LINE TO PREVENT BACKFLOW OF SUPPLY WATER.

GENERAL NOTES:

1. CONDENSATE DRAINAGE PIPING SLOPED AT 1/8" PER FOOT.
2. PLUMBING SCOPE OF WORK IS TO PROVIDE CONDENSATE DRAIN DRAINAGE, WHEN REQUIRED, FOR ALL NEW MECHANICAL EQUIPMENT IN ENTRANCE ROOMS AND THE DATA CENTER.
3. ALL ROUTING IS DIAGRAMMATIC. ACCOUNT FOR FIELD CONDITIONS DURING CONSTRUCTION.
4. CONDENSATE DRAINS SHALL NOT DISCHARGE TO CLINIC/ EXAM/TREATMENT SINKS OR LAVATORIES IN PATIENT BED ROOMS.
5. SEAL PENETRATIONS THROUGH SMOKE OR FIRE-RATED WALLS PER ASTM E-814 AND BUILDING CODE REQUIREMENTS.
6. PROVIDE FIRE-STOPPING WHERE PIPING PENETRATES FIRE-RATED WALLS. RATED WALLS ARE INDICATED ON PLANS.

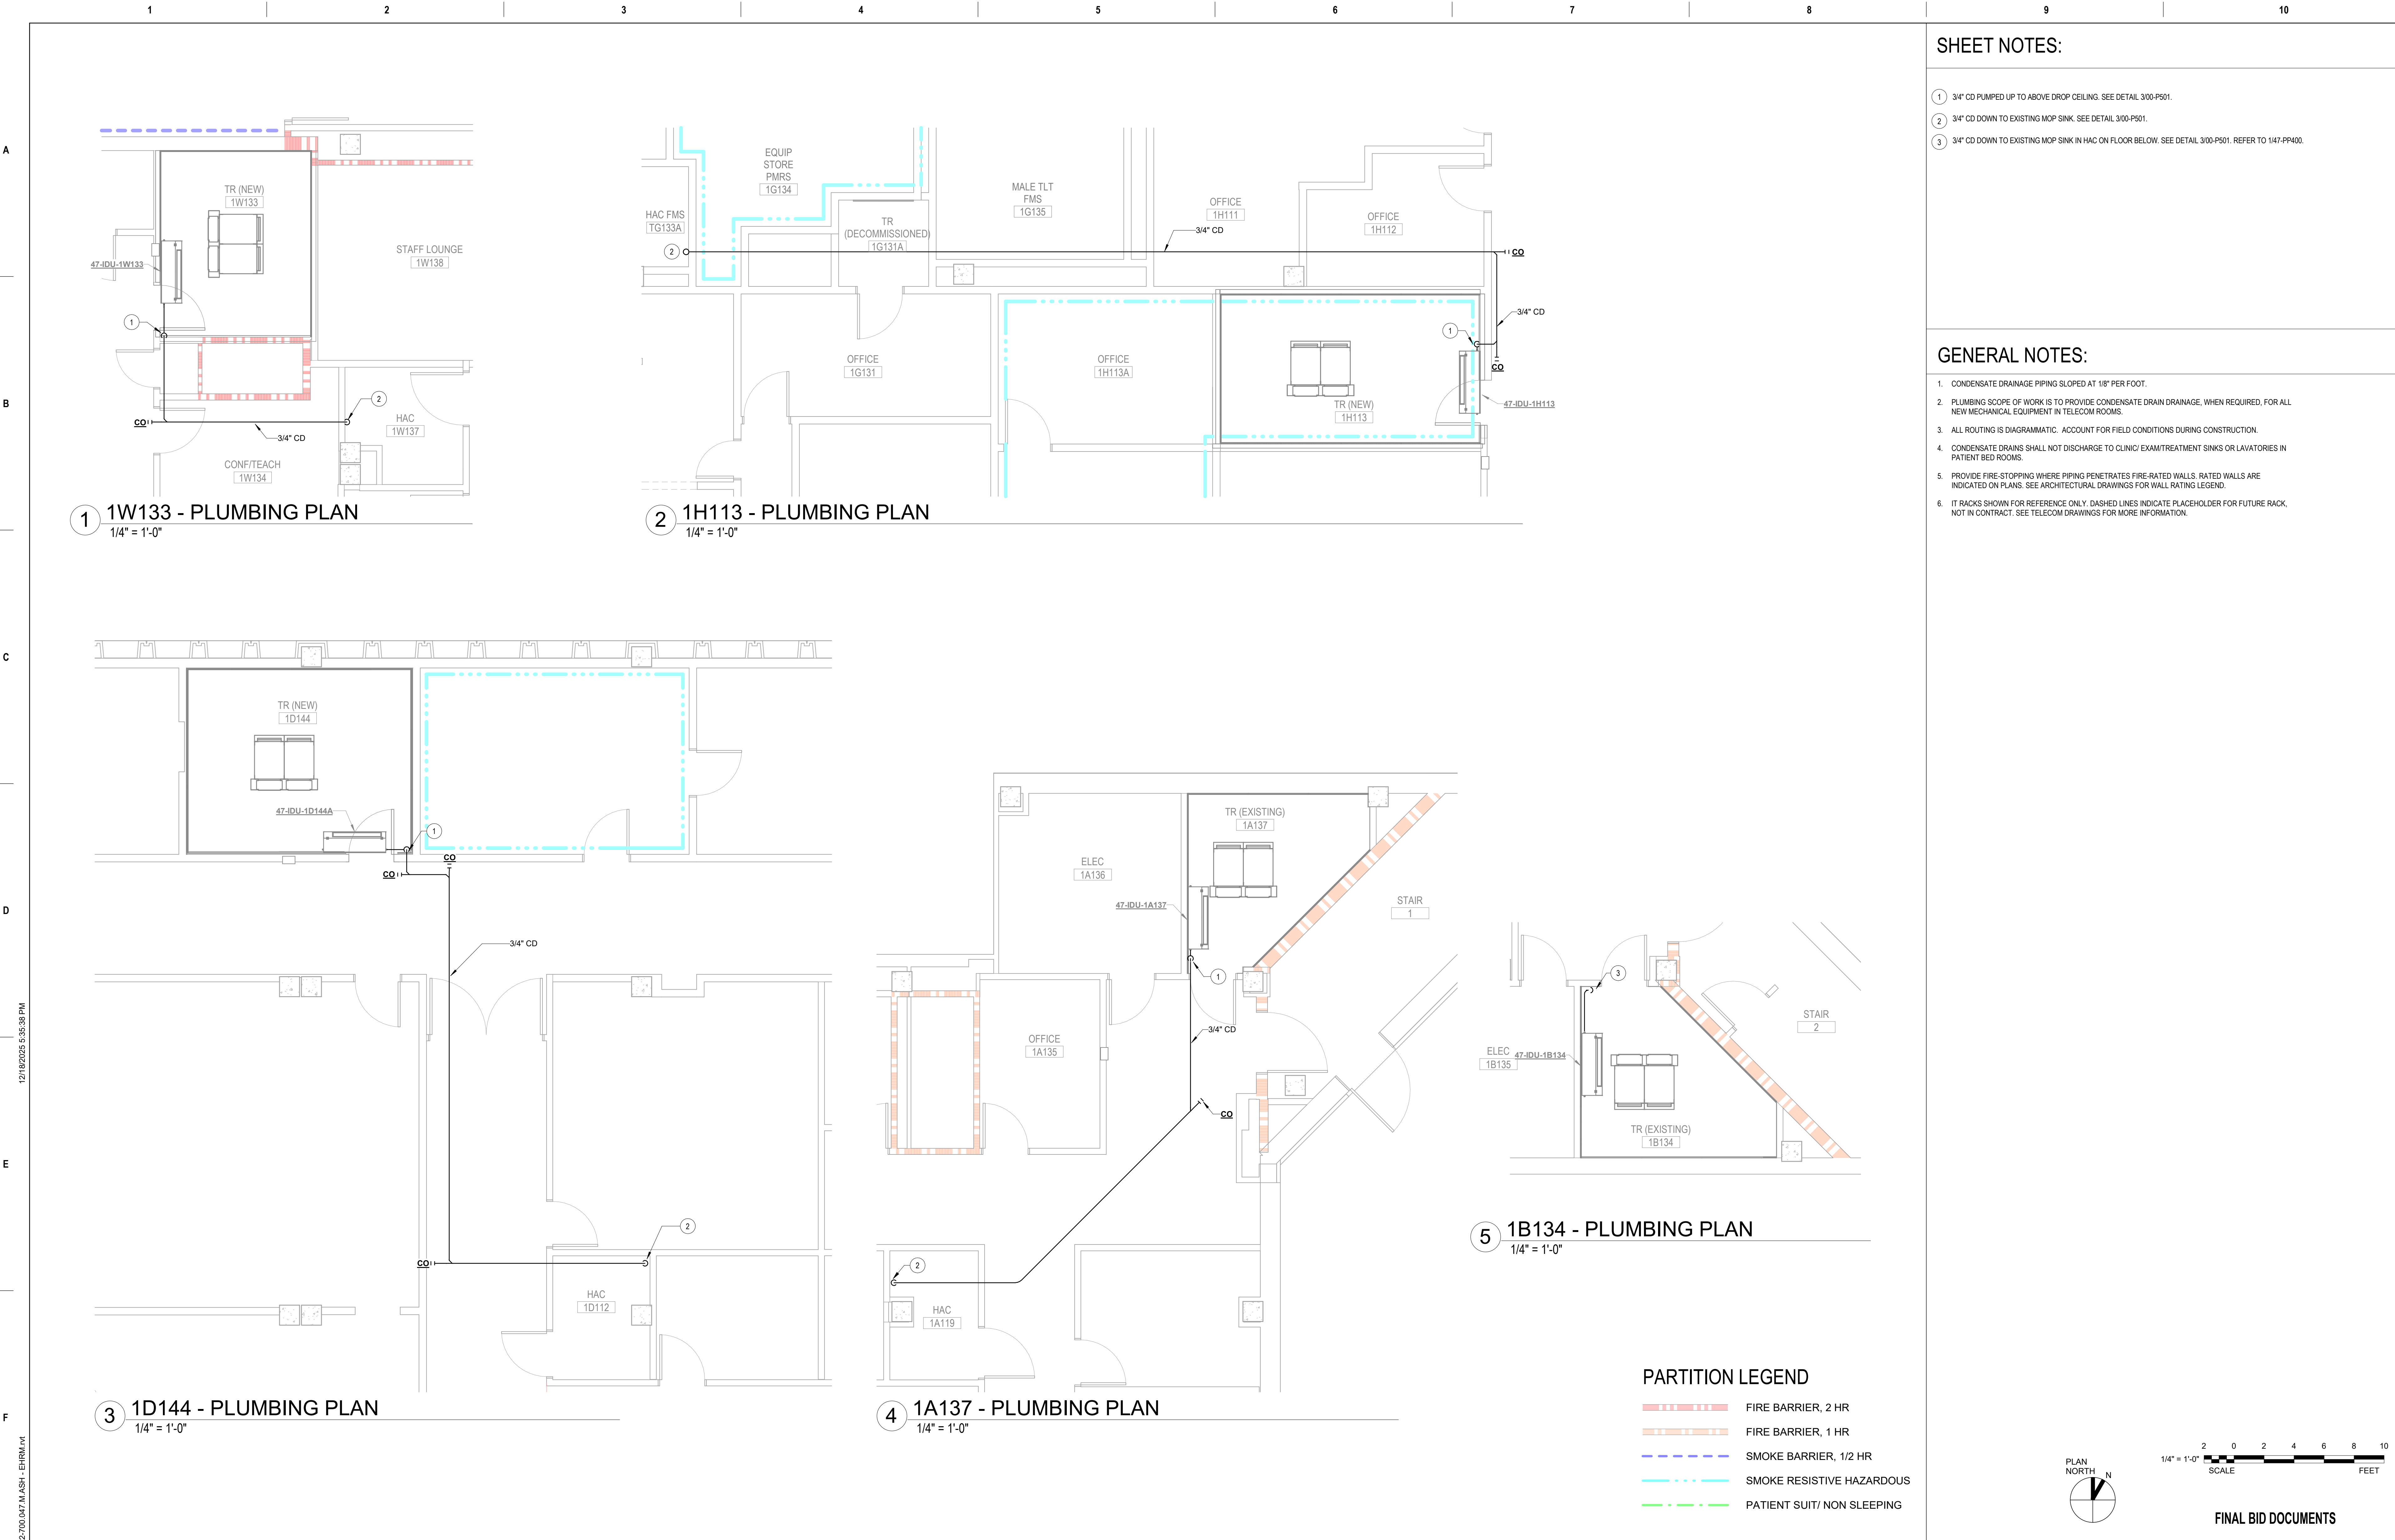



SHEET NOTES:

- 3/4" CD PUMPED UP TO ABOVE DROP CEILING. SEE DETAIL 300-P501.
- 3/4" CD DOWN TO EXISTING MOP SINK. SEE DETAIL 300-P501.
- 3/4" CD DOWN TO EXISTING MOP SINK IN HAC ON FLOOR BELOW. SEE DETAIL 300-P501. REFER TO 147-PP400.


GENERAL NOTES:

- CONDENSATE DRAINAGE PIPING SLOPED AT 1/8" PER FOOT.
- PLUMBING SCOPE OF WORK IS TO PROVIDE CONDENSATE DRAIN DRAINAGE, WHEN REQUIRED, FOR ALL NEW MECHANICAL EQUIPMENT IN TELECOM ROOMS.
- ALL ROUTING IS DIAGRAMMATIC. ACCOUNT FOR FIELD CONDITIONS DURING CONSTRUCTION.
- CONDENSATE DRAINS SHALL NOT DISCHARGE TO CLINIC/ EXAM/TREATMENT SINKS OR LAVATORIES IN PATIENT BED ROOMS.
- PROVIDE FIRE-STOPPING WHERE PIPING PENETRATES FIRE-RATED WALLS. RATED WALLS ARE INDICATED ON PLANS. SEE ARCHITECTURAL DRAWINGS FOR WALL RATING LEGEND.
- IT RACKS SHOWN FOR REFERENCE ONLY. DASHED LINES INDICATE PLACEHOLDER FOR FUTURE RACK, NOT IN CONTRACT. SEE TELECOM DRAWINGS FOR MORE INFORMATION.

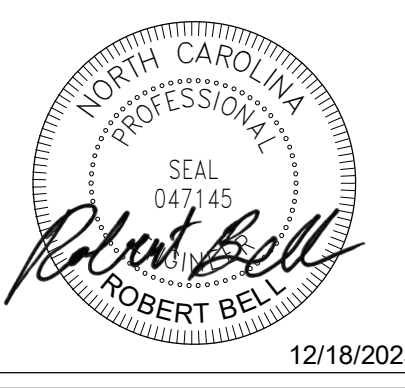
Revisions: <table><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr></table> Date:									ARCHITECT/ENGINEER OF RECORD AWEN SOLUTIONS GROUP ARCHITECTURE ENGINEERING PLANNING A/E: Awen Solutions Group 215 N. Payne Street, Suite 122 Alexandria, VA 22314 COFFMAN ENGINEERS 701 Corporate Center Drive, Suite 419 Raleigh, NC 27607 ph 919.374.6888 www.coffman.com STAMP  Facilities Management Services  U.S. Department of Veterans Affairs Drawing Title ENLARGED PLUMBING 1ST FLOOR PLANS Approved: FOR OFFICIAL USE ONLY Phase FINAL BID DOCUMENTS Project Title EHRM INFRASTRUCTURE UPGRADES Location 1100 TUNNEL ROAD ASHEVILLE, NC 28805 Issue Date 12.19.2025 Checked Drawn Project Number 637-22-700 Building Number BLDG 47 Drawing Number 47-PP402 SHEET 350 of 559

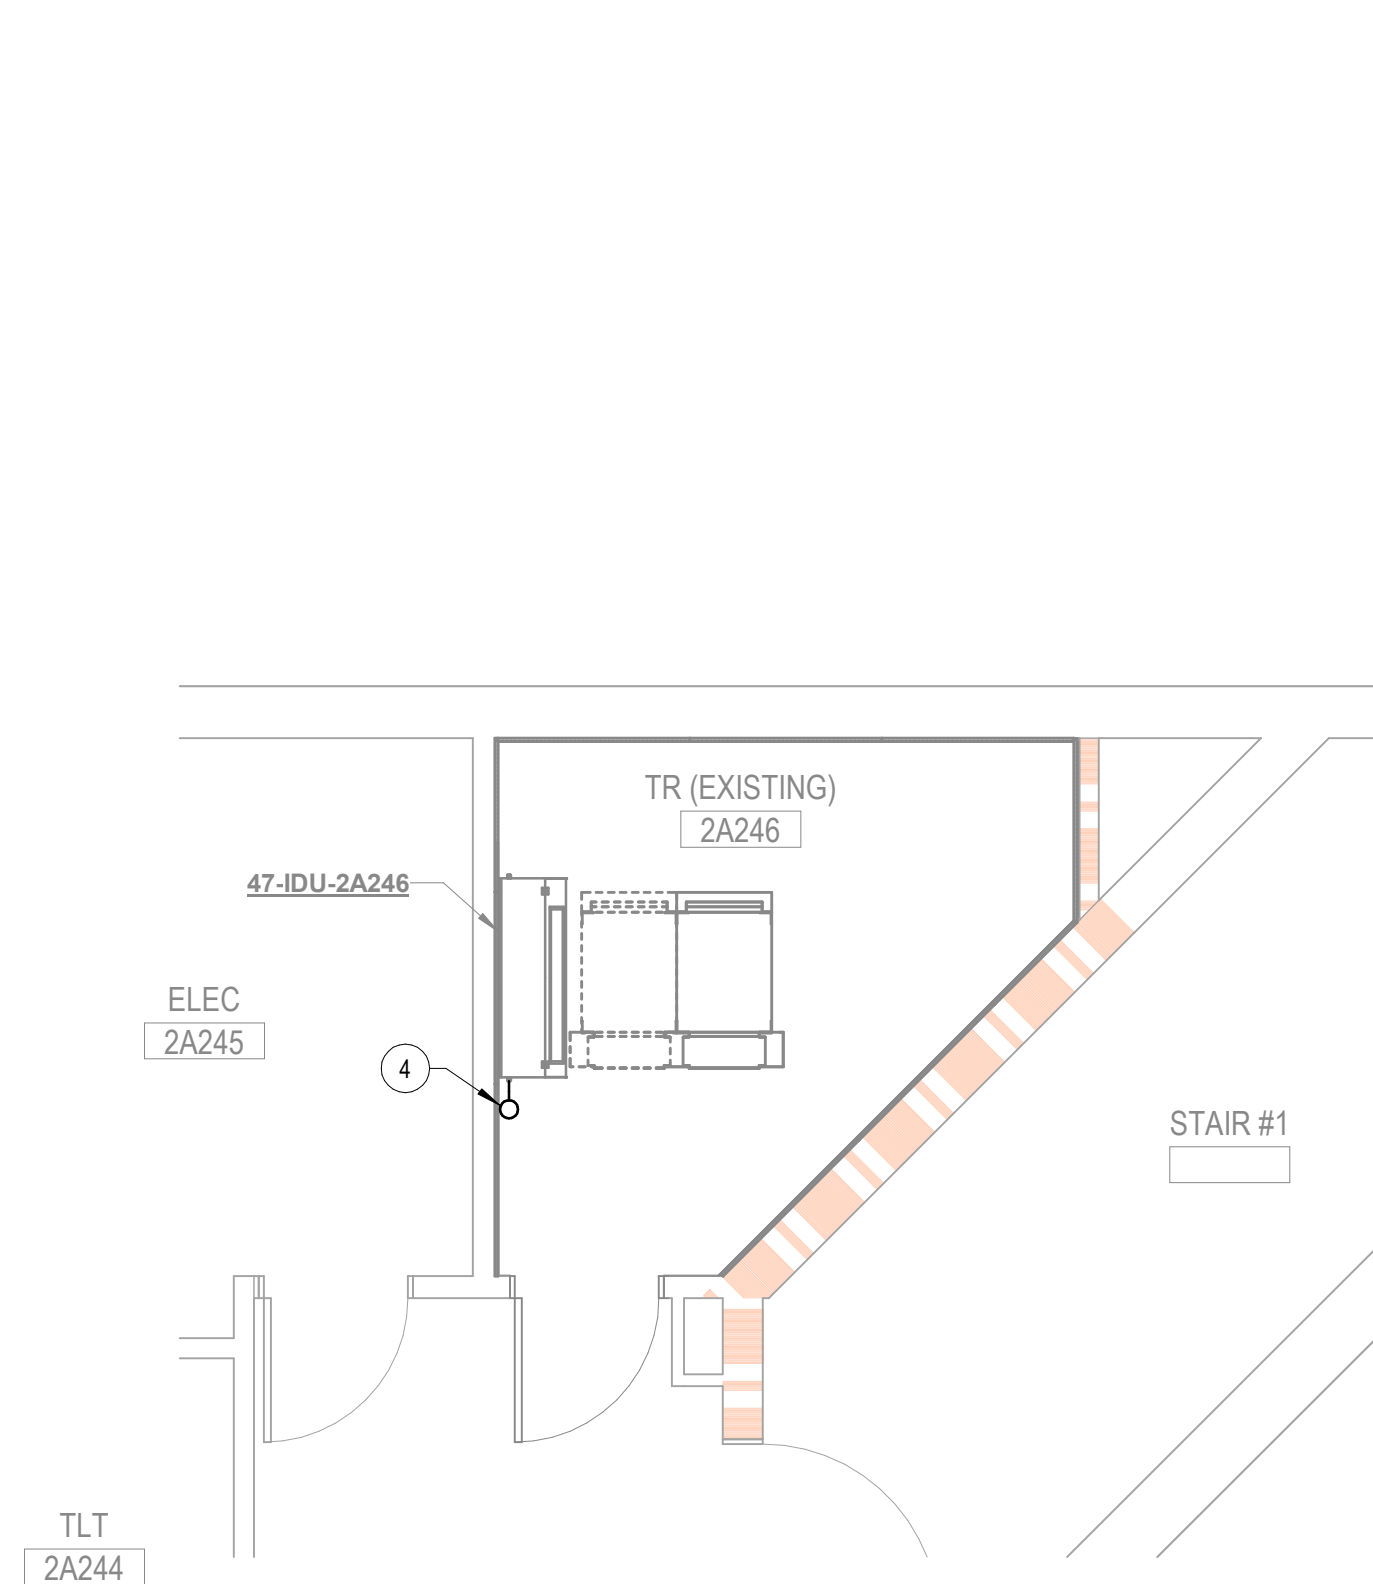

1 2A246 - PLUMBING PLAN
1/4" = 1'-0"

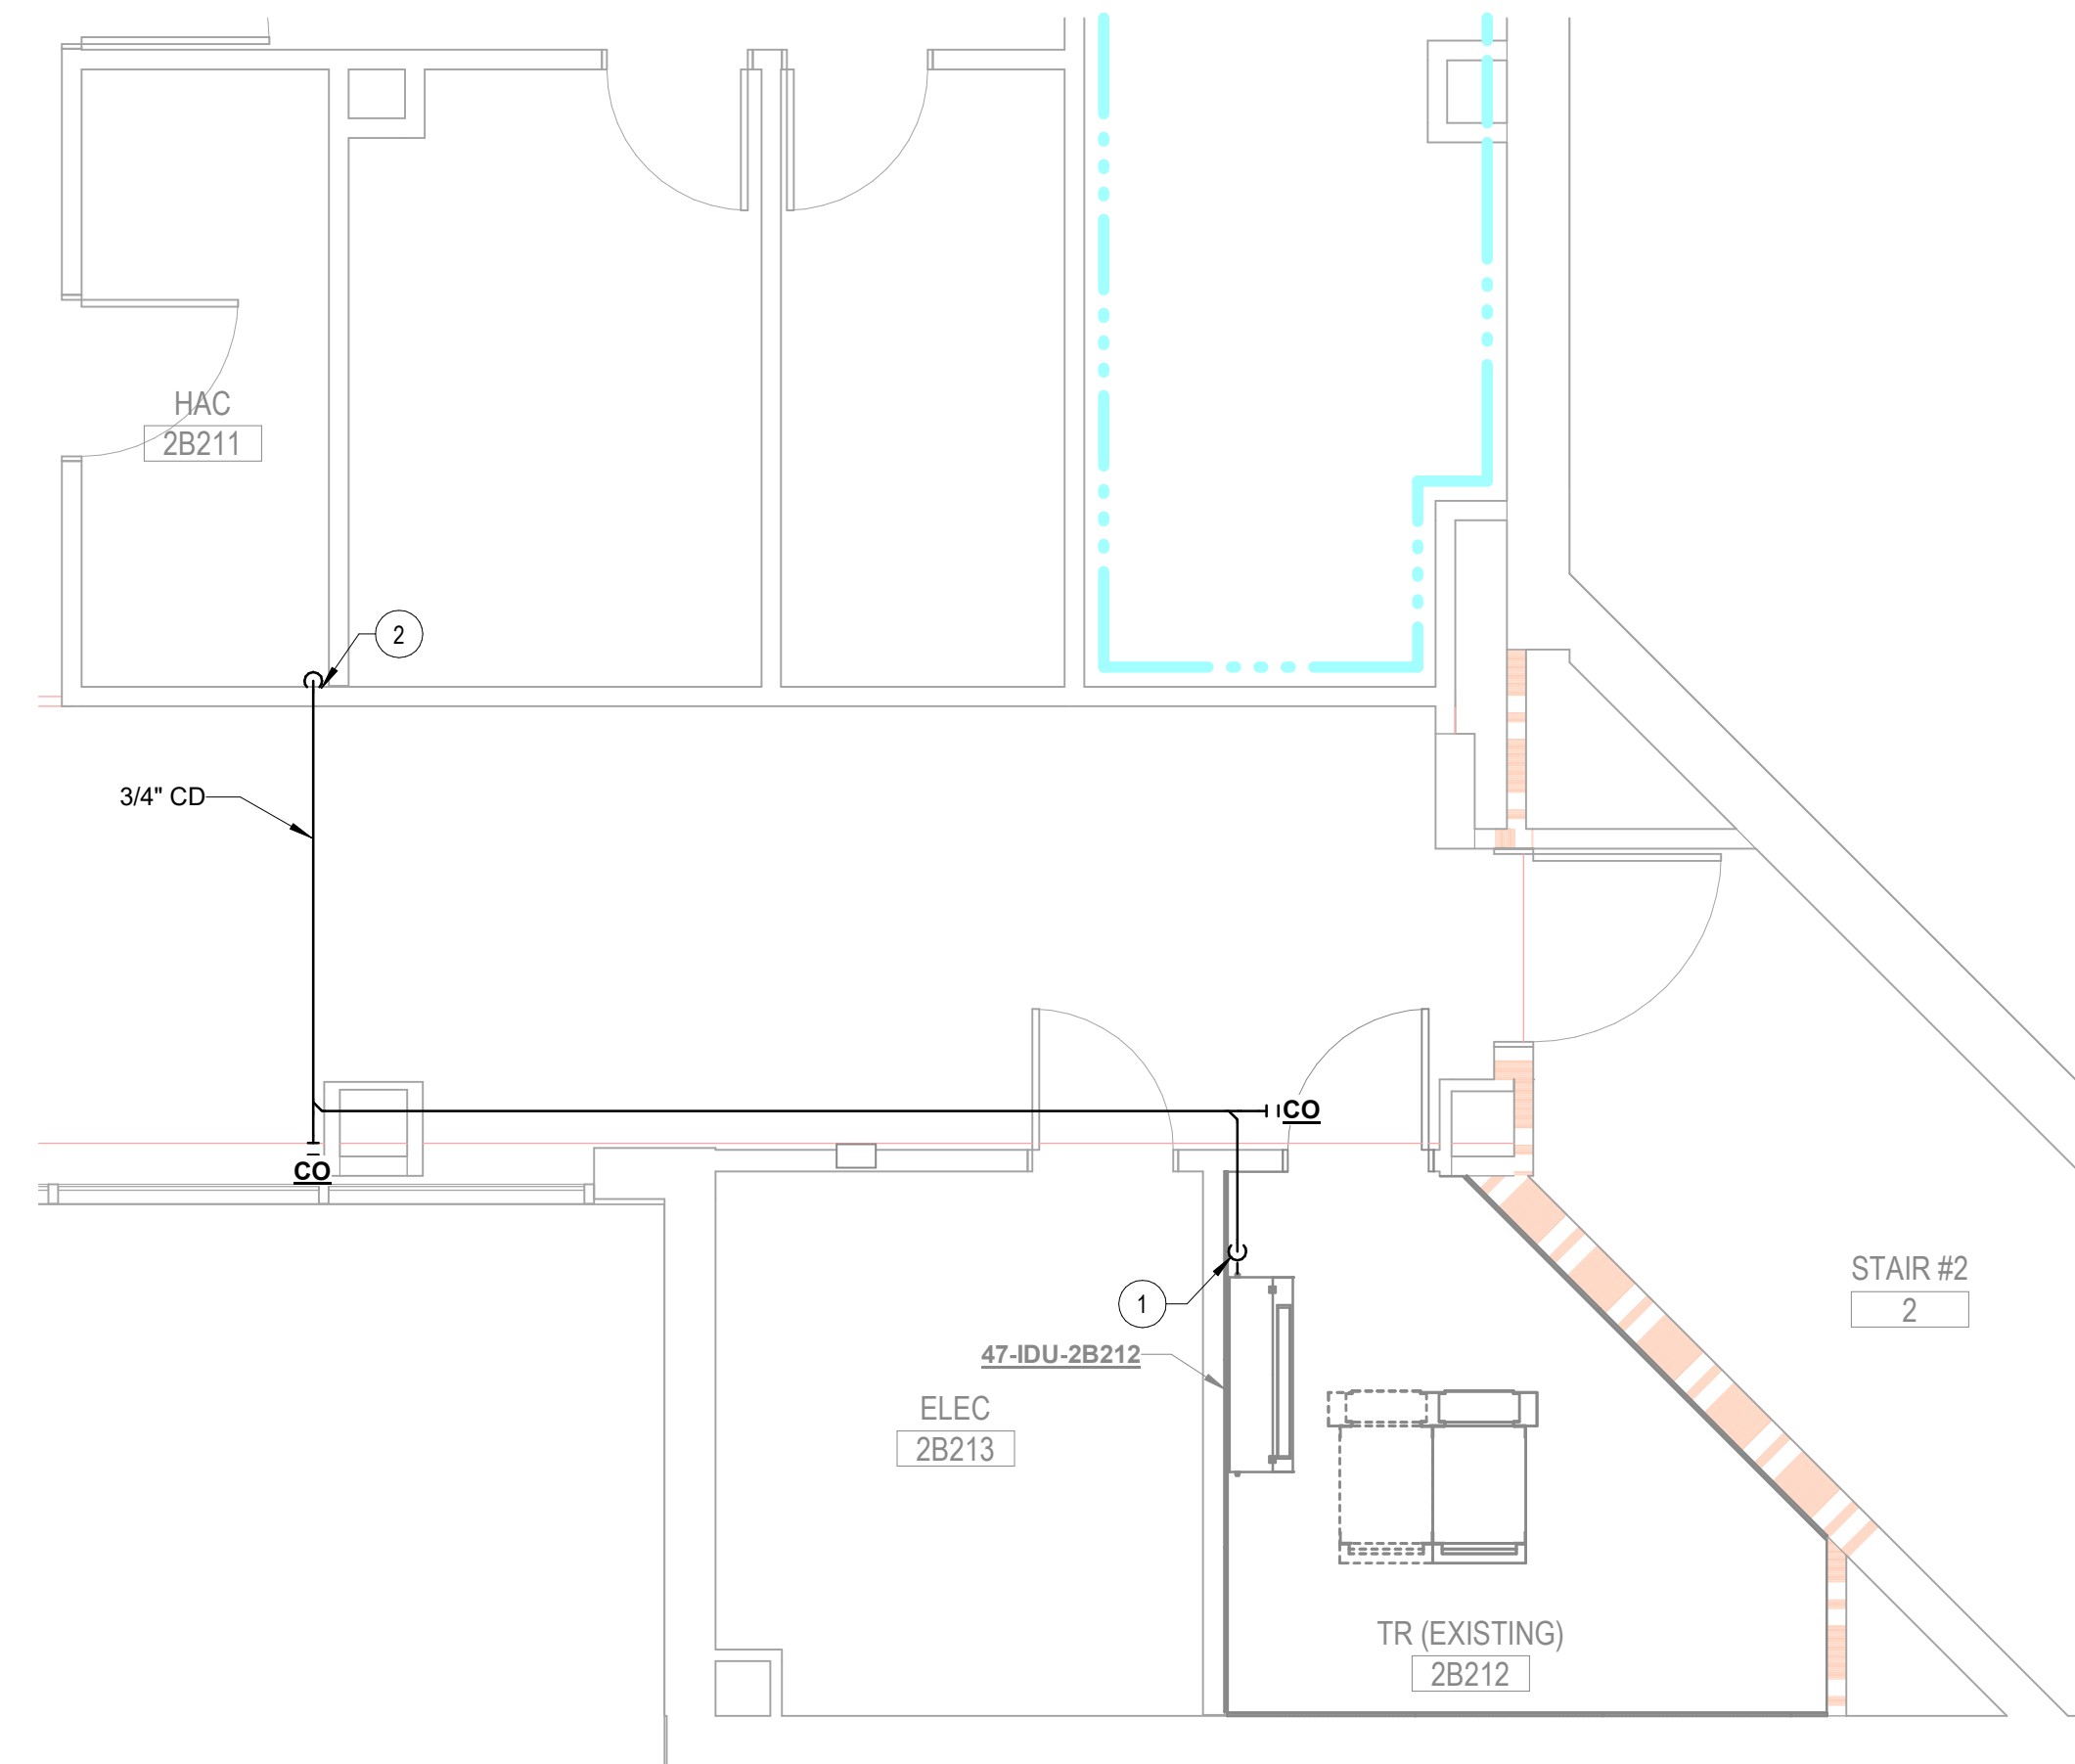


2 2B212 - PLUMBING PLAN
1/4" = 1'-0"

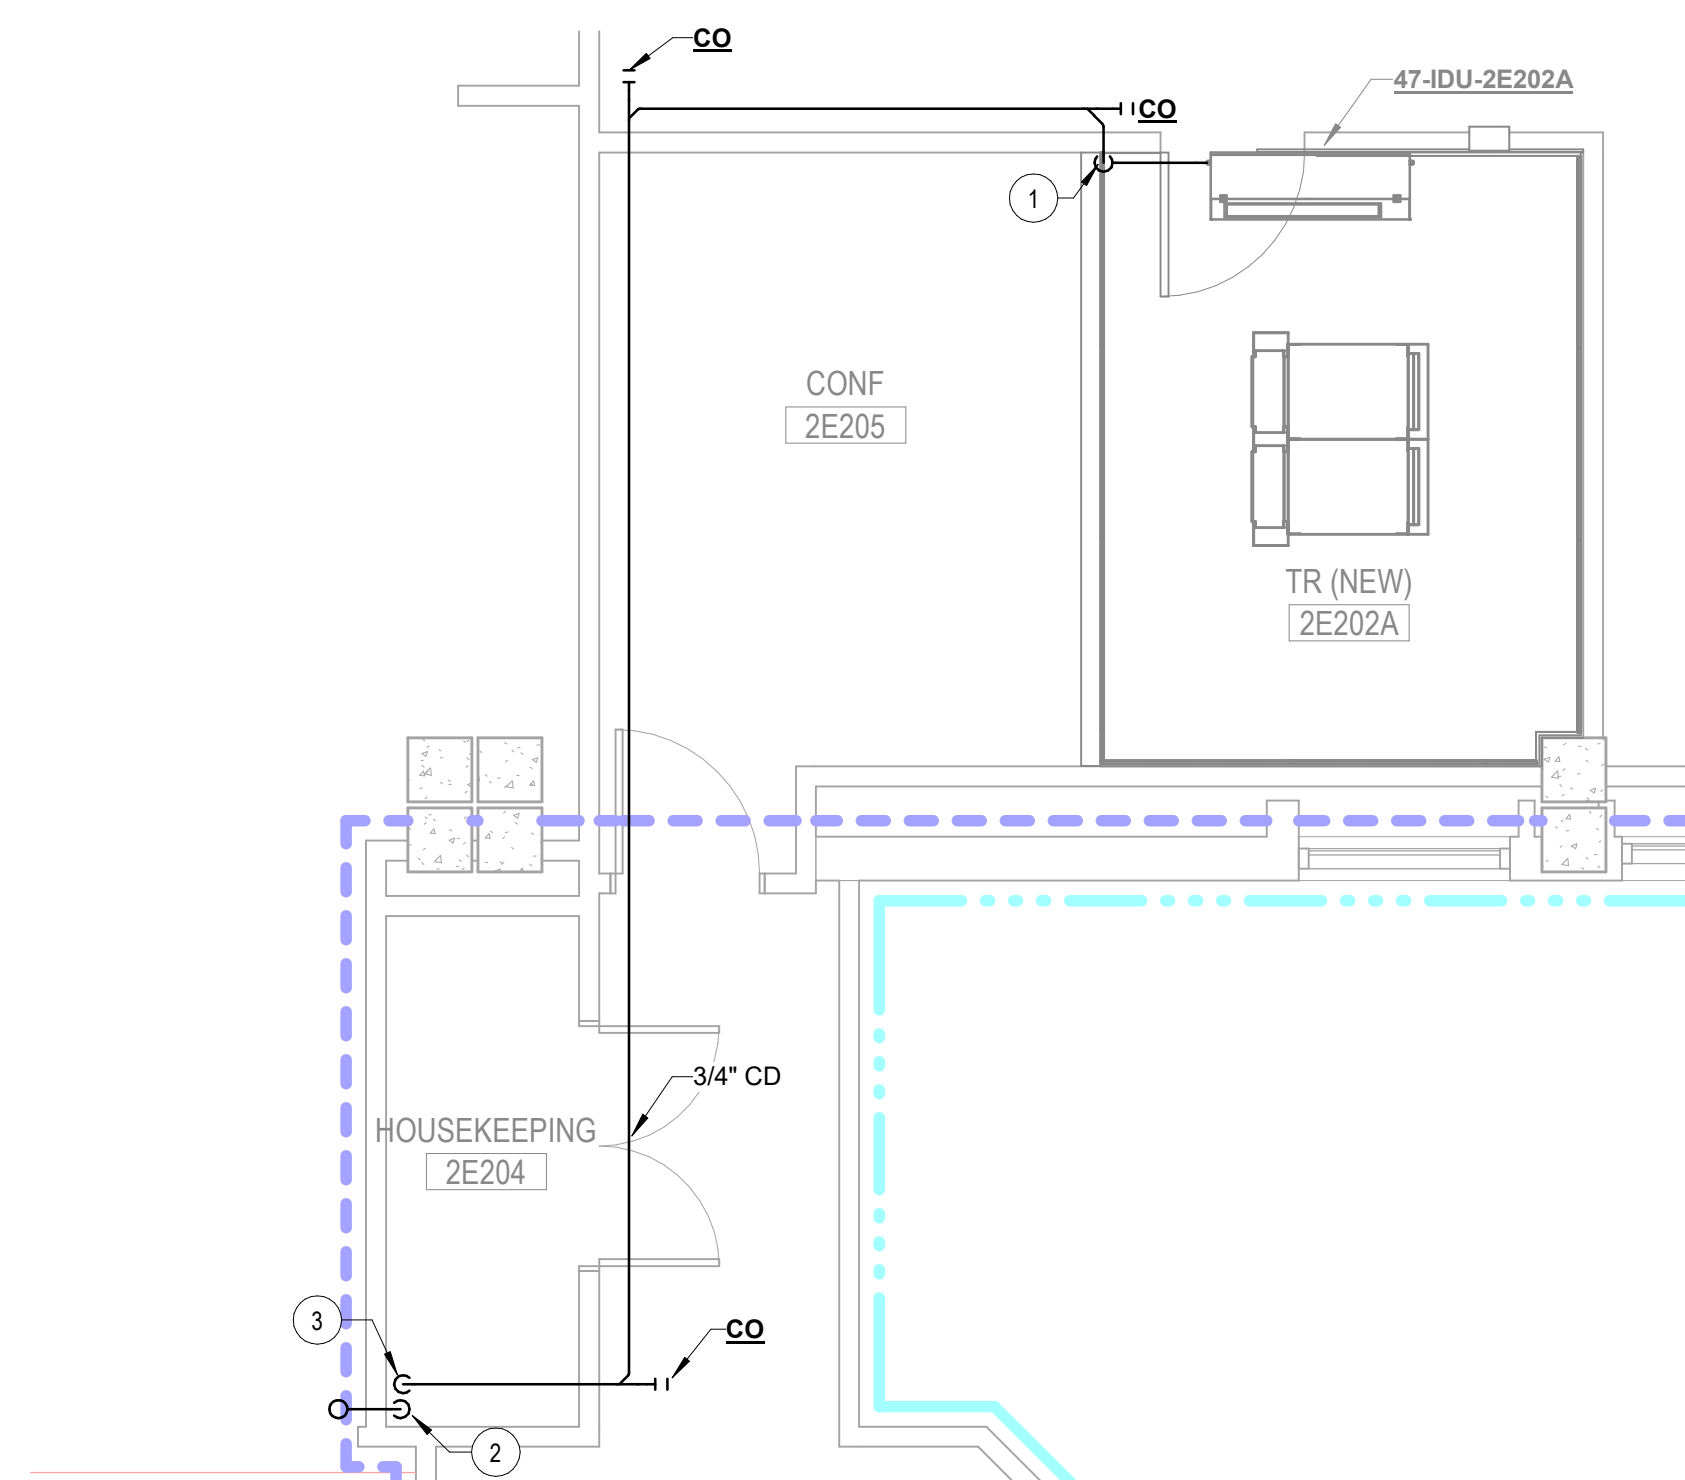

3 2E202A - PLUMBING PLAN
1/4" = 1'-0"

PARTITION LEGEND

- | | |
|---|----------------------------|
|  | FIRE BARRIER, 2 HR |
|  | FIRE BARRIER, 1 HR |
|  | SMOKE BARRIER, 1/2 HR |
|  | SMOKE RESISTIVE HAZARDOUS |
| | PATIENT SUIT/ NON SLEEPING |



2 0 2 4 6 8 10
1/4" = 1'-0"
SCALE FEET

FINAL BID DOCUMENTS[illegible]


ARCHITECT/ENGINEER OF RECORD



A/E:
Awen Solutions Group
215 N. Payne Street, Suite 122
Alexandria, VA 22314



STAMP

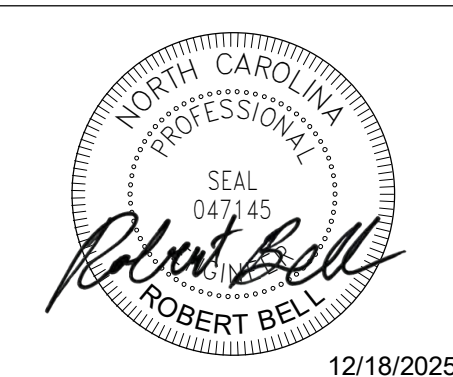

Facilities
Management
Services



U.S. Department
of Veterans
Affairs

Drawing Title
ENLARGED PLUMBING 2ND FLOOR PLANS

Approved:

FOR OFFICIAL USE ONLY

Phase

FINAL BID DOCUMENTS

Project Title

EHRM INFRASTRUCTURE UPGRADES

Location	1100 TUNNEL ROAD ASHEVILLE, NC 28805
----------	---

☒ **Checked**

Drawn

Project Number
637-22-700

Building Number
BLDG 47

Drawing Number

47-PP403


SHEET 351 of 559

- 1 3/4" CD PUMPED UP TO ABOVE DROP CEILING. SEE DETAIL 3/00-P501. MAINTAIN MANUFACTURER'S MINIMUM CLEARANCES.
- 2 3/4" CD DOWN TO EXISTING MOP SINK. SEE DETAIL 3/00-P501.
- 3 3/4" CD DOWN TO EXISTING MOP SINK IN HAC ON FLOOR BELOW. SEE DETAIL 3/00-P501. SEE SHEET 3/47-PP403.

- 1 3/4" CD PUMPED UP TO ABOVE DROP CEILING. SEE DETAIL 3/00-P501. MAINTAIN MANUFACTURER'S MINIMUM CLEARANCES.
- 2 3/4" CD DOWN TO EXISTING MOP SINK. SEE DETAIL 3/00-P501.
- 3 3/4" CD DOWN TO EXISTING MOP SINK IN HAC ON FLOOR BELOW. SEE DETAIL 3/00-P501. SEE SHEET 3/47-PP403.


2. PLUMBING SCOPE OF WORK IS TO PROVIDE CONDENSATE DRAIN DRAINAGE, WHEN REQUIRED, FOR ALL NEW MECHANICAL EQUIPMENT IN TELECOM ROOMS.
3. ALL ROUTING IS DIAGRAMMATIC. ACCOUNT FOR FIELD CONDITIONS DURING CONSTRUCTION.
4. CONDENSATE DRAINS SHALL NOT DISCHARGE TO CLINIC/ EXAM/TREATMENT SINKS OR LAVATORIES IN PATIENT PLANS ROOMS.
5. PROVIDE FIRE-STOPPING WHERE PIPING PENETRATES FIRE-RATED WALLS. RATED WALLS ARE INDICATED ON PLANS.
6. IT RACKS SHOWN FOR REFERENCE ONLY. DASHED LINES INDICATE PLACEHOLDER FOR FUTURE RACK, NOT IN CONTRACT. SEE TELECOM DRAWINGS FOR MORE INFORMATION.

2. PLUMBING SCOPE OF WORK IS TO PROVIDE CONDENSATE DRAIN DRAINAGE, WHEN REQUIRED, FOR ALL NEW MECHANICAL EQUIPMENT IN TELECOM ROOMS.
3. ALL ROUTING IS DIAGRAMMATIC. ACCOUNT FOR FIELD CONDITIONS DURING CONSTRUCTION.
4. CONDENSATE DRAINS SHALL NOT DISCHARGE TO CLINIC/ EXAM/TREATMENT SINKS OR LAVATORIES IN PATIENT PLANS ROOMS.
5. PROVIDE FIRE-STOPPING WHERE PIPING PENETRATES FIRE-RATED WALLS. RATED WALLS ARE INDICATED ON PLANS.
6. IT RACKS SHOWN FOR REFERENCE ONLY. DASHED LINES INDICATE PLACEHOLDER FOR FUTURE RACK, NOT IN CONTRACT. SEE TELECOM DRAWINGS FOR MORE INFORMATION.

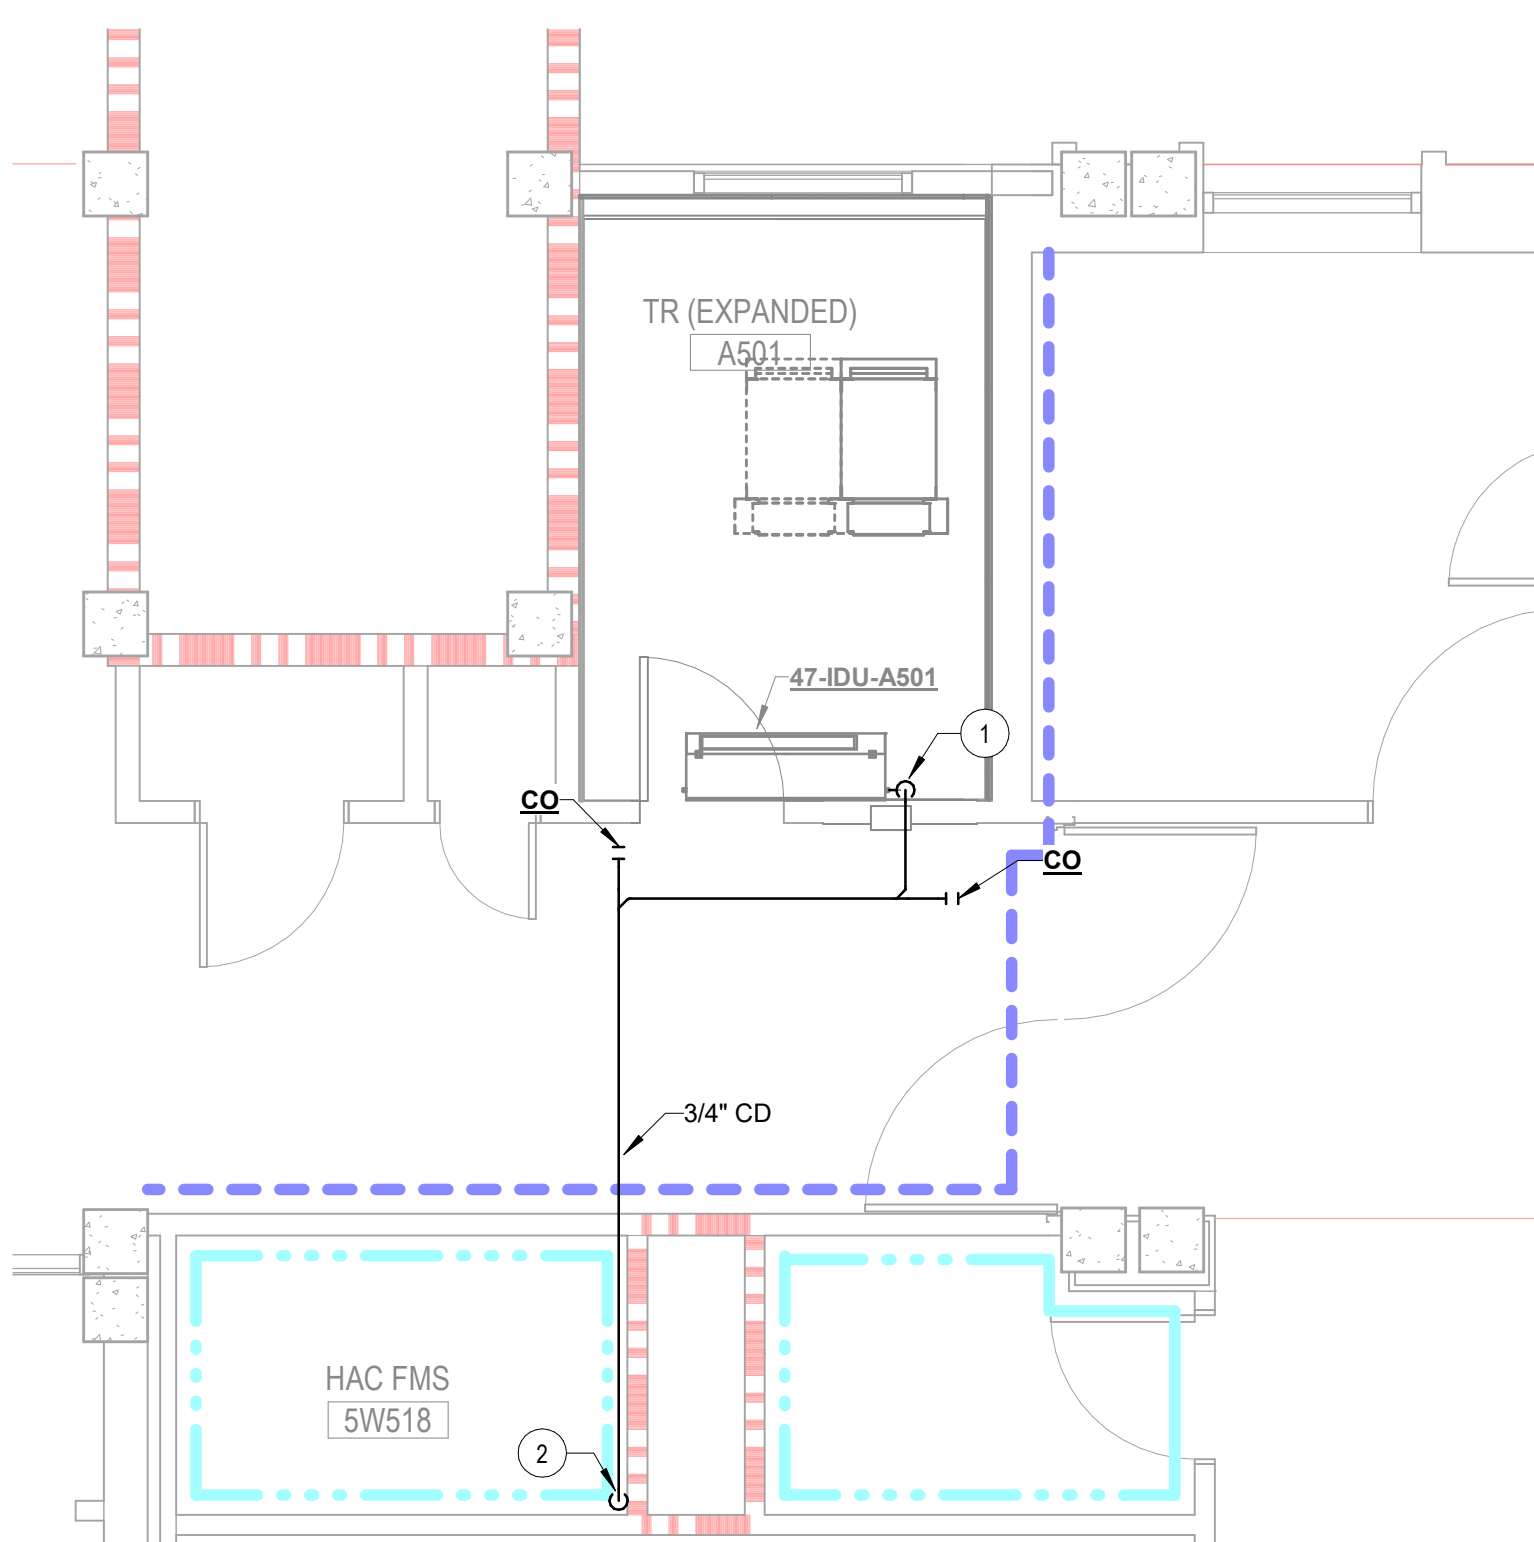

3 A501 - PLUMBING PLAN
1/4" = 1'-0"

	FIRE BARRIER, 2 HR
	FIRE BARRIER, 1 HR
	SMOKE BARRIER, 1/2 HR
	SMOKE RESISTIVE HAZARDOUS
	PATIENT SUIT/ NON SLEEPING

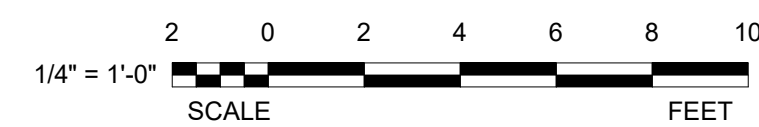

	Project Number 027 22 30
--	-----------------------------

Project Number	637-22-700
Building Number	BLDG 47
Drawing Number	47-PP404
SHEET 352 of 559	

Autodesk Docs://Ashville EHRM V23637-22-700.047.M.ASH - EHRM.m
12/18/2025 5:35:40 PM