



SHEET 52 OF 85
JUNE 12, 2026

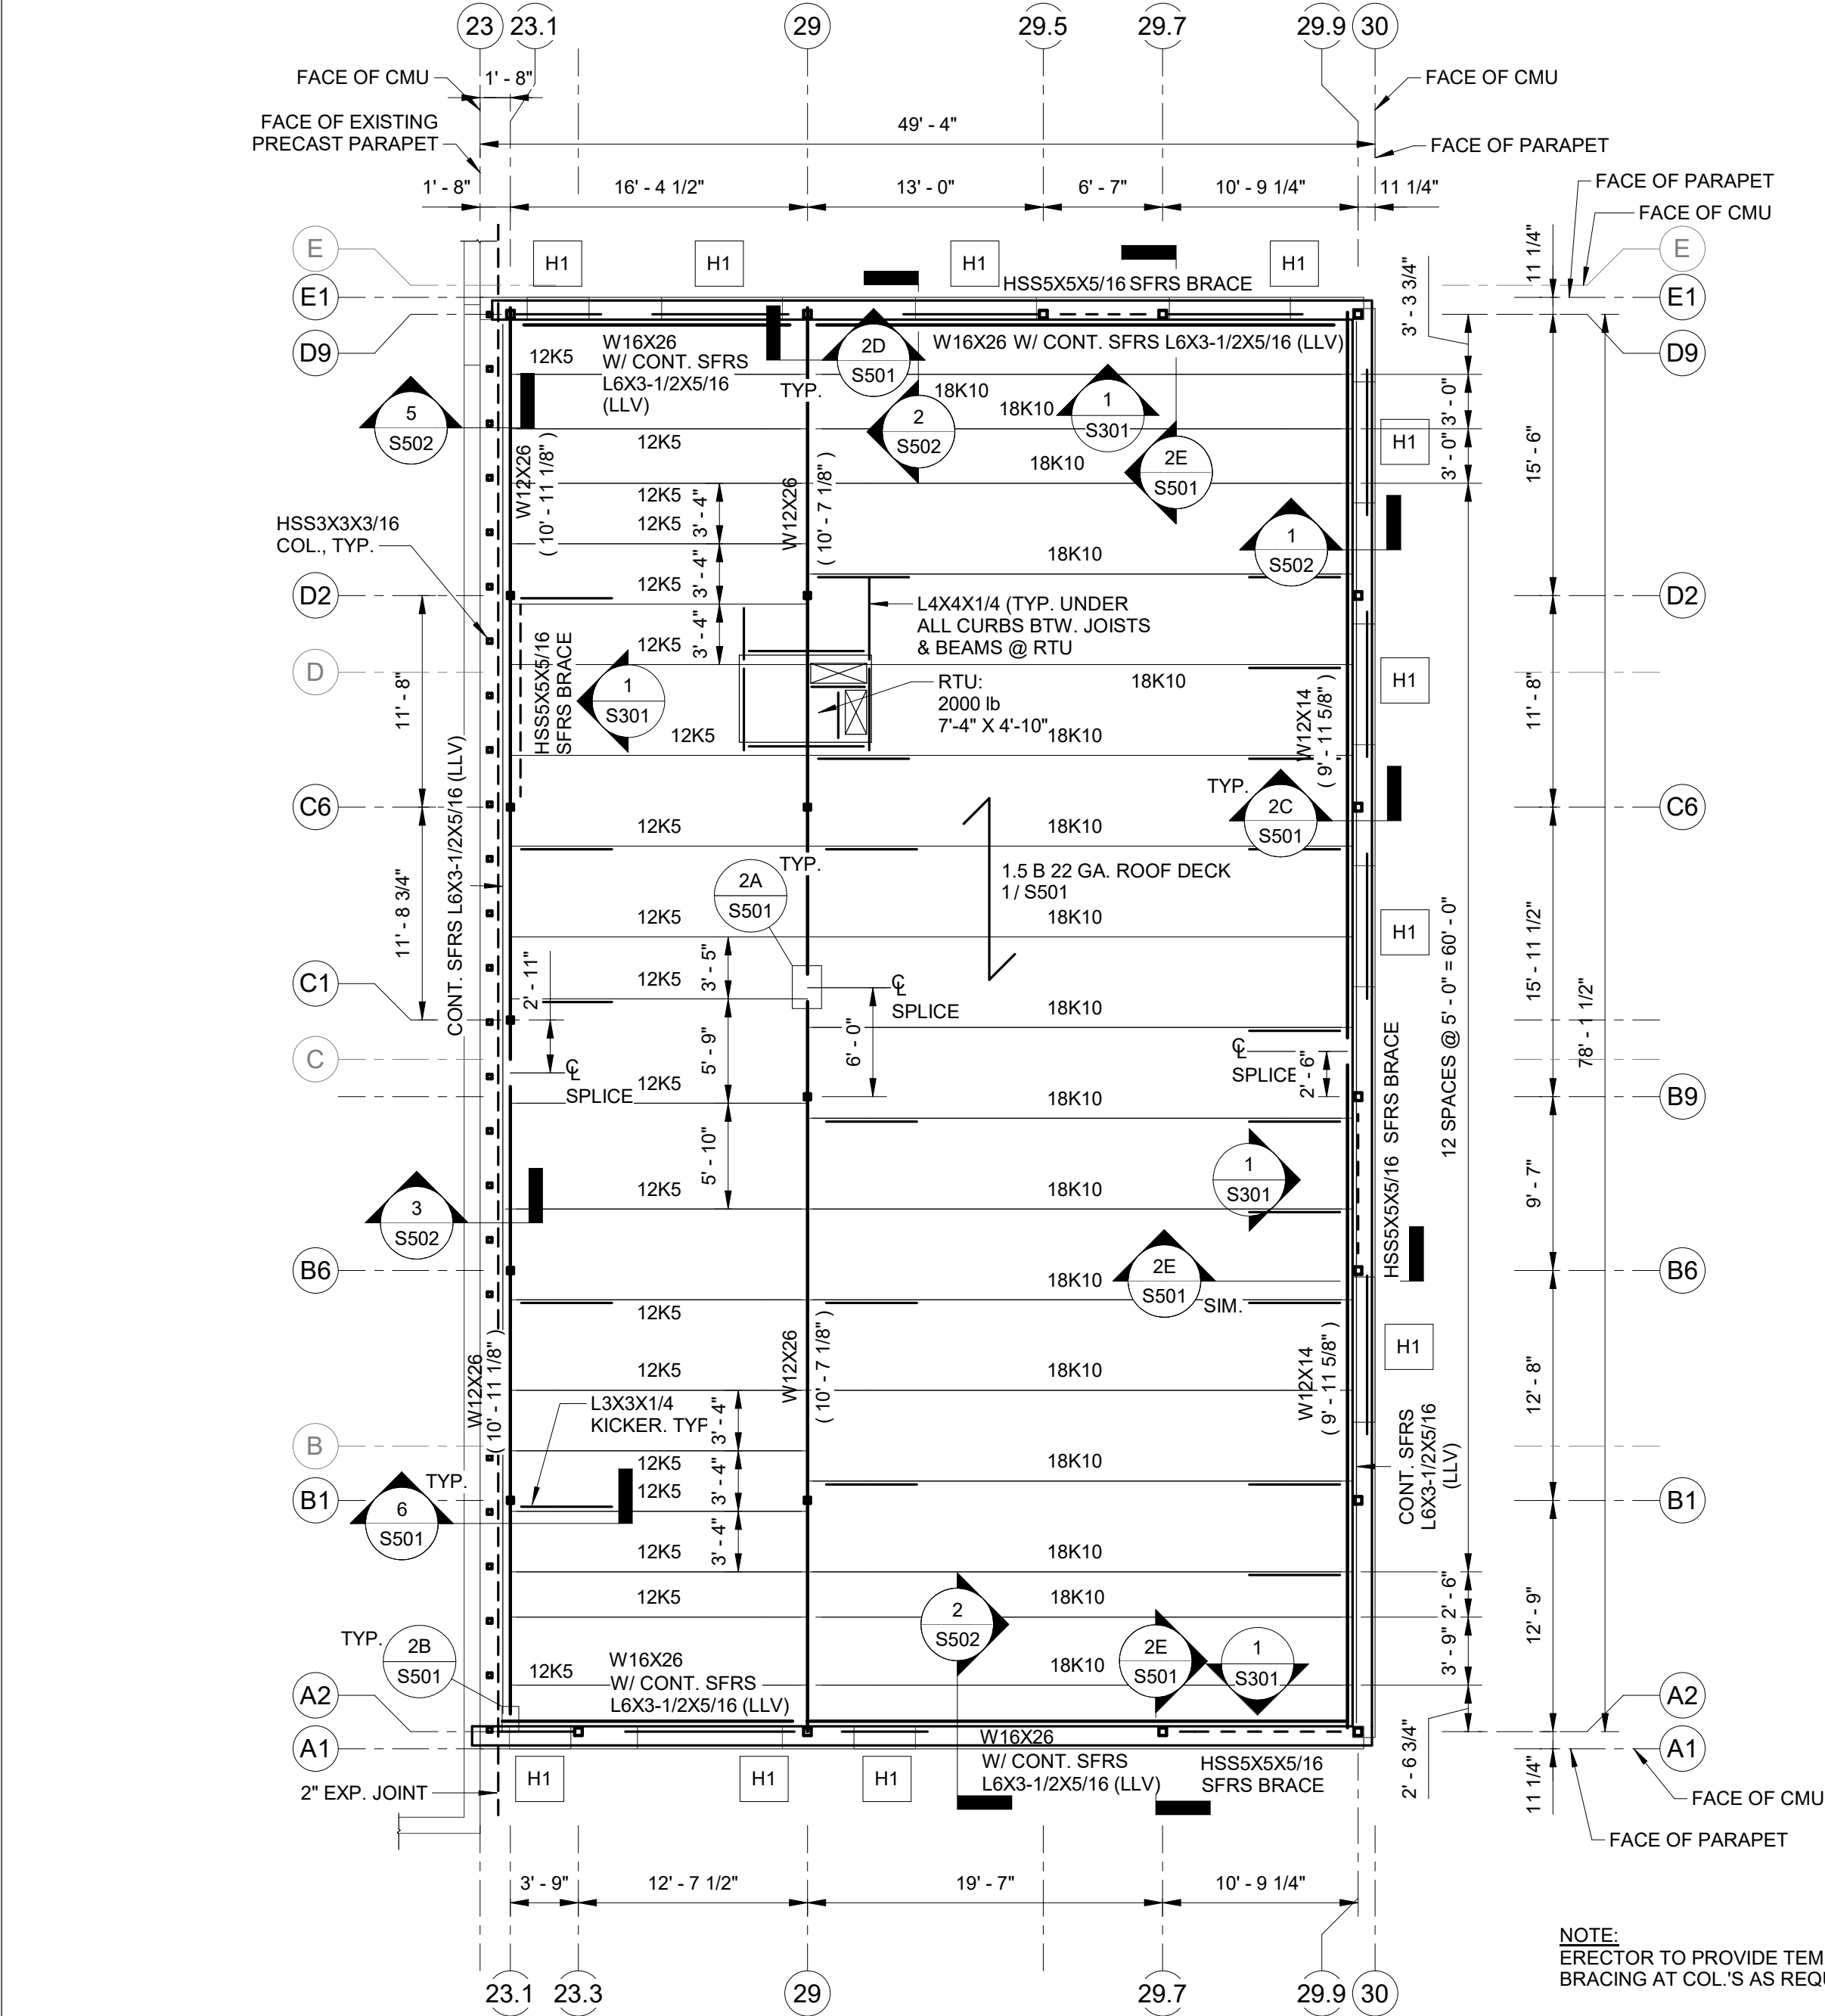

HEADER SCHEDULE			
Mark	Count	Size	Detail
H1	11	(3)600S200-54 W/ 600T200-54 TRACK ABOVE & BELOW	1/ S601 & 8/ S601

1 ROOF FRAMING PLAN
1/8" = 1'-0"

NOTE:
ERECTOR TO PROVIDE TEMPORARY
BRACING AT COL.'S AS REQUIRED BY OSHA

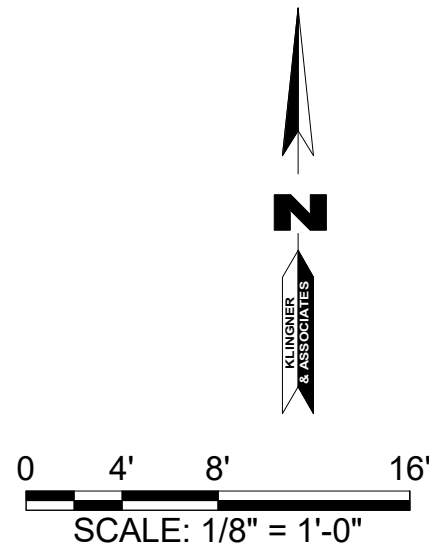

STATE OF MISSOURI
MIKE KEHOE,
GOVERNOR



FOSTER T POPKEN - ENGINEER
MO # PE-2026014880

KLINGNER
& ASSOCIATES, P.C.
Engineers • Architects • Surveyors
Columbia, Missouri
3622 Endeavor Ave, Suite 117
573.355.5988
www.klingner.com
Quincy, IL Cape Girardeau, MO
Burlington, IA Pella, IA Hannibal, MO Galveston, IL

KLINGNER & ASSOCIATES, P.C. - ARCHITECTURE
MISSOURI STATE CERTIFICATE OF AUTHORITY #2001010108

OFFICE OF ADMINISTRATION
DIVISION OF FACILITIES
MANAGEMENT,
DESIGN AND CONSTRUCTION

JEFFERSON CITY
READINESS CENTER

CIVIL SUPPORT TEAM
BUILDING ADDITION

1225 COOPER DRIVE
JEFFERSON CITY, MO 65101

PROJECT # T2147-01
SITE # 6298
ASSET # 8136298008

REVISION: _____
DATE: _____
REVISION: _____
DATE: _____
REVISION: _____
DATE: _____

ISSUE DATE:06/12/2026

CAD DWG FILE: S201
DRAWING BY: FTP
CHECKED BY: JEK
DESIGNED BY: FTP

SHEET TITLE:
FRAMING PLAN

SHEET NUMBER:

S201
SHEET 53 OF 85
JUNE 12, 2026

KLINGNER
& ASSOCIATES, P. C.
Engineers • Architects • Surveyors

Columbia, Missouri
3622 Endeavor Ave., Suite 117
Burlington, IA 573.355.5988

www.klinger.com
Quincy, IL Cape Girardeau, MO
St. Louis, MO
Burlington, IA Pella, IA Hannibal, MO Gainesburg, MO

KLINGNER & ASSOCIATES, P.C. — ARCHITECTURE

**JEFFERSON CITY
READINESS CENTER**

**CIVIL SUPPORT TEAM
BUILDING ADDITION**

PROJECT # T2147-01
SITE # 6298
ASSET # 8136298008

CAD DWG FILE: S202
DRAWING BY: AMB/WPH/JEK
CHECKED BY: KTH/JEK
DESIGNED BY: WPH/JEK

FRAMING PLAN - ALT #1

S202
SHEET 54 OF 85
JUNE 12, 2026



EXISTING PRE-ENGINEERED ROOF TRUSSES

EXISTING 2x4 ROOF PURLINS (LAID FLAT) AT 2'-0" CENTERS

EXISTING METAL ROOF SHEATHING

2X STUD @ 2'-0" O.C. FASTENED TO EACH ROOF MEMBER w/ 10d NAILS @ 3" O.C.

EXISTING 2X HEADER

NEW 2X12 DF SEL. STR. IN CONTACT w/ BOTTOM OF EXISTING HEADER


FULL HEIGHT BEARING STUD ON EACH SIDE OF EXISTING POST

EXISTING METAL WALL SHEATHING

2X STUD @ 2'-0" O.C. FASTENED TO EACH ROOF MEMBER w/ 10d NAILS @ 3" O.C.


EXISTING (3) PLY POST @ EACH END OF DOOR OPENING

3 ALTERNATE 1 - EXISTING HEADER REINFORCEMENT DETAIL
NTS



1. SEE STRUCTURAL NOTES FOR DESIGN CRITERIA AND ABBREVIATIONS
2. VERIFY ALL DIMENSIONS AND ELEVATIONS W/ ARCHT DRAWINGS
3. BOLT HOLES IN WOOD MEMBERS SHALL BE DRILLED A MIN 1/32" TO A MAX 1/16" LARGER THAN THE BOLT DIAMETER
4. USE FULL-HEAD COMMON WIRE NAILS FOR ALL DIAPHRAGM NAILING (ROOF/FLOOR JOIST AND SHEATH WALLS) AND FRAMING CONNECTIONS
5. ROOF SYSTEM, INCLUDING ROOF BRIDGING, TO BE BIDDER DESIGNED - ROOF PLAN INFORMATION SHOWN FOR COORDINATION ONLY. DESIGN SUBMITTAL TO BE PROVIDED TO KLINGER.
6. ALL PRE-ENGINEERED WOOD ROOF TRUSSES TO HAVE TRUSS HANGER CLIPS AT EA END, ANCHORED TO WALL DBL TOP PLATES. TRUSS HANGER CLIPS TO BE PROVIDED AND DESIGNED BY TRUSS MFR.
7. PRE-ENGINEERED WOOD ROOF TRUSSES TO BE DESIGNED FOR OUTRIGGER LOADS, IF APPLICABLE.
8. NON-BEARING PARTITION TOP PL TO BE ATTACHED TO EA RAFTER/TRUSS BTM CHORD W/ SIMPSON SDPW DEFLECTOR SCREW. REQUIREMENTS PER MFR.

ROOF FRAMING PLAN LEGEND	
	INDICATES T.O. ELEVATION
	STRUCTURAL WALL BELOW
	ROOF TRUSS, SEE PLAN
	HEADER OR LINTEL TAG, SEE SCHED.

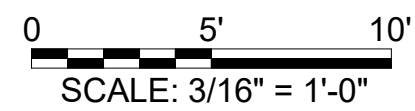



0 5' 10'
SCALE: 3/16" = 1'-0"

DIAPHRAGM TRUSS (NS/FS RIDGE)
DESIGNED FOR 110plf ASD UNIFORM
HORIZ. LOAD, PER TRUSS MFR.
ATTACHMENTS TO ROOF & DRAG
TRUSSES PER MFR
LOCATE WITHIN PLANE OF PURLINS
MITER PURLINS TO FIT BTWN WEB
MEMBERS

BIDDING NOTE:
ASSUME EX TRUSS BEARING ELEVATION = 16'-0".
VERIFY IN FIELD.

1 ROOF PLAN

3/16" = 1'-0"

FRAMING GENERAL NOTES:


- SEE STRUCTURAL NOTES FOR DESIGN CRITERIA AND ABBREVIATIONS
- VERIFY ALL DIMENSIONS AND ELEVATIONS W/ ARCH'L DRAWINGS
- BOLT HOLES IN WOOD MEMBERS SHALL BE DRILLED A MIN 1/32" TO A MAX 1/16" LARGER THAN THE BOLT DIAMETER
- USE FULL-HEAD COMMON WIRE NAILS FOR ALL DIAPHRAGM NAILING (ROOF/FLOOR SHEATHING AND SHEAR WALLS) AND FRAMING CONNECTIONS
- ROOF SYSTEM, INCLUDING REQ'D BRIDGING, TO BE BIDDER DESIGNED - ROOF PLAN INFORMATION SHOWN FOR COORDINATION ONLY. DESIGN SUBMITTAL TO BE PROVIDED TO KLINGNER
- ALL PRE-ENGINEERED WOOD ROOF TRUSSES TO HAVE UPLIFT CLIPS AT EA END, ANCHORED TO WALL DBL TOP PLATES. UPLIFT CLIPS TO BE PROVIDED AND DESIGNED BY TRUSS MFR.
- PRE-ENGINEERED WOOD ROOF TRUSSES TO BE DESIGNED FOR OUTRIGGER LOADS, IF APPLICABLE
- NON-BEARING PARTITION TOP PL TO BE ATTACHED TO EA RAFTER/TRUSS BTM CHORD W/ SIMPSON SDPW DEFLECTOR SCREW. REQUIREMENTS PER MFR.
- NAILERS FOR GYP ATTACHMENT NOT SHOWN. SEE ARCH'L DWGS.
- RIDGE VENT CAP BY PNL MFR.
- TRUSS MFR TO PROVIDE RIDGE SPLICE PLATE & CONNECTIONS.

ROOF FRAMING PLAN LEGEND

	INDICATES T.O. ELEVATION
	STRUCTURAL WALL BELOW
	ROOF OR DIAPHRAGM TRUSS, SEE PLAN
	HEADER OR LINTEL TAG, SEE SCHED.


2 TYPICAL ROOF EAVE

NTS

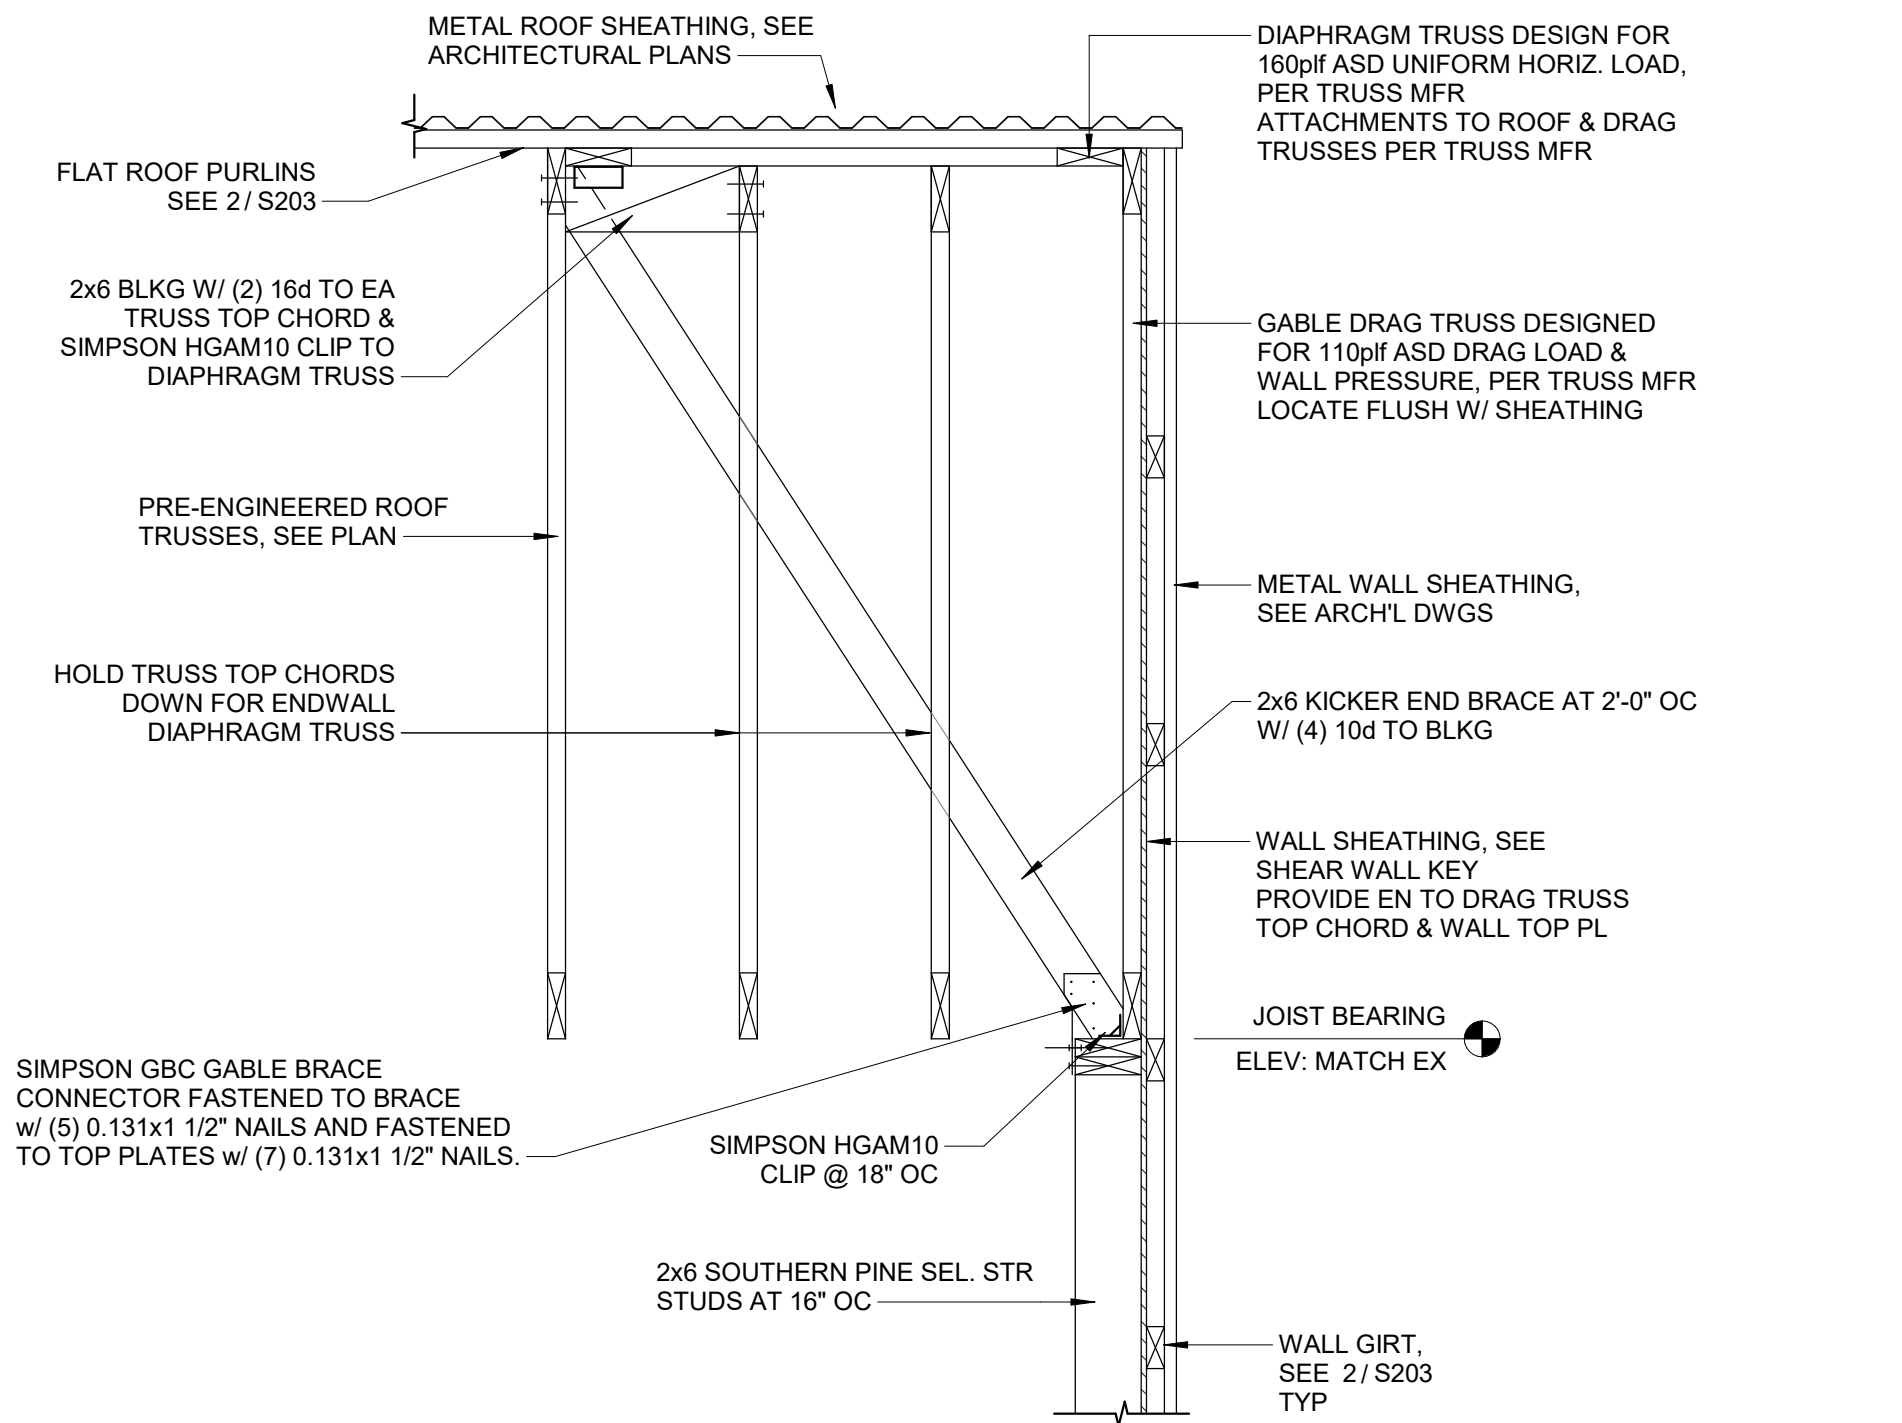

3 ROOF GABLE SECTION

NTS

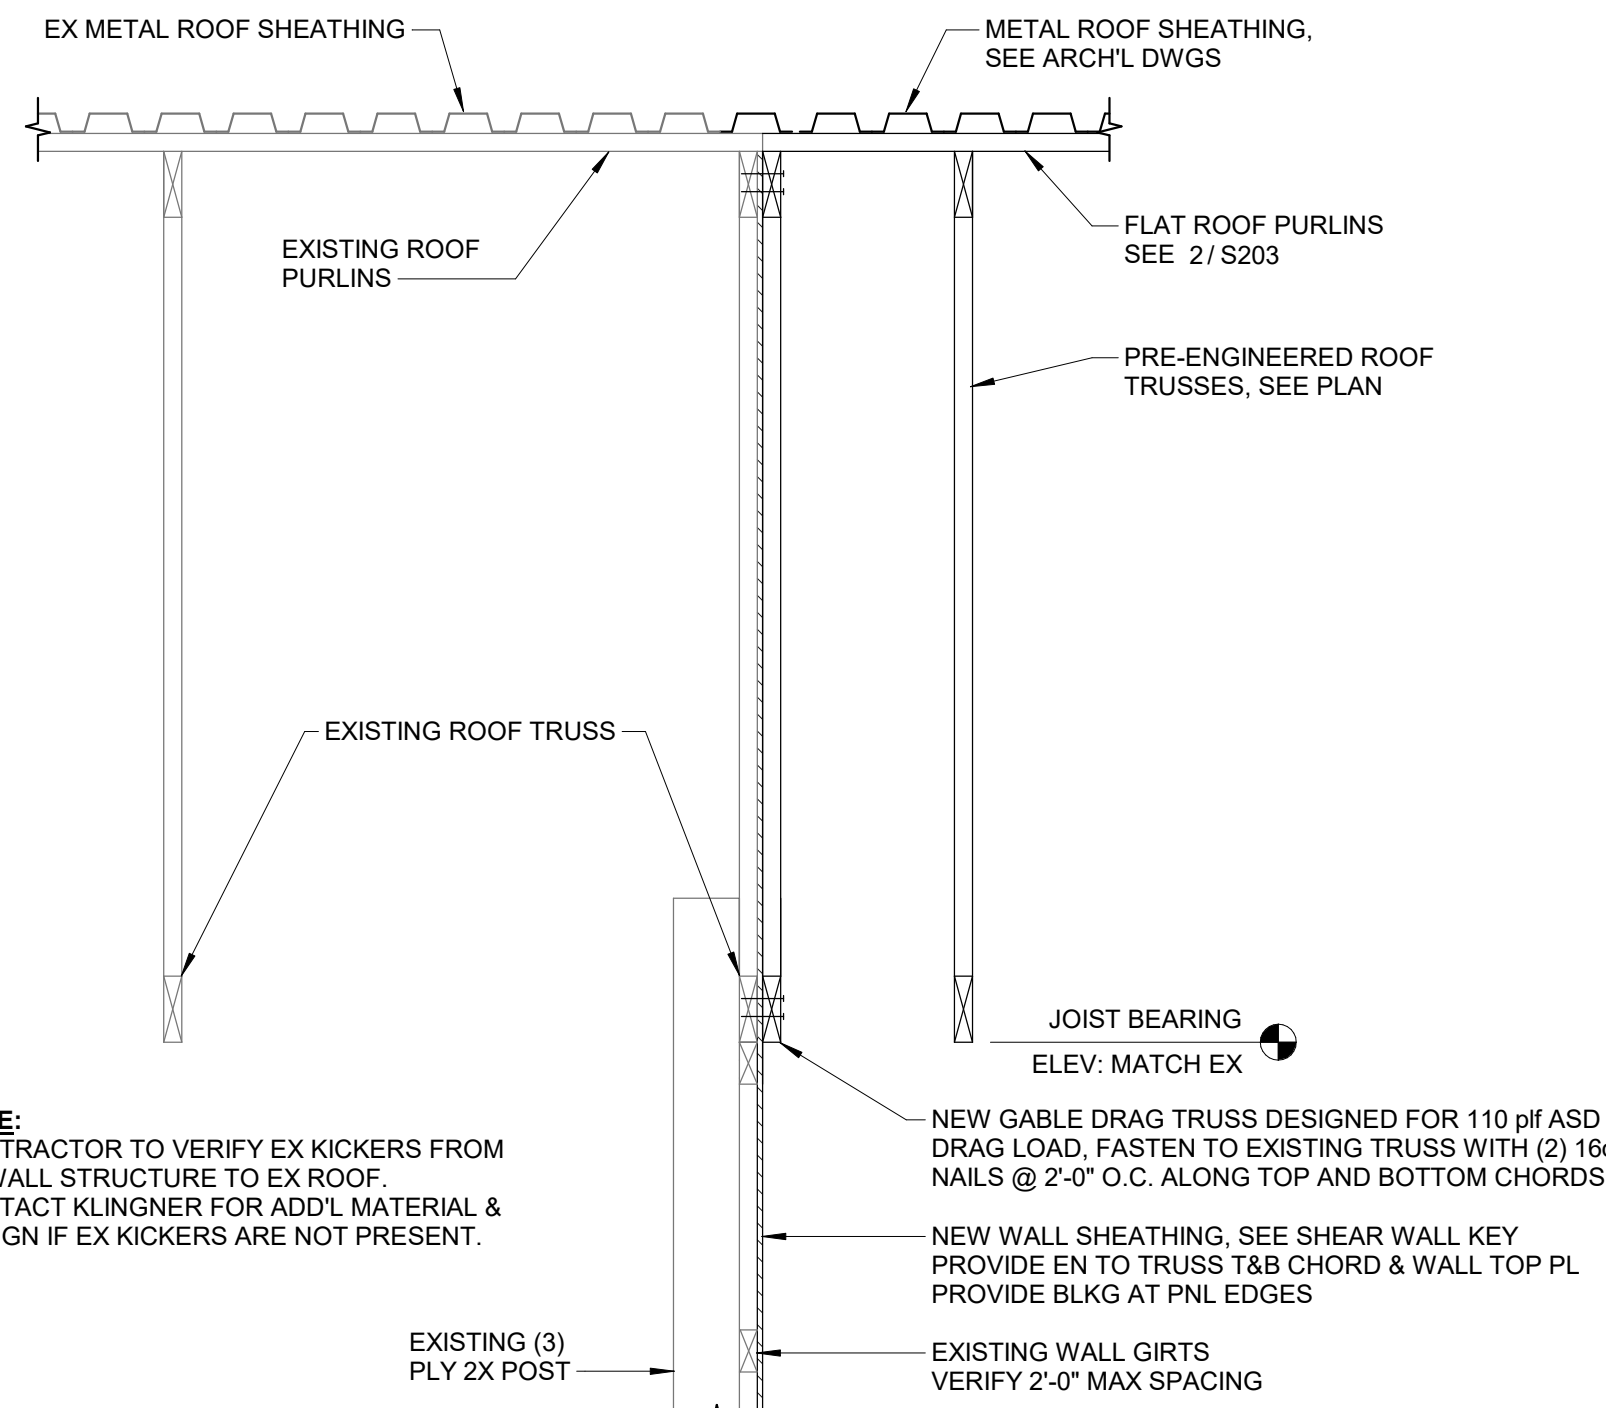


NOTE:
CONTRACTOR TO VERIFY EX KICKERS FROM
EX WALL STRUCTURE TO EX ROOF.
CONTACT KLINGNER FOR ADD'L MATERIAL &
DESIGN IF EX KICKERS ARE NOT PRESENT.

4 ROOF CONNECTION TO EXISTING

NTS

STATE OF MISSOURI
MIKE KEHOE,
GOVERNOR

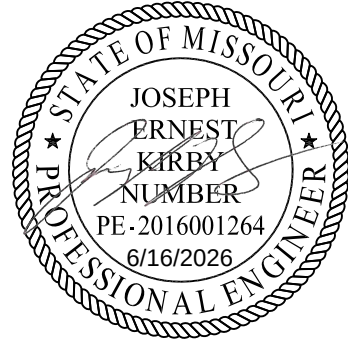

JOSEPH E. KIRBY - ENGINEER
MO # PE-2016001264

KLINGNER
& ASSOCIATES, P.C.

Engineers • Architects • Surveyors

Columbia, Missouri
3622 Endeavor Ave., Suite 117
573.355.5988

Quincy, IL 62455
Burlington, IA 50832
Hannibal, MO 65683

www.klingner.com

MISSOURI STATE CERTIFICATE OF AUTHORITY #2001010108

OFFICE OF ADMINISTRATION
DIVISION OF FACILITIES
MANAGEMENT,
DESIGN AND CONSTRUCTION

JEFFERSON CITY
READINESS CENTER

CIVIL SUPPORT TEAM
BUILDING ADDITION

1225 COOPER DRIVE
JEFFERSON CITY, MO 65101

PROJECT # T2147-01
SITE # 6298
ASSET # 8136298008

REVISION:
DATE:
REVISION:
DATE:
REVISION:
DATE:
ISSUE DATE:06/12/2026

CAD DWG FILE: S203
DRAWING BY: AMB/WPH/JEK
CHECKED BY: KTH/JEK
DESIGNED BY: WPH/JEK


SHEET TITLE:

ROOF PLAN - ALT
#1


SHEET NUMBER:

S203

SHEET 55 OF 85
JUNE 12, 2026

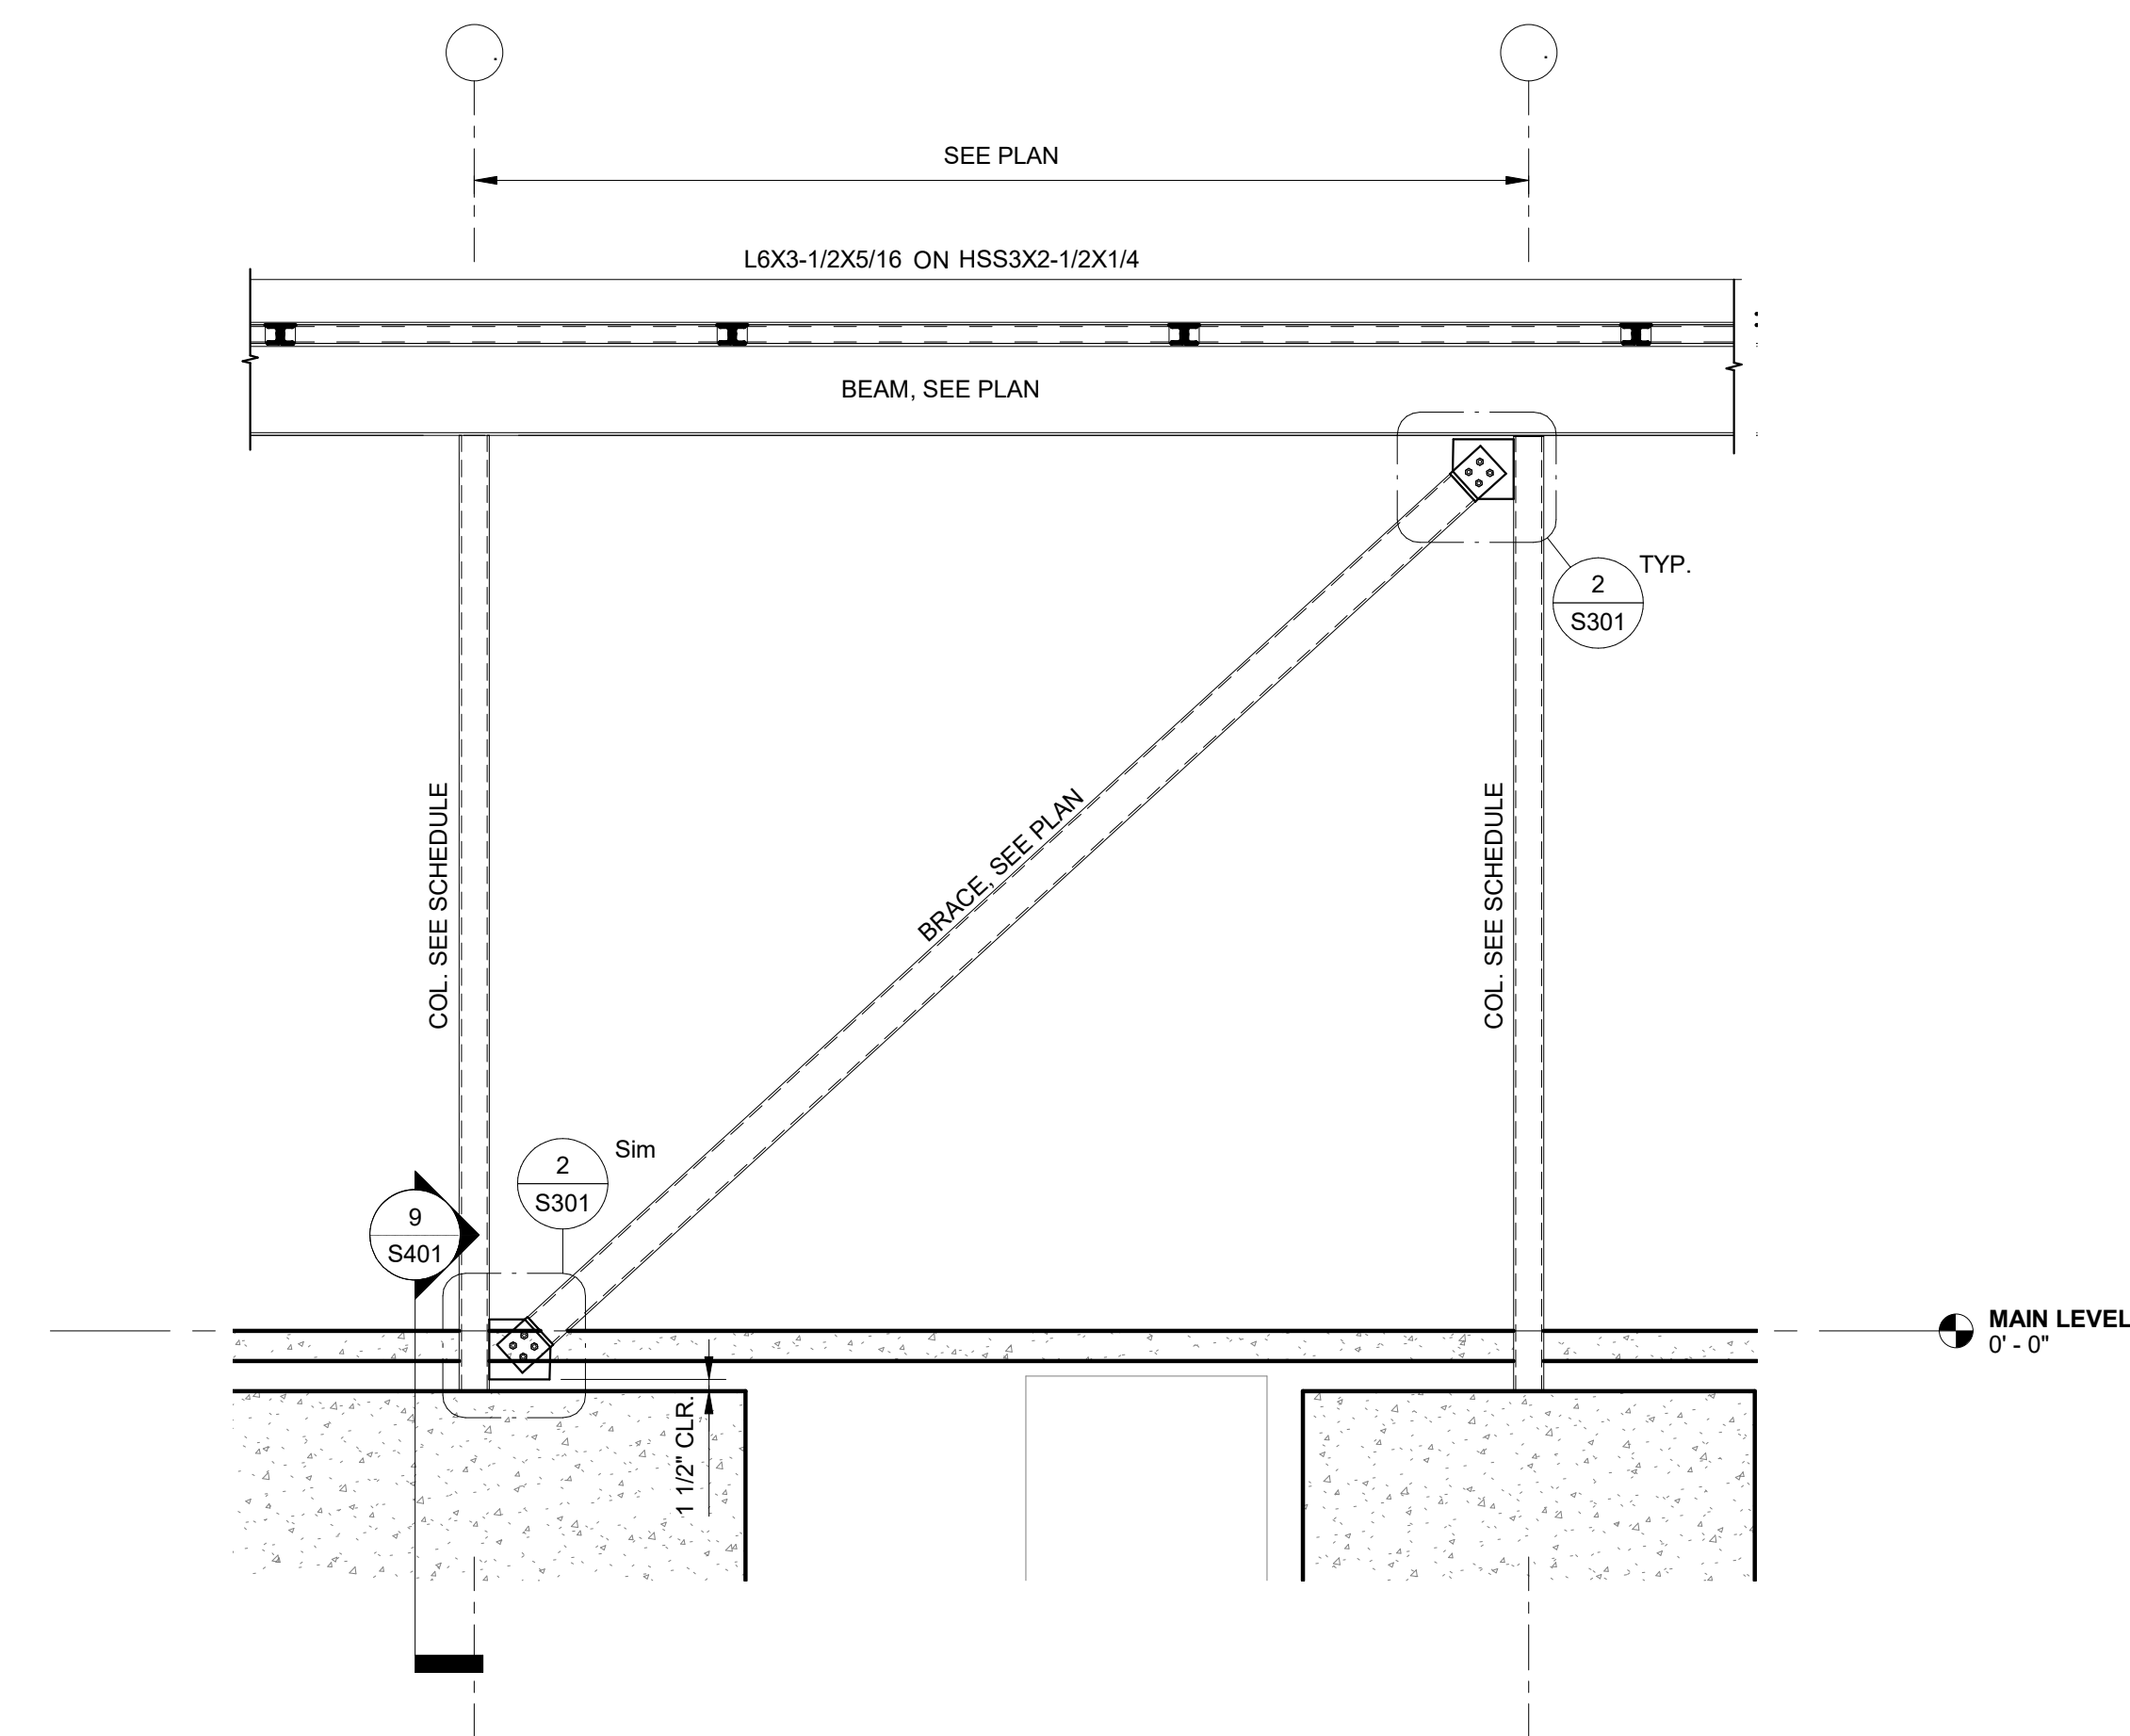

1 SFRS HSS BRACE
1/2" = 1'-0"

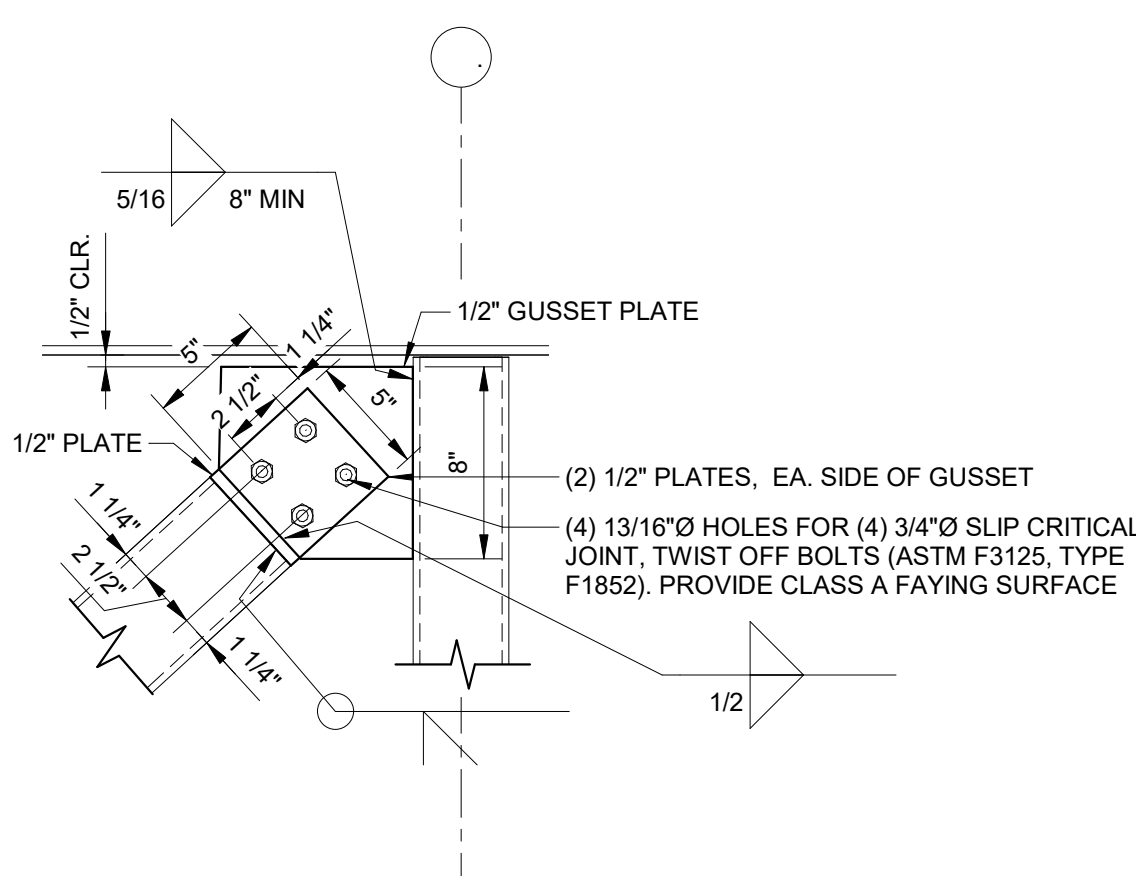

2 TYP. SFRS BRACE CONNECTION
1 1/2" = 1'-0"

STATE OF MISSOURI
MIKE KEHOE,
GOVERNOR



FOSTER T POPKEN - ENGINEER
MO # PE-2026014880

KLINGNER
& ASSOCIATES, P.C.

Engineers • Architects • Surveyors

Columbia, Missouri
3622 Endeavor Ave, Suite 117
Burlington, IA Pella, IA Hannibal, MO Galveston, IL

www.klinger.com
573.355.5988

KLINGNER & ASSOCIATES, P.C. - ARCHITECTURE
MISSOURI STATE CERTIFICATE OF AUTHORITY #2001010108

OFFICE OF ADMINISTRATION
DIVISION OF FACILITIES
MANAGEMENT,
DESIGN AND CONSTRUCTION

JEFFERSON CITY
READINESS CENTER

CIVIL SUPPORT TEAM
BUILDING ADDITION

1225 COOPER DRIVE
JEFFERSON CITY, MO 65101

PROJECT # T2147-01
SITE # 6298
ASSET # 8136298008

REVISION: _____
DATE: _____
REVISION: _____
DATE: _____
REVISION: _____
DATE: _____

ISSUE DATE:06/12/2026

CAD DWG FILE: S301
DRAWING BY: FTP
CHECKED BY: JEK
DESIGNED BY: FTP

SHEET TITLE:

**FRAMING
ELEVATIONS**

SHEET NUMBER:

S301

SHEET 56 OF 85
JUNE 12, 2026



KLINGNER
& ASSOCIATES, P. C.
Engineers • Architects • Surveyors


Engineers • Architects • Surveyors


Columbia, Missouri

3622 Endeavor Ave, Suite 117
Quincy, IL Cape Girardeau, MO
573.365.5988
Burlington, IA Pella, IA Hannibal, MO Galesburg, IL

www.klingner.com




SHEET 57 OF 85
JUNE 12, 2026

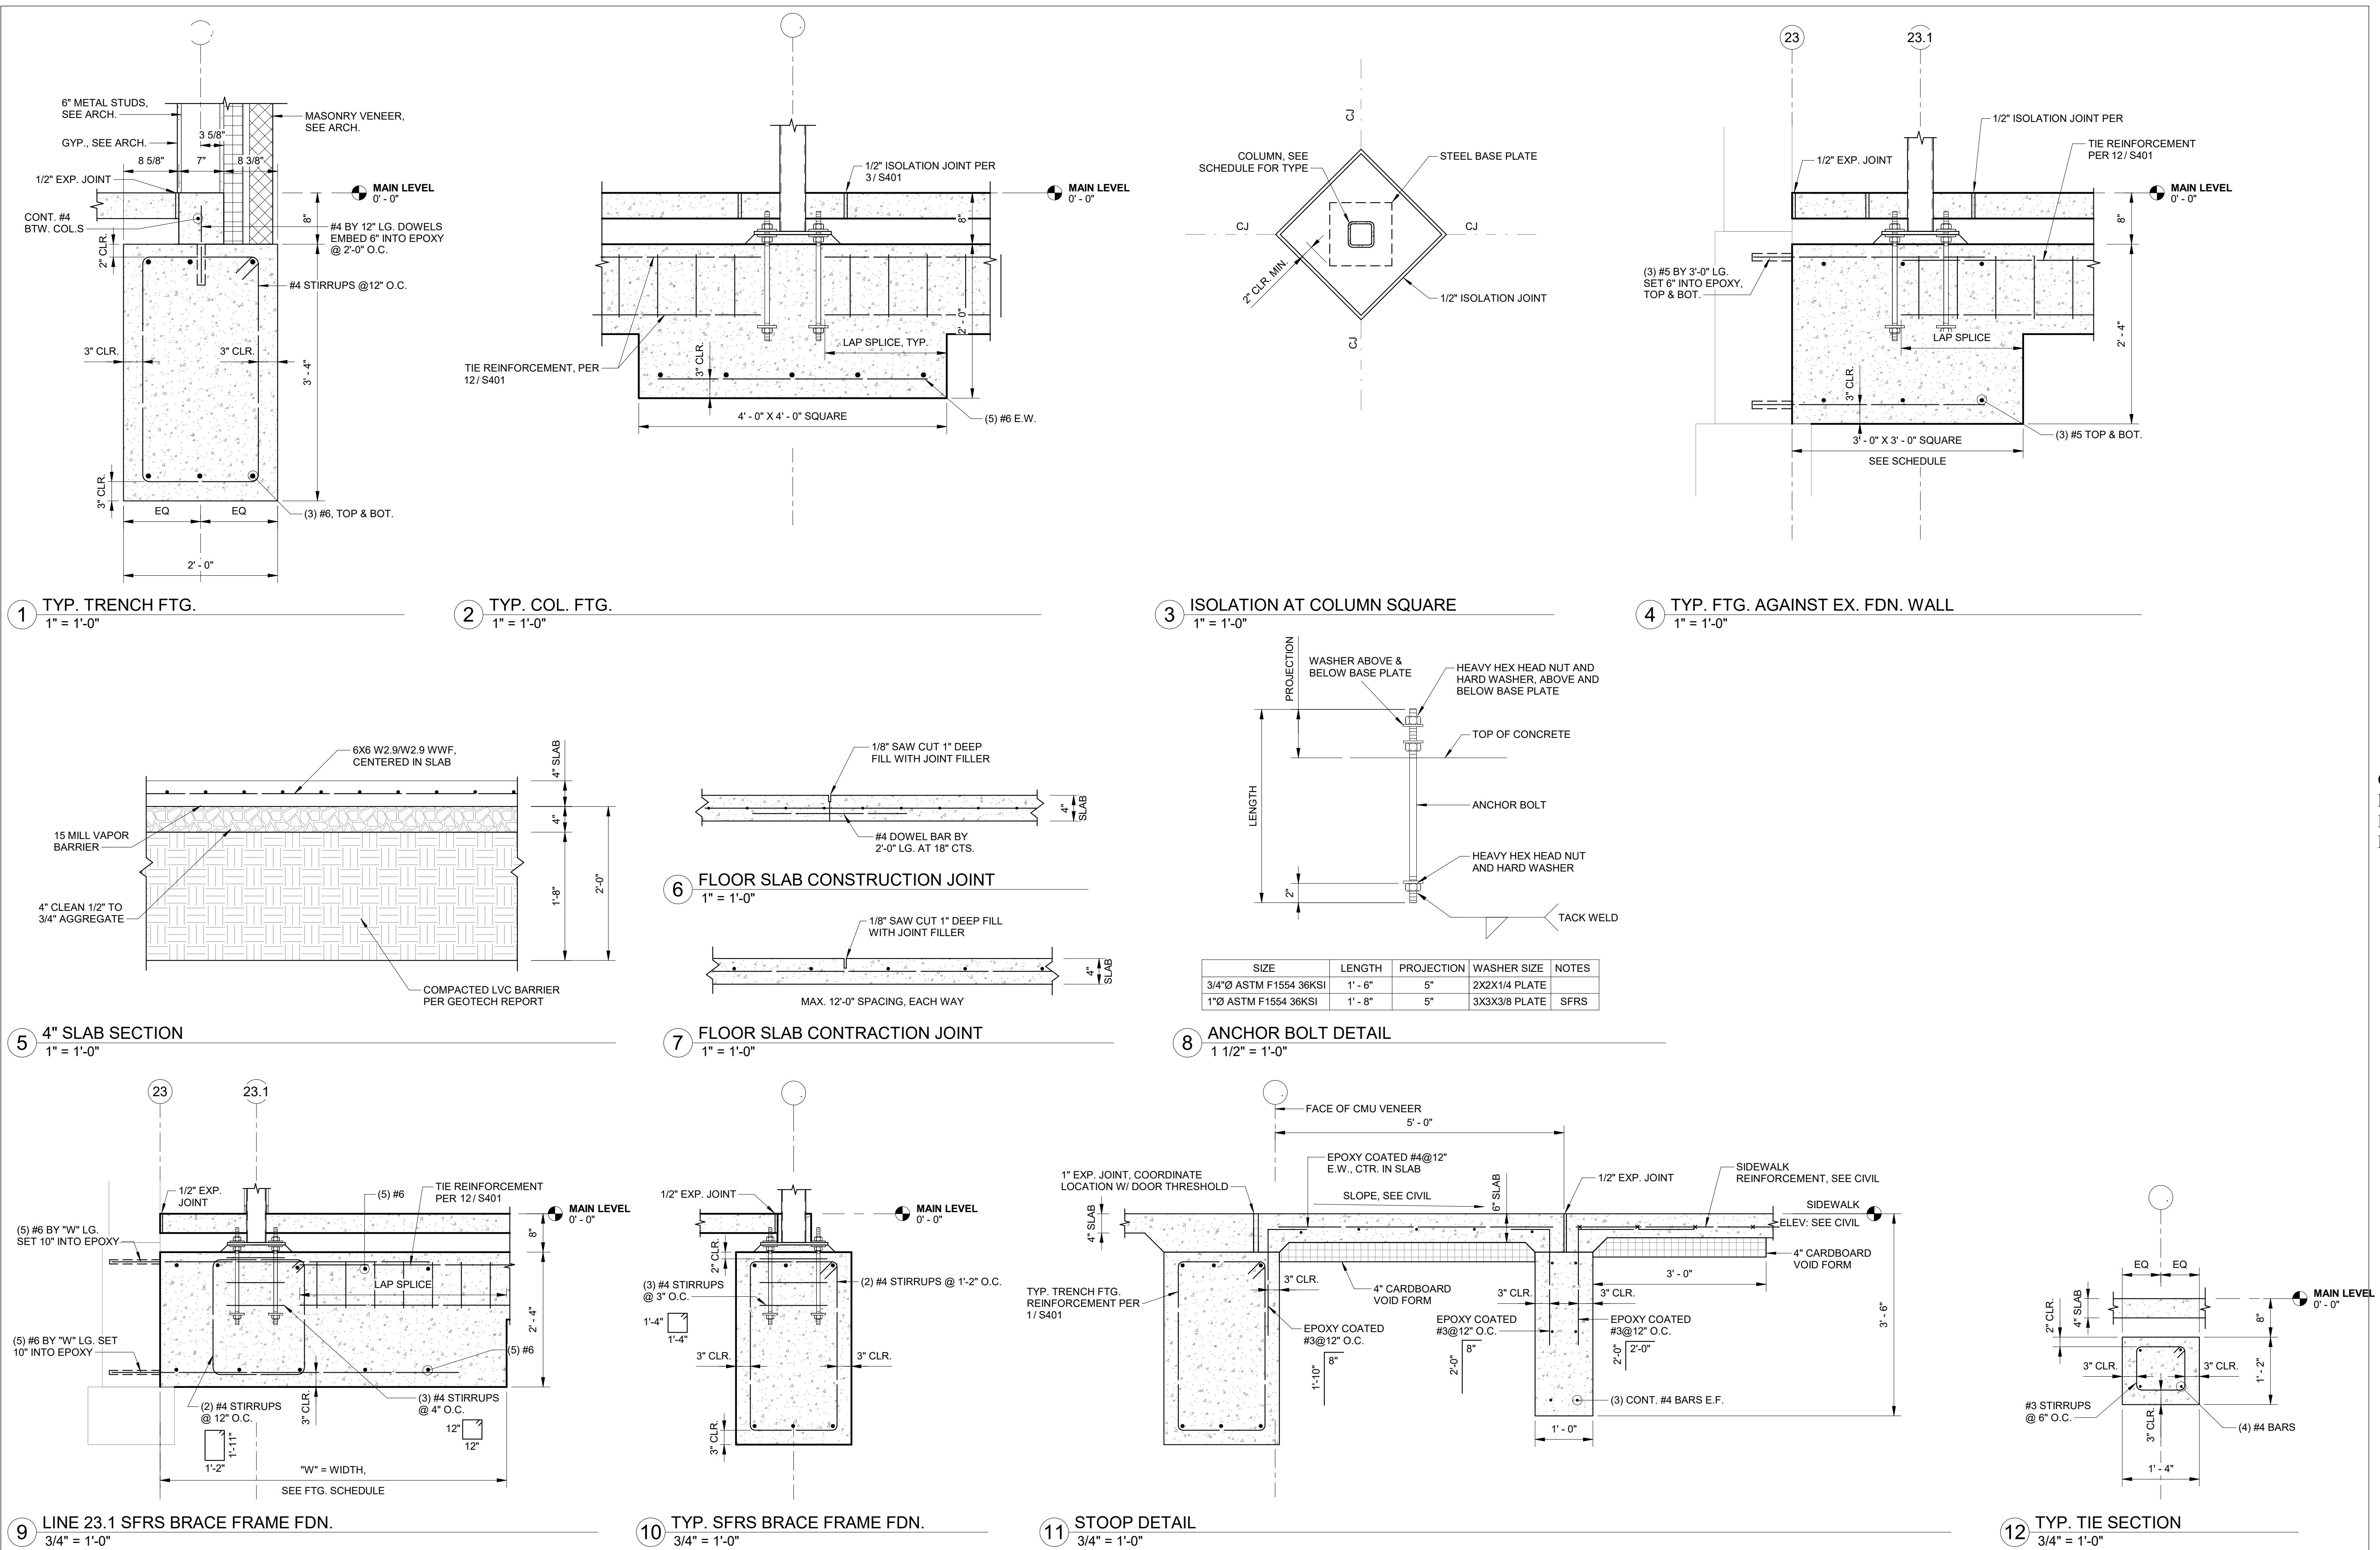



NOTES:

1. ALL BOLTS (UNLESS OTHERWISE NOTED) ARE SNUG-TIGHT 3/4" Ø A325-N BOLTS IN 13/16" Ø HOLES. SHORT SLOTTED HOLES ARE PERMITTED IF TYPE F1852 BOLTS ARE PRETENSIONED.
2. SPACE ROWS OF BOLTS AT 3" OC
3. PROVIDE 1 1/4" MINIMUM EDGE DISTANCES
4. THE NUMBER OF ROWS ARE BASED ON THE SHALLOWER STEEL BEAM IN THE CONNECTION.
5. SUBTRACT ONE ROW OF BOLTS WHERE TOP OF STEEL DIFFERS BY 2 1/2".

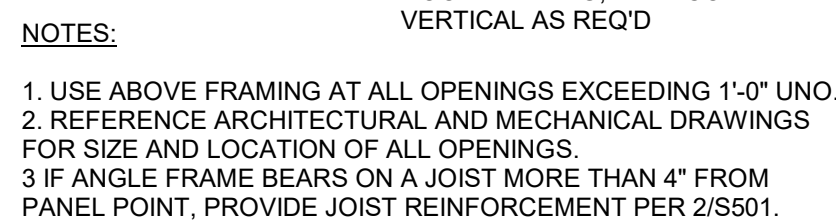

KLINGNER
& ASSOCIATES, P. C.
Engineers • Architects • Surveyors

Engineers • Architects • Surveyors

Columbia, Missouri
3622 Endeavor Ave, Suite 117
573.365.5988

www.klingner.com
Quincy, IL Cape Girardeau, MO
Hannibal, MO Galesburg, IL
Burlington, IA Pella, IA


**JEFFERSON CITY
READINESS CENTER**

**1225 COOPER DRIVE
JEFFERSON CITY, MO 65101**

ASSET # 8136298008


ISSUE DATE:06/12/2026

JUNE 12, 2026

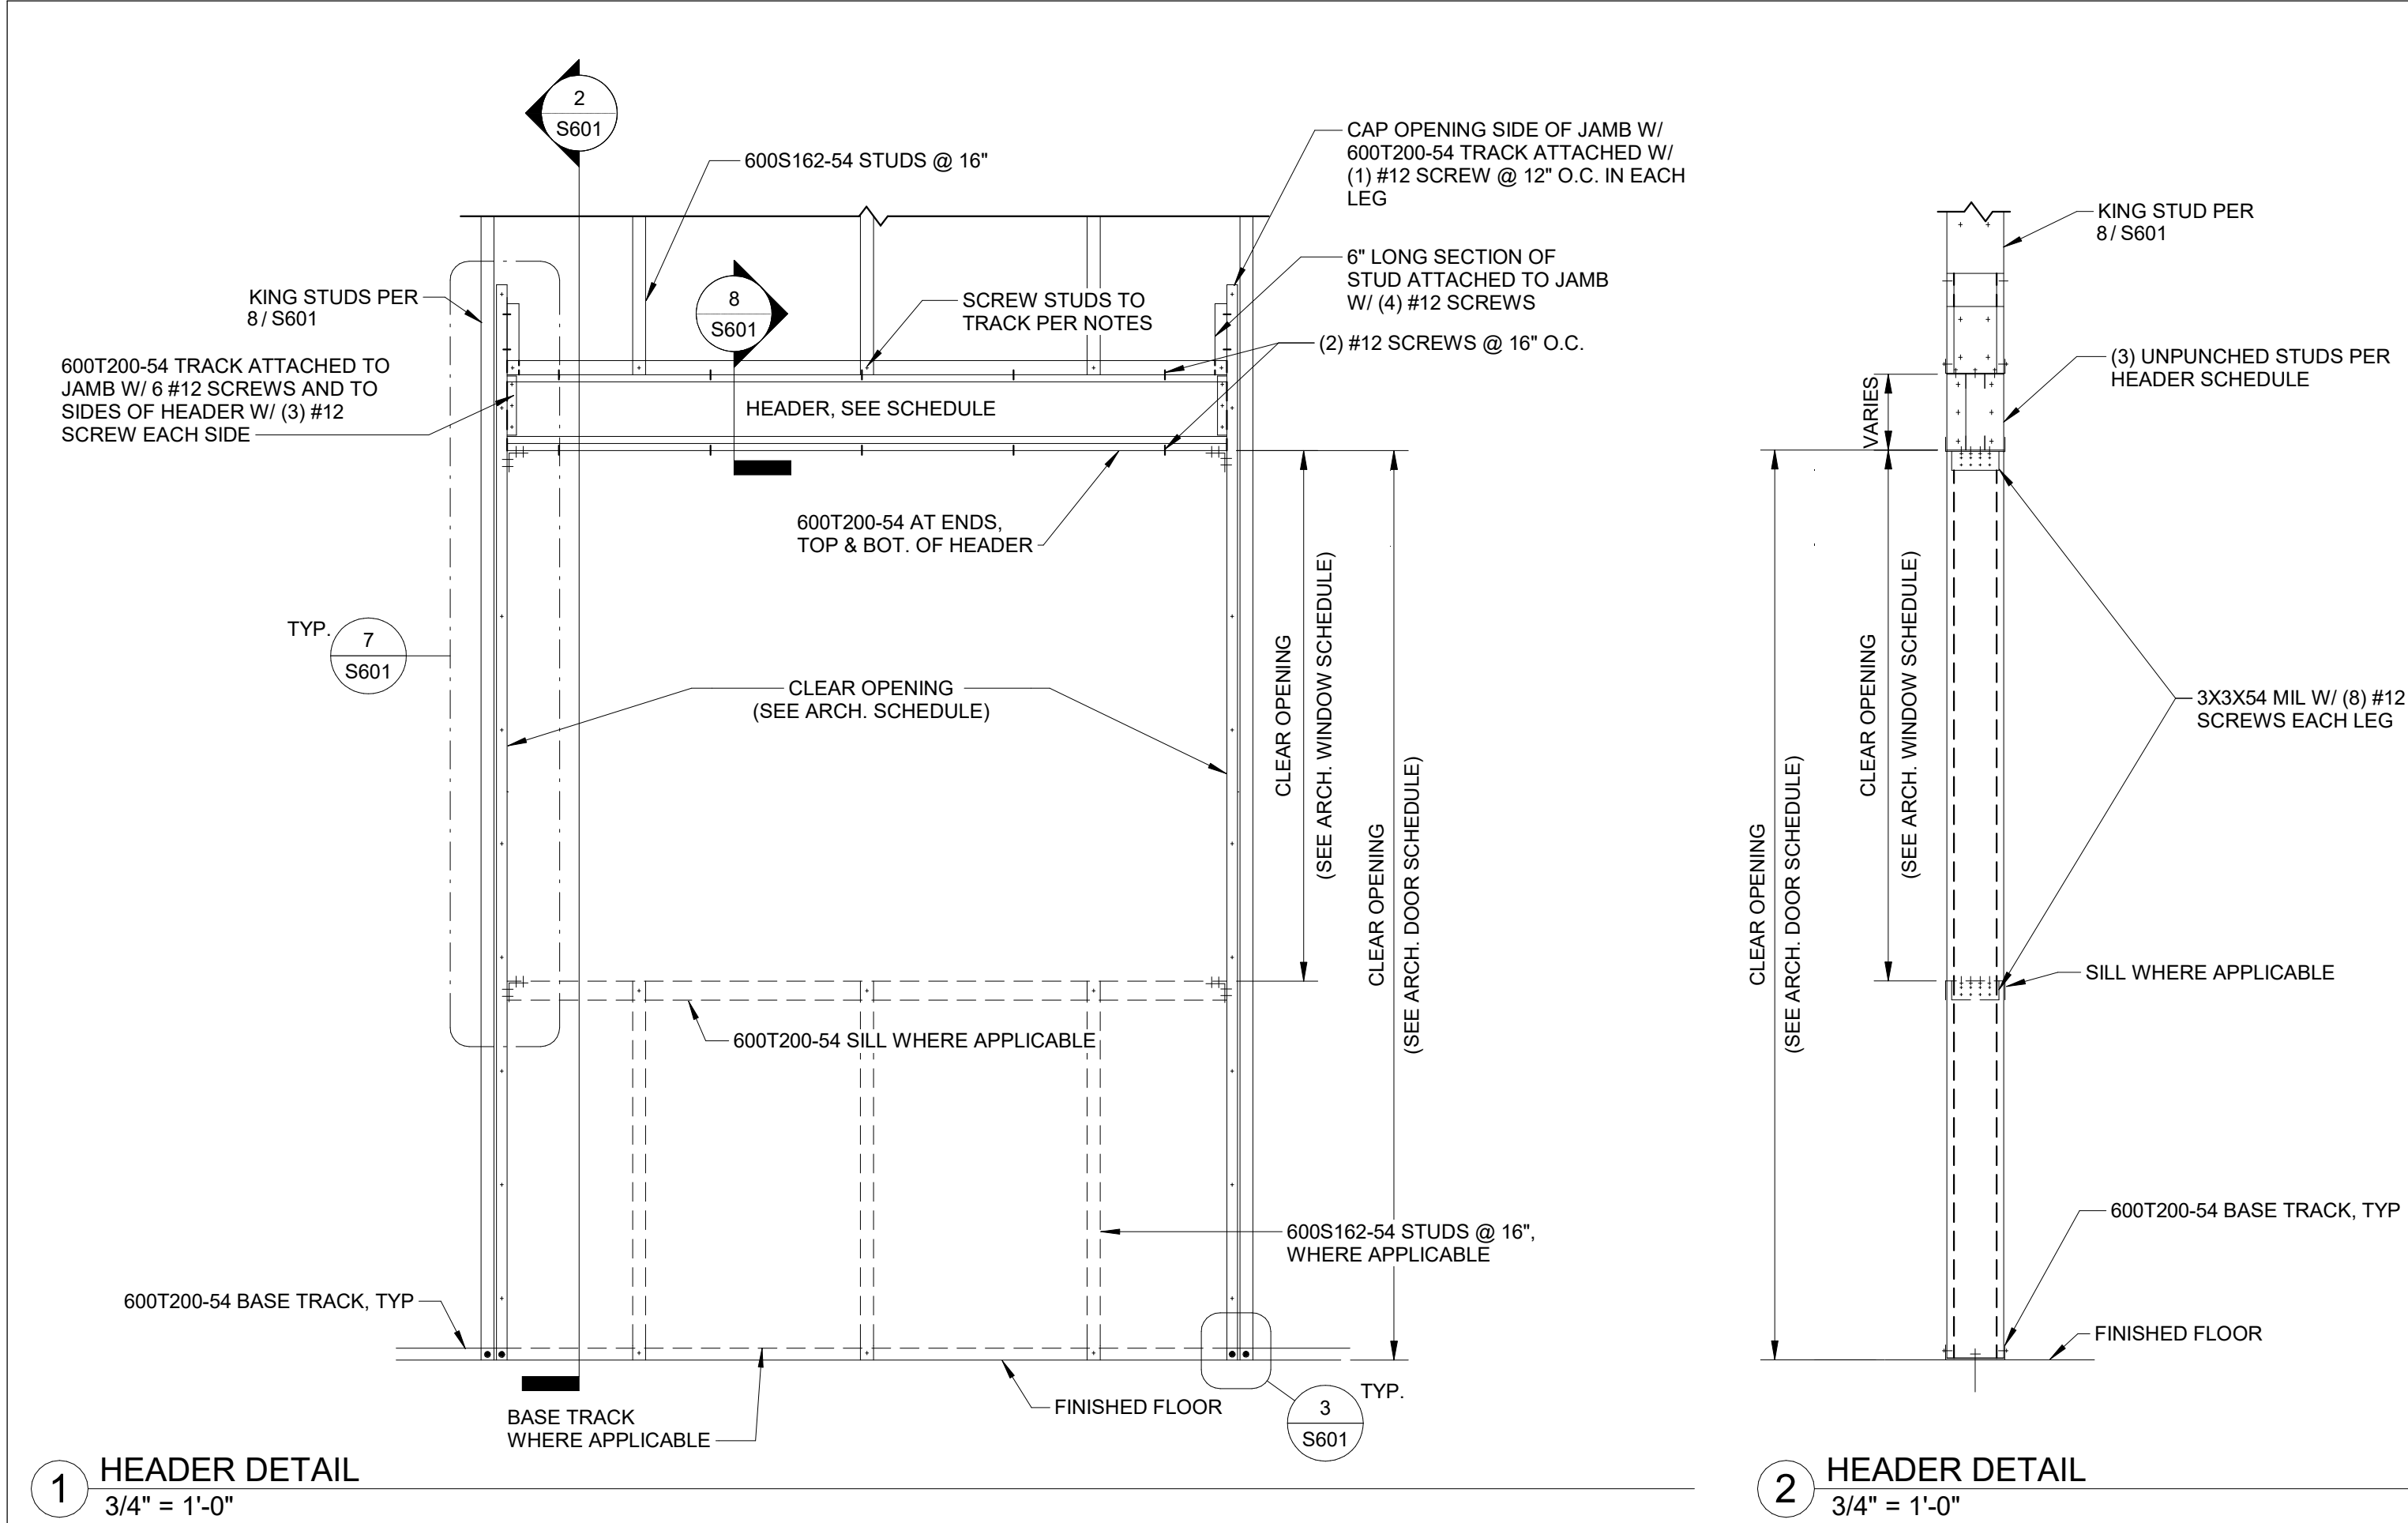


1 HEADER DETAIL
3/4" = 1'-0"


2 HEADER DETAIL
3/4" = 1'-0"

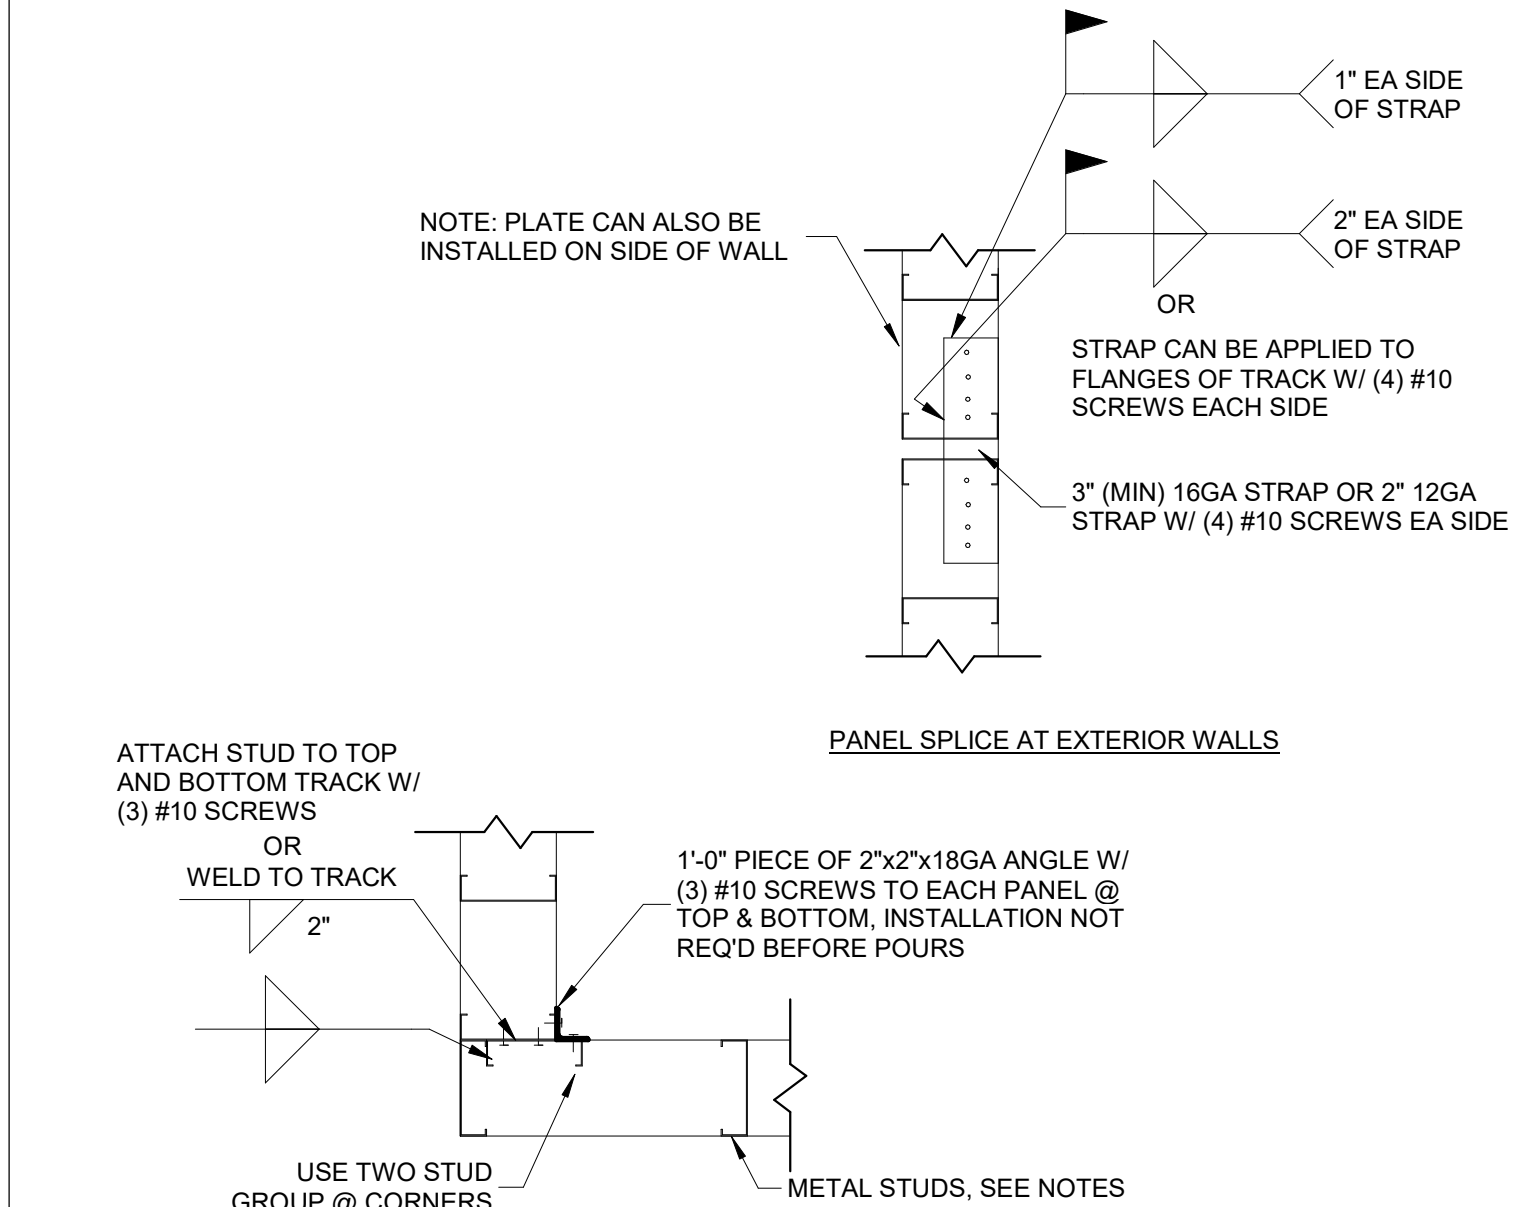

6 CORNER STUDS & PANEL SPLICE @ EXT WALL
1" = 1'-0"

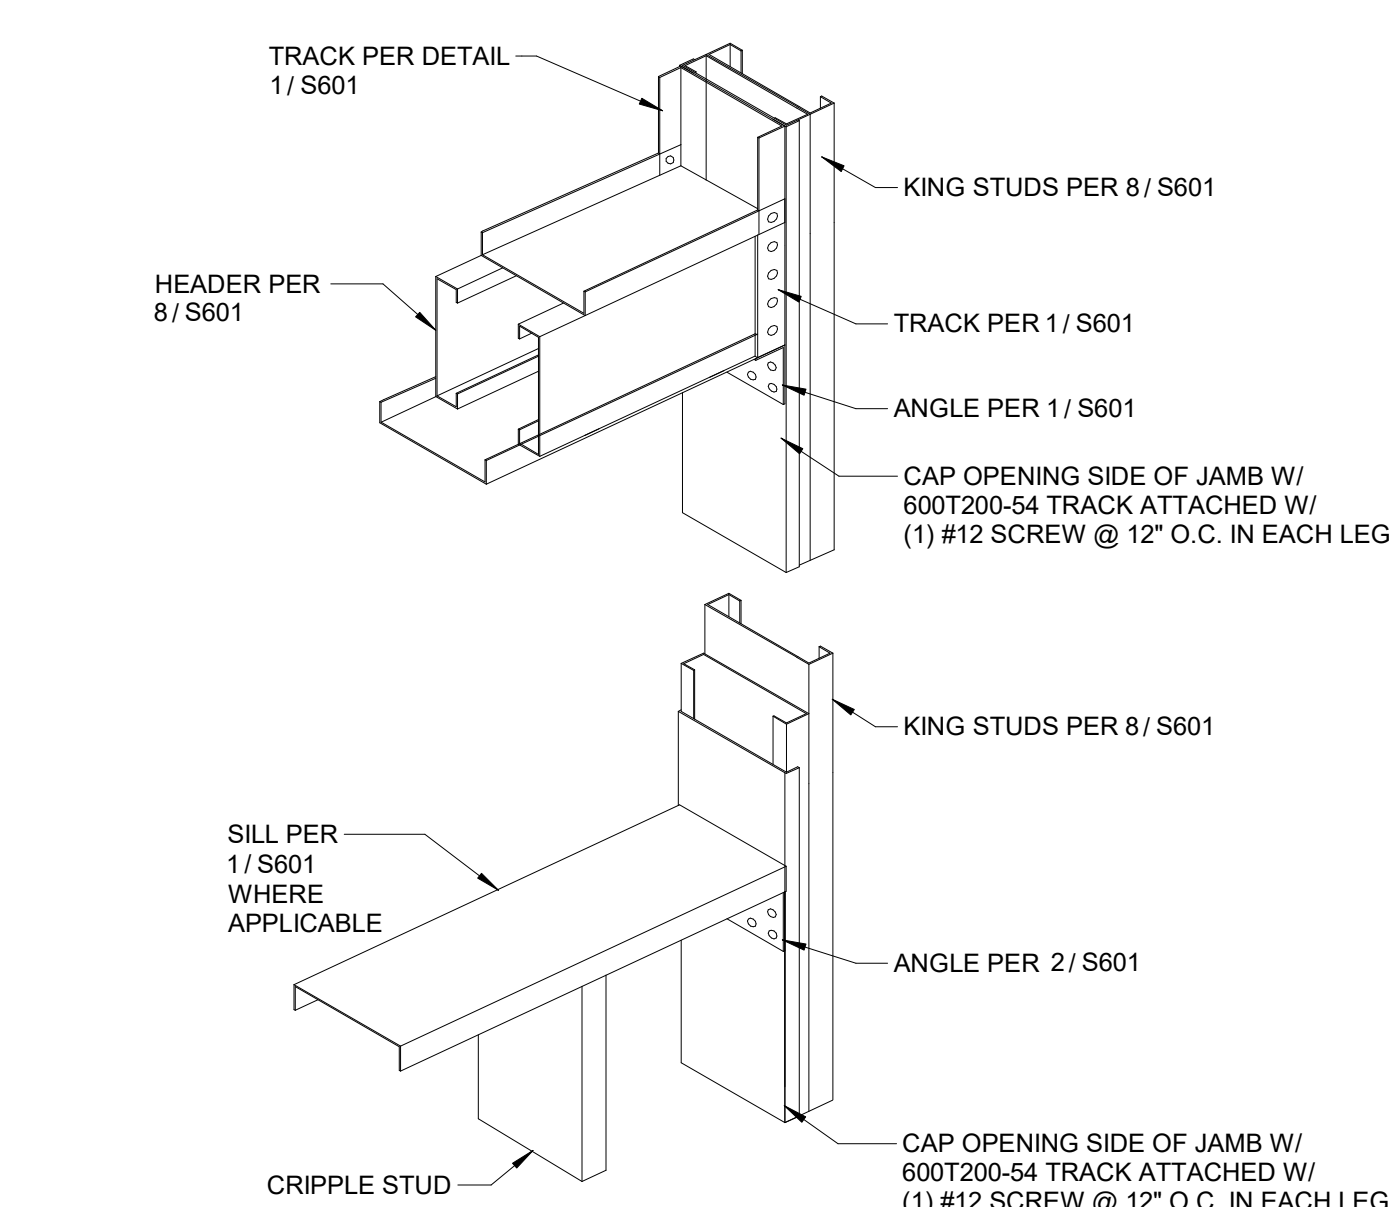


7 HEADER/SILL/KING CONNECTION
1" = 1'-0"

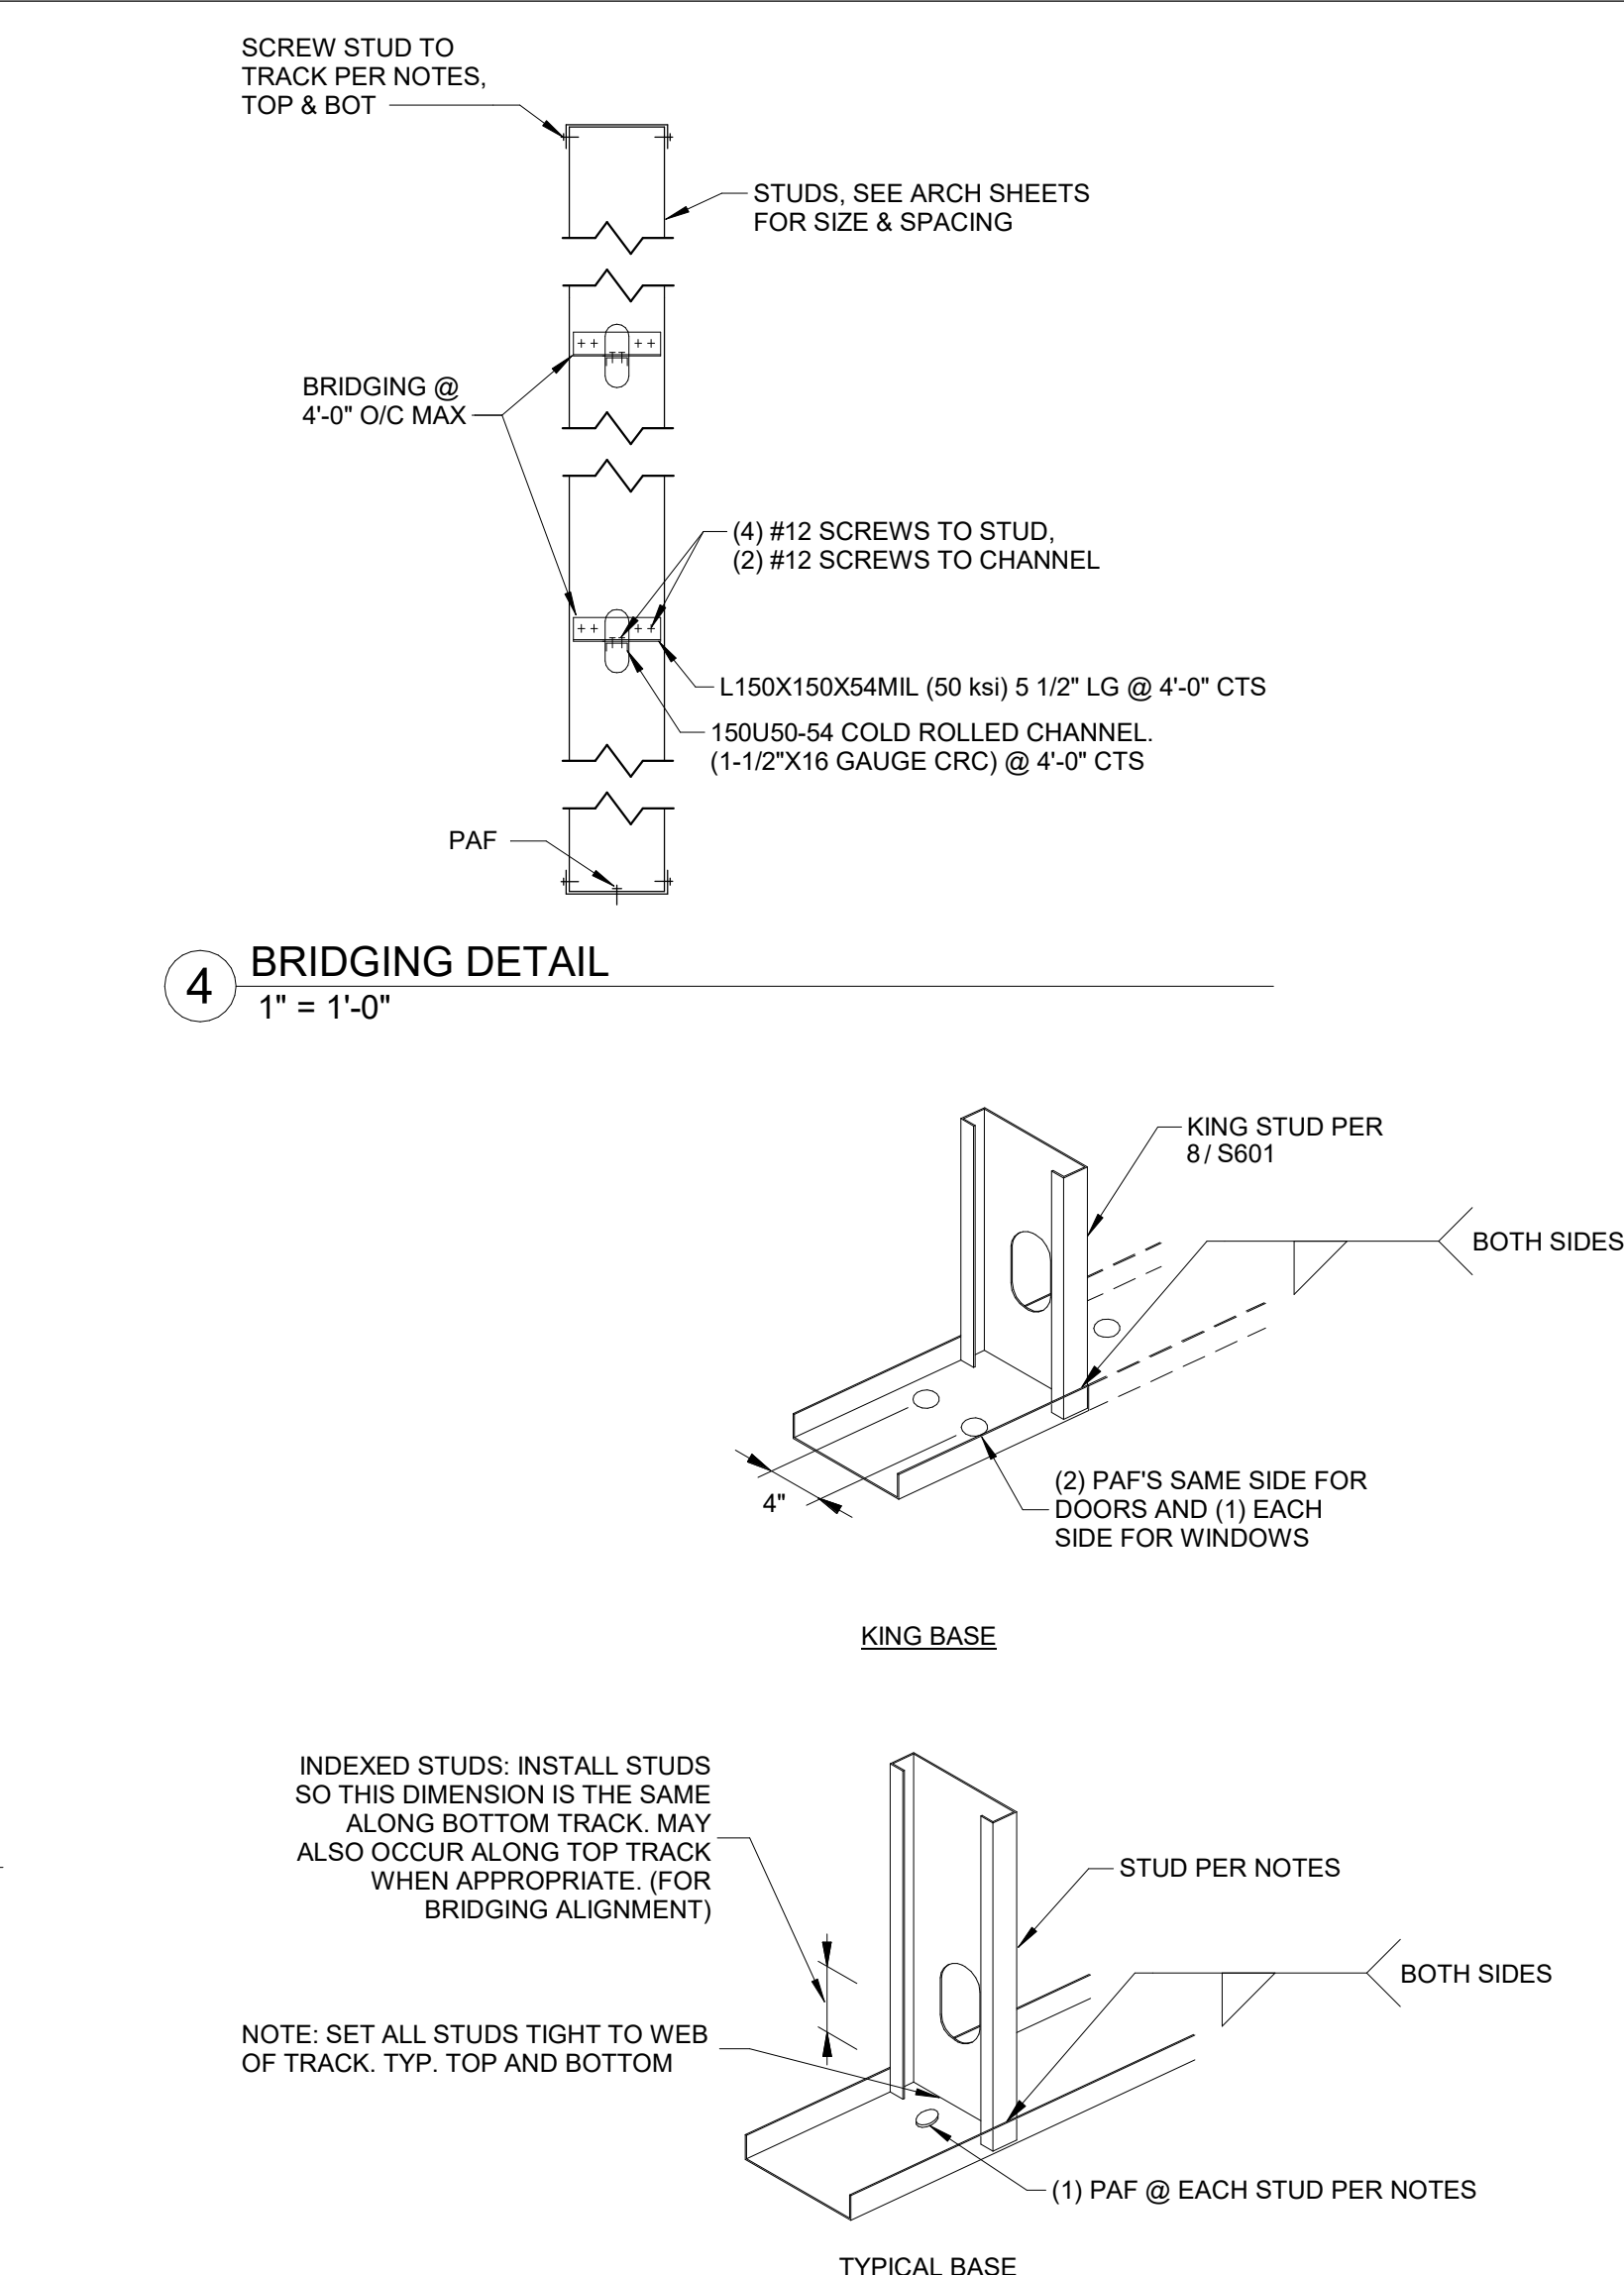

4 BRIDGING DETAIL
1" = 1'-0"

3 BASE CONNECTION DETAIL
1" = 1'-0"

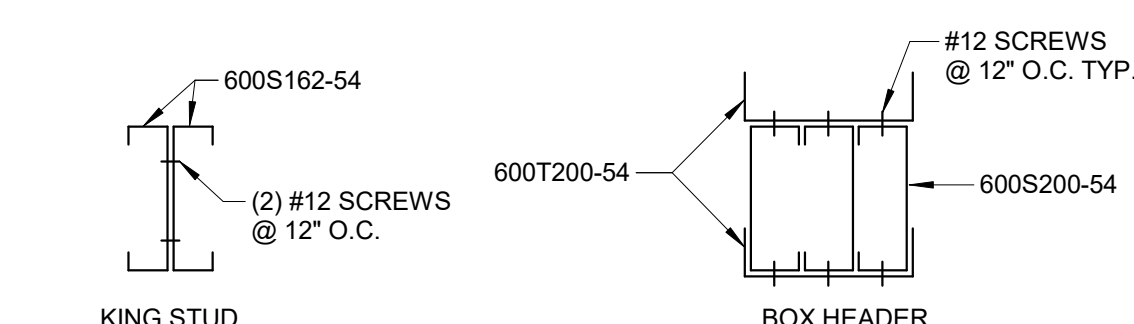

8 TYP. BUILD UP MEMBERS
1 1/2" = 1'-0"

STATE OF MISSOURI
MIKE KEHOE,
GOVERNOR



FOSTER T POPKEN - ENGINEER
MO # PE-2026014880

**KLINGNER
& ASSOCIATES, P.C.**

Engineers • Architects • Surveyors

Columbia, Missouri

3622 Endeavor Ave, Suite 117
Burlington, IA 50801

Quincy, IL Cape Girardeau, MO
573.355.5988

KLINGNER & ASSOCIATES, P.C. - ARCHITECTURE
MISSOURI STATE CERTIFICATE OF AUTHORITY #2001010108

OFFICE OF ADMINISTRATION
DIVISION OF FACILITIES
MANAGEMENT,
DESIGN AND CONSTRUCTION

JEFFERSON CITY
READINESS CENTER

CIVIL SUPPORT TEAM
BUILDING ADDITION

1225 COOPER DRIVE
JEFFERSON CITY, MO 65101

PROJECT # T2147-01
SITE # 6298
ASSET # 8136298008

REVISION: _____
DATE: _____
REVISION: _____
DATE: _____
REVISION: _____
DATE: _____
ISSUE DATE: 06/12/2026

CAD DWG FILE: S601
DRAWING BY: FTP
CHECKED BY: JEK
DESIGNED BY: FTP

SHEET TITLE:

**COLD-FORM
DETAILS**

SHEET NUMBER:

S601

SHEET 60 OF 85
JUNE 12, 2026

GENERAL FIRE PROTECTION NOTES:

1. THE INFORMATION PROVIDED ON THE FIRE PROTECTION DRAWINGS IS INTENDED TO SERVE AS THE "PRELIMINARY PLANS" FOR THE PROJECT AS DEFINED BY NFPA 13 FOR THE PURPOSE OF PRELIMINARY BUILDING PERMIT APPROVAL AND CONSTRUCTION BIDDING. "WORKING PLANS", IN ACCORDANCE WITH THE "HYDRAULIC CALCULATION METHODS" DEFINED BY NFPA 13, SHALL BE DEVELOPED BY THE CONTRACTOR AND APPROVED BY THE ENGINEER AND THE AUTHORITY HAVING JURISDICTION PRIOR TO THE PURCHASE OR INSTALLATION OF ANY FIRE PROTECTION SYSTEM EQUIPMENT.
2. THE CONTRACTOR IS RESPONSIBLE FOR REVIEWING ALL DRAWINGS ASSOCIATED WITH THE PROJECT TO UNDERSTAND BUILDING COMPONENTS AND ARRANGEMENTS (INCLUDING CONCEALED SPACES THAT COULD IMPACT THE FINAL DESIGN OF THE FIRE SPRINKLER SYSTEM).
3. ALL AREAS OF THE BUILDING SHALL BE PROVIDED WITH SPRINKLERS EXCEPT WHERE SPRINKLER OMISSION IS PERMITTED BY NFPA 13.
4. PRELIMINARY FLOW ANALYSIS HAS DETERMINED THAT A FIRE PUMP IS NOT REQUIRED FOR THE PROPOSED FIRE PROTECTION SYSTEM. CONTRACTOR SHALL NOTIFY THE ENGINEER DURING HE BIDDING PERIOD IF THEY BELIEVE A FIRE PUMP IS REQUIRED.
5. FLOW TEST INFORMATION SHALL BE USED FOR BIDDING PURPOSES ONLY. FIRE SPRINKLER CONTRACTOR IS RESPONSIBLE FOR PERFORMING FLOW TEST FOR FIRE SPRINKLER DESIGN PURPOSES.
6. COORDINATE SPRINKLER HEAD LOCATIONS WITH LIGHTING FIXTURES, OCCUPANCY SENSORS, AND HVAC DIFFUSERS. SPRINKLER HEADS INSTALLED IN SUSPENDED ACOUSTICAL TILE CEILINGSS SHALL BE IN THE CENTER OF THE TILE.
7. SEE ARCHITECTURAL SHEET FOR FIRE RATED CONSTRUCTION LOCATIONS. ALL PIPE PENETRATIONS IN FIRE RATED CONSTRUCTION SHALL BE UL LISTED OF EQUAL OR GREATER HOUR RATING.
8. CONTRACTOR SHALL PROVIDE DESIGN DRAWINGS, STAMPED AS HAVING BEEN APPROVED BY THE FIRE RATING BUREAU HAVING JURISDICTION, SHOWING THE COMPLETE OVERHEAD SPRINKLER SYSTEM AND INDICATING CEILING AIR DIFFUSERS, LIGHTING FIXTURES, AND BEAMS.
9. FIRE SPRINKLER SUBMITTAL SHALL SHOW SPRINKLER HEAD LOCATIONS ON A REFLECTED CEILING PLAN WHICH SHOWS ALL LIGHT FIXTURES, OCCUPANCY SENSORS, HVAC EQUIPMENT, PROJECTORS, AND FIRE ALARM DEVICES. SPRINKLER HEAD LOCATIONS TO BE APPROVED BY THE ARCHITECT.
10. UPON COMPLETION OF THE INSTALLATION, PROVIDE NECESSARY PERSONNEL AND EQUIPMENT TO TEST AND RETEST THE COMPLETE SYSTEM, MAKING ADJUSTMENTS AS REQUIRED, AND SECURE ALL NECESSARY APPROVALS.
11. WHEN THE SYSTEM HAS BEEN COMPLETELY APPROVED, SECURE A LETTER OF FINAL ACCEPTANCE FROM THE FIRE RATING BUREAU HAVING JURISDICTION, AND FORWARD ELECTRONIC COPY OF THE LETTER TO THE ARCHITECT.

GENERAL PLUMBING NOTES:

1. ALL WORK SHALL COMPLY WITH APPLICABLE LOCAL, STATE, AND NATIONAL CODES AND REGULATIONS.
2. MATERIALS MUST BE NEW, IN FIRST CLASS CONDITION
3. PIPE INSTALLATION SHALL BE COORDINATED WITH OTHER TRADES.
4. PIPING SHALL BE SEPARATELY HUNG AND ANCHORED, FREE TO EXPAND AND CONTRACT QUIETLY, WITHOUT IMPOSING STRAINS ON STRUCTURE, PIPING, VALVES, DEVICES, AND EQUIPMENT. PIPING SHALL BE RUN PARALLEL OR PERPENDICULAR TO BUILDING LINES.
5. CONNECTIONS BETWEEN DISSIMILAR METALS SHALL BE SEPARATED BY DIELECTRIC COUPLINGS
6. CONTRACTOR SHALL PERFORM EXCAVATION REQUIRED TO INSTALL HIS WORK.
7. PIPING, ETC., SHALL BE TESTED TO AT LEAST 125 PSI.
8. PIPE HANGERS AND SUPPORTS SHALL MEET THE LOCAL SEISMIC REQUIREMENTS.
9. PROVIDE BALL VALVE ON PIPES TO EACH GROUP OF FIXTURES OR TO EACH PIECE OF EQUIPMENT.
10. PLUMBING CONTRACTOR SHALL PROVIDE FLEXIBLE CONNECTOR AND MAKE FINAL CONNECTION TO HEATING EQUIPMENT PROVIDED BY MECHANICAL CONTRACTOR.
11. LOCATE ALL SHUT-OFFS, CLEANOUTS, AND OTHER DEVICES REQUIRING ACCESS IN AN EASILY ACCESSIBLE AREA.
12. DRAWINGS ARE SCHEMATIC AND SHOW APPROXIMATE LOCATIONS OF PIPING. EXACT LOCATIONS SHALL BE COORDINATED BY THE CONTRACTOR AND VERIFIED IN THE FIELD PRIOR TO ROUGH-IN.
13. SEE ARCHITECTURAL SHEET FOR FIRE RATED CONSTRUCTION LOCATIONS. ALL PLUMBING PENETRATIONS IN FIRE RATED CONSTRUCTION SHALL BE UL LISTED OF EQUAL OR GREATER HOUR RATING.

GENERAL HVAC NOTES:

1. ALL MECHANICAL INSTALLATIONS SHALL CONFORM TO NFPA 90A, SMACNA, ASHRAE AND ALL OTHER STATE AND LOCAL CODES.
2. SUPPLY (AS A MINIMUM) FRESH AIR REQUIRED BY ANSIASHRAE STANDARD 62-1989 AS NOTED ON PLANS.
3. UPON COMPLETION OF CONSTRUCTION, REPLACE ALL FILTERS.
4. ALL 90 DEGREE BENDS IN AIR DUCTS SHALL HAVE TURNING VANES. VANES SHALL BE SINGLE THICKNESS WITH RADIUS = 4.5" AND SPACING = 2.25'.
5. ALL MAIN AND BRANCH DUCTS SHALL BE RECTANGULAR GALV. STEEL SIZED AS NOTED ON THE PLANS. SIZE SHALL REFER TO UNOBSTRUCTED INTERNAL AIRFLOW AREA. DUCTWORK SHALL BE MOUNTED TIGHT TO JOISTS ABOVE OR RUN IN SPACE BETWEEN JOISTS, U N O, CLEARANCES FROM FINISH FLOOR SHALL BE MAXIMIZED WHERE POSSIBLE.
6. A FLEXIBLE CONNECTION BETWEEN MECHANICAL UNITS AND BOTH THE SUPPLY AND RETURN AIR DUCTWORK IS REQUIRED FOR VIBRATION ISOLATION AND NOISE REDUCTION.
7. BALANCE ALL MECHANICAL EXHAUST, MAKE-UP AIR, HEATING AND AIR CONDITIONING SYSTEMS WITHIN 10% OF THE FLOWRATES NOTED ON PLANS.
8. INSULATE DUCTWORK AS REQUIRED IN THE SPECIFICATIONS.
9. SERVICE OPENINGS SHALL BE LOCATED IN THE DUCTWORK BEFORE AND AFTER EACH TURNING VANE. SEE SPECIFICATIONS AND NFPA 90A FOR LOCATIONS OF ADDITIONAL ACCESS DOORS AND PANEL REQUIRED THROUGHOUT THE AIR DISTRIBUTION SYSTEM.
10. LEAVE ADEQUATE SPACE FOR INSTALLATION OF PLUMBING PIPES. COORDINATE WITH PLUMBING CONTRACTOR.

GENERAL ELECTRICAL NOTES:

1. APPLICABLE STANDARDS: NFPA-70, NFPA-101, STATE BUILDING CODES, AND THE OCCUPATIONAL SAFETY AND HEALTH ACT (OSHA) OF 1971 AND ALL AMENDMENTS THERETO; EQUIPMENT, DEVICES, APPARATUS, SYSTEMS, AND INSTALLATIONS SHALL BE ENTIRELY SUITABLE AND SAFE FOR EACH INTENDED APPLICATION AND BE IN FULL COMPLIANCE WITH APPLICABLE STANDARDS, REQUIREMENTS, RULES, REGULATIONS, CODES, STATUTES, ORDINANCES, ETC., OF MUNICIPAL, COUNTY, AND STATE GOVERNMENTS, OWNER'S INSURANCE COMPANY, LOCAL UTILITIES, AND LABOR REGULATIONS. NOTHING CONTAINED IN THESE PLANS AND SPECIFICATIONS SHALL BE CONSTRUED TO CONFLICT WITH THESE LAWS, CODES, AND ORDINANCES.
2. DRAWINGS ARE SCHEMATIC AND SHOW APPROXIMATE LOCATIONS OF ELECTRICAL EQUIPMENT. EXACT LOCATIONS SHALL BE COORDINATED BY THE CONTRACTOR AND VERIFIED IN THE FIELD PRIOR TO ROUGH-IN.
3. INSTALLATIONS WHICH INCLUDE ELECTRICAL FIXTURES, DEVICES, CONDUIT, SWITCHES, PANELS, HANGERS, WIRE, CABLE, STANDARDS, ETC., MUST BE ENTIRELY SUITABLE FOR TEMPERATURES, HUMIDITY, DAMP AREAS, VOLTAGE, FREQUENCY, AND ALL INSTALLATION CONDITIONS ENCOUNTERED.
4. INSTALLATION MUST BE ENTIRELY SAFE IN EVERY RESPECT, AND MUST NOT CREATE ANY CONDITIONS OF ANY KIND WHICH WILL BE HARMFUL TO ANY OCCUPANT OF THE BUILDING. IF CONTRACTOR BELIEVES THAT INSTALLATION WILL NOT BE SAFE FOR ALL PEOPLE, HE/SHE SHALL SO REPORT IN WRITING TO ENGINEER BEFORE ANY EQUIPMENT IS PURCHASED OR WORK IS INSTALLED, GIVING EXACT RECOMMENDATIONS, AND REASONS FOR THEM.
5. GROUNDING: ALL GROUNDING SHALL BE IN STRICT ACCORDANCE WITH THE LATEST EDITION OF THE NATIONAL ELECTRICAL CODE (NEC).
6. INSTALLATION OF ELECTRICAL DEVICES SHALL BE COORDINATED WITH OTHER TRADES AS NECESSARY TO PREVENT ANY CONFLICTS DURING CONSTRUCTION.
7. LOW VOLTAGE CONDUIT AND JUNCTION BOXES SHALL BE INSTALLED BY THE ELECTRICAL CONTRACTOR.
8. WHERE PHONE/DATA OUTLET LOCATIONS ARE INDICATED INSTALL 1" EMT FROM OUTLET BOX (4"x4"x1/2"MIN.) TO TOP OF FINISHED WALL (ABOVE S.A.T. CEILING). FOR OUTLETS LOCATED IN SURFACE MOUNTED RACEWAY, PROVIDE (2) 1" EMT FROM SURFACE RACEWAY BACK BOX TO ABOVE SAT CEILING.
9. WHERE THERMOSTAT LOCATIONS ARE SHOWN, THE ELECTRICAL CONTRACTOR SHALL PROVIDE A RECESSED WALL BOX WITH CONDUIT TO AN ACCESSIBLE LOCATION, IN AREAS WHERE SURFACE MOUNTED BOXES ARE REQUIRED, A SURFACE MOUNTED BOX AND CONDUIT TO 10' AFF SHALL BE PROVIDED (OR TO THE EQUIPMENT LOCATION, WHICHEVER IS CLOSER). THERMOSTAT INSTALLATION AND THE CORRESPONDING LOW VOLTAGE THERMOSTAT WIRING SHALL BE BY THE MECHANICAL CONTRACTOR.
10. LIGHTING: FURNISH AND INSTALL ALL LIGHTING FIXTURES COMPLETE WITH LAMPS IN ACCORDANCE WITH THE LIGHTING FIXTURE SCHEDULE SHOWN ON THE DRAWINGS. ALL UNITS SHALL BE COMPLETE WITH SUSPENSION ACCESSORIES, CANOPIES, SOCKETS, LOUVERS, FRAMES, AND ROUGH-IN BOXES. WIRED AND ASSEMBLES TO FURNISH A COMPLETE WORKABLE SYSTEM.
11. EQUIPMENT GROUNDING CONDUCTORS SHALL BE PULLED WITH ALL BRANCH CIRCUITS. CONDUIT SHALL NOT BE USED AS A GROUND U N O.
12. ELECTRICAL CONTRACTOR SHALL FURNISH AND INSTALL ALL MATERIALS, ACCESSORIES, TOOLS, EQUIPMENT, TRANSPORTATION, LABOR, SERVICES AND OPERATIONS NECESSARY FOR A COMPLETE ELECTRICAL SYSTEM.
13. ELECTRICAL CONTRACTOR SHALL OBTAIN ALL NECESSARY PERMITS AND ARRANGE FOR ALL INSPECTIONS REQUIRED BY STATE OR LOCAL AUTHORITIES.
14. MATERIALS MUST BE NEW, IN FIRST CLASS CONDITION.
15. CONDUIT SHALL BE SEPARATELY HUNG AND ANCHORED, FREE TO EXPAND AND CONTRACT QUIETLY, WITHOUT IMPOSING STRAINS ON STRUCTURE, DEVICES, AND EQUIPMENT. CONDUIT SHALL BE RUN PARALLEL OR PERPENDICULAR TO BUILDING LINES.
16. CONTRACTOR SHALL PERFORM EXCAVATION REQUIRED TO INSTALL HIS WORK.
17. SEE ARCHITECTURAL SHEET FOR FIRE RATED CONSTRUCTION LOCATIONS. ALL ELECTRICAL PENETRATIONS IN FIRE RATED CONSTRUCTION SHALL BE UL LISTED OF EQUAL OR GREATER HOUR RATING.
18. SEE ARCHITECTURAL SHEETS FOR SMOKE PARTITION LOCATIONS. ALL SPACES AROUND ELEOTRICAL PENETRATIONS THOUGH A SMOKE PARTITION SHALL BE FILLED WITH AN APPROVED MATERIAL TO LIMIT THE FREE PASSAGE OF SMOKE.

FIRE PROTECTION SYMBOLS

FP-D	FIRE PROTECTION DRY
FP-O	FIRE PROTECTION OTHER
FP-PA	FIRE PROTECTION PRE-ACTION
FP-W	FIRE PROTECTION WET
FP-DOM-W	COMBINATION FIRE & DOMESTIC
UPRIGHT SPRINKLER HEAD	
PENDENT SPRINKLER HEAD	
RECESSED SPRINKLER HEAD	
CONCEALED SPRINKLER HEAD	
SIDEWALL SPRINKLER HEAD	
EXTENDED COVERAGE SIDEWALL SPRINKLER HEAD	
D	'D' REPRESENTS DRY SPRINKLER HEAD
48"x18" SA	OBSTRUCTION FROM DUCTWORK 48" AND GREATER
CONNECT TO EXISTING	

PLUMBING AND PIPING SYMBOLS

2"	PIPE SIZE TAG (DIAMETER)
ABOVE GROUND PIPING	
1/8" / 12" SLOPE	PIPE SLOPE TAG
INV. ELEV.-5' - 0 127/128"	PIPE INVERT ELEVATION TAG
(E)	EXISTING PIPE TAG
PIPING BEING DEMOLISHED	
G	NATURAL GAS
CA	COMPRESSED AIR
CD	CONDENSATE DRAINAGE
CW	DOMESTIC COLD WATER
HW	DOMESTIC HOT WATER
HWC	DOMESTIC HOT WATER-CIRCULATING
GV	GREASE VENT
GW	GREASE WASTE
V	SANITARY VENT
SS	SANITARY SEWER
SD	STORM DRAINAGE
OSD	STORM DRAINAGE-OVERFLOW
PIPE DROP	
PIPE RISE	
PIPE TEE	
CAP	
4"	
4"	
2"	
4"	
PLUG	
REDUCING 45 DEGREE TEE	
45 DEGREE TEE	
DOMESTIC WATER METER	MOTORIZED CONTROL VALVE
FLOW MEASURING AND BALANCING DEVICE	THREE WAY MOTORIZED CONTROL VALVE
BALL VALVE	PRESSURE REDUCING VALVE
CHECK VALVE	SOLENOID VALVE
THREE WAY VALVE	BUTTERFLY VALVE

PLUMBING FIXTURE	
PLUMBING FIXTURE TAG	
TYPE (SEE SCHEDULE)	
CONNECT TO EXISTING	


HVAC SYMBOLS

16"x8"	SQUARE DUCT SIZE TAG (WIDTH x HEIGHT)
(E)	EXISTING DUCT TAG
DUCT BEING DEMOLISHED	
SA	SUPPLY AIR
OA	OUTSIDE AIR
RA	RETURN AIR
EA	EXHAUST AIR
AIR INLET/OUTLET	
TYPE (SEE SCHEDULE)	
GRILLES, REGISTERS, AND DIFFUSERS TAG	
CFM	
AHU-8	MECHANICAL EQUIPMENT
CARBON DIOXIDE SENSOR	CO2
TEMPERATURE & HUMIDITY SENSOR	TH
CARBON MONOXIDE SENSOR	CO
TEMPERATURE SENSOR	TS
NITROGEN DIOXIDE SENSOR	NO2
THERMOSTAT	T
HUMIDITY SENSOR	HS
MANUAL SWITCH	SW
HUMIDISTAT	H
SENSOR	S
F	FIRE DAMPER
S	SMOKE DAMPER
M	MOTORIZED DAMPER
B	MANUAL BALANCING DAMPER
D	BACKDRAFT DAMPER
C	COMBINATION FIRE/SMOKE DAMPER
CONNECT TO EXISTING	

ELECTRICAL SYMBOLS

SINGLE RECEPTACLE	SAFETY DISCONNECT SWITCH (FUSED)
STANDARD DUPLEX RECEPTACLE	SAFETY DISCONNECT SWITCH (NON-FUSED)
EMERGENCY POWER DUPLEX RECEPTACLE	PHOTOCELL
DUPLEX RECEPTACLE WITH ISOLATED GROUND	TIME CONTROL SWITCH
DUPLEX RECEPTACLE INSTALLED ABOVE COUNTER	HUMIDISTAT
DUPLEX RECEPTACLE INSTALLED AT DISTANCE ABOVE FINISHED FLOOR	THERMOSTAT
DUPLEX RECEPTACLE WITH GROUND FAULT CIRCUIT INTERRUPTER	REMOTE TEMPERATURE SENSOR
FOURPLEX RECEPTACLE	JUNCTION BOX
FOURPLEX EMERGENCY RECEPTACLE	PULL BOX
208/240 VOLT 2-POLE RECEPTACLE	CIRCUIT BREAKER PANEL
FLOOR RECEPTACLE (FOURPLEX SHOWN)	POWER OR DISTRIBUTION PANEL
RECEPTACLE ON DROP CORD (DUPLEX SHOWN)	TRANSFORMER (TYPE DENOTED)
RECEPTACLE ON CORD REEL (DUPLEX SHOWN)	MOTOR (SEE SCHEDULE)
SINGLE POLE SWITCH	HAND OR HAIR DRYER (TYPE NOTED)
3-WAY SWITCH	
4-WAY SWITCH	
KEYED SWITCH	LOW VOLTAGE POWER CIRCUIT
DIMMER SWITCH	LINE VOLTAGE POWER CIRCUIT
OCCUPANCY SENSOR SWITCH	CONDUIT
TIMER SWITCH	SURFACE RACEWAY
FAN SPEED CONTROL SWITCH	CONDUIT TRANSITION UP
MOTOR HORSEPOWER RATED SWITCH	CONDUIT TRANSITION DOWN
WALL MOUNT OCCUPANCY SENSOR	BRANCH CIRCUIT HOME RUN
CEILING MOUNT OCCUPANCY SENSOR	UNDERGROUND ELECTRICAL
LIGHT LEVEL SENSOR (TYPE DENOTED)	UNDERGROUND HIGH VOLTAGE ELECTRICAL
LOW VOLTAGE SWITCH	UNDERGROUND TELEPHONE
LOW VOLTAGE SWITCH WITH DIMMING	UNDERGROUND COMMUNICATIONS
VACANCY SENSOR SWITCH	UNDERGROUND CABLE TELEVISION (CATV OR CCTV)
LIGHTING CONTROL POWER PACK	UNDERGROUND FIBER OPTIC
FIRE ALARM HORN/STROBE	OVERHEAD ELECTRIC
FIRE ALARM STROBE	OVERHEAD TELEPHONE
FIRE ALARM PULL STATION	CONNECT TO EXISTING
FIRE ALARM WATER FLOW SWITCH	
FIRE ALARM PRESSURE SWITCH	
FIRE ALARM SPRINKLER TAMPER SWITCH	
WIRELESS ACCESS POINT	
DATA OUTLET	

STATE OF MISSOURI
MIKE KEHOE,
GOVERNOR

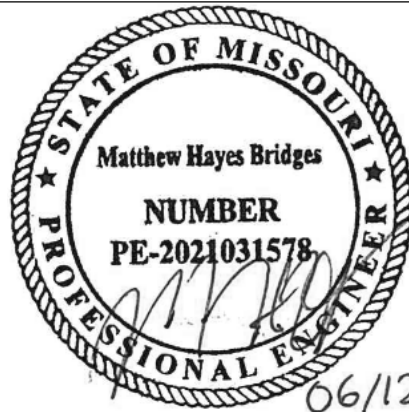

MATTHEW H BRIDGES - ENGINEER
MO # PE-2021031578

KLINGNER
& ASSOCIATES, P.C.

Engineers • Architects • Surveyors

Columbia, Missouri
3622 Endeavor Ave, Suite 117
Quincy, IL Cape Girardeau, MO
Burlington, IA Pella, IA Hannibal, MO Galveston, IL
573.355.5988

www.klingner.com

KLINGNER & ASSOCIATES, P.C. - ARCHITECTURE
MISSOURI STATE CERTIFICATE OF AUTHORITY #2001010108

OFFICE OF ADMINISTRATION
DIVISION OF FACILITIES
MANAGEMENT,
DESIGN AND CONSTRUCTION

JEFFERSON CITY
READINESS CENTER

CIVIL SUPPORT TEAM
BUILDING ADDITION

1225 COOPER DRIVE
JEFFERSON CITY, MO 65101

PROJECT # T2147-01
SITE # 6298
ASSET # 8136298008

REVISION:
DATE:
REVISION:
DATE:
REVISION:
DATE:
ISSUE DATE:06/12/26

CAD DWG FILE: MEP001
DRAWING BY: ALD
CHECKED BY: RMS
DESIGNED BY: MHB

SHEET TITLE:


MEP SYMBOLS
LIST

SHEET NUMBER:


MEP001

SHEET 61 OF 85
JUNE 12, 2026


KEYNOTE LEGEND	
VALUE	DESCRIPTION
D01	DEMOLISH EXISTING LIGHT FIXTURE.
D02	DEMOLISH EXISTING SUPPLY AIR DIFFUSER AND ASSOCIATED FLEX DUCT.
D03	DEMOLISH EXISTING RETURN AIR GRILLE. PROVIDE AND INSTALL MESH SCREEN AT EXISTING TO REMAIN DUCTWORK OPENING.
D04	DEMOLISH EXISTING SUPPLY AIR DIFFUSER AND ASSOCIATED DUCTWORK.
D05	DEMOLISH EXISTING EXHAUST FAN AND ASSOCIATED DUCTWORK. THE EXISTING LOUVER SHALL REMAIN IN PLACE. INSTALL 2" RIGID INSULATION TO THE INTERIOR SIDE OF THE LOUVER AND SEAL THE EDGES WITH JOINT SEALANT, TO MAKE WATERTIGHT, AND CAP WITH SHEET METAL TO INCAPSULATE THE INSULATION.
D06	REMOVE EXISTING CEILING MOUNTED ROUTER. PROTECT FROM DAMAGE AND SAVE FOR REINSTALLATION.
D07	REMOVE EXISTING SPEAKER. PROTECT FROM DAMAGE AND SAVE FOR REINSTALLATION.
D09	DEMOLISH EXISTING SUPPLY AIR DIFFUSER. PREPARE EXISTING DUCTWORK FOR INSTALLATION OF NEW DIFFUSER.

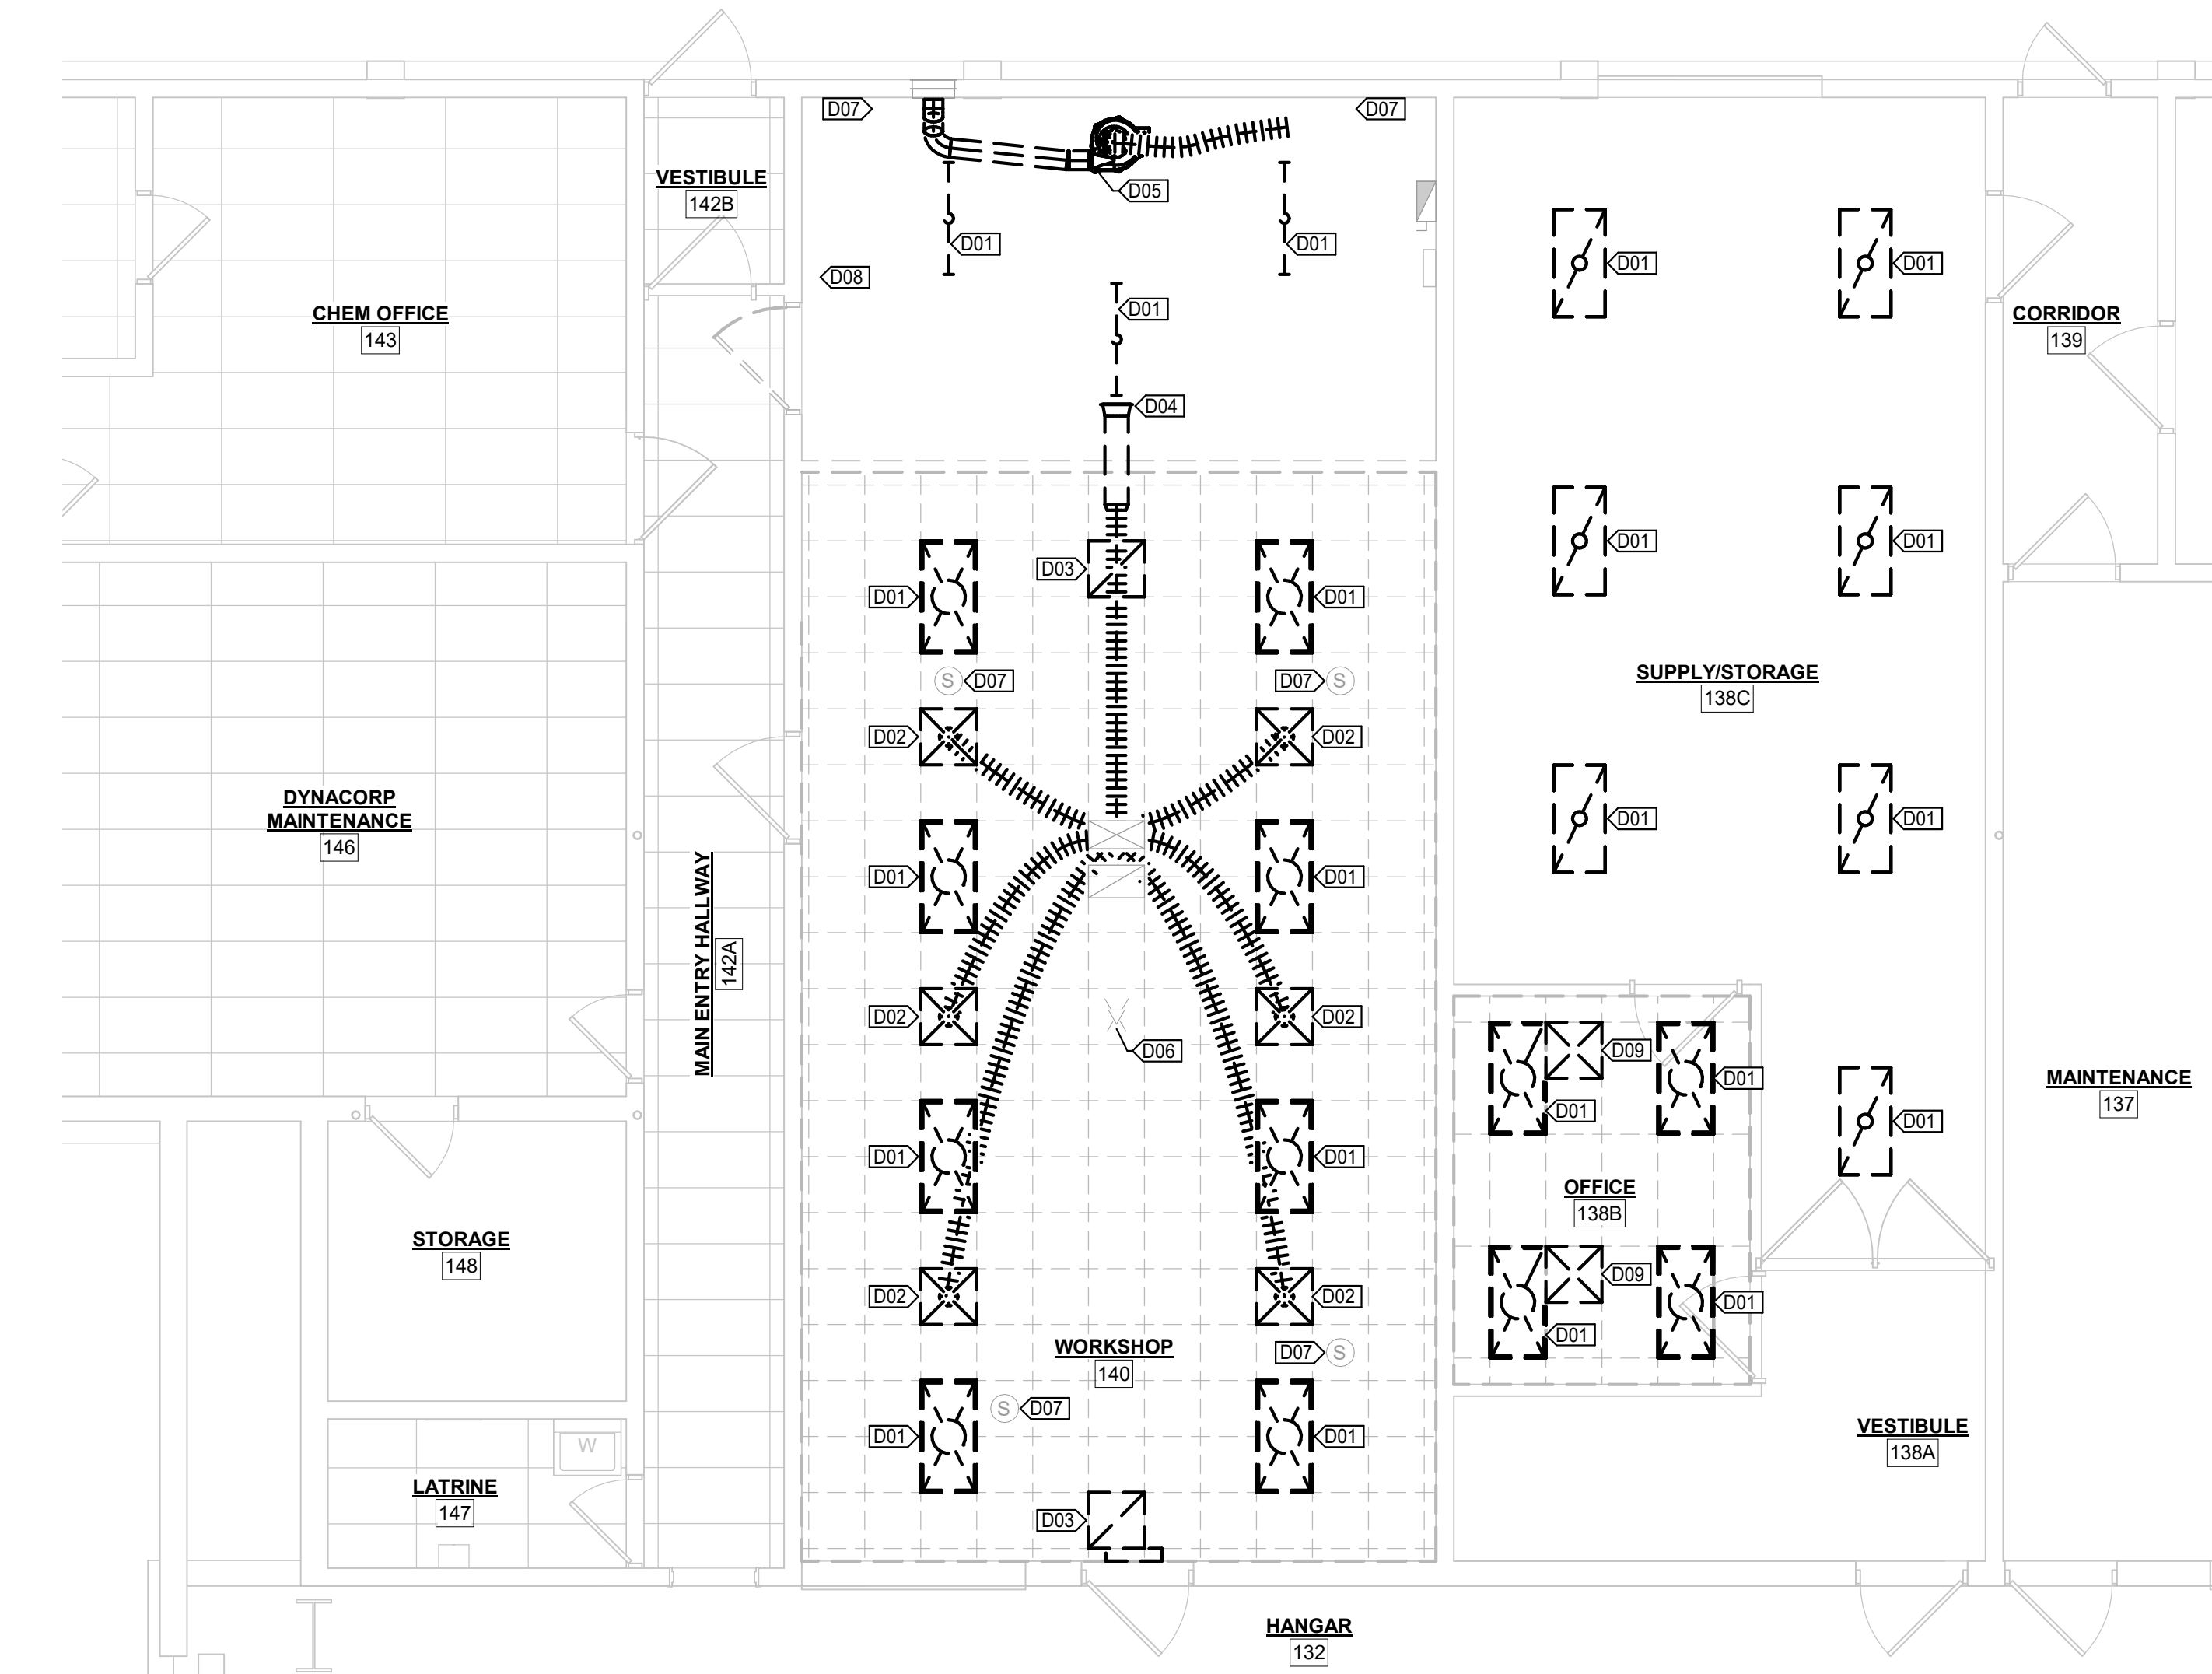

1 DEMOLITION PLAN - AREA A
3/16" = 1'-0"

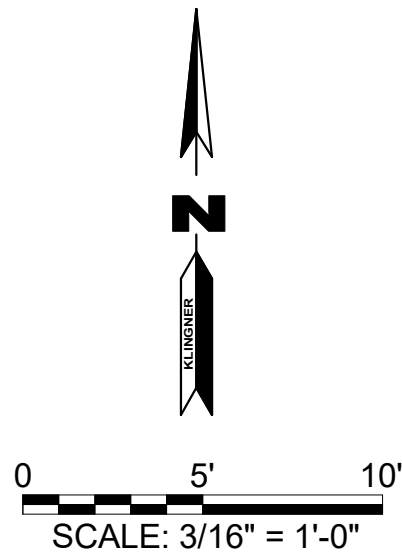

STATE OF MISSOURI
MIKE KEHOE,
GOVERNOR

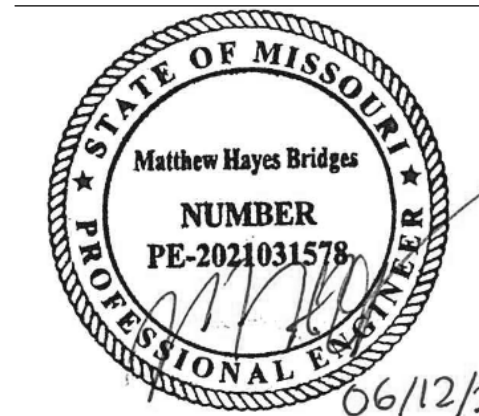

06/12/26
MATTHEW H BRIDGES - ENGINEER
MO # PE-2021031578

KLINGNER
& ASSOCIATES, P.C.

Engineers • Architects • Surveyors
Columbia, Missouri
3622 Endeavor Ave, Suite 117
573.355.5988
Quincy, IL Cape Girardeau, MO
Burlington, IA Pella, IA Hannibal, MO Galveston, IL

www.klingner.com
MISSOURI STATE CERTIFICATE OF AUTHORITY #2001010108

OFFICE OF ADMINISTRATION
DIVISION OF FACILITIES
MANAGEMENT,
DESIGN AND CONSTRUCTION

JEFFERSON CITY
READINESS CENTER

CIVIL SUPPORT TEAM
BUILDING ADDITION

1225 COOPER DRIVE
JEFFERSON CITY, MO 65101

PROJECT # T2147-01
SITE # 6298
ASSET # 8136298008

REVISION: _____
DATE: _____
REVISION: _____
DATE: _____
REVISION: _____
DATE: _____

ISSUE DATE: 06/12/26

CAD DWG FILE: D101
DRAWING BY: MHB
CHECKED BY: RMS
DESIGNED BY: MHB

SHEET TITLE:
**MECH/ELEC
DEMOLITION
PLAN - AREA A**

SHEET NUMBER:


D101

SHEET 62 OF 85
JUNE 12, 2026

1 DEMOLITION PLAN - AREA B
1/8" = 1'-0"

KEYNOTE LEGEND	
VALUE	DESCRIPTION
D01	DEMOLISH EXISTING LIGHT FIXTURE.
D03	DEMOLISH EXISTING RETURN AIR GRILLE. PROVIDE AND INSTALL MESH SCREEN AT EXISTING TO REMAIN DUCTWORK OPENING.
D09	DEMOLISH EXISTING SUPPLY AIR DIFFUSER. PREPARE EXISTING DUCTWORK FOR INSTALLATION OF NEW DIFFUSER.

STATE OF MISSOURI
MIKE KEHOE,
GOVERNOR

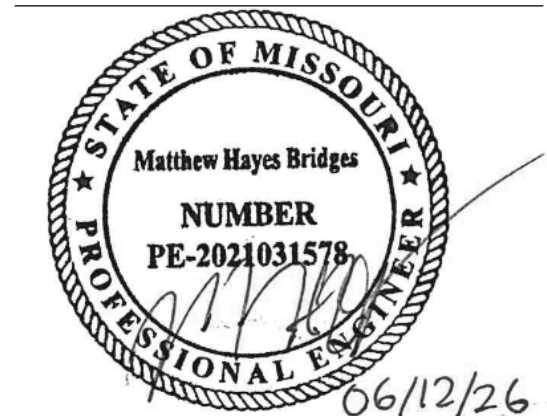

06/12/26
MATTHEW H BRIDGES - ENGINEER
MO # PE-2021031578

KLINGNER
& ASSOCIATES, P.C.

Engineers • Architects • Surveyors
Columbia, Missouri
3622 Endeavor Ave, Suite 117
Quincy, IL Cape Girardeau, MO
573.355.5988 Burlington, IA Pella, IA Hannibal, MO Galveston, IL

www.klingner.com

KLINGNER & ASSOCIATES, P.C. - ARCHITECTURE
MISSOURI STATE CERTIFICATE OF AUTHORITY #2001010108

OFFICE OF ADMINISTRATION
DIVISION OF FACILITIES
MANAGEMENT,
DESIGN AND CONSTRUCTION

JEFFERSON CITY
READINESS CENTER

CIVIL SUPPORT TEAM
BUILDING ADDITION

1225 COOPER DRIVE
JEFFERSON CITY, MO 65101

PROJECT # T2147-01
SITE # 6298
ASSET # 8136298008

REVISION: _____
DATE: _____
REVISION: _____
DATE: _____
REVISION: _____
DATE: _____

ISSUE DATE:06/12/26

CAD DWG FILE: D102
DRAWING BY: MHB
CHECKED BY: RMS
DESIGNED BY: MHB


SHEET TITLE:

MECH/ELEC
DEMOLITION
PLAN - AREA B

SHEET NUMBER:

D102

SHEET 63 OF 85
JUNE 12, 2026

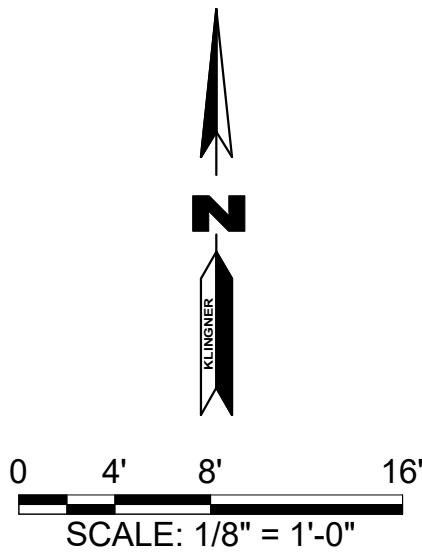

OWNER'S INFORMATION

OWNER: JEFFERSON CITY READINESS CENTER 2
PROJECT NAME: CONSTRUCT CST READY BAY ADDITION
SITE ADDRESS: 1225 COOPER DRIVE, JEFFERSON CITY, MO 65101

EXISTING OR PLANNED CONSTRUCTION IS:
☐ FIRE RESISTIVE OR NONCOMBUSTIBLE
☒ WOOD FRAME OR ORDINARY (MASONRY WALLS WITH WOOD BEAMS)
☐ UNKNOWN

INTENDED USE OF THE BUILDING IS: VEHICLE PARKING, STORAGE, FITNESS AREA

THE SYSTEM IS INTENDED FOR THE FOLLOWING SPECIAL OCCUPANCIES:

AIRCRAFT HANGAR	☐ YES	☒ NO
FIXED GUIDEWAY TRANSIT SYSTEM	☐ YES	☒ NO
RACE TRACK STABLE	☐ YES	☒ NO
MARINE TERMINAL, PIER, OR WARF	☐ YES	☒ NO
AIRPORT TERMINAL	☐ YES	☒ NO
AIRCRAFT ENGINE TEST FACILITY	☐ YES	☒ NO
POWER PLANT	☐ YES	☒ NO
WATER-COOLING TOWER	☐ YES	☒ NO

(IF INTENDED FOR SPECIAL OCCUPANCY REFER TO NFPA STANDARD FOR SPRINKLER DENSITY/AREA CRITERIA)

THE FOLLOWING SPECIAL MATERIALS ARE INTENDED TO BE PRESENT:

FLAMMABLE OR COMBUSTIBLE LIQUIDS	☐ YES	☒ NO
AEROSOL PRODUCTS	☐ YES	☒ NO
NITRATE FILM	☐ YES	☒ NO
PRYOXYLIN PLASTIC	☐ YES	☒ NO
COMPRESSED OR LIQUIFIED GAS CYLINDERS	☐ YES	☒ NO
LIQUID OR SOLID OXIDIZERS	☐ YES	☒ NO
ORGANIC PEROXIDE FORMULATIONS	☐ YES	☒ NO
IDLE PALLETS	☐ YES	☒ NO

IF ANY OF THE ABOVE LISTED MATERIALS ARE INTENDED TO BE PRESENT DESCRIBE TYPE, LOCATION, ARRANGEMENT, AND INTENDED MAXIMUM QUANTITIES:
NONE

FIRE SPRINKLER PROTECTION IS INTENDED FOR ONE OF THE FOLLOWING SPECIALIZED OCCUPANCIES OR AREAS:

SPRAY AREA OR MIXING ROOM	☐ YES	☒ NO
SOLVENT EXTRACTION	☐ YES	☒ NO
LABORATORY USING CHEMICALS	☐ YES	☒ NO
OXYGEN-FUEL GAS SYSTEM OR LIQUIFIED GASES	☐ YES	☒ NO
ACETYLENE CYLINDER CHARGING	☐ YES	☒ NO
PRODUCTION OR USE OF COMPRESSED OR LIQUIFIED GASES	☐ YES	☒ NO
COMMERCIAL COOKING OPERATION	☐ YES	☒ NO
CLASS A HYPERBARIC CHAMBER	☐ YES	☒ NO
CLEANROOM	☐ YES	☒ NO
INCINERATOR OR WASTE HANDLING SYSTEM	☐ YES	☒ NO
LINEN HANDLING SYSTEM	☐ YES	☒ NO
INDUSTRIAL FURNACE	☐ YES	☒ NO
WATER-COOLING TOWER	☐ YES	☒ NO

IF PROTECTION OF ANY OF THE ABOVE LISTED SPECIALIZED OCCUPANCIES OR AREAS ARE SELECTED DESCRIBE THE TYPE, LOCATION, ARRANGEMENT AND INTENDED MAXIMUM QUANTITIES:
NONE

DESCRIBE PRODUCTS, INTENDED STORAGE ARRANGMENT, AND HEIGHT OF ANY MATERIALS STORAGE OVER 12 FT IN HEIGHT:
NONE

DESCRIBE PRODUCTS, INTENDED STORAGE ARRANGEMENT, AND STORAGE HEIGHT OF ANY PLASTIC, RUBBER OR SIMILAR PRODUCTS OVER 5 FT NOT DESCRIBED ABOVE:
NONE

DESCRIBE ANY SPECIAL INFORMATION PERTAINING TO THE WATER SUPPLY INCLUDING KNOWN ENVIRONMENTAL CONDITIONS THAT MIGHT BE RESPONSIBLE FOR CORROSION, INCLUDING MICROBIOLOGICALLY INFLUENCED CORROSION:
NONE



THE FOLLOWING FIRE HYDRANT FLOW TESTS HAS BEEN PROVIDED FOR BIDDING PURPOSES ONLY REFER TO SITE UTILITY PLAN FOR FIRE HYDRANT LOCATIONS. THE FIRE SPRINKLER DESIGNER SHALL SELF-PERFORM A FLOW TEST AT THE FIRE HYDRANT CHOSEN FOR FIRE SPRINKLER SYSTEM DESIGN:

HYDRANT (FLOW): HJN-8
FLOWRATE: 495.0 GPM
HYDRANT (PRESSURE): HJN-8
STATIC PRESSURE: 100.00 psi
RESIDUAL PRESSURE: 28.00 psi


FIRE SPRINKLER SUMMARY

ROOM			OCCUPANCY CLASSIFICATION (IBC)	OCCUPANCY HAZARD CLASSIFICATION (NFPA 13)	MINIMUM REQUIRED DENSITY (GPM/SF)	RISER NAME
NO.	NAME	AREA				
	ADDITION ATTIC	3,110 SF		LIGHT HAZARD	0.1	DRY RISER #1
	EXISTING ATTIC	4,334 SF		LIGHT HAZARD	0.1	DRY RISER #1
101	EXISTING BAYS	4,332 SF	STORAGE - MODERATE HAZARD S-1	ORDINARY HAZARD, GROUP 2	0.2	WET RISER #1
102	READY BAYS	1,682 SF	STORAGE - MODERATE HAZARD S-1	ORDINARY HAZARD, GROUP 2	0.2	WET RISER #1
103	STORAGE	484 SF	STORAGE - MODERATE HAZARD S-1	ORDINARY HAZARD, GROUP 2	0.2	WET RISER #1
104	MEDICAL STORAGE	183 SF	STORAGE - MODERATE HAZARD S-1	ORDINARY HAZARD, GROUP 2	0.2	WET RISER #1
105	MECHANICAL AND FIRE SPRINKLER ROOM	84 SF	STORAGE - MODERATE HAZARD S-1	ORDINARY HAZARD, GROUP 2	0.2	WET RISER #1
106	PERSONAL FITNESS AREA	590 SF	STORAGE - MODERATE HAZARD S-1	LIGHT HAZARD	0.1	WET RISER #1

INSIDE HOSE STREAM ALLOWANCE: 0 GPM
OUTSIDE HOSE STREAM ALLOWANCE: 250 GPM

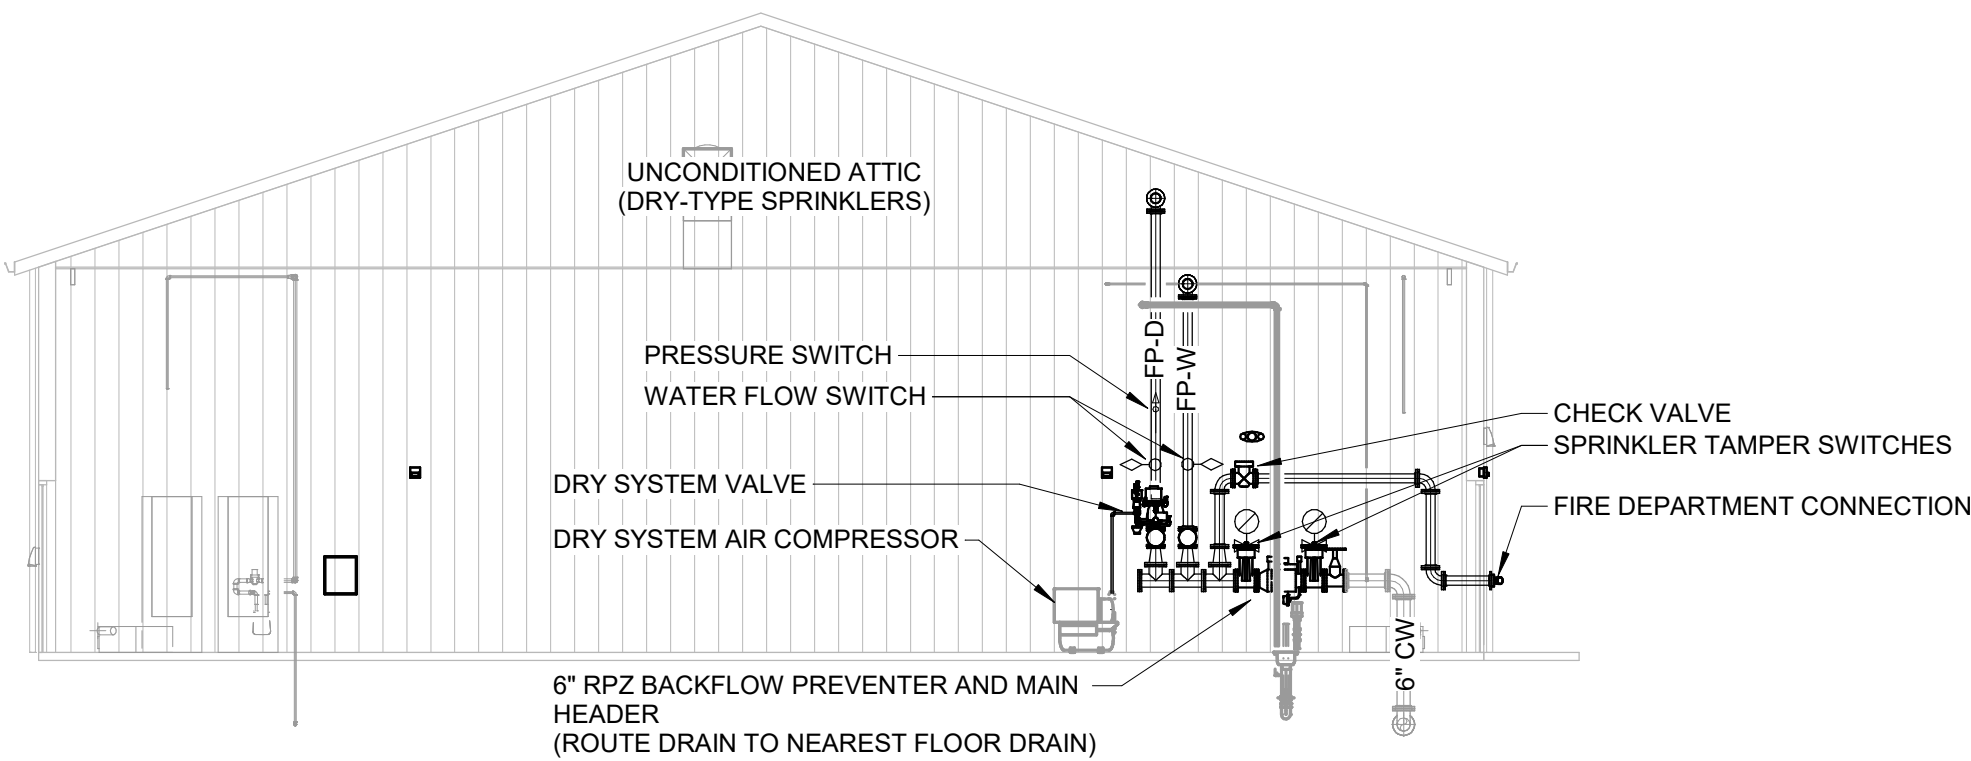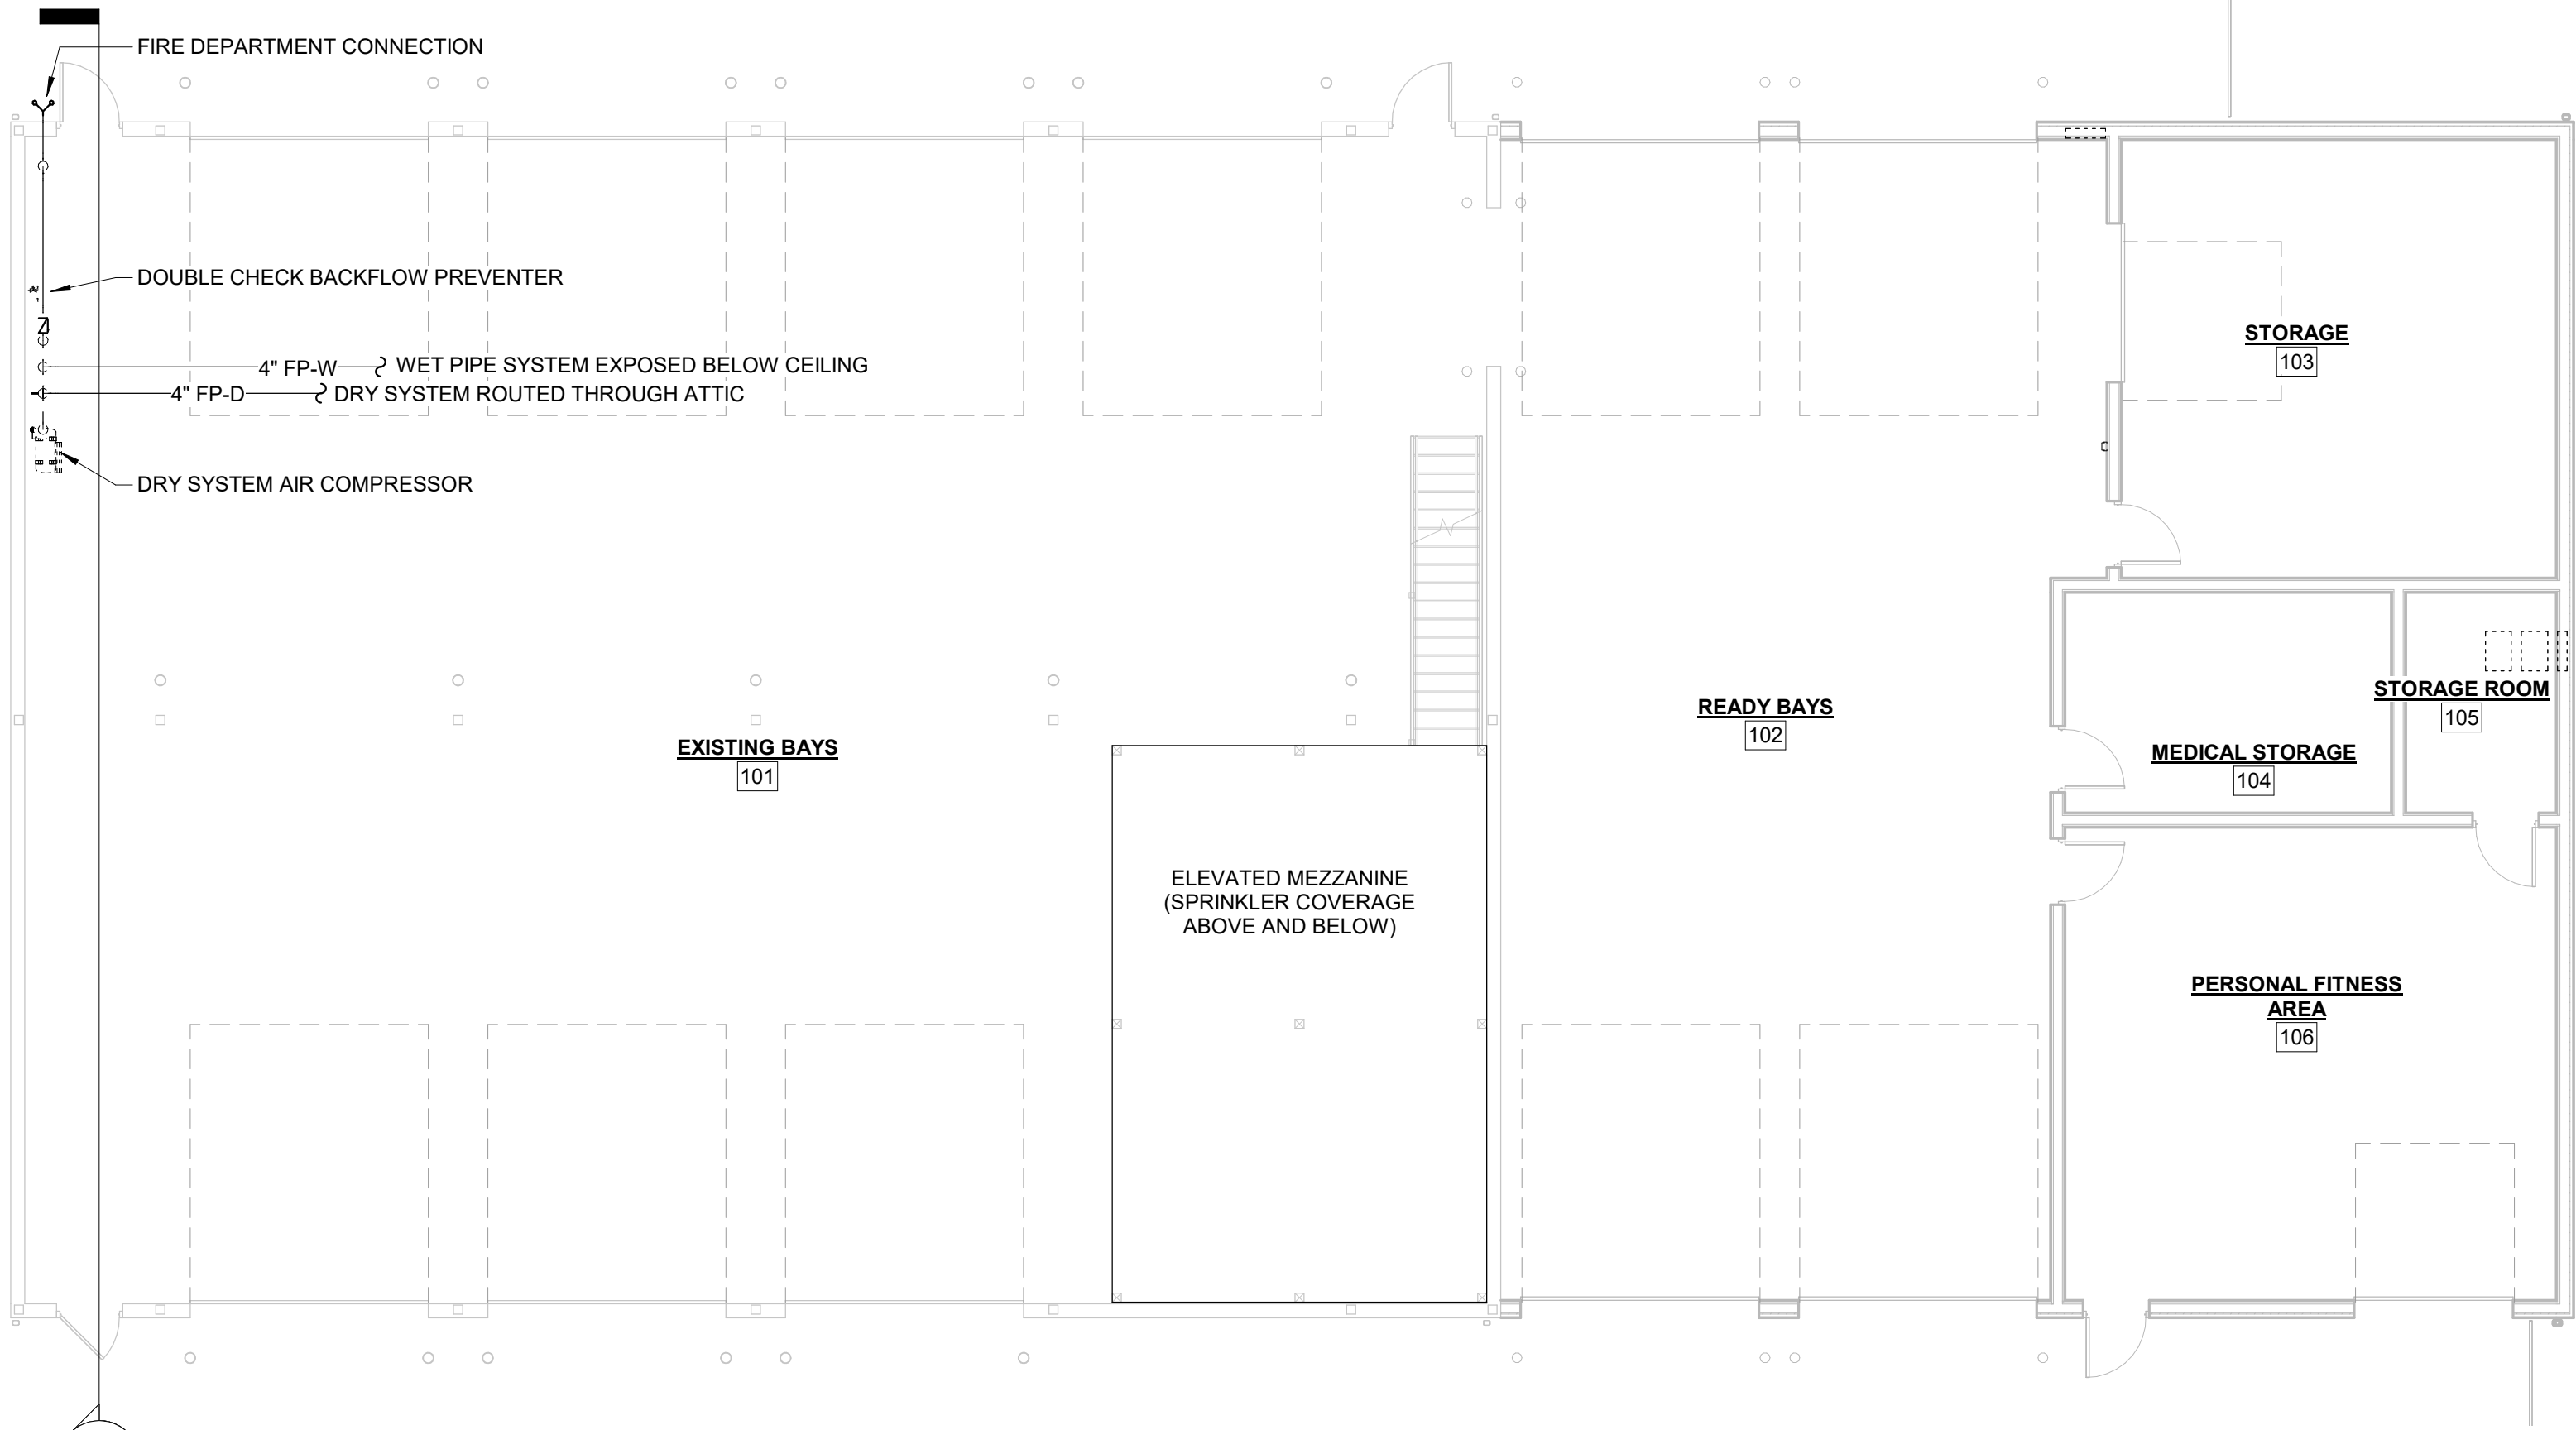

STATE OF MISSOURI
MIKE KEHOE,
GOVERNOR

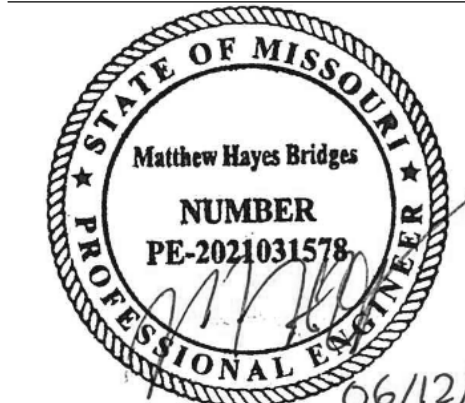

MATTHEW H BRIDGES - ENGINEER
MO # PE-2021031578

KLINGNER
& ASSOCIATES, P.C.

Engineers • Architects • Surveyors

Columbia, Missouri
3622 Endeavor Ave., Suite 117
Quincy, IL Cape Girardeau, MO
573.355.5988 Burlington, IA Pella, IA Hannibal, MO Galveston, IL

KLINGNER & ASSOCIATES, P.C. - ARCHITECTURE
MISSOURI STATE CERTIFICATE OF AUTHORITY #2001010108

OFFICE OF ADMINISTRATION
DIVISION OF FACILITIES
MANAGEMENT,
DESIGN AND CONSTRUCTION

JEFFERSON CITY
READINESS CENTER

CIVIL SUPPORT TEAM
BUILDING ADDITION

1225 COOPER DRIVE
JEFFERSON CITY, MO 65101

PROJECT # T2147-01
SITE # 6298
ASSET # 8136298008

REVISION:
DATE:
REVISION:
DATE:
REVISION:
DATE:

ISSUE DATE:06/12/26

CAD DWG FILE: FP111
DRAWING BY: ALD
CHECKED BY: RMS
DESIGNED BY: MHB


SHEET TITLE:

**FIRE
PROTECTION
PLAN - ALT #2**

SHEET NUMBER:

FP111

SHEET 64 OF 85
JUNE 12, 2026

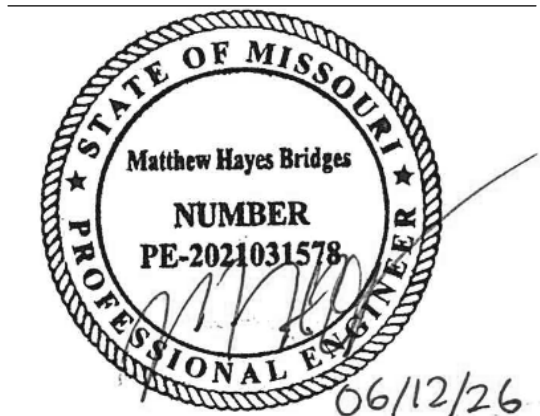

06/12/26
MATTHEW H BRIDGES - ENGINEER
MO # PE-2021031578

KLINGNER
& ASSOCIATES, P.C.

Engineers • Architects • Surveyors
Columbia, Missouri
3622 Endeavor Ave, Suite 117
Quincy, IL Cape Girardeau, MO
573.355.5988
Burlington, IA Pella, IA Hannibal, MO Galveston, IL

www.klingner.com

KLINGNER & ASSOCIATES, P.C. - ARCHITECTURE
MISSOURI STATE CERTIFICATE OF AUTHORITY #2001010108

OFFICE OF ADMINISTRATION
DIVISION OF FACILITIES
MANAGEMENT,
DESIGN AND CONSTRUCTION

JEFFERSON CITY
READINESS CENTER

CIVIL SUPPORT TEAM
BUILDING ADDITION

1225 COOPER DRIVE
JEFFERSON CITY, MO 65101

PROJECT # T2147-01
SITE # 6298
ASSET # 8136298008


REVISION: _____
DATE: _____
REVISION: _____
DATE: _____
REVISION: _____
DATE: _____
ISSUE DATE: 06/12/26

CAD DWG FILE: P101
DRAWING BY: MHB
CHECKED BY: RMS
DESIGNED BY: MHB


SHEET TITLE:
**PLUMBING PLAN -
NEW ADDITION**

SHEET NUMBER:
P101
SHEET 65 OF 85
JUNE 12, 2026


KEYNOTE LEGEND	
VALUE	DESCRIPTION
P03	STORM DRAIN ROUTED BELOW SLAB.
P04	STORM DRAIN ROUTED ABOVE CEILING.

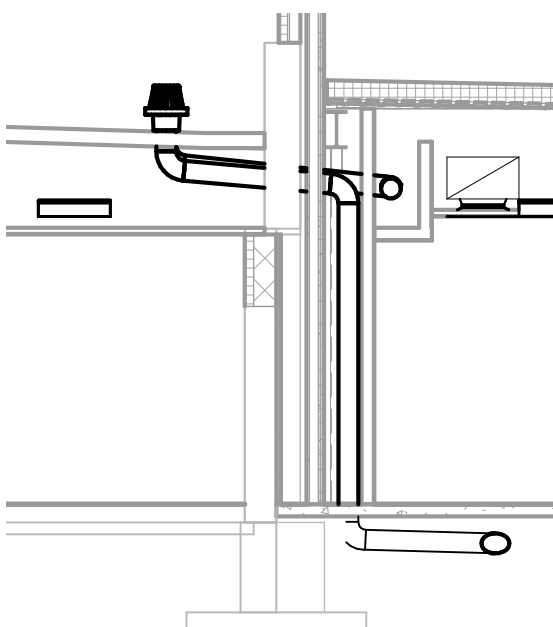


2 OPS CENTER 168 NORTH SECTION
3/16" = 1'-0"

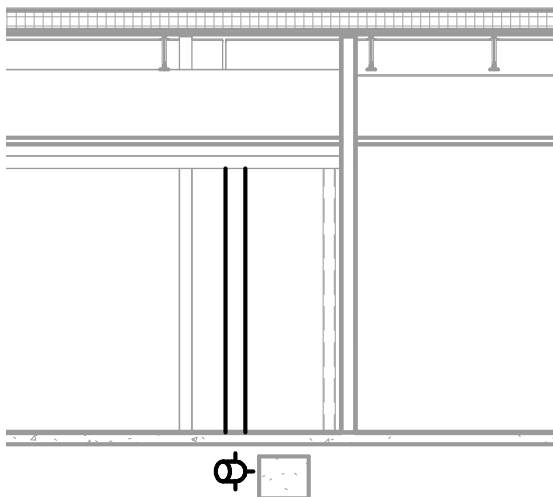


3 OPS CENTER 168 WEST SECTION
3/16" = 1'-0"

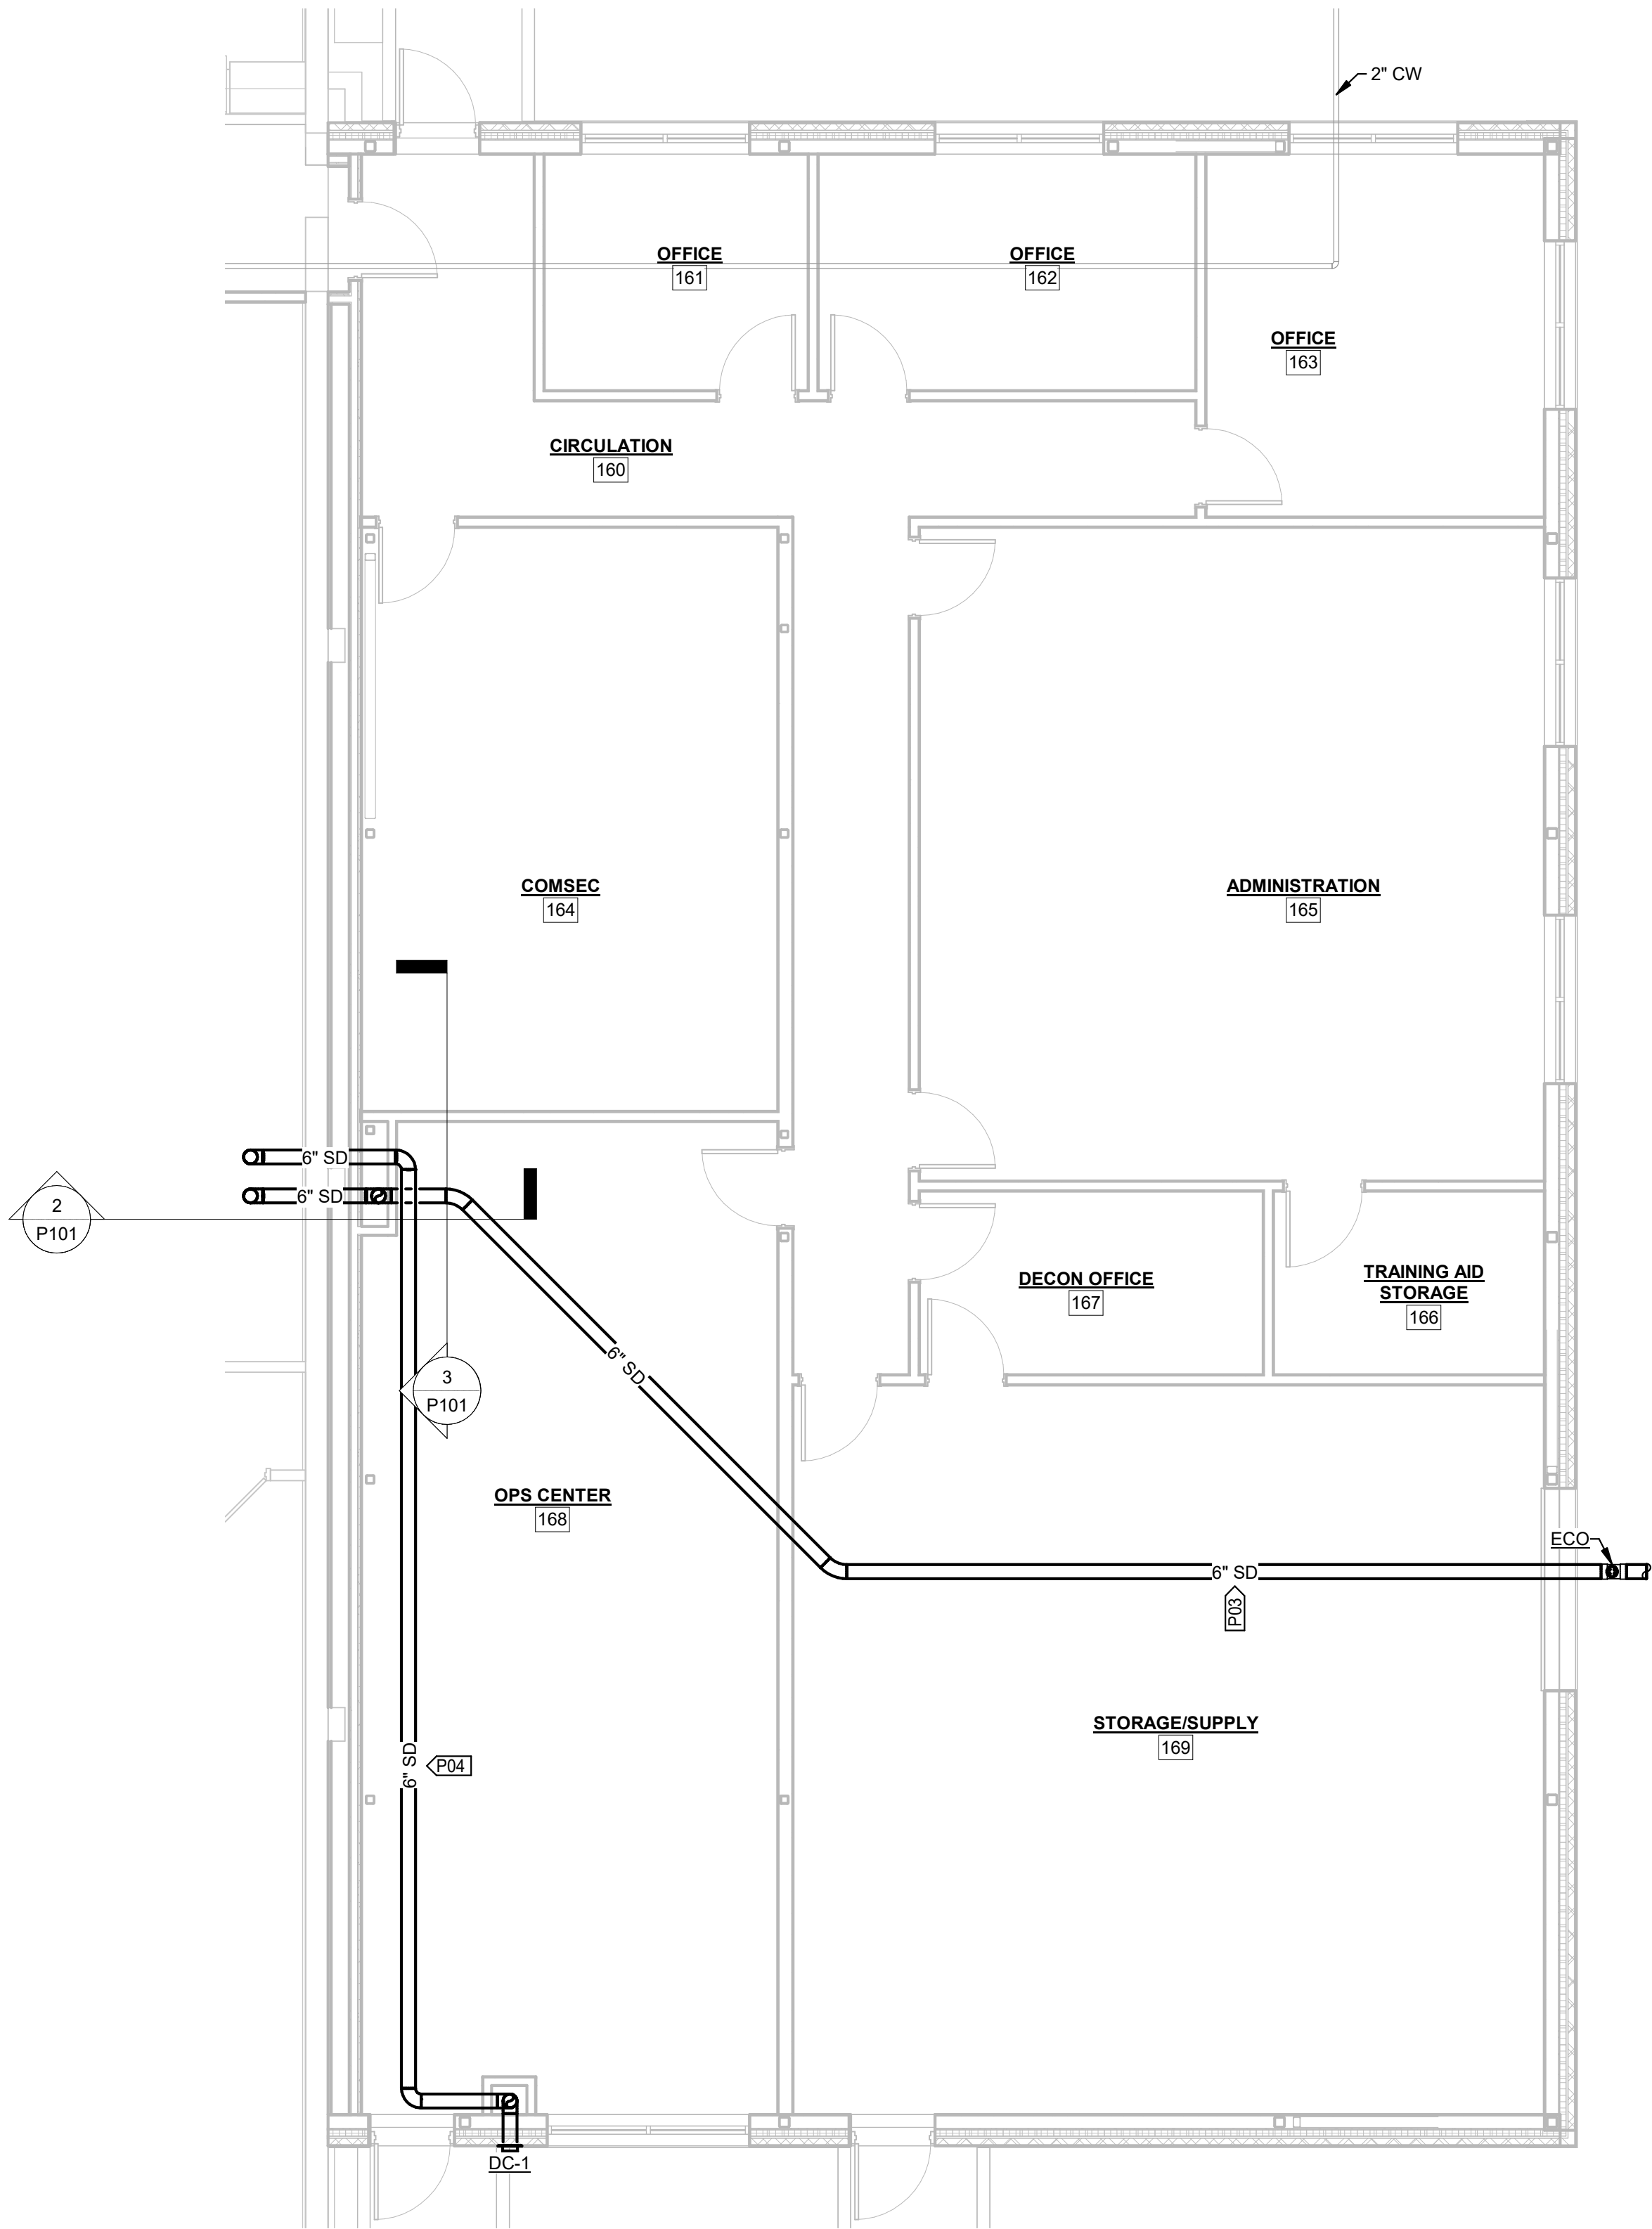


1 PLUMBING PLAN - NEW ADDITION
3/16" = 1'-0"

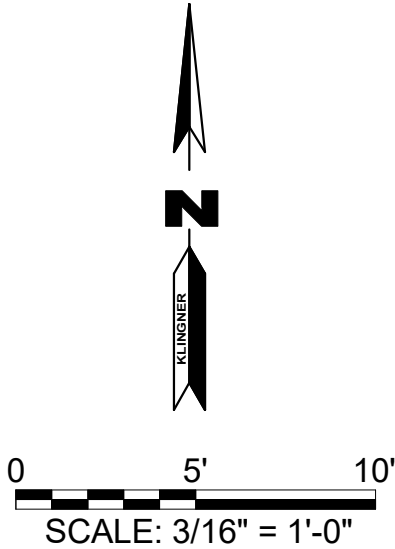


PLUMBING FIXTURE SCHEDULE															
TAG	ADA	Fixture Type	DESCRIPTION	ROUGH-IN PIPE SIZE					MAKE	MODEL	BASIS OF DESIGN FIXTURE ACCESSORIES				
				CW	HW	SS	V	SD			TYPE	DESCRIPTION	MAKE	MODEL	ACCESSORY REMARKS
DC-1	No	DOWNSPOUT COVER	304 STAINLESS STEEL BODY THROUGH-WALL DOWNSPOUT WITH HINGED COVER, LINE SIZED, MOUNTED WITH BOTTOM 18" ABOVE FINISHED GRADE	0"	0"	0"	0"	6"	ZURN JAY R. SMITH JOSAM	Z199-DC 1775 2502					
ECO	No	2-WAY EXTERIOR CLEANOUT	ADJUSTABLE, CAST IRON BODY W/ POLISHED NICKEL BROZE TOP & BRONZE PLUG	0"	0"	4"	0"		ZURN JAY R SMITH MIFAB	ZN-1400-BP-SG-SM 4021S C1220-1					
RD-1	No	ROOF DRAIN	12"ø CAST IRON BODY AND DOME STRAINER, W/ FLASHING CLAMP, ROOF SUMP, & UNDER DECK CLAMP	0"	0"	0"	0"	6"	ZURN JAY R SMITH JOSAM	Z121 1010 21500					
RDO-1	No	ROOF DRAIN - OVERFLOW	12"ø CAST IRON BODY AND DOME STRAINER, W/ FLASHING CLAMP, ROOF SUMP, & UNDER DECK CLAMP	0"	0"	0"	0"	6"	ZURN JAY R SMITH JOSAM	Z121 1010 21500	WATER DAM	EXTERNAL 2" HIGH			

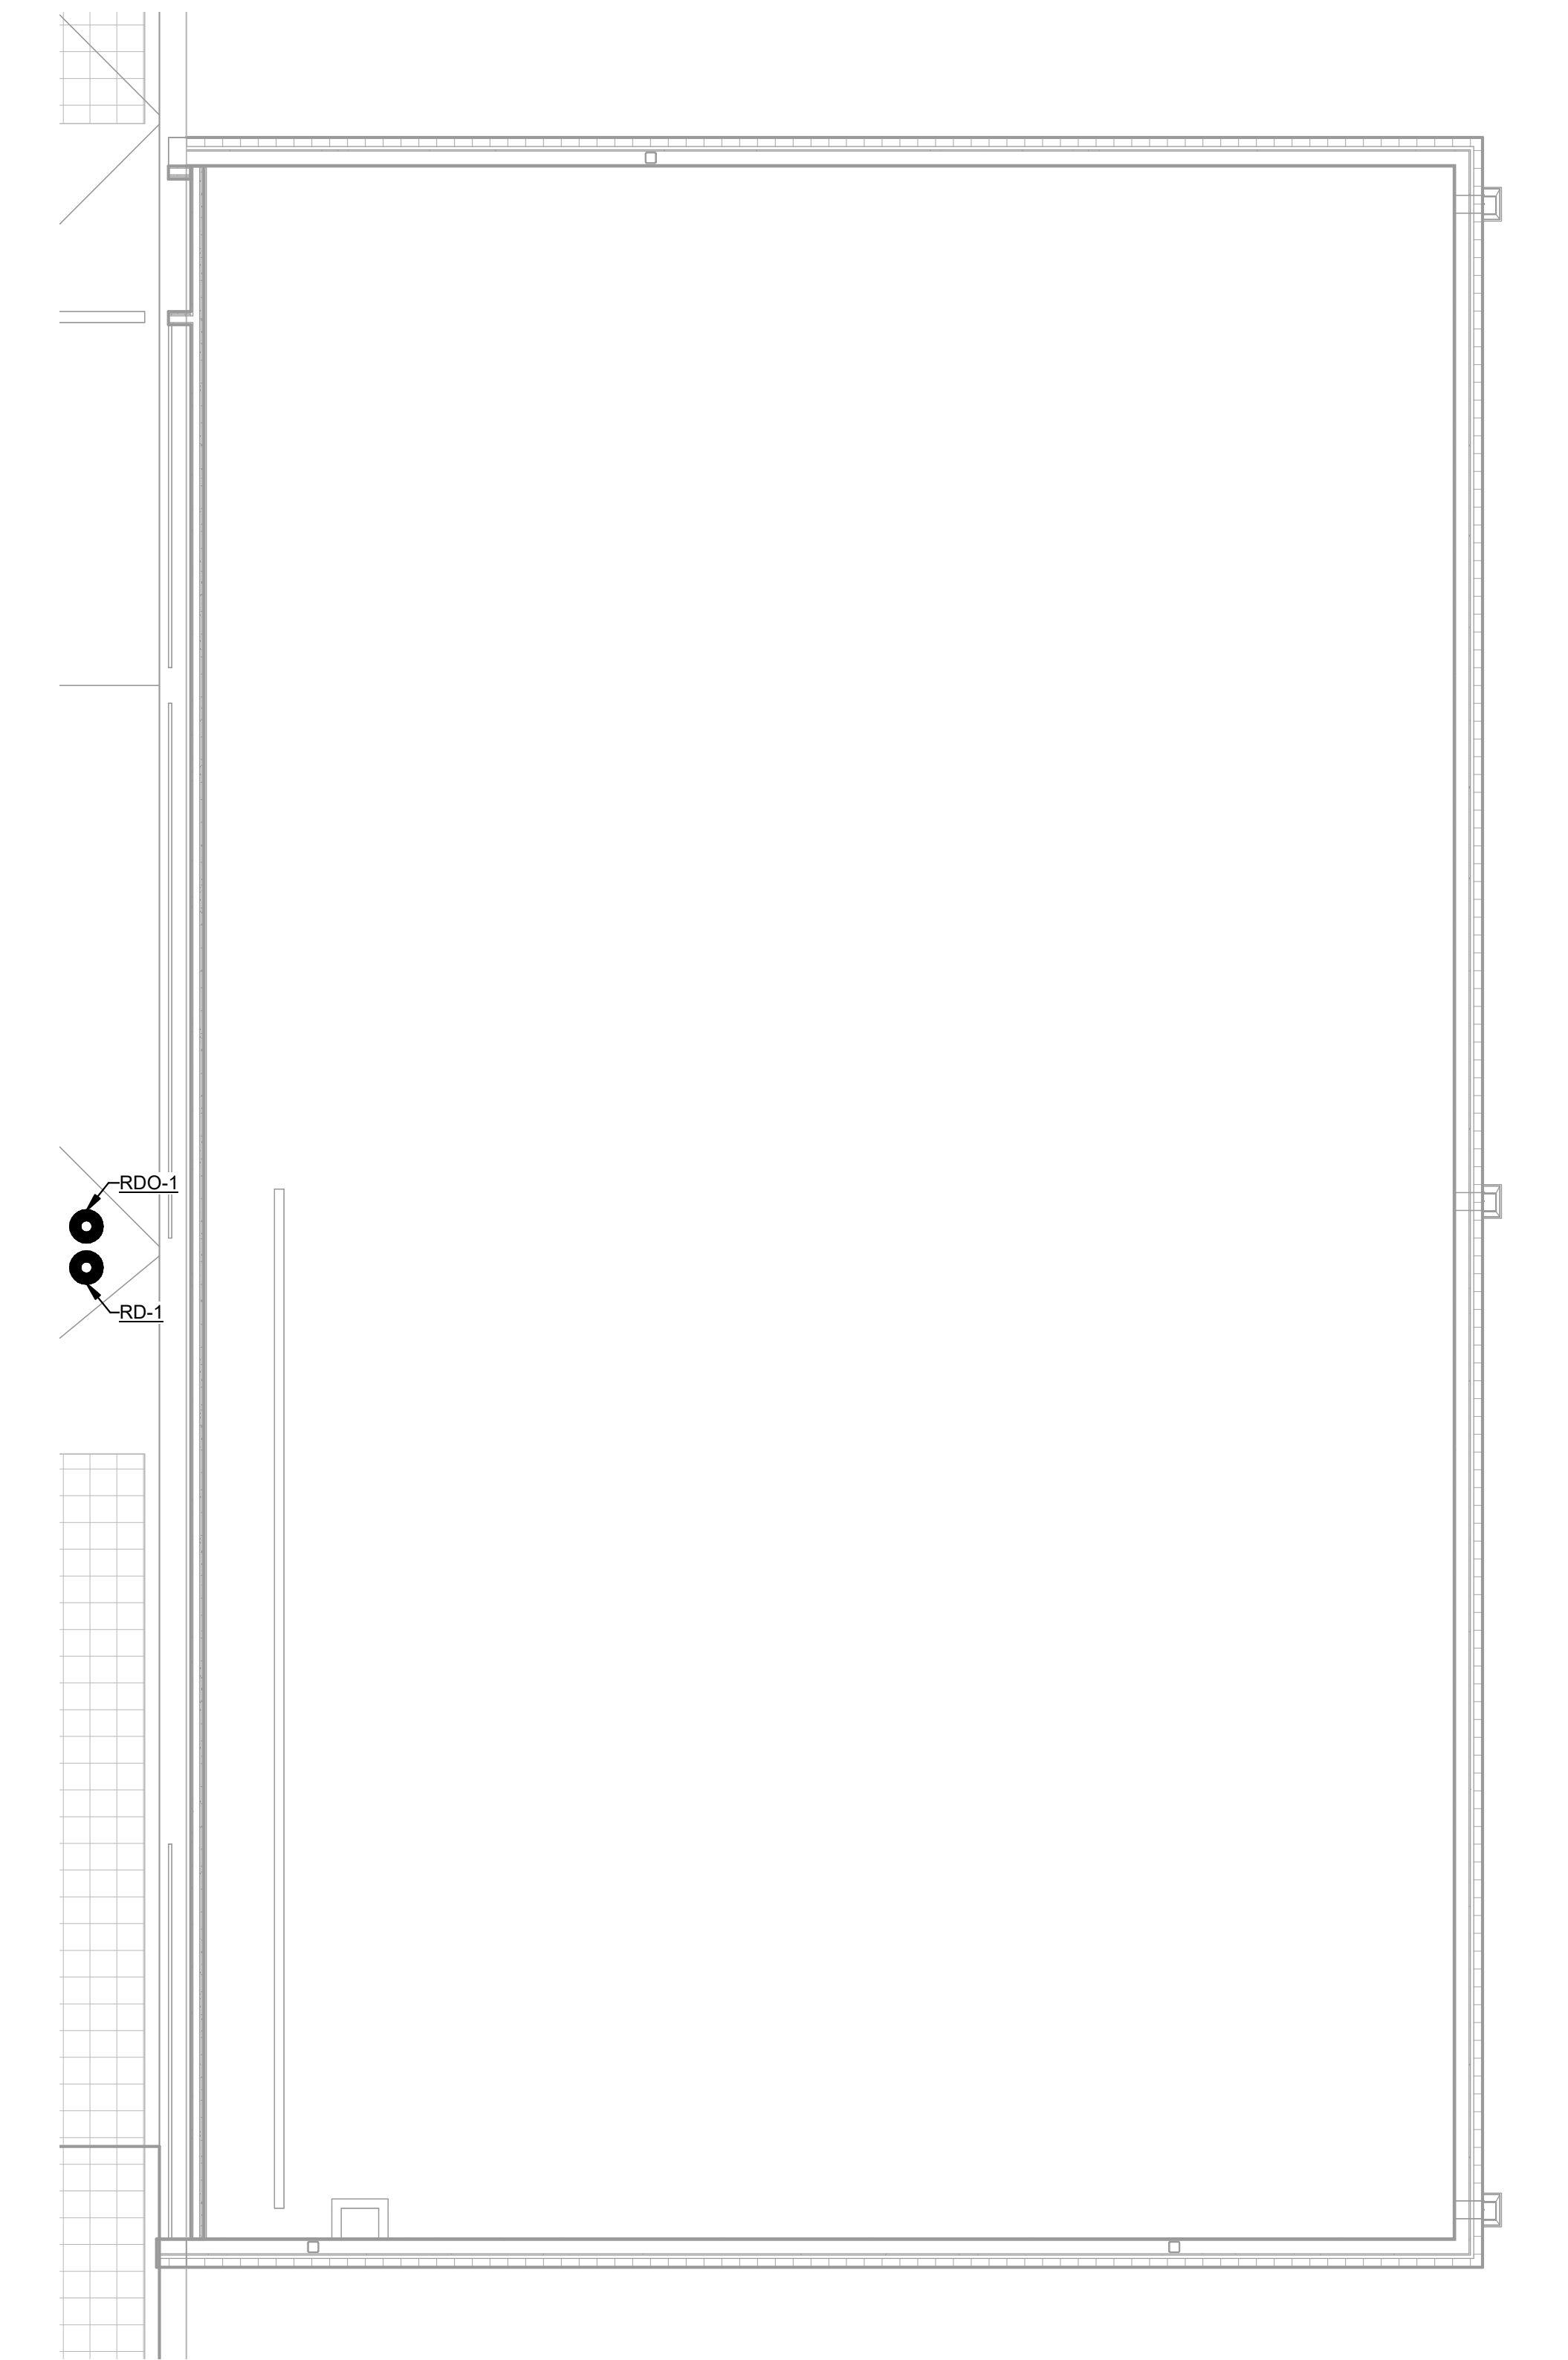

1 PLUMBING ROOF PLAN - NEW ADDITION
3/16" = 1'-0"

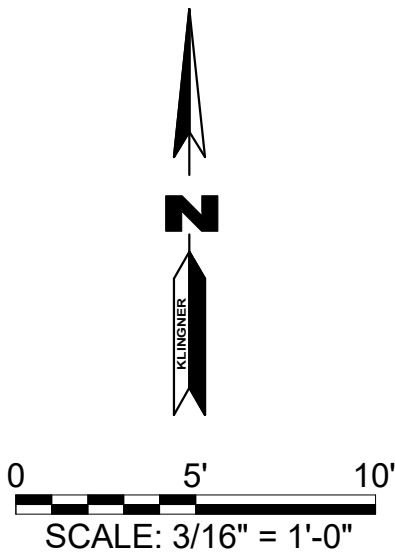

STATE OF MISSOURI
MIKE KEHOE,
GOVERNOR

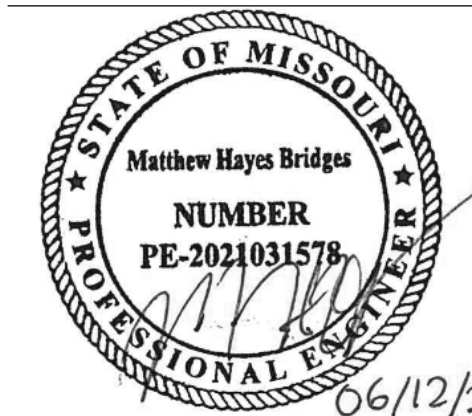

06/12/26
MATTHEW H BRIDGES - ENGINEER
MO # PE-2021031578

KLINGNER

& ASSOCIATES, P. C.

Engineers • Architects • Surveyors

Columbia, Missouri

3622 Endeavor Ave, Suite 117
573.355.5988
Burlington, IA Pella, IA Hannibal, MO Galveston, IL

www.klingner.com

MISSOURI STATE CERTIFICATE OF AUTHORITY #2001010108

OFFICE OF ADMINISTRATION
DIVISION OF FACILITIES
MANAGEMENT,
DESIGN AND CONSTRUCTION

JEFFERSON CITY
READINESS CENTER

CIVIL SUPPORT TEAM
BUILDING ADDITION

1225 COOPER DRIVE
JEFFERSON CITY, MO 65101

PROJECT # T2147-01
SITE # 6298
ASSET # 8136298008

REVISION: _____
DATE: _____
REVISION: _____
DATE: _____
REVISION: _____
DATE: _____

ISSUE DATE:06/12/26

CAD DWG FILE: P102
DRAWING BY: MHB
CHECKED BY: RMS
DESIGNED BY: MHB


SHEET TITLE:

PLUMBING ROOF
PLAN - NEW
ADDITION


SHEET NUMBER:

P102

SHEET 66 OF 85
JUNE 12, 2026

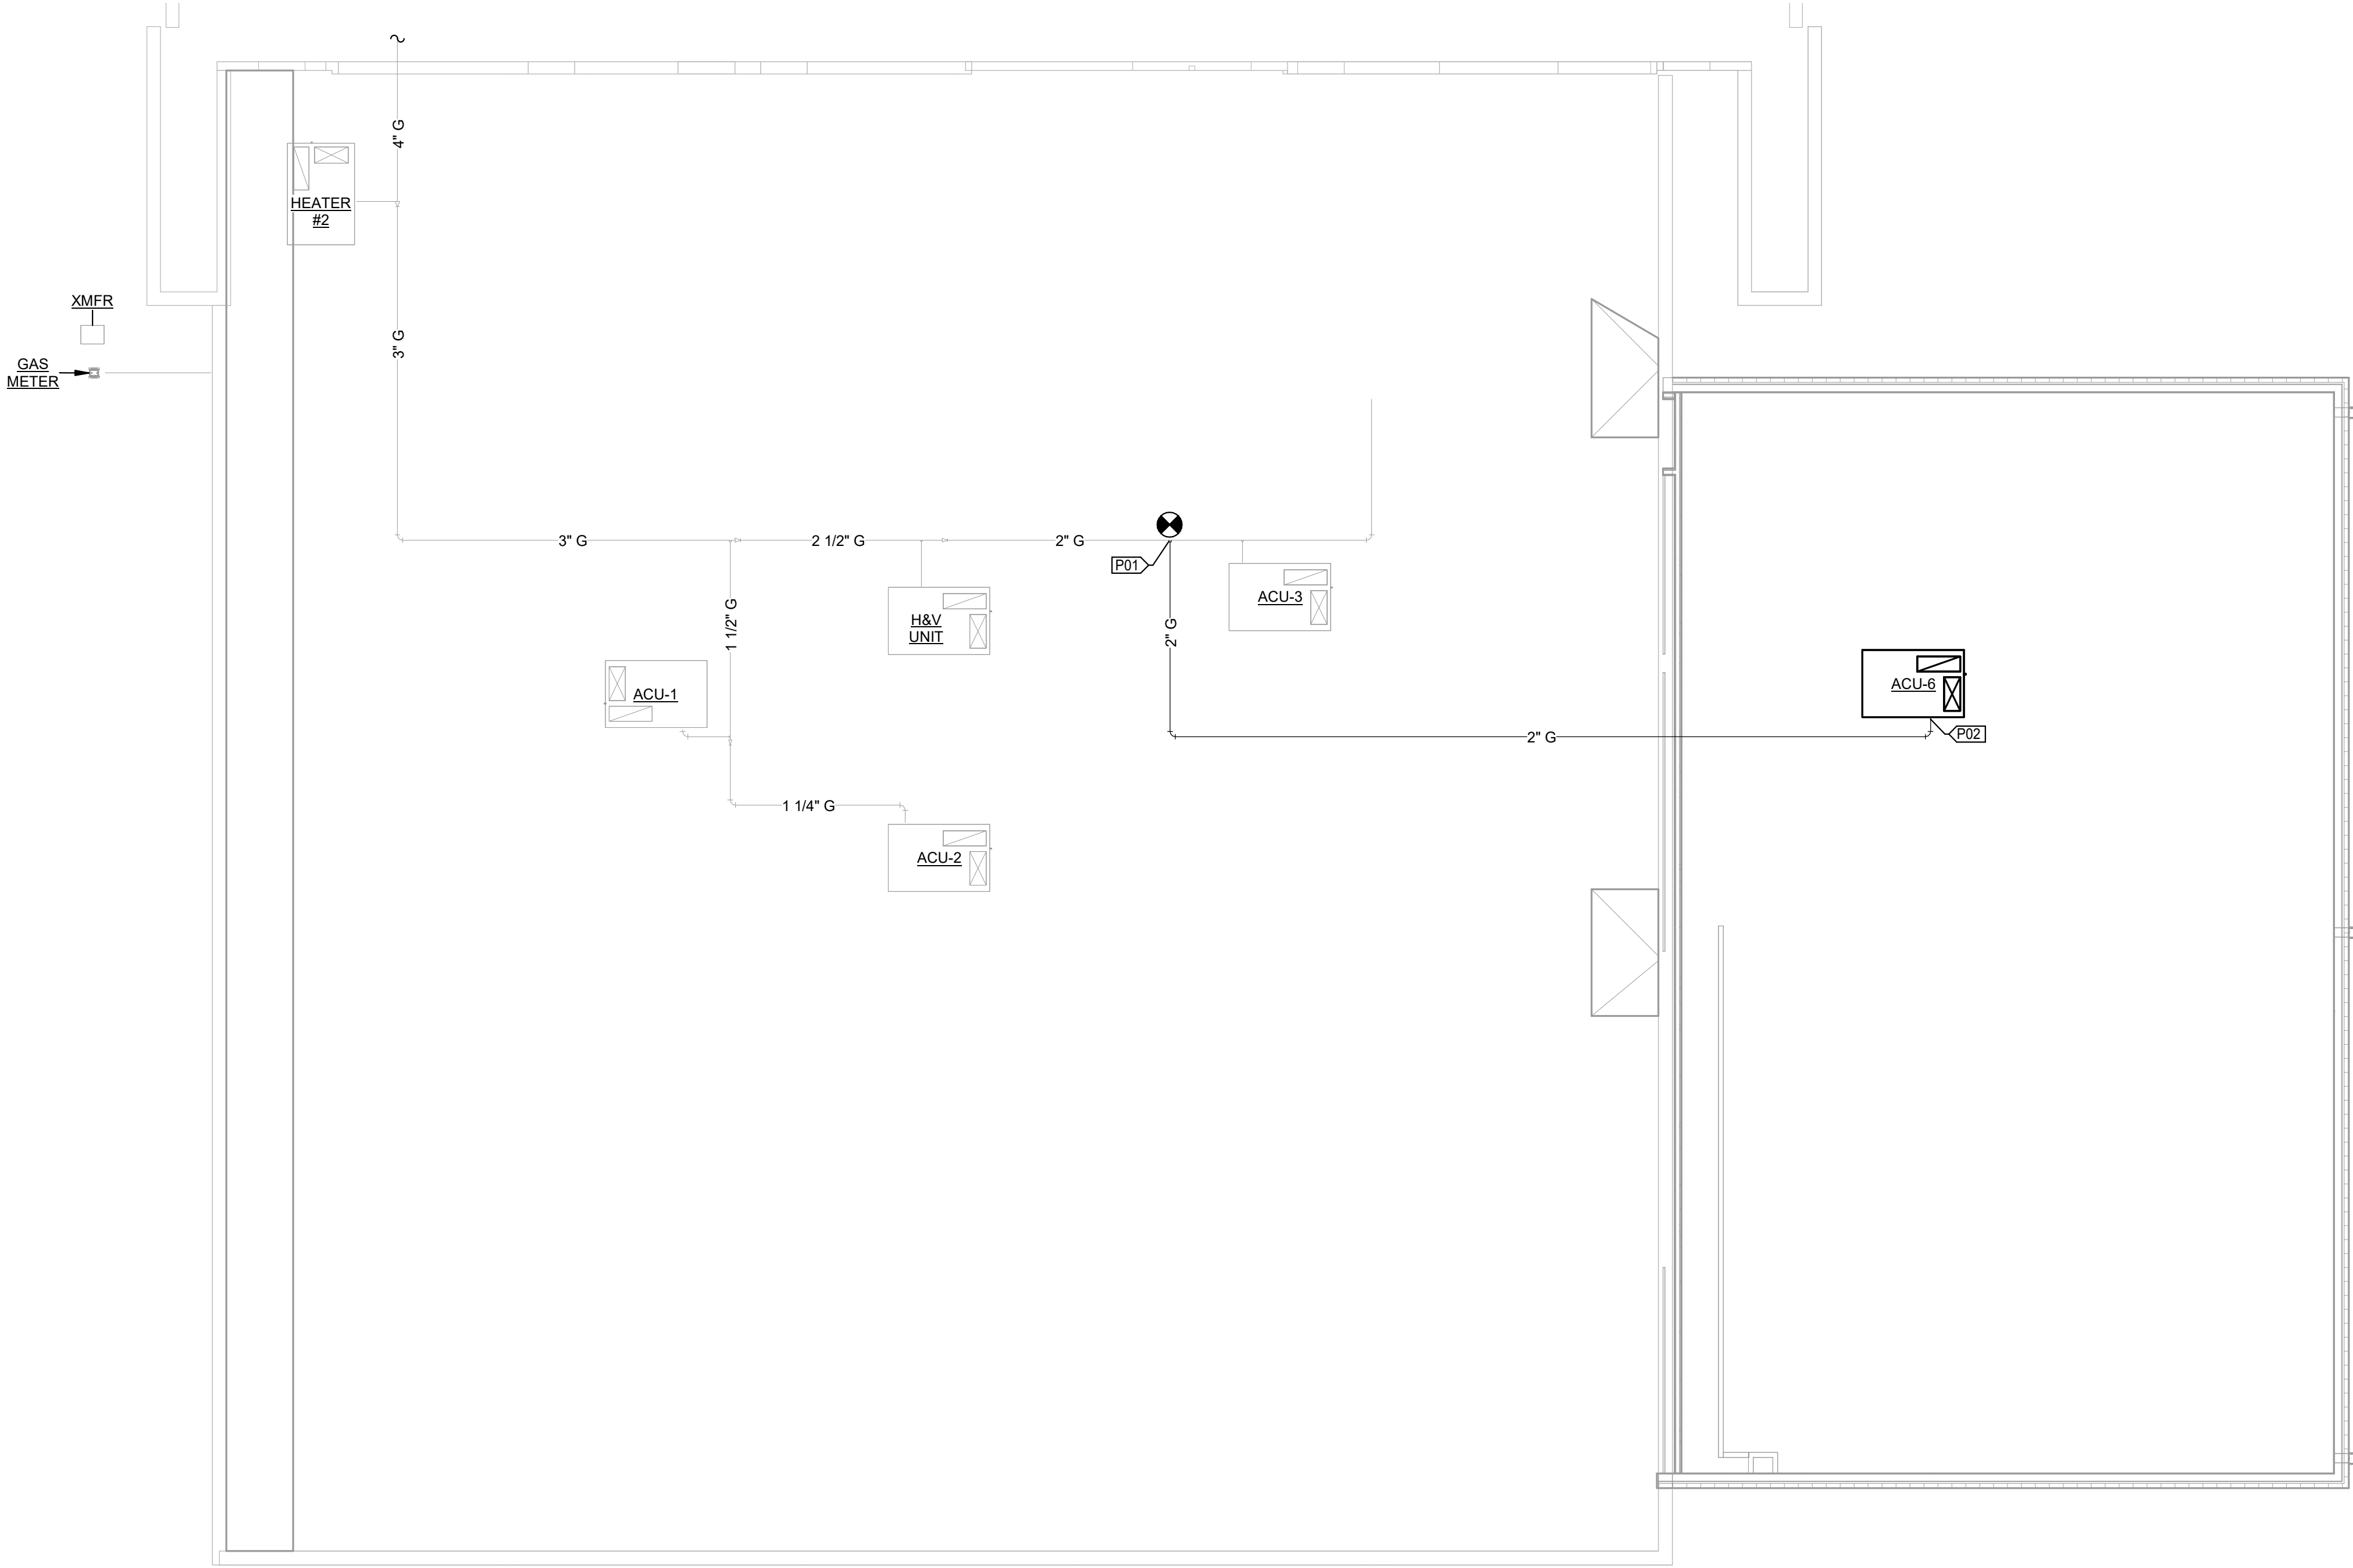


1 EXTERIOR GAS PIPING PLAN - AREA B
1/8" = 1'-0"

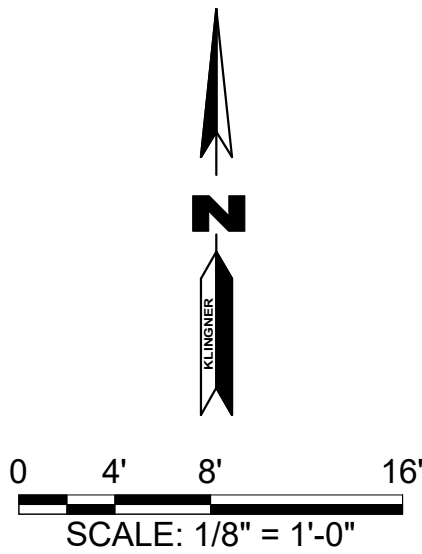

KEYNOTE LEGEND	
VALUE	DESCRIPTION
P01	CONNECT NEW NATURAL GAS SUPPLY LINE FOR THE NEW ROOFTOP UNIT TO THE EXISTING NATURAL GAS SUPPLY LINE MAIN.
P02	CONNECT NEW NATURAL GAS SUPPLY LINE TO THE NEW ROOFTOP UNIT.

STATE OF MISSOURI
MIKE KEHOE,
GOVERNOR

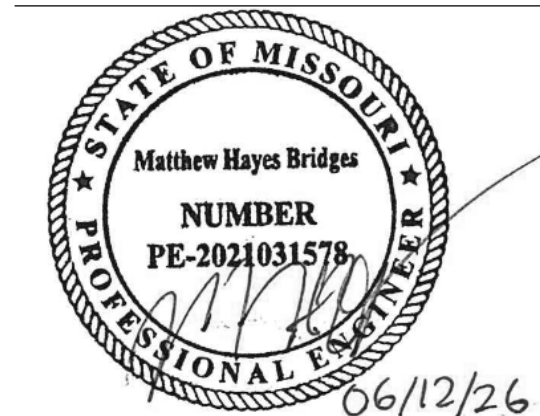

06/12/26
MATTHEW H BRIDGES - ENGINEER
MO # PE-2021031578

KLINGNER
& ASSOCIATES, P.C.

Engineers • Architects • Surveyors
Columbia, Missouri
3622 Endeavor Ave, Suite 117
573.355.5988
Burlington, IA, Pella, IA, Hannibal, MO, Galveston, IL

www.klinger.com

MISSOURI STATE CERTIFICATE OF AUTHORITY #2001010108

OFFICE OF ADMINISTRATION
DIVISION OF FACILITIES
MANAGEMENT,
DESIGN AND CONSTRUCTION

JEFFERSON CITY
READINESS CENTER

CIVIL SUPPORT TEAM
BUILDING ADDITION

1225 COOPER DRIVE
JEFFERSON CITY, MO 65101

PROJECT # T2147-01
SITE # 6298
ASSET # 8136298008

REVISION: _____
DATE: _____
REVISION: _____
DATE: _____
REVISION: _____
DATE: _____
ISSUE DATE: 06/12/26

CAD DWG FILE: P103
DRAWING BY: MHB
CHECKED BY: RMS
DESIGNED BY: MHB


SHEET TITLE:
**EXTERIOR GAS
PIPING PLAN -
AREA B**

SHEET NUMBER:
P103
SHEET 67 OF 85
JUNE 12, 2026

PLUMBING FIXTURE SCHEDULE												
TAG	ADA	DESCRIPTION	ROUGH IN PIPE SIZE				BASIS OF DESIGN		TYPE	BASIS OF DESIGN FIXTURE ACCESSORIES		
			CW	HW	SS	V	MAKE	MODEL		DESCRIPTION	MAKE	MODEL
EWS-1	Yes	WALL MOUNTED, HAND OPERATED, W/ STAINLESS STEEL RECEPTOR & DUAL EYE/FACE SPRAY HEADS	1/2"	1/2"	1 1/4"	1 1/4"	CHICAGO FAUCET HAWS CONDOR	8001-NF 7260BT-7270BT 49E/V56	MIXING VALVE	WALL MOUNTED EMERGENCY WATER MIXING VALVE W/ LOCKING TEMP. REGULATOR, INTERNAL COLD WATER BYPASS, BIMETAL THERMOSTAT, HIGH TEMP. LIMIT STOP, UNION CHECKSTOPS, DIAL THERMOMETER	LEONARD BRADLEY WATTS	TA-300-LF W/ TA-300-LF-STSTL-REC S19-2000 ETV200
FS-1	Yes	FLOOR SINK - 12"x12"x6", PORCELAIN ENAMELED CAST IRON	0"	0"	4"	2"	ZURN JAY R SMITH WATTS	Z-1900-4NH 320-340 FS-730				
S-1	Yes	SINK - STAND ALONE UNIT WITH LEGS, DOUBLE BOWL, STAINLESS STEEL	0"	0"	2"	0"	ELKAY RIDALCO JUST		FAUCET	WALL MOUNT WITH VACUUM BREAKER	CHICAGO ELKAY JUST	631-L8BVBE2-2CP
WH-1		EXTERIOR WALL HYDRANT - FREEZE PROOF, TAMPER RESISTANT	3/4"				WOODFORD WATTS ZURN	86	MIXING VALVE	THERMOSTATIC MIXING VALVE	LEONARD	170-LF

SINK PUMP SCHEDULE										
TAG	TYPE	FLOW	HEAD	ELECTRICAL			BASIS OF DESIGN			REMARKS
				VOLT	POLES	MOP	MAKE	MODEL	WEIGHT	
SP-1	PACKAGED SYSTEM SINK DRAIN PUMP	18.0 GPM	16.0 fth2O	120 V	1	15 A	SANIVITE LIBERTY ZOELLER	008	50 lb	

DOMESTIC WATER HEATER SCHEDULE														
TAG	DESCRIPTION	MAX FLOWRATE	HEATING ELEMENT		RATINGS		ELECTRICAL				BASIS OF DESIGN			REMARKS
			HEATING CAP.	UEF	MAX. PRES.	MAX. TEMP.	VOLT	POLES	FLA	MOP	MAKE	MODEL	WEIGH	
DWH-1	TANKLESS POINT-OF-USE WATER HEATER	2.0 GPM	8 kW		150.0 psig	140 °F	208 V	2	40 A	50 A	EEMAX INC. RHEIM AO SMITH	SPEX8208T	10 lb	SET OUTLET TEMPERATURE TO 140°F

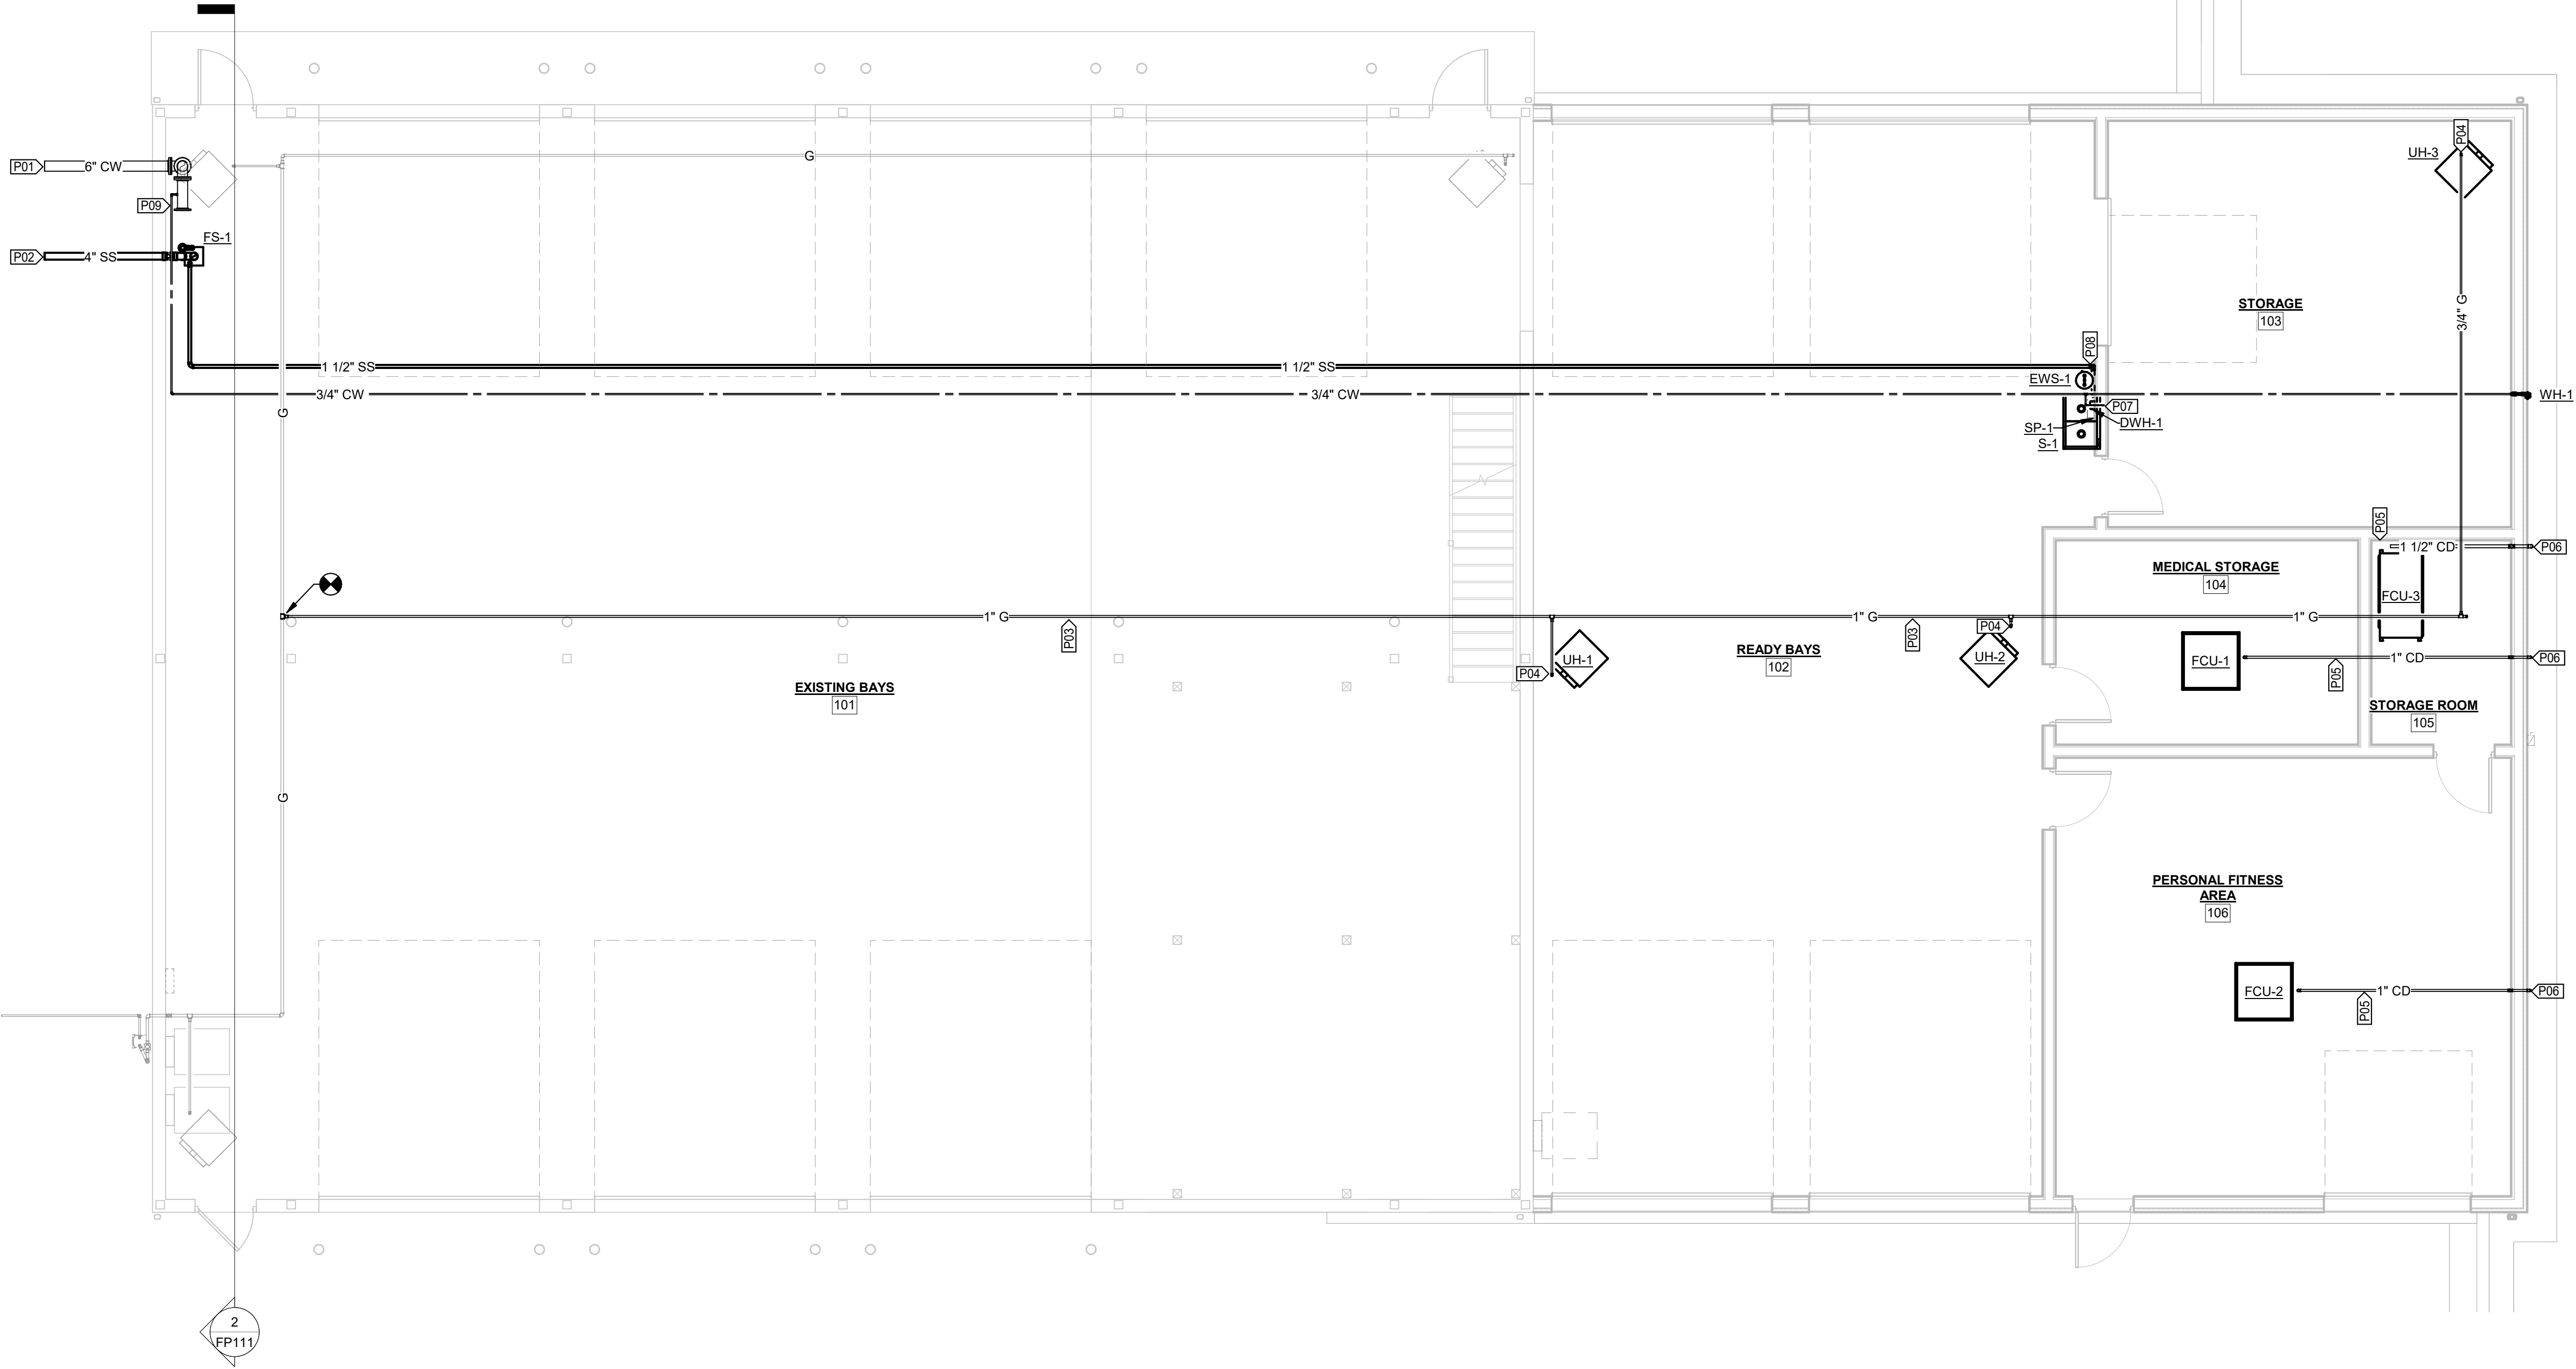


1 PLUMBING PLAN
3/16" = 1'-0"

0 5' 10'
SCALE: 3/16" = 1'-0"



KEYNOTE LEGEND	
VALUE	DESCRIPTION
P01	COORDINATE 6" WATER SERVICE ENTRANCE WITH SITE UTILITY PLAN.
P02	COORDINATE 4" SANITARY SEWER SERVICE ENTRANCE WITH SITE UTILITY PLAN.
P03	ROUTE NATURAL GAS PIPING THROUGH ATTIC.
P04	ROUTE PIPING DOWN THROUGH CEILING TO UNIT HEATER. PROVIDE TEE, CAP, NIPPLE, GAS COCK, AND FLEXIBLE CONNECTOR AND MAKE FINAL CONNECTION TO UNIT HEATER.
P05	ROUTE CONDENSATION DRAIN AS HIGH AS POSSIBLE AND BELOW CEILING TO EXTERIOR WALL.
P06	ROUTE CONDENSATION DRAIN PIPING EXPOSED DOWN INTERIOR WALL TO 18" ABOVE FINISHED GRADE. PENETRATE THROUGH EXTERIOR WALL AND PROVIDE 45Â° FITTING TURNED DOWN.
P07	INSTALL POINT-OF-USE WATER HEATER AND SINK PUMP SYSTEM BELOW SINK. ROUTE 2" VENT UP TO 3" VENT THROUGH THE ROOF.
P08	ROUTE SINK PUMP DISCHARGE UP TO CEILING IN THIS LOCATION AND SLOPE DOWN AT 1/16" PER FOOT TO FLOOR SINK.
P09	FURNISH AND INSTALL WATER METER AND BACKFLOW PREVENTER ON 3/4-INCH DOMESTIC WATER LINE. COORDINATE REQUIREMENTS WITH UTILITY.

STATE OF MISSOURI
MIKE KEHOE,
GOVERNOR

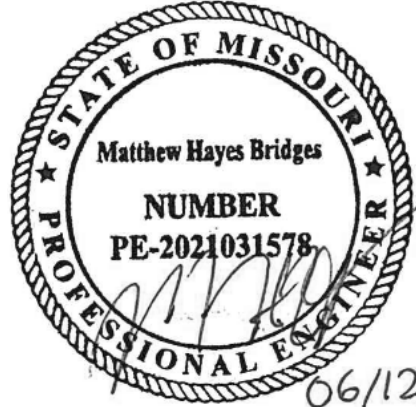

06/12/26
MATTHEW H BRIDGES - ENGINEER
MO # PE-2021031578

KLINGNER
& ASSOCIATES, P. C.

Engineers • Architects • Surveyors

Columbia, Missouri
3622 Endeavor Ave, Suite 117
573.355.5988
Burlington, IA, Pella, IA, Hannibal, MO, Galveston, IL

www.klingner.com

KLINGNER & ASSOCIATES, P. C. - ARCHITECTURE
MISSOURI STATE CERTIFICATE OF AUTHORITY #2001010108

OFFICE OF ADMINISTRATION
DIVISION OF FACILITIES
MANAGEMENT,
DESIGN AND CONSTRUCTION

JEFFERSON CITY
READINESS CENTER

CIVIL SUPPORT TEAM
BUILDING ADDITION

1225 COOPER DRIVE
JEFFERSON CITY, MO 65101

PROJECT # T2147-01
SITE # 6298
ASSET # 8136298008

REVISION: _____
DATE: _____
REVISION: _____
DATE: _____
REVISION: _____
DATE: _____
ISSUE DATE: 06/12/26

CAD DWG FILE: P111
DRAWING BY: ALD
CHECKED BY: RMS
DESIGNED BY: MHB

SHEET TITLE:

PLUMBING PLAN -
ALT #1

SHEET NUMBER:

P111

SHEET 68 OF 85
JUNE 12, 2026