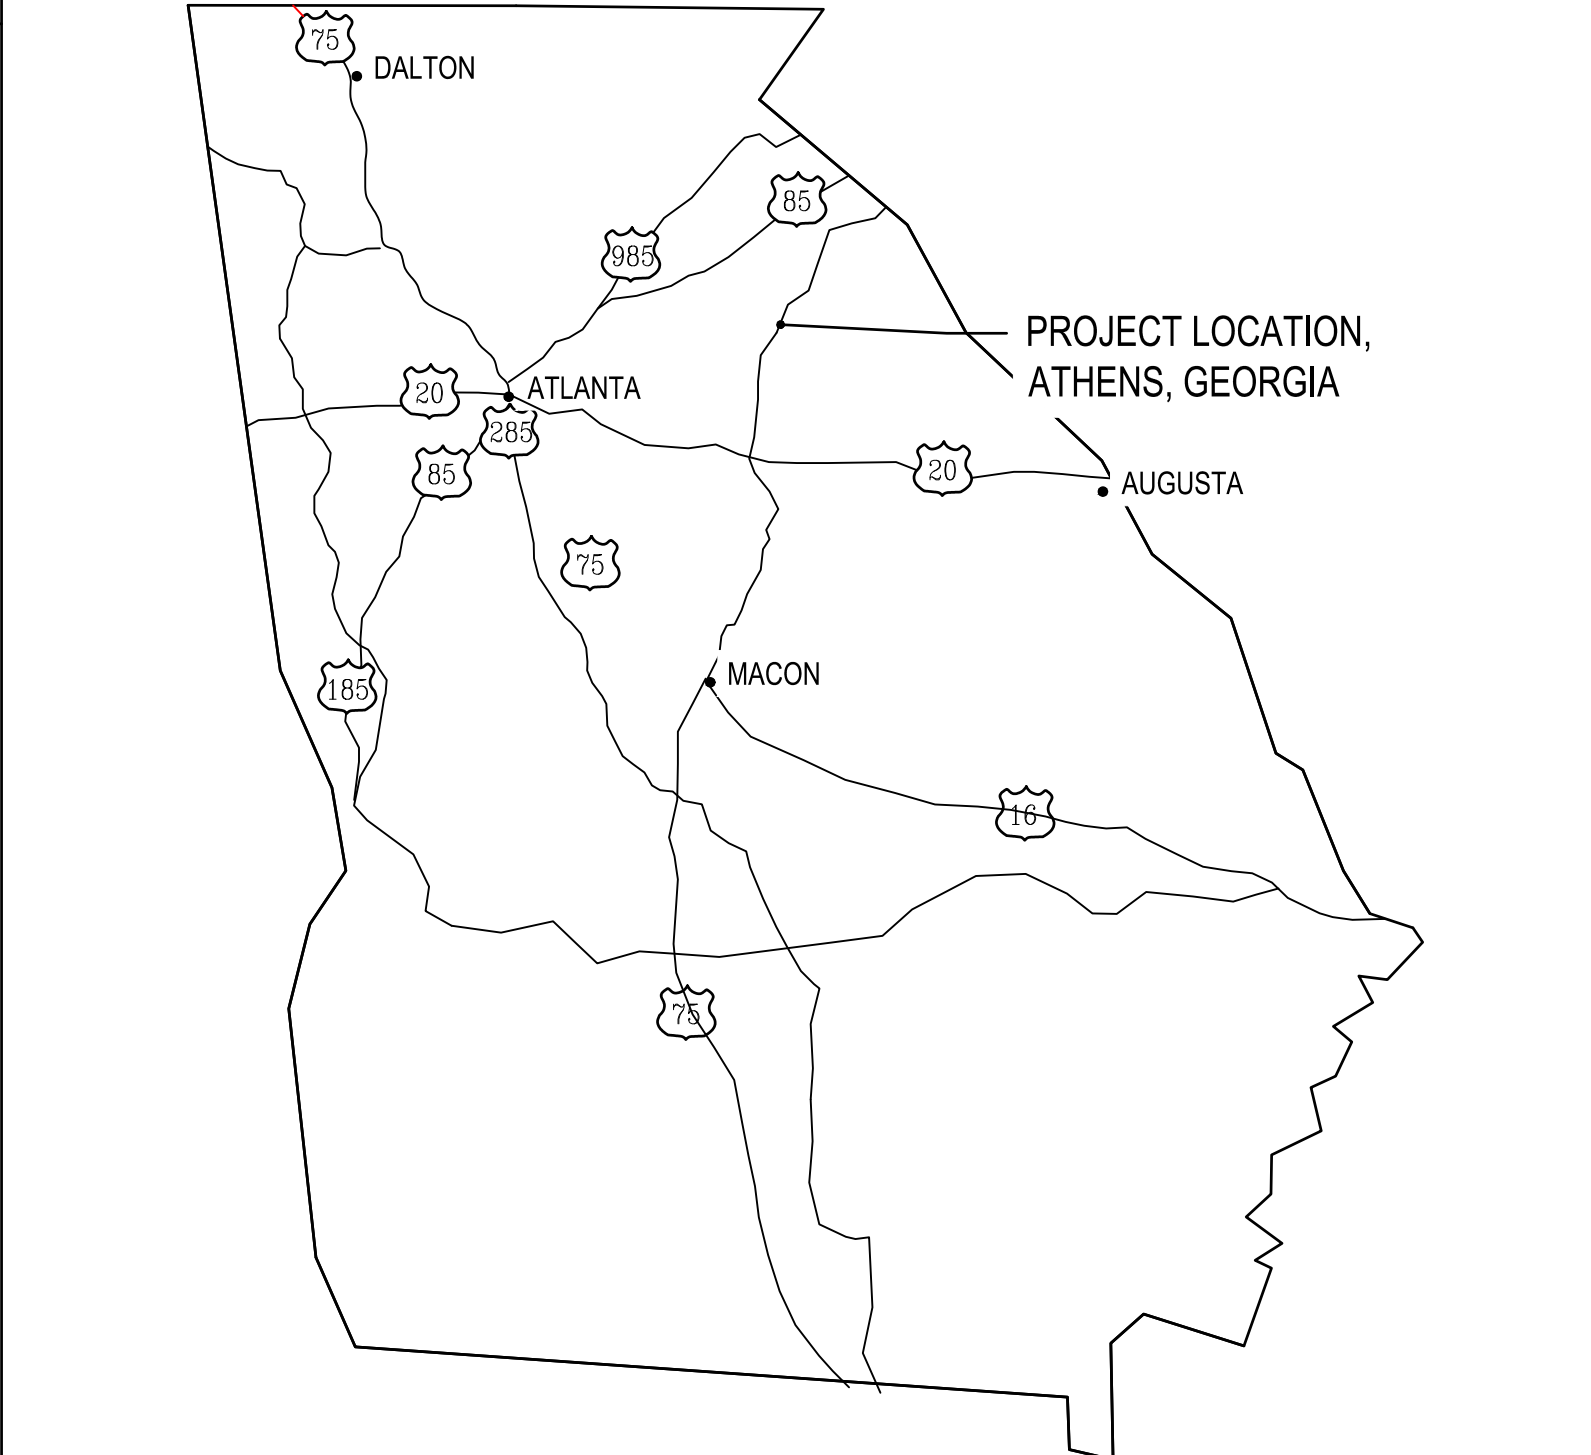


U.S. DEPARTMENT OF AGRICULTURE
AGRICULTURAL RESEARCH SERVICE



BUILDING 1, NATIONAL POULTRY RESEARCH CENTER
RENOVATE ROOM P111
ATHENS, GEORGIA

100% DESIGN SUBMITTAL

A/E DESIGN CONTRACT #12405B21D0003
A/E DESIGN TASK ORDER #12805B24F0352

INDEX OF DRAWINGS			VICINITY MAP	LOCATION MAP																																																																																		
SHEET NO.	DRAWING NO.	TITLE																																																																																				
T-101	1 OF ?	TITLE SHEET																																																																																				
HM101	2 OF ?	PARTIAL FIRST FLOOR PLAN - HAZARDOUS MATERIAL																																																																																				
AD101	3 OF ?	PARTIAL FIRST FLOOR PLANS - DEMOLITION																																																																																				
A-001	4 OF ?	ARCHITECTURAL NOTES AND LEGEND																																																																																				
A-101	5 OF ?	PARTIAL FIRST FLOOR PLANS																																																																																				
A-201	6 OF ?	SCHEDULES AND DETAILS																																																																																				
P-101	7 OF ?	PARTIAL FIRST FLOOR PLUMBING PLAN																																																																																				
P-601	8 OF ?	PLUMBING SCHEDULE AND DETAILS																																																																																				
MD101	9 OF ?	PARTIAL FIRST FLOOR HVAC DEMOLITION PLAN																																																																																				
M-101	10 OF ?	PARTIAL FIRST FLOOR HVAC PLAN																																																																																				
M-501	11 OF ?	MECHANICAL DETAILS																																																																																				
M-502	12 OF ?	MECHANICAL DETAILS																																																																																				
M-601	13 OF ?	MECHANICAL SCHEDULES AND DETAILS																																																																																				
M-701	14 OF ?	MECHANICAL CONTROLS																																																																																				
E-001	15 OF ?	ELECTRICAL NOTES																																																																																				
E-002	16 OF ?	ELECTRICAL LEGEND																																																																																				
ED101	17 OF ?	ELECTRICAL DEMOLITION																																																																																				
E-101	18 OF ?	POWER PLAN																																																																																				
E-201	19 OF ?	LIGHTING PLAN																																																																																				
E-202	20 OF ?	LIGHTING DETAILS																																																																																				
E-301	21 OF ?	EQUIPMENT PLAN																																																																																				
E-601	22 OF ?	POWER SCHEDULES AND RISER																																																																																				
F-101	23 OF ?	FIRE ALARM PLAN																																																																																				
T-101	24 OF ?	TELECOMMUNICATIONS PLAN																																																																																				
T-102	25 OF ?	TELECOMMUNICATION FIBER PLAN																																																																																				
																																																																																						
			STATE OF GEORGIA	NATIONAL POULTRY RESEARCH CENTER 950 COLLEGE STATION ROAD ATHENS, GA 30605																																																																																		
				<table><tr><td colspan="2" rowspan="2"></td><td colspan="4"></td></tr><tr><td colspan="4"></td></tr><tr><td colspan="2" rowspan="2">A-E FIRM</td><td colspan="2" rowspan="2">USDA</td><td colspan="4">REVISIONS</td></tr><tr><td colspan="4"></td></tr><tr><td colspan="2">PROJECT MANAGER</td><td colspan="2">EPM</td><td>NO.</td><td>DATE</td><td>BY</td><td>DESCRIPTION</td></tr><tr><td colspan="2">RPP</td><td colspan="2">XXX</td><td colspan="4"></td></tr><tr><td colspan="2">DESIGNER</td><td colspan="2">PPM</td><td colspan="4"></td></tr><tr><td colspan="2">RPP</td><td colspan="2">XXX</td><td colspan="4"></td></tr><tr><td colspan="2">CHECKED BY</td><td colspan="2">SAFETY & HEALTH</td><td colspan="2" rowspan="2">PROJECT NO.</td><td colspan="2" rowspan="2">AGRICULTURAL RESEARCH SERVICE</td><td rowspan="2">SHEET</td></tr><tr><td colspan="2">CG</td><td colspan="2">XXX</td></tr><tr><td colspan="2">JOB #</td><td colspan="2">REAL PROPERTY</td><td colspan="2">DATE</td><td colspan="2" rowspan="2">STONEVILLE, MS</td><td rowspan="2">T-101</td></tr><tr><td colspan="2">6124-A</td><td colspan="2">XXX</td><td colspan="2">4/22/2025</td></tr></table>											A-E FIRM		USDA		REVISIONS								PROJECT MANAGER		EPM		NO.	DATE	BY	DESCRIPTION	RPP		XXX						DESIGNER		PPM						RPP		XXX						CHECKED BY		SAFETY & HEALTH		PROJECT NO.		AGRICULTURAL RESEARCH SERVICE		SHEET	CG		XXX		JOB #		REAL PROPERTY		DATE		STONEVILLE, MS		T-101	6124-A		XXX		4/22/2025	
																																																																																						
A-E FIRM		USDA		REVISIONS																																																																																		
PROJECT MANAGER		EPM		NO.	DATE	BY	DESCRIPTION																																																																															
RPP		XXX																																																																																				
DESIGNER		PPM																																																																																				
RPP		XXX																																																																																				
CHECKED BY		SAFETY & HEALTH		PROJECT NO.		AGRICULTURAL RESEARCH SERVICE		SHEET																																																																														
CG		XXX																																																																																				
JOB #		REAL PROPERTY		DATE		STONEVILLE, MS		T-101																																																																														
6124-A		XXX		4/22/2025																																																																																		

2/2024, Issue 01/24/24, USDA, B1 Renovation P111 Lab - Athens GA07 Working Folder ArchtH0101.dwg
Apr 23, 2025 - 3:18pm

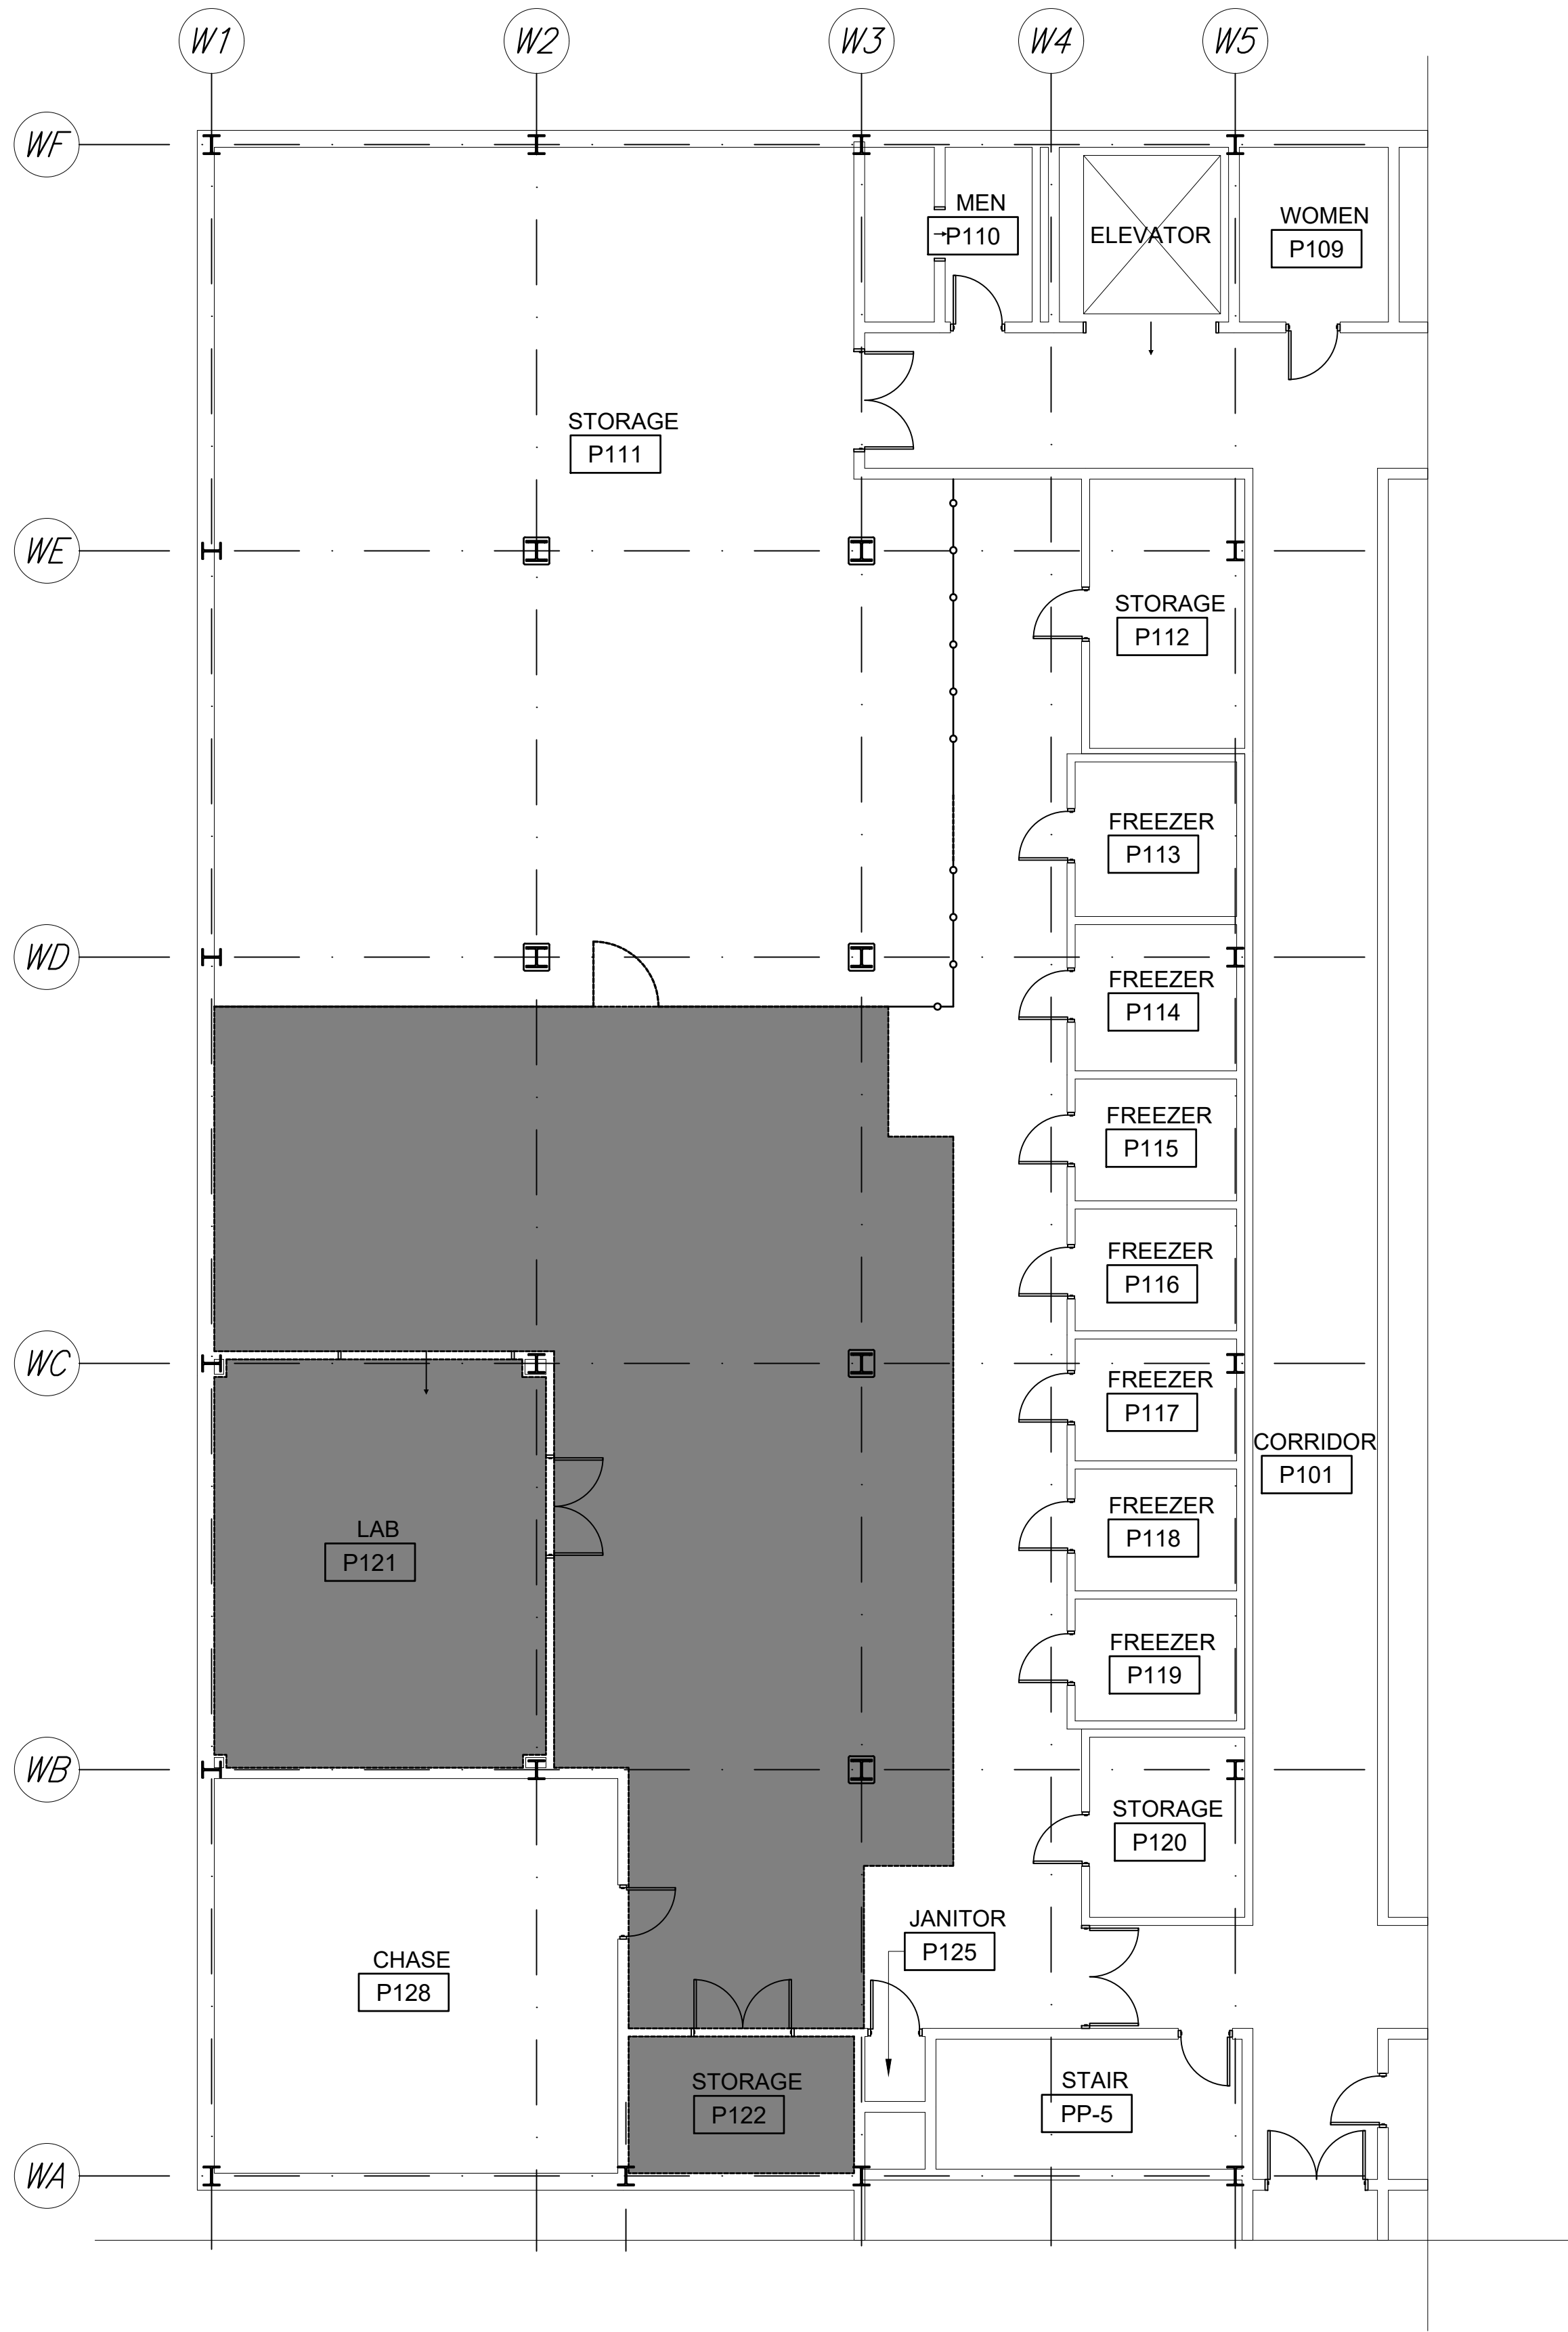




1
AD101

PARTIAL FIRST FLOOR PLAN - HAZARDOUS MATERIALS
SCALE: 1/4"= 1'-0"

ENVIRONMENTAL NOTES

1. THE CONTRACTOR MUST REMOVE AND DISPOSE OF ALL ASBESTOS CONTAINING BUILDING MATERIALS (ACBM) AS HAZARDOUS ASBESTOS WASTE IN ACCORDANCE WITH ALL LOCAL, STATE AND FEDERAL REGULATIONS.
2. THE CONTRACTOR MUST NOTIFY THE GEORGIA STATE DEPARTMENT OF HEALTH AND ENVIRONMENT A MINIMUM OF 10 DAYS PRIOR TO ANY DEMOLITION WORK AT THE FACILITY.
3. ALL MECHANICAL AND PLUMBING PIPE JOINT INSULATION IS CONSIDERED AS ASBESTOS CONTAINING MATERIALS. THESE MATERIALS MUST BE REMOVED AND DISPOSED OF AS HAZARDOUS WASTE AND NEW, NON-ASBESTOS PIPE JOINT INSULATION MUST BE PROVIDED TO REPLACE THAT REMOVED. SEE SPECIFICATION 02 82 00, 'ASBESTOS REMEDIATION' AND THE ASBESTOS SURVEY REPORT BY TERRACON DATED JANUARY 20, 2025 FOR ADDITIONAL INFORMATION.
4. BUILDING 1 WILL BE OCCUPIED DURING CONSTRUCTION. PROVIDE PROPER CONTAINMENT AND VENTILATION DURING HAZARDOUS MATERIAL ABATEMENT PROCEDURES AS DIRECTED BY SPECIFICATIONS.
5. CONTRACTOR IS REQUIRED TO HIRE A STATE OF GEORGIA LICENSED ASBESTOS PROJECT DESIGNER AS REQUIRED IN SPECIFICATIONS.

LEGEND

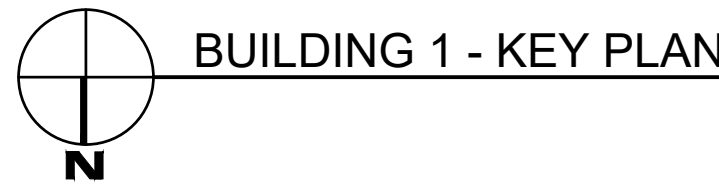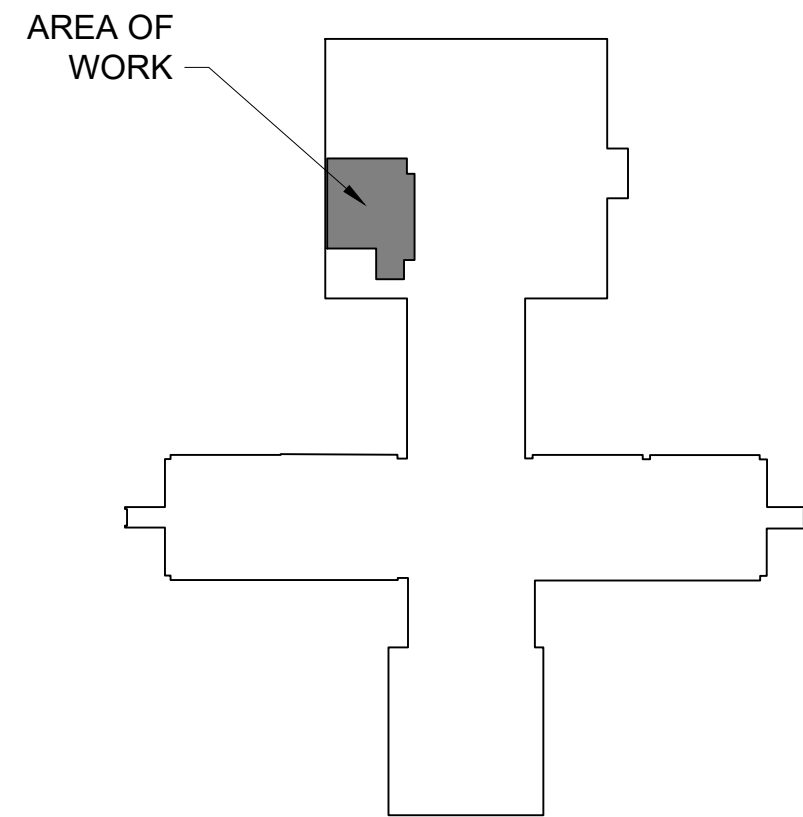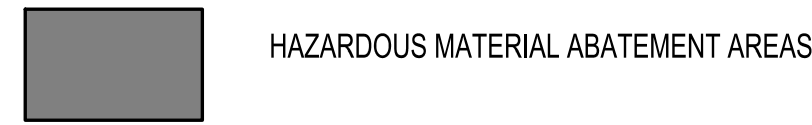


BUILDING 1 - KEY PLAN

The Johnson-McAdams Firm
P.O. BOX 515, GREENWOOD, MISSISSIPPI 39202-0515

A-E FIRM	USDA
PROJECT MANAGER	RPP
DESIGNER	RPP
CHECKED BY	CG
JOB #	6124-A

NO.	DATE	BY	DESCRIPTION
REVISIONS			
USDA Agricultural Research Service			
USDA AGRICULTURAL RESEARCH SERVICE BUILDING 1, U.S. NATIONAL POULTRY RESEARCH CTR. ATHENS, GEORGIA			
PARTIAL FIRST FLOOR PLAN HAZARDOUS MATERIALS			
PROJECT NO.	XXX	AGRICULTURAL RESEARCH SERVICE	SHEET
DATE	12/10/2024	SOUTHEAST AREA	HM101
		STONEVILLE, MS	1 OF XX

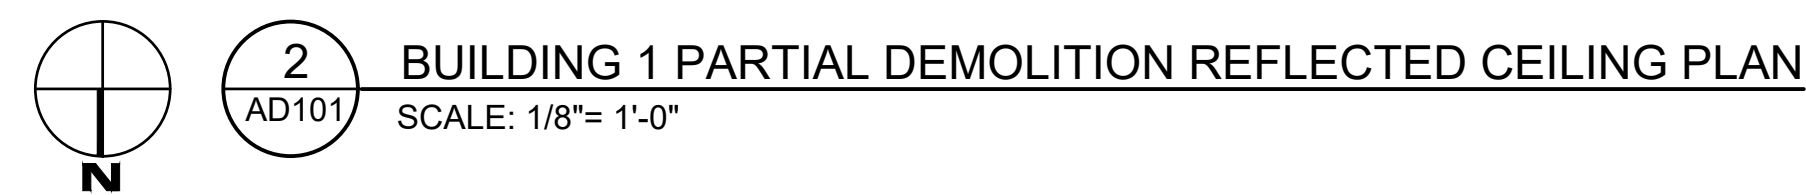


1. ITEMS DENOTED BY DASHED LINES MUST BE DEMOLISHED.
2. EXISTING OVERALL DIMENSIONS ARE PROVIDED FOR GENERAL BIDDING PURPOSES ONLY.
3. PERFORM ALL HAZARDOUS WASTE ABATEMENT PRIOR TO PERFORMING ANY OTHER WORK UNDER THIS CONTRACT.



 KEYED DEMOLITION NOTES

1. REMOVE EXISTING HVAC EQUIPMENT (SEE MECH.)
2. REMOVE EXISTING ELECTRICAL DEVICES (SEE ELEC.)
3. REMOVE EXISTING 6" HIGH CHAIN LINK FENCING. APPROXIMATELY 41'-6".
4. REMOVE EXISTING 4' CHAIN LINK GATE, RETAIN FOR REINSTALLATION.
5. SAWCUT AND REMOVE EXISTING 6" WIDE CONCRETE CURB , EPOXY GROUT TO MATCH ADJACENT FINISH FLOOR ELEVATION AS REQUIRED.
6. REMOVE FENCE AS REQUIRED TO REINSTALL EXISTING 4' GATE.
7. REMOVE QUARRY TILE FLOOR AND SETTING BED IN AREA OF NEW WORK.
8. REMOVE HVAC DUCTWORK AND EQUIPMENT, (SEE MECH.)
9. REMOVE LIGHT FIXTURES (SEE ELEC.)
10. SAWCUT AND REMOVE WALL AS REQUIRED FOR NEW DOOR OPENING
11. EXISTING FREEZERS TO REMAIN, PROTECT DURING CONSTRUCTION.



LEGEND

 REMOVE FENCE
 FENCE TO REMAIN

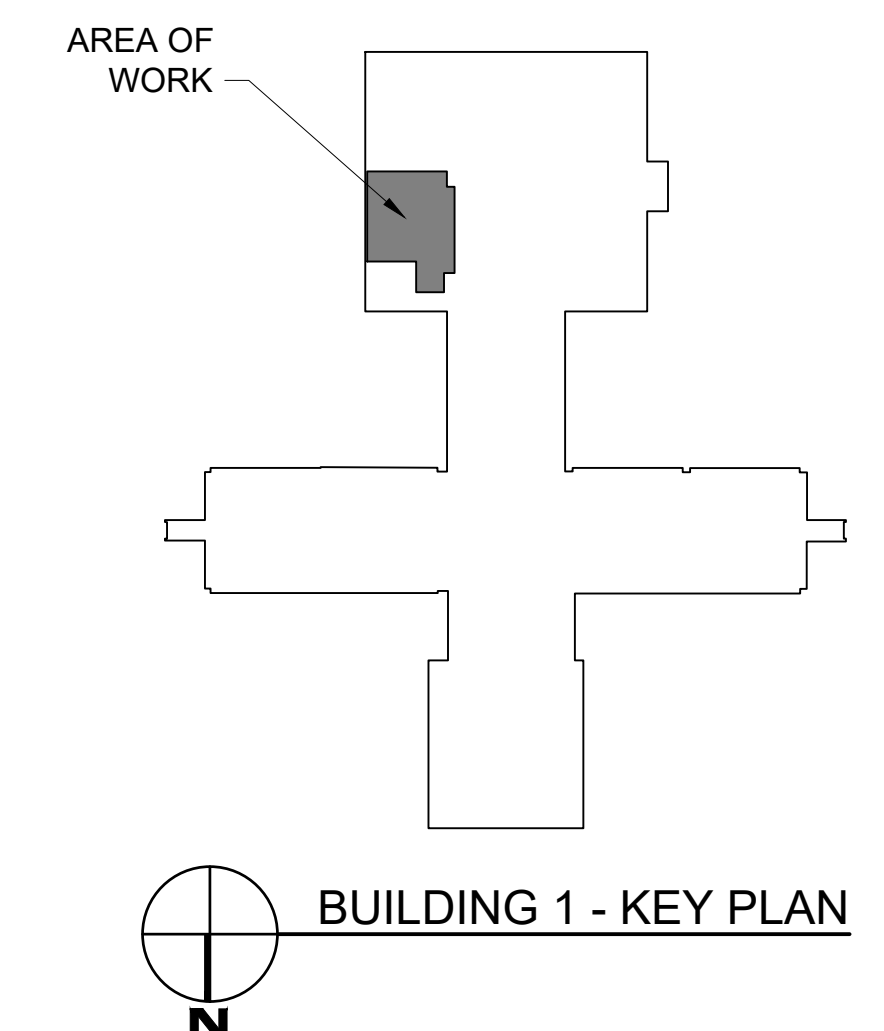

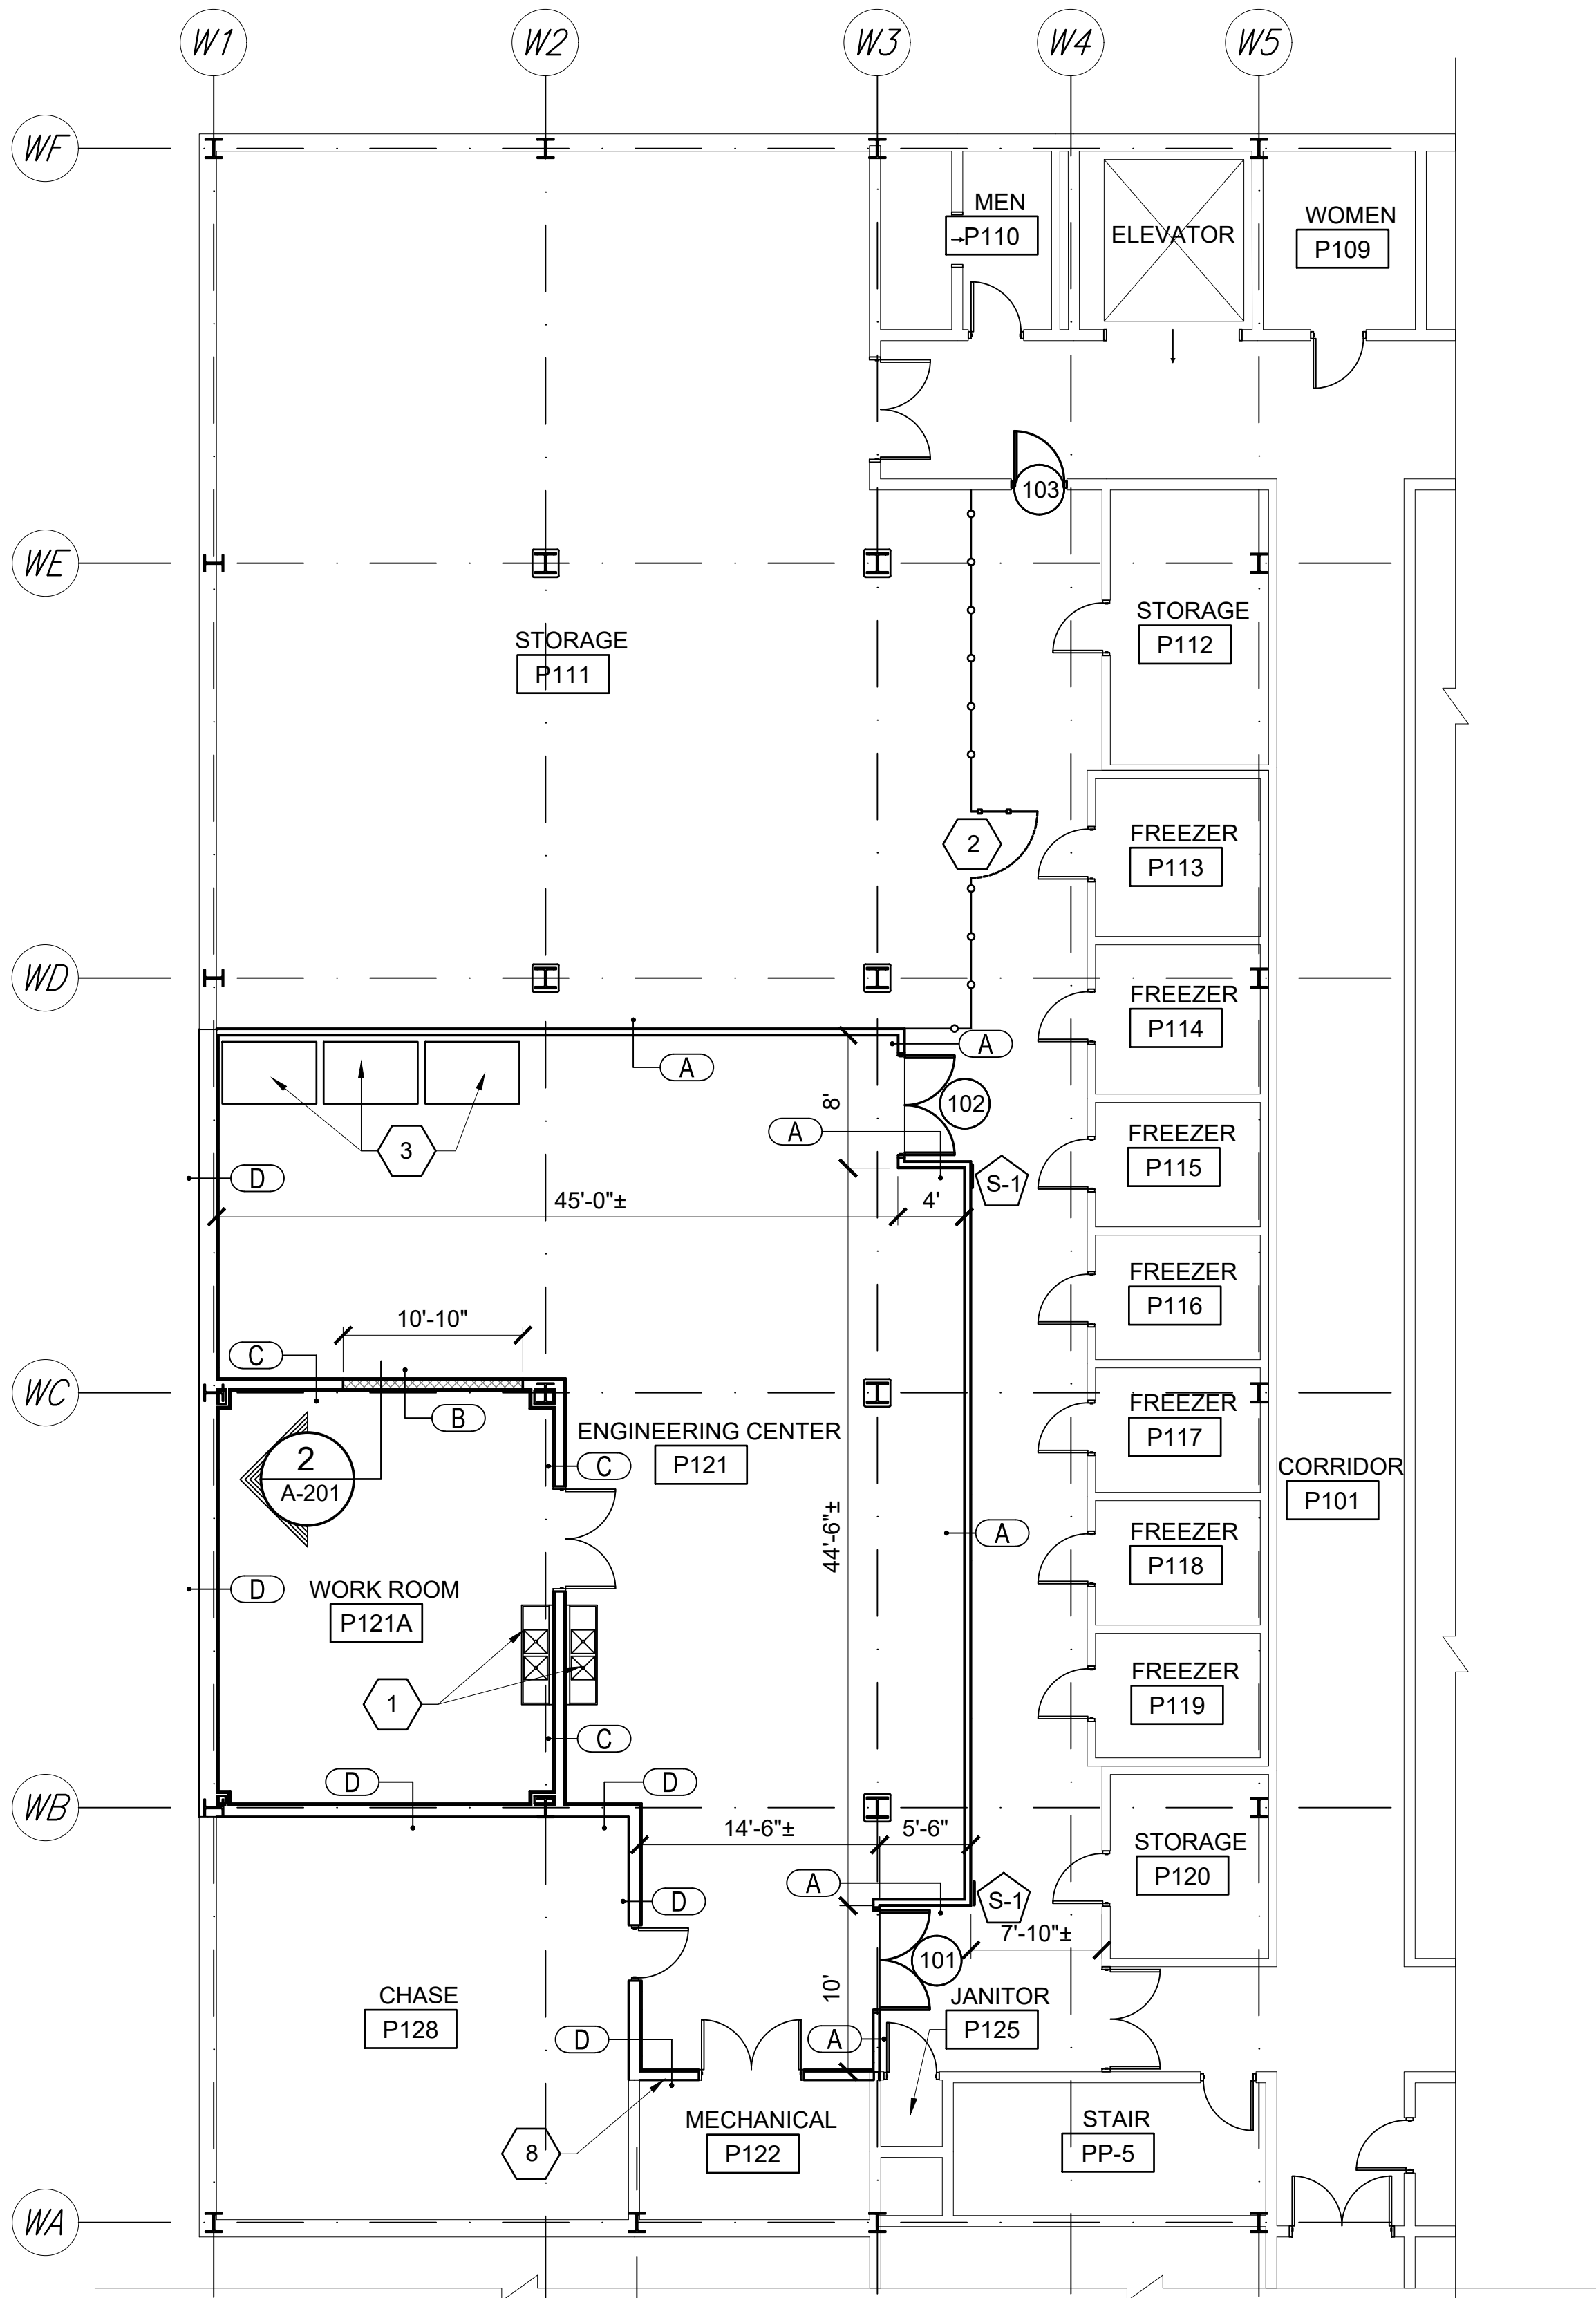

1 BUILDING 1 PARTIAL FLOOR PLAN
A-101
SCALE: 1/8"= 1'-0"

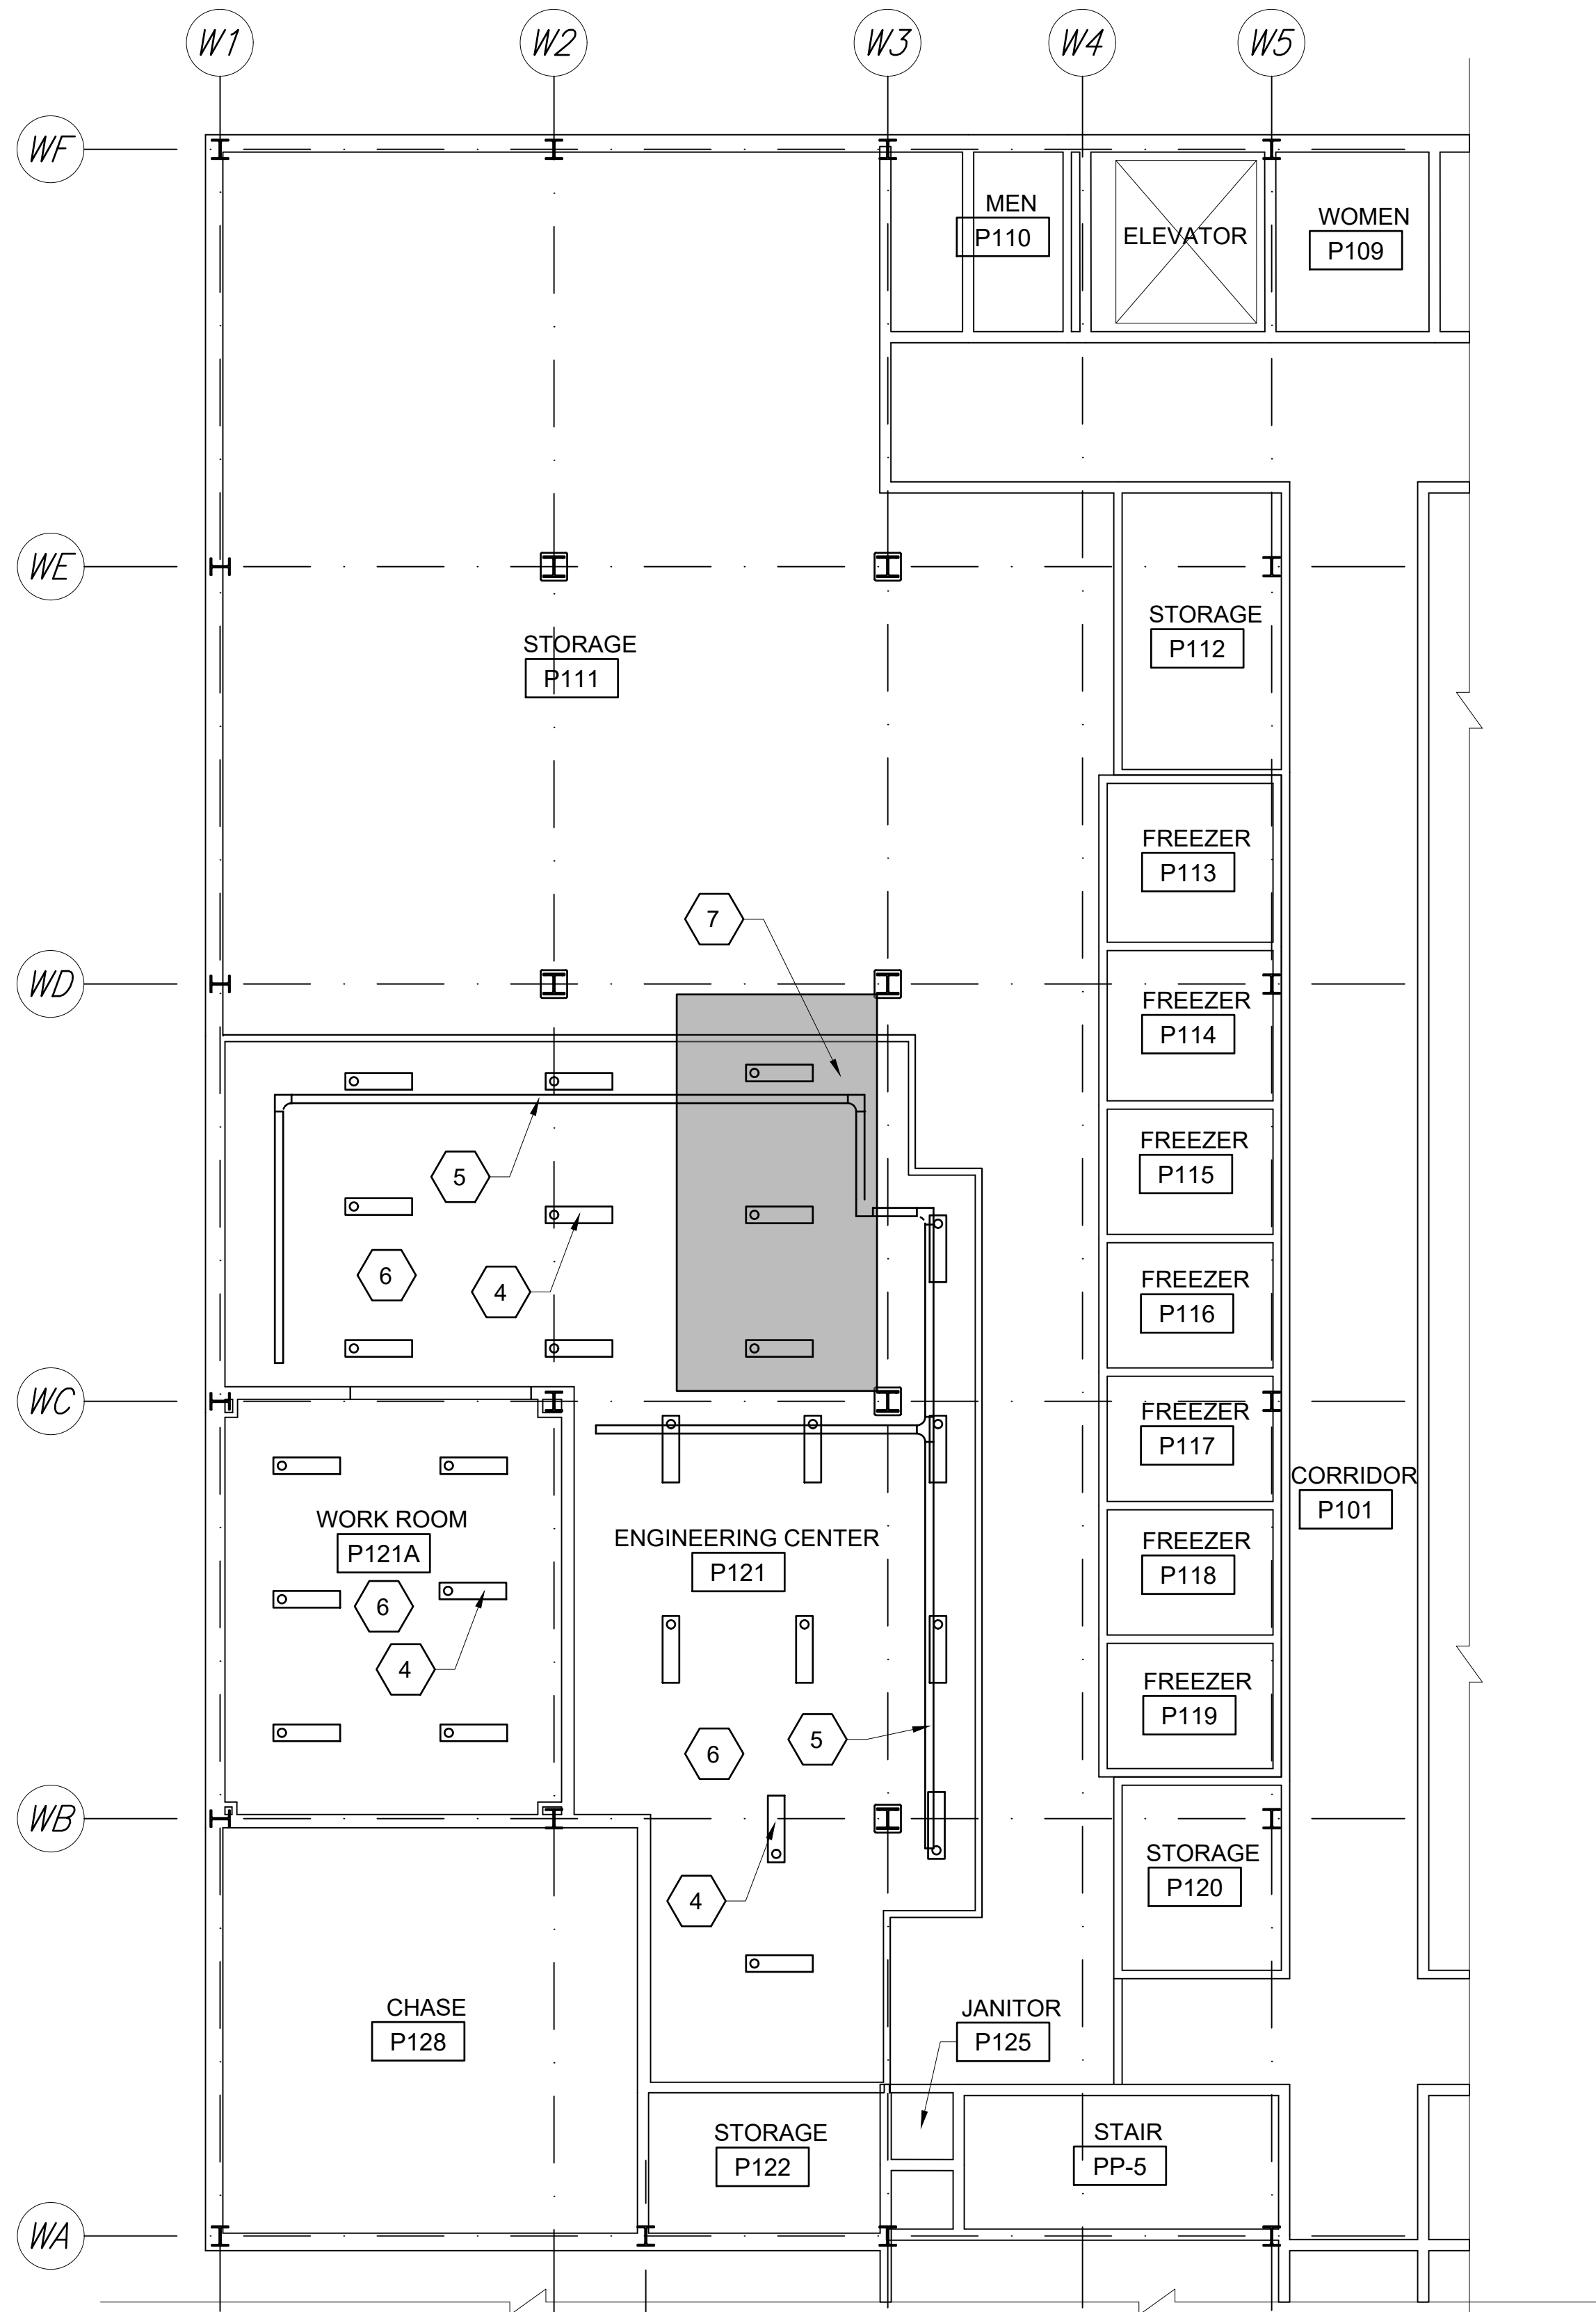



2 BUILDING 1 PARTIAL REFLECTED CEILING PLAN
A-101
SCALE: 1/8"= 1'-0"

GENERAL NOTES

- DIMENSIONS FROM FACE OF FINISHED WALL.
- CONTRACTOR SHALL VERIFY ALL DIMENSIONS.
- EXISTING STRUCTURE IS EXPOSED. BOTTOM OF 2ND FLOOR SLAB IS PAINTED. IN SHADED AREA, METAL DECKING IS EXPOSED AND UNPAINTED.

KEYED NOTES

- NEW SINK (SEE PLUMBING)
- REINSTALL EXISTING GATE IN NEW OPENING. PROVIDE FENCE POST REQUIRED FOR HINGE AND LATCH POST.
- EXISTING FREEZERS TO REMAIN.
- SUSPENDED LIGHTS (SEE ELEC.)
- SUSPENDED CABLE TRAY (SEE ELEC.)
- PAINT CEILING (CONCRETE AND METAL) AND STRUCTURE
- EXISTING METAL DECKING, PAINT (± 285 SQ. FT.)
- EXTEND CMU WALL TO DECK ABOVE TO CLOSE OPENING ABOVE DOOR.

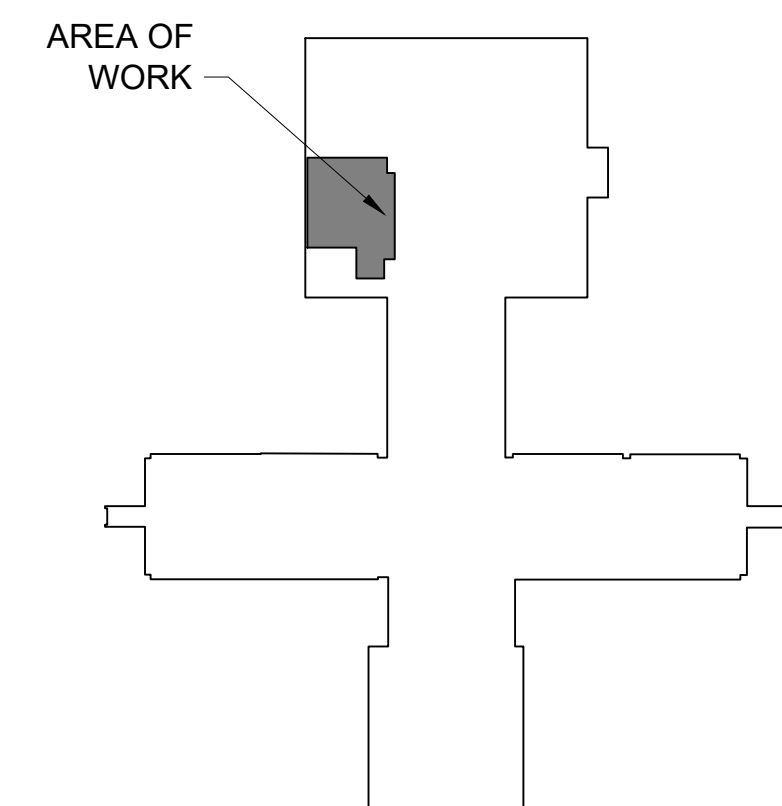


BUILDING 1 - KEY PLAN




A-E FIRM	USDA
PROJECT MANAGER	EPM
RPP	XXX
DESIGNER	PPM
RPP	XXX
CHECKED BY	SAFETY & HEALTH
CG	XXX
JOB #	REAL PROPERTY
6124-A	XXX




NO.	DATE	BY	DESCRIPTION
REVISIONS			
USDA Agricultural Research Service			
USDA AGRICULTURAL RESEARCH SERVICE BUILDING 1, U.S. NATIONAL POULTRY RESEARCH CTR. RENOVATE ROOM P111 ATHENS, GEORGIA			
PARTIAL FIRST FLOOR PLANS			
PROJECT NO.	AGRICULTURAL RESEARCH SERVICE	SHEET	
XXX	SOUTHEAST AREA	A-101	
DATE	STONEVILLE, MS	1 OF XX	
09/25/2024			

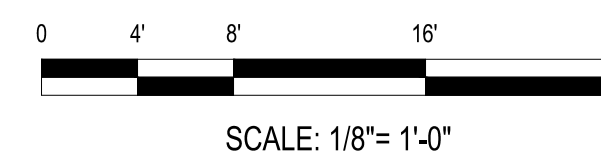

SCALE: 1/8"= 1'-0"


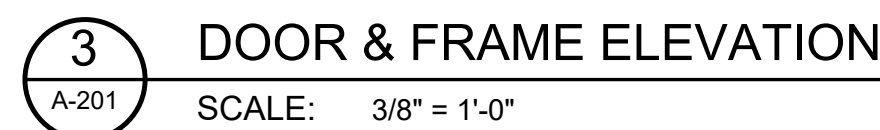


4 DOOR HEAD
A-201 SCALE: 3"= 1'-0"

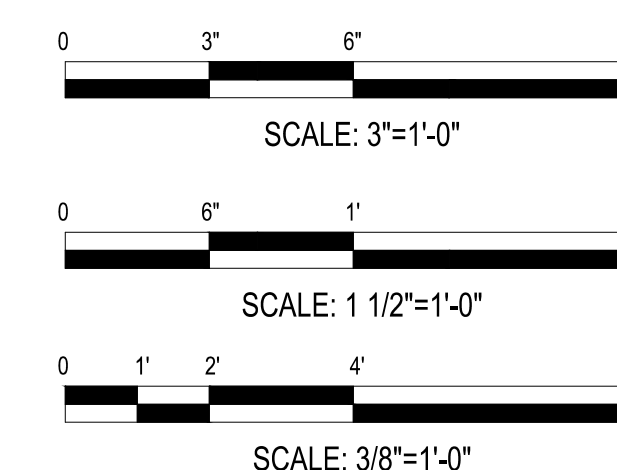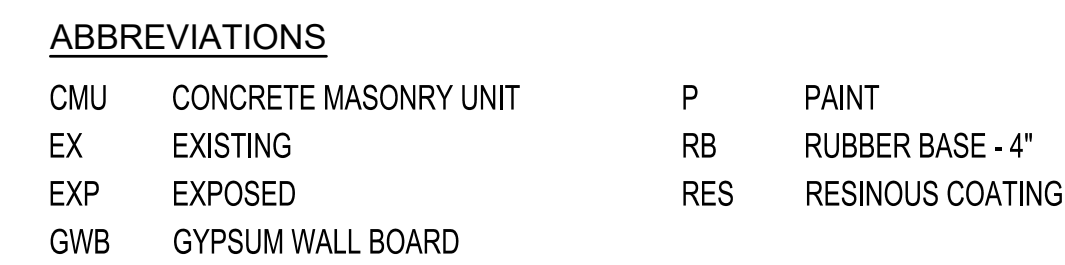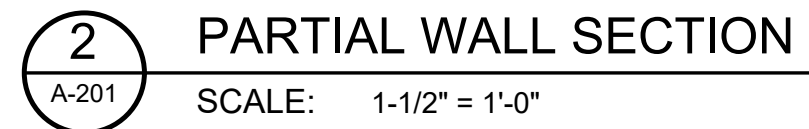

 John Johnson & McAdams ARCHITECT • ENGINEER • PLANNING • ENVIRONMENTAL MANAGEMENT 910 S. BIRD ST., GREENSBORO, NORTH CAROLINA 27401-4000						
	NO.	DATE	BY	DESCRIPTION		
	REVISIONS					
A-E FIRM	USDA					
PROJECT MANAGER	EGM					 USDA Agricultural Research Service USDA AGRICULTURAL RESEARCH SERVICE BUILDING 1, U.S. NATIONAL POULTRY RESEARCH CTR. RENOVATE ROOM P111 ATHENS, GEORGIA
RPP	XXX					
DESIGNER	PPM					
RPP	XXX					
CHECKED BY	SAFETY & HEALTH	PROJECT NO.	AGRICULTURAL RESEARCH SERVICE			SHEET
CG	XXX					
JOB #	REAL PROPERTY	DATE	SOUTHEAST AREA			A-201
6124-A	XXX	12/10/2024	STONEVILLE, MS			
					1 OF XX	



2:3024, Issue01(2)A4, USDA, B1 Renovate P111 Lab - Athens GA07 Working FederalMechP-101.dwg
Apr 23, 2025 - 9:45am

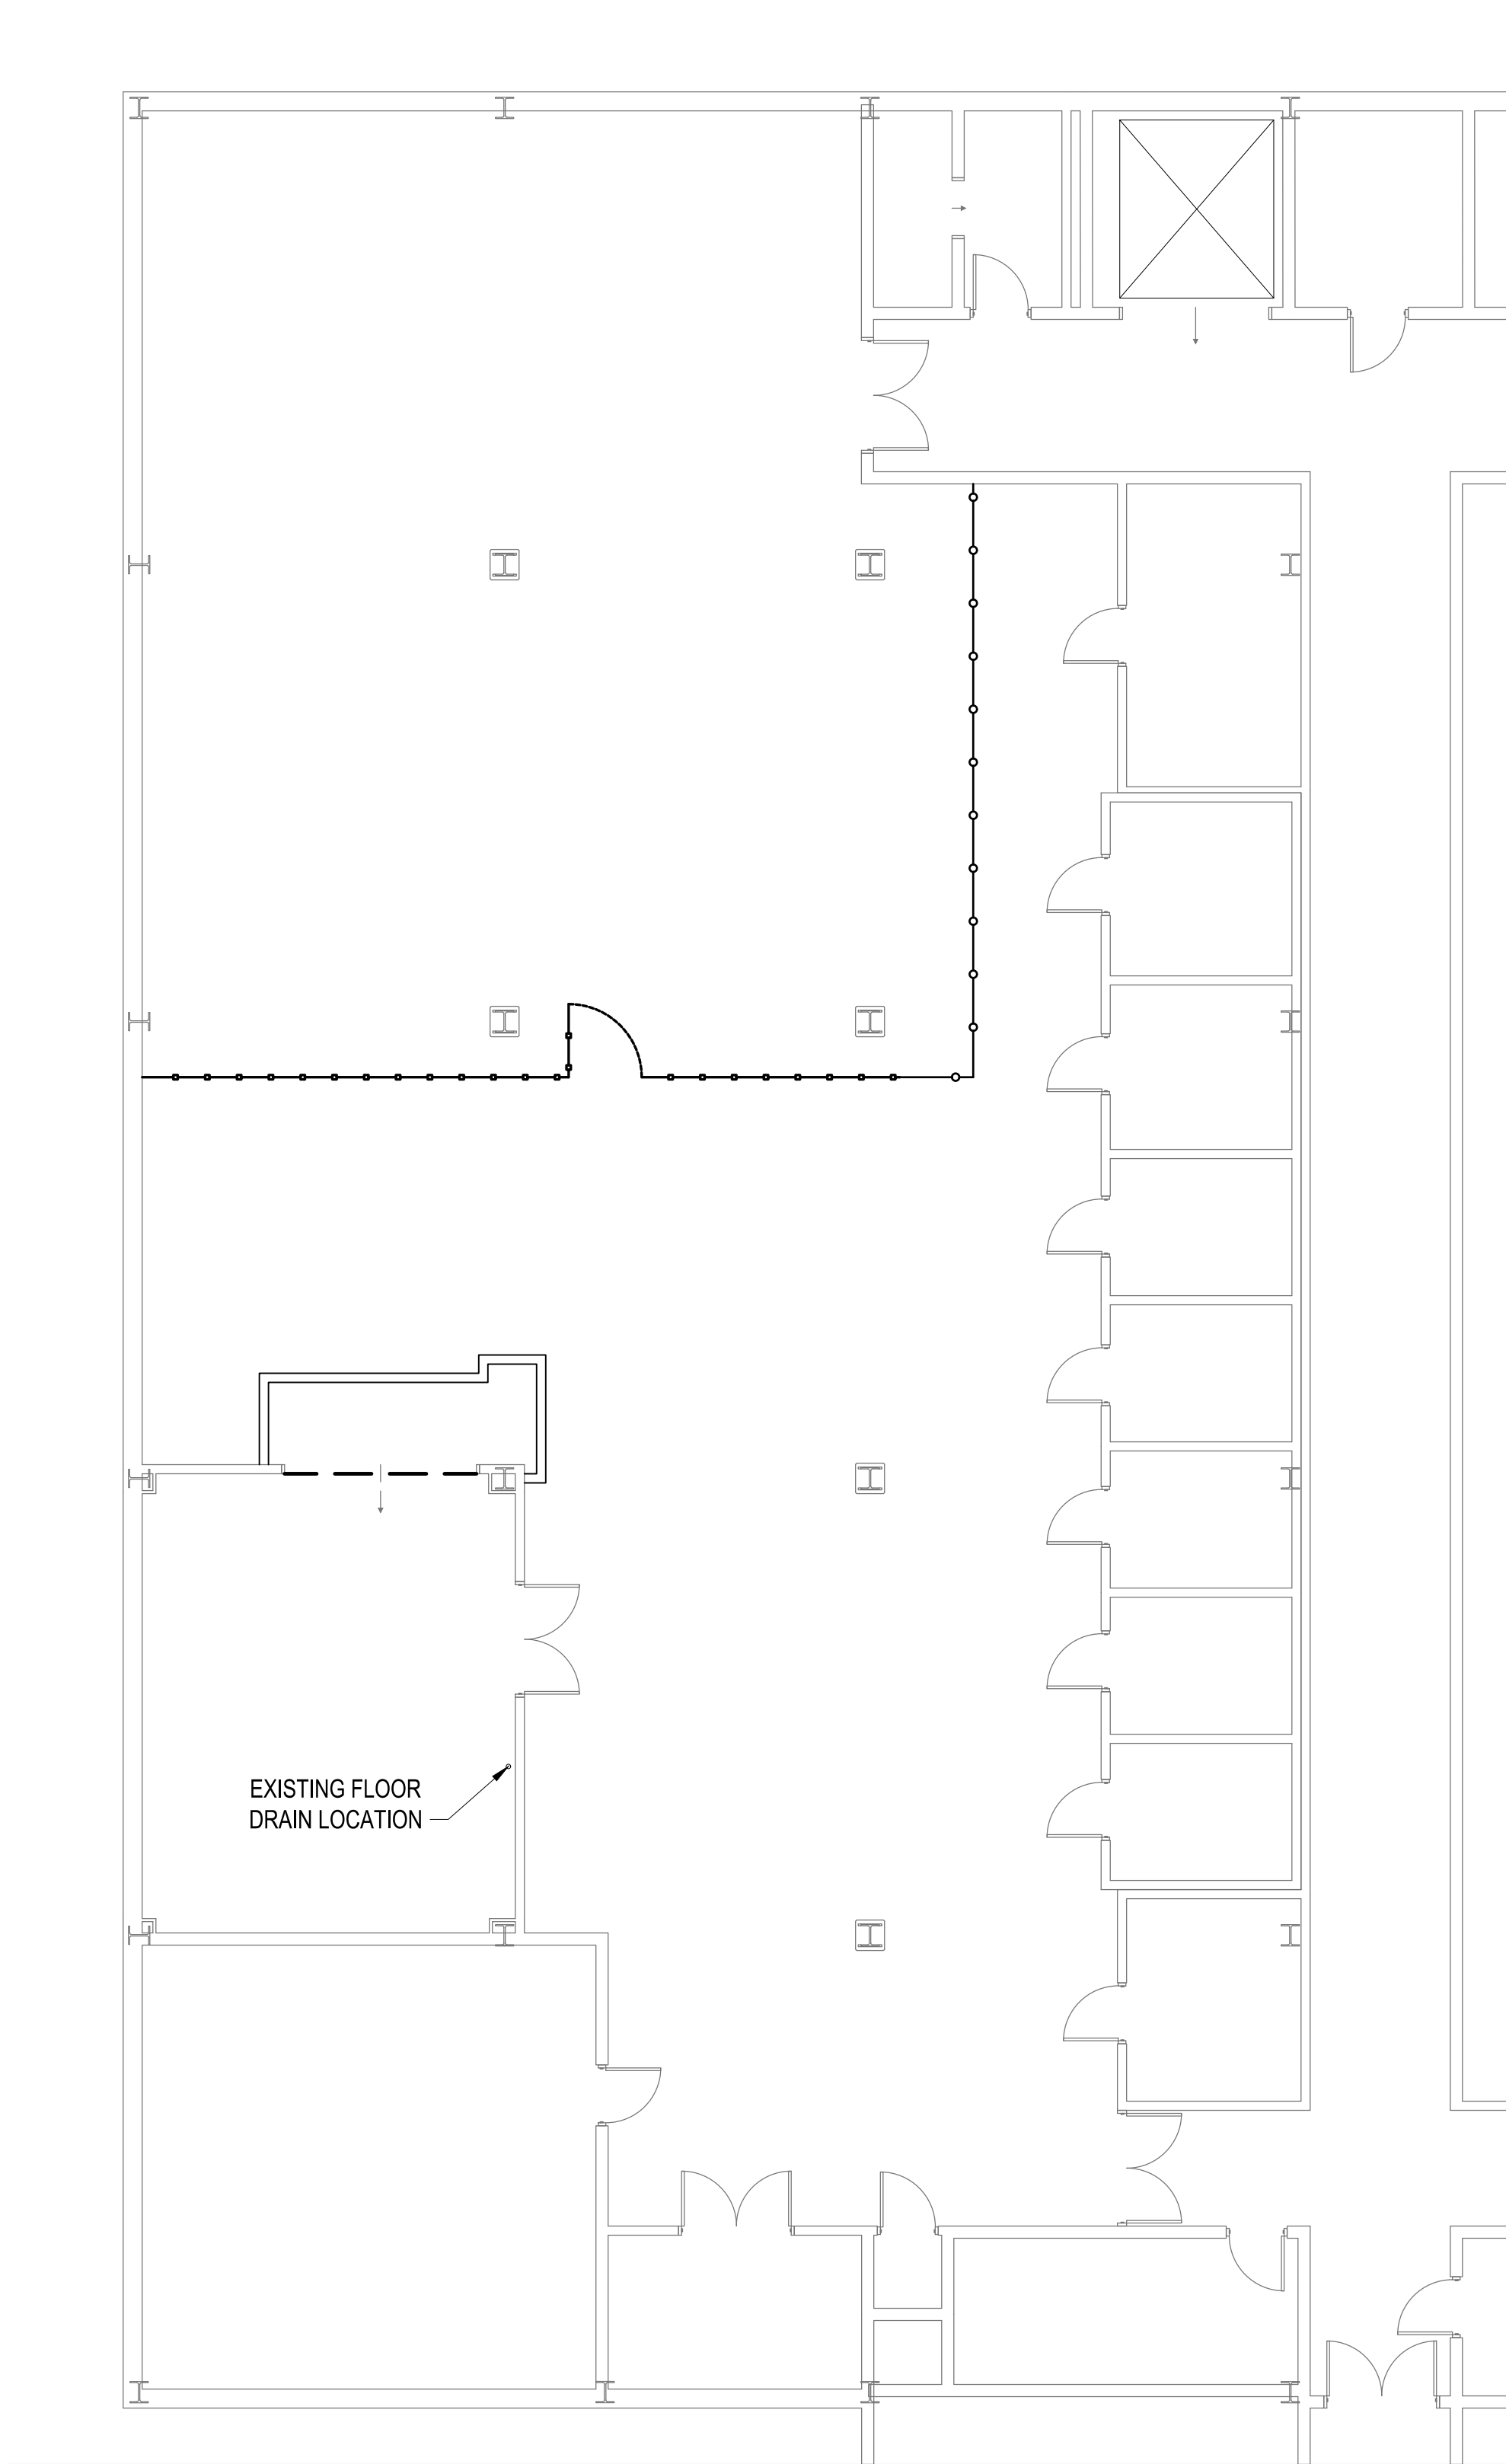

1
P-101
BUILDING 1 PARTIAL PLUMBING EXISTING FLOOR PLAN
SCALE: 1/8"= 1'-0"

3/4" CA DOWN TO AIR HOSE REEL. MOUNT HOSE REEL APPROX. 6'-6" AFF. USE RUBBER AIR REEL STOPPERS TO MAKE ACCESS TO AIR HOSE READILY AVAILABLE. PROVIDE ADJUSTABLE WALL-MOUNTED PRESSURE REGULATOR WITH VISIBLE PRESSURE GAUGE PRIOR TO HOSE REEL CONNECTION.

3/4" CA DOWN TO AIR HOSE REEL. MOUNT HOSE REEL APPROX. 6'-6" AFF. USE RUBBER AIR REEL STOPPERS TO MAKE ACCESS TO AIR HOSE READILY AVAILABLE. PROVIDE ADJUSTABLE WALL-MOUNTED PRESSURE REGULATOR WITH VISIBLE PRESSURE GAUGE PRIOR TO HOSE REEL CONNECTION.

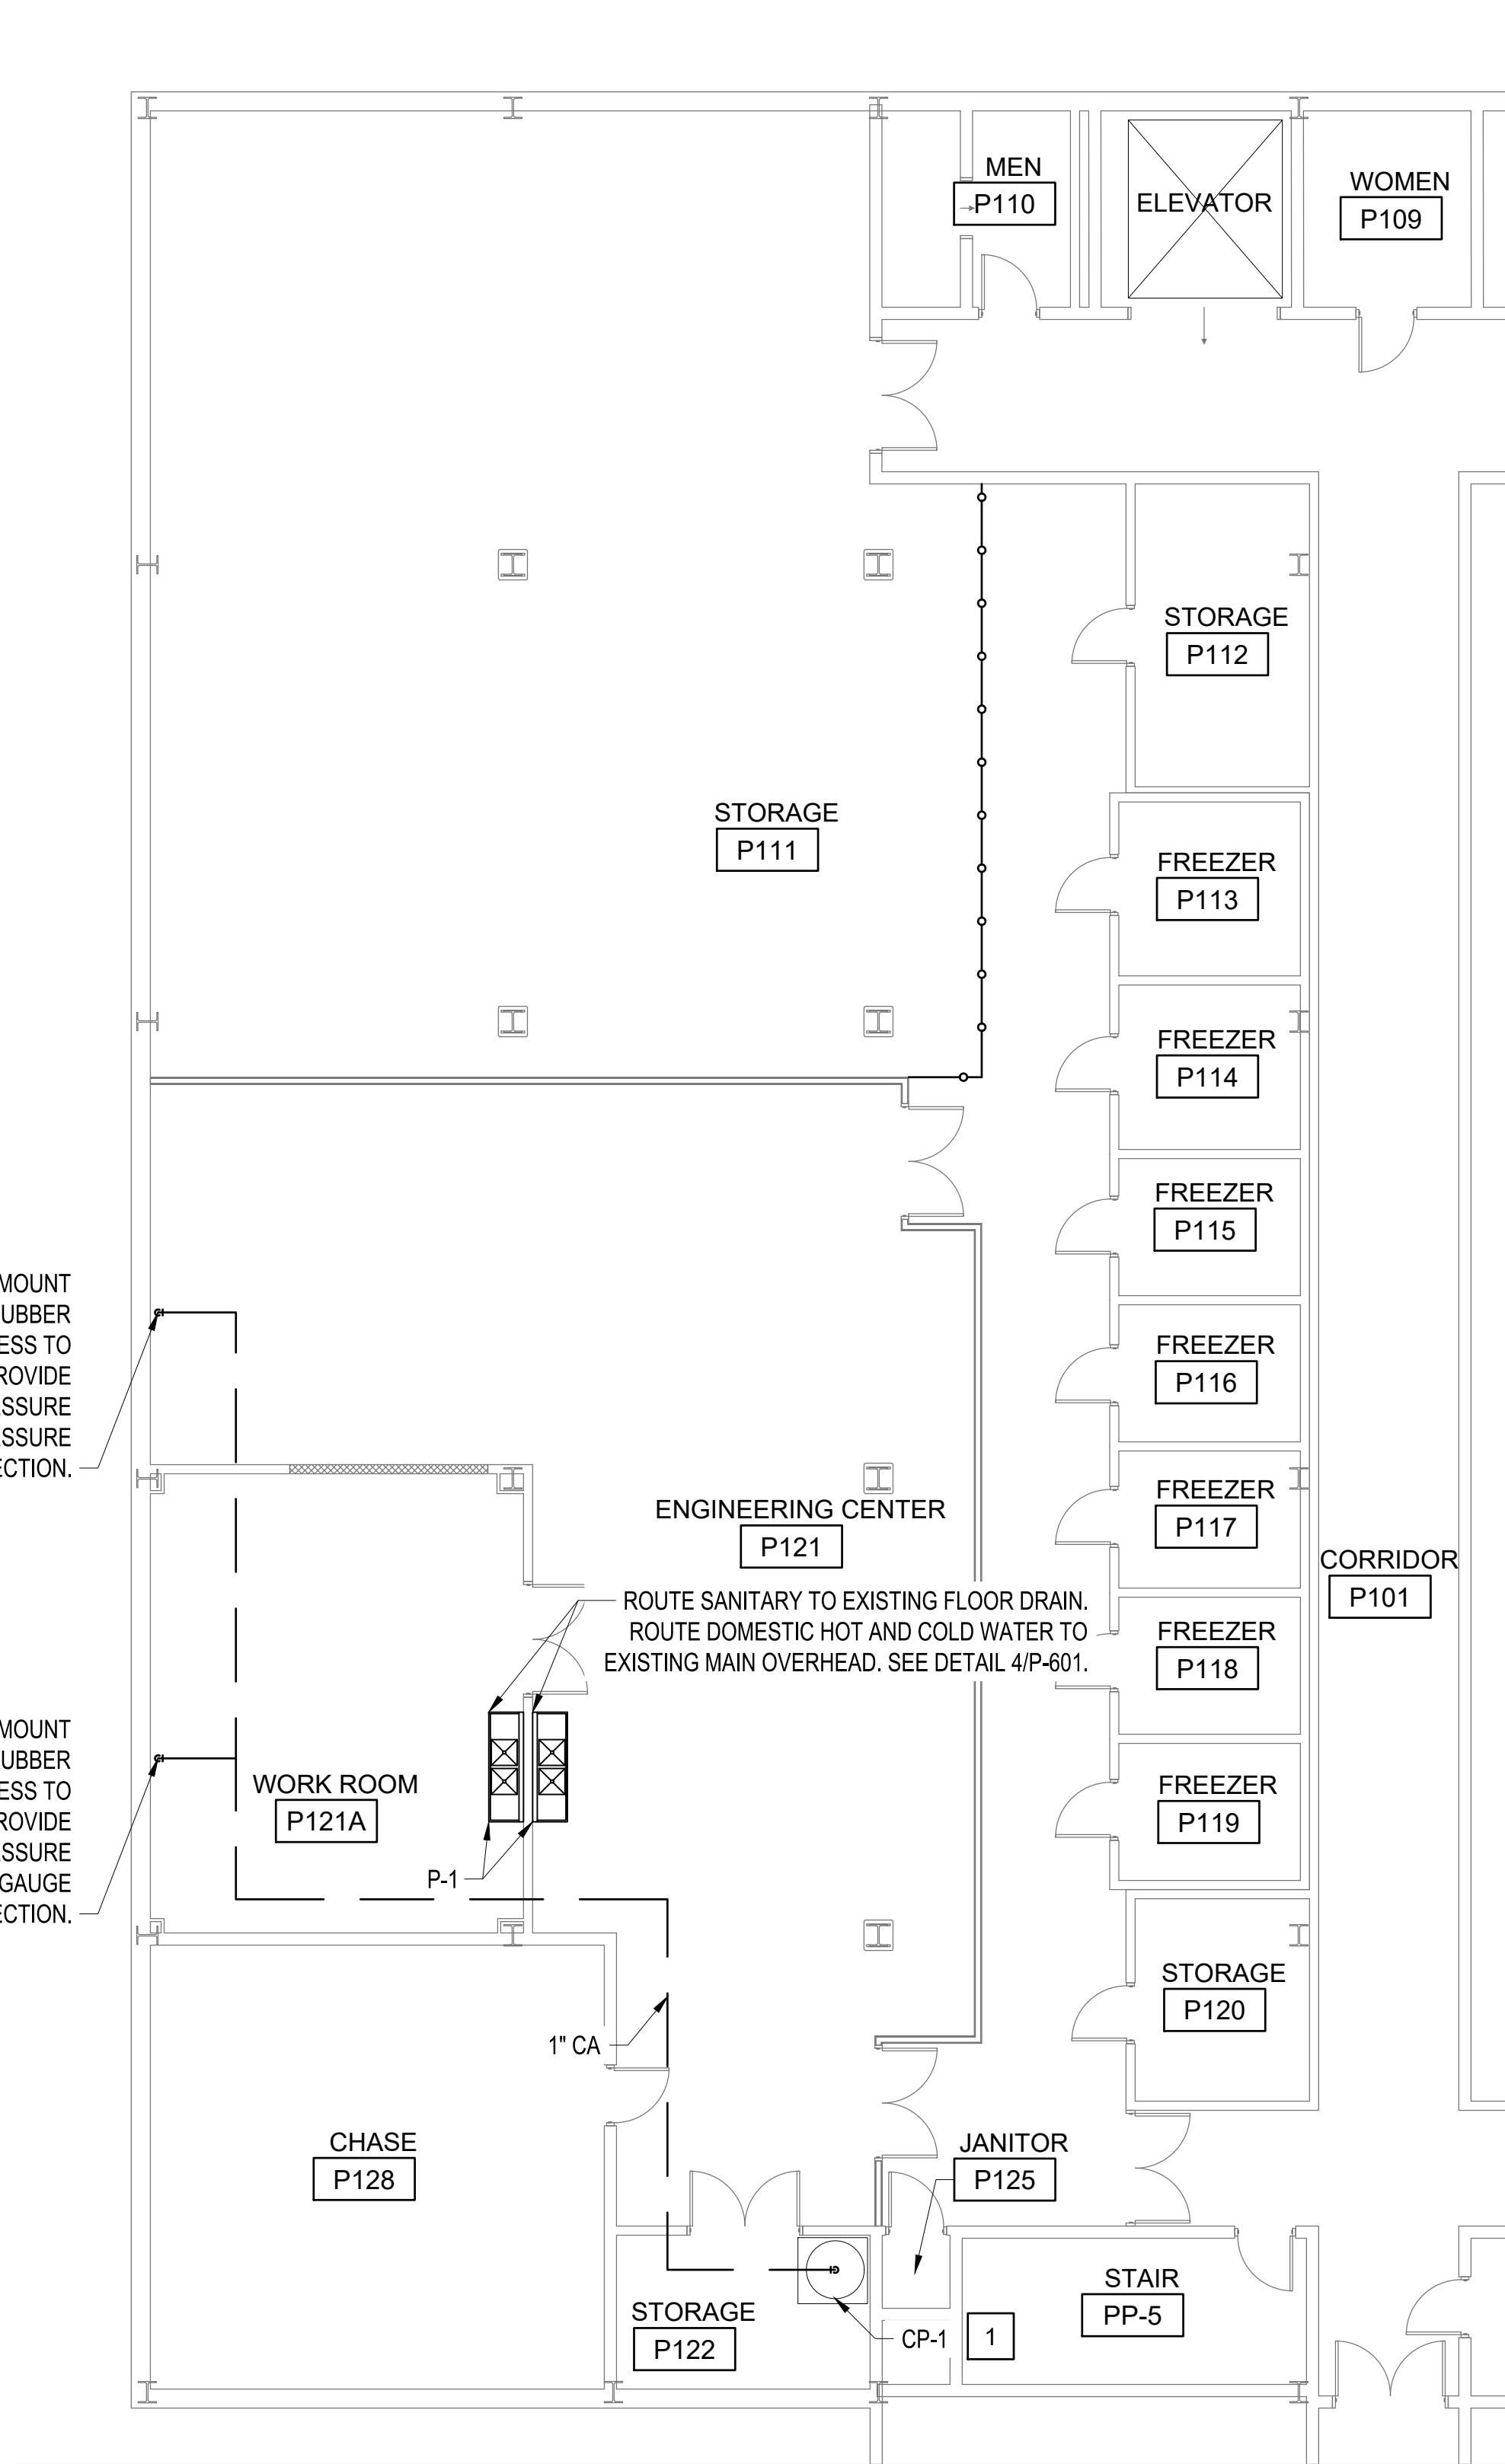

1
P-101
BUILDING 1 PARTIAL PLUMBING FLOOR PLAN
SCALE: 1/8"= 1'-0"

LEGEND
EXIST. ———
CA ———

AFF ABOVE FINISHED FLOOR
CA COMPRESSED AIR PIPING
CP AIR COMPRESSOR
DCW DOMESTIC COLD WATER PIPING
DHW DOMESTIC HOT WATER PIPING
FD FLOOR DRAIN
GCO GRADE CLEAN OUT
SSWR SANITARY SEWER PIPING
TYP TYPICAL
VTR VENT THROUGH ROOF
WCO WALL CLEAN OUT
WH WATER HEATER



0 4' 8' 16' 24'
SCALE: 1/8"= 1'-0"

GENERAL NOTES

- IT IS THE CONTRACTOR'S RESPONSIBILITY TO PATCH DAMAGED INSULATION, ADD INSULATION TO ALL DOMESTIC WATER PIPING WHERE MISSING, AND TO PROTECT ALL EXISTING INSULATION IN THE AREA OF WORK.

X


- ROUTE 3/4" DRAIN PIPING TO EXISTING MOP SINK LOCATED IN JANITOR P125. PROVIDE EQUIPMENT PAD AND SPRING ISOLATORS. SEE DETAIL 3/P-601.

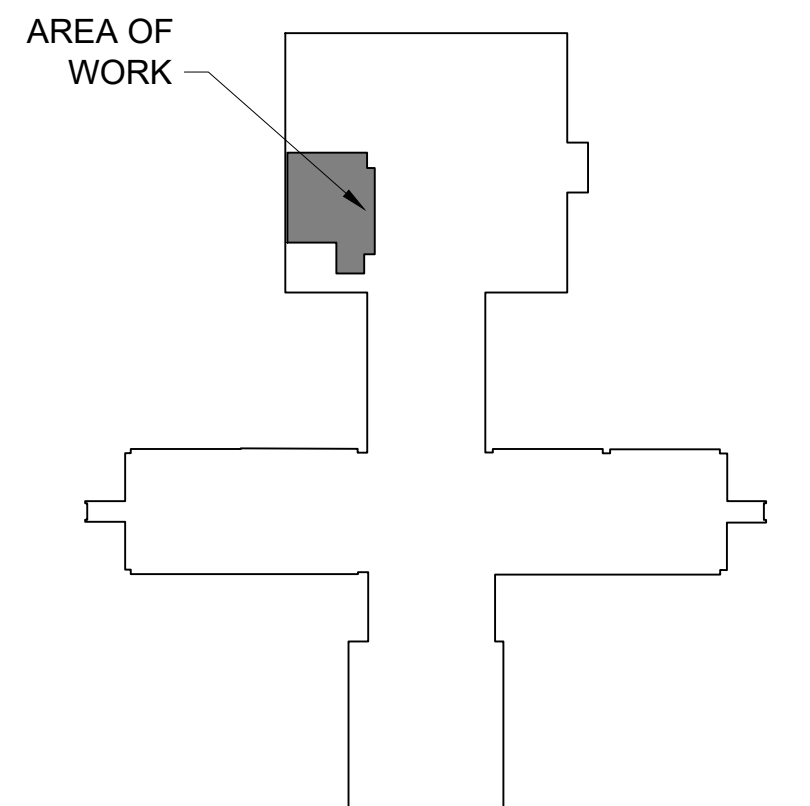


BUILDING 1 - KEY PLAN

LEGEND

		NO.		DATE	BY	DESCRIPTION
		REVISIONS				
A-E FIRM		USDA				
PROJECT MANAGER		EPM				
DESIGNER		SME				
CHECKED BY		SAFETY & HEALTH				
JOB #		6124-A				
DATE		12/10/2024				
PROJECT NO.		XXX				
AGRICULTURAL RESEARCH SERVICE		SOUTHEAST AREA				
BUILDING 1, U.S. NATIONAL POULTRY RESEARCH CTR.		STONEVILLE, MS				
RENOVATE ROOM P111		ATHENS, GEORGIA				
PARTIAL FIRST FLOOR PLUMBING PLAN		P-101				
SHEET		1 OF XX				

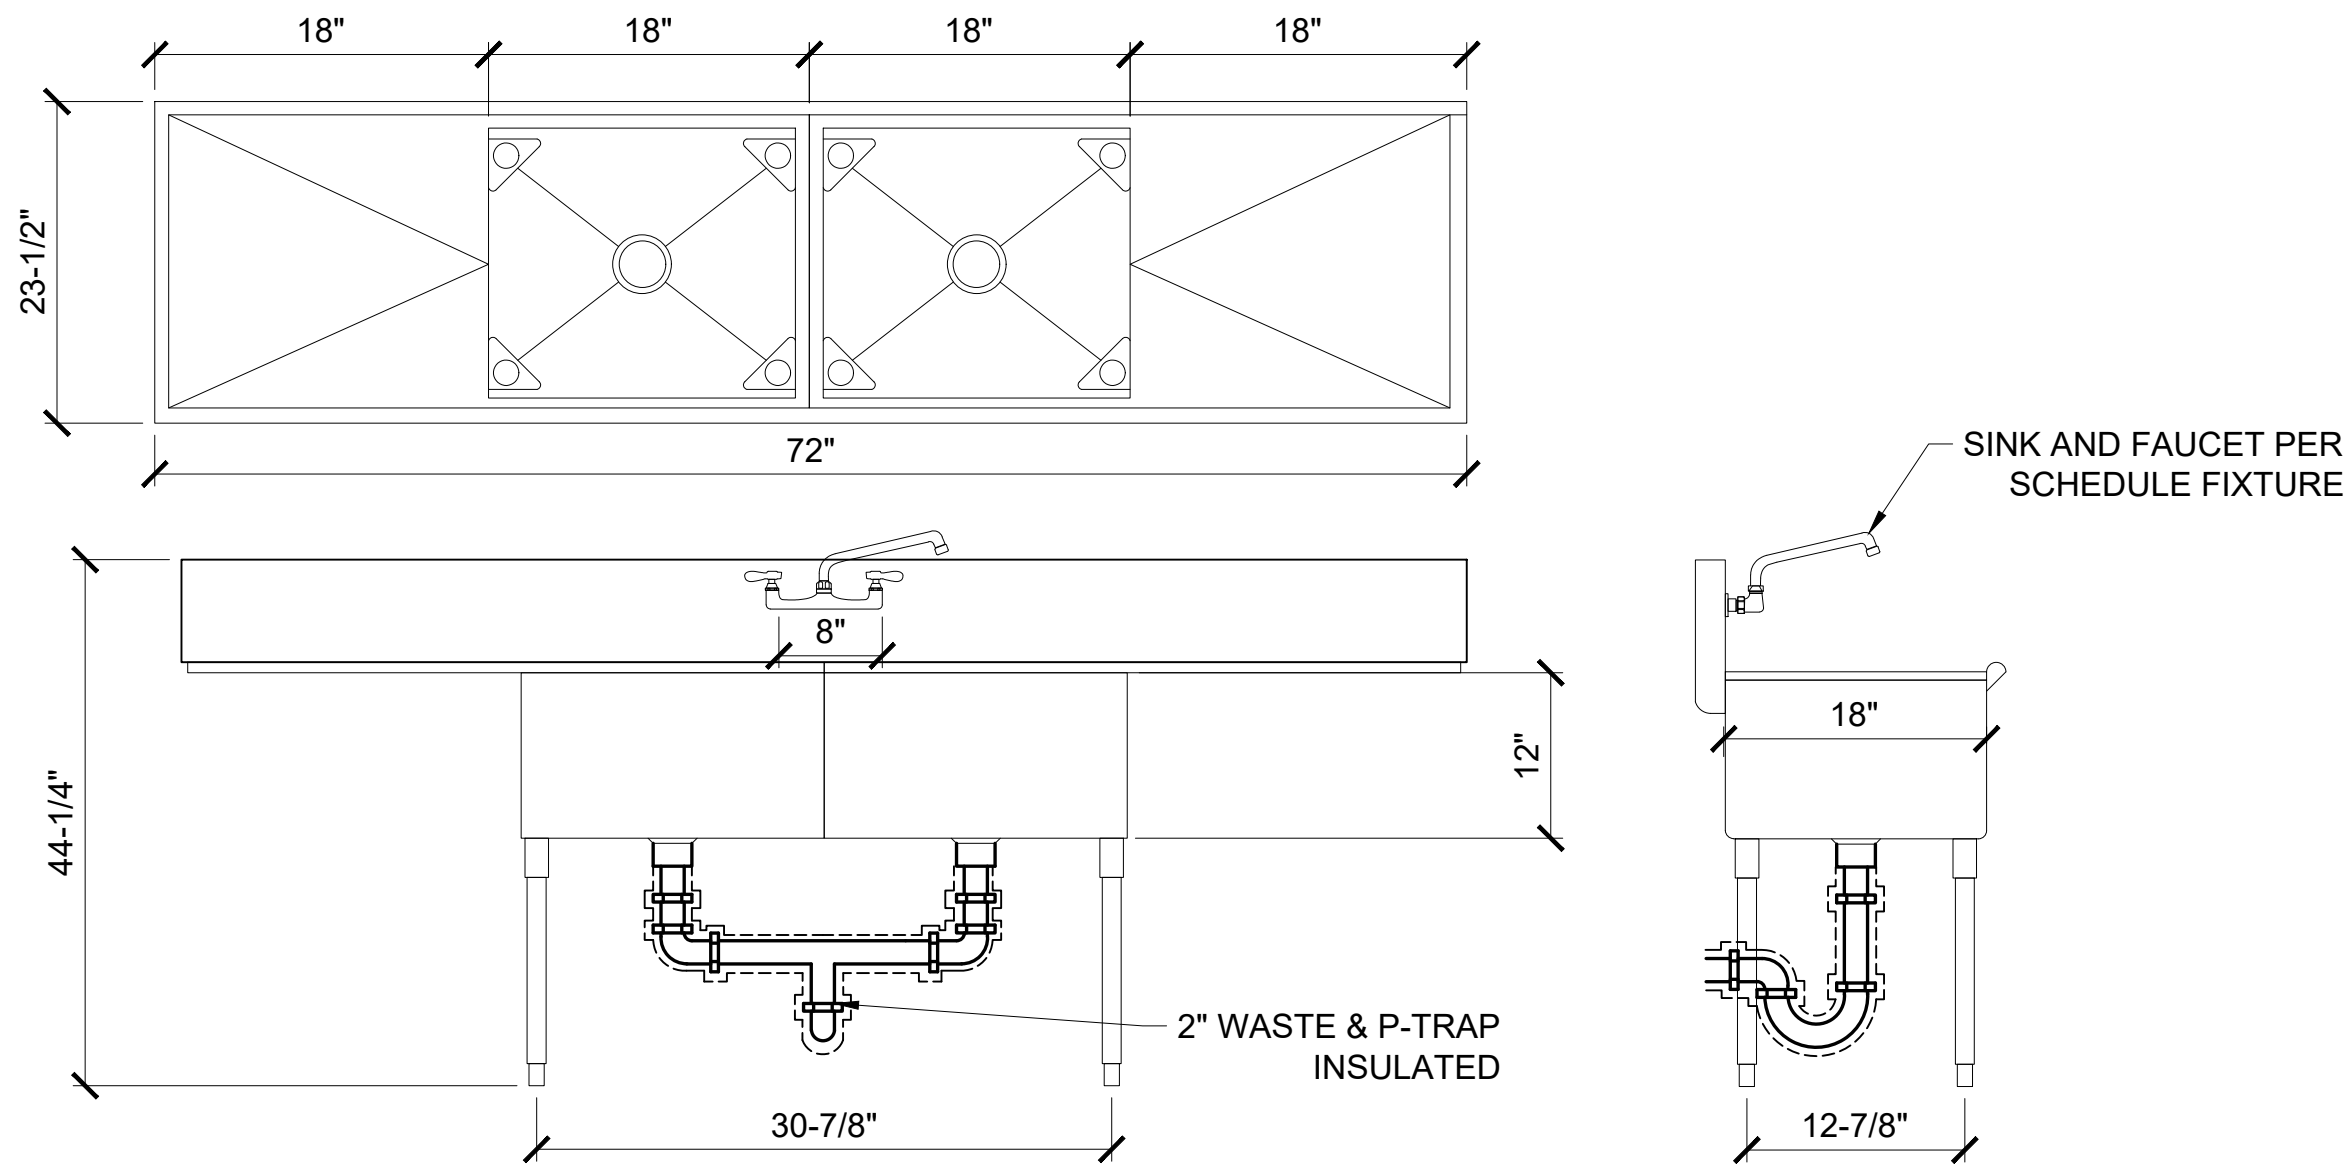


1 SERVICE SINK DETAIL
P-601 SCALE: NOT TO SCALE

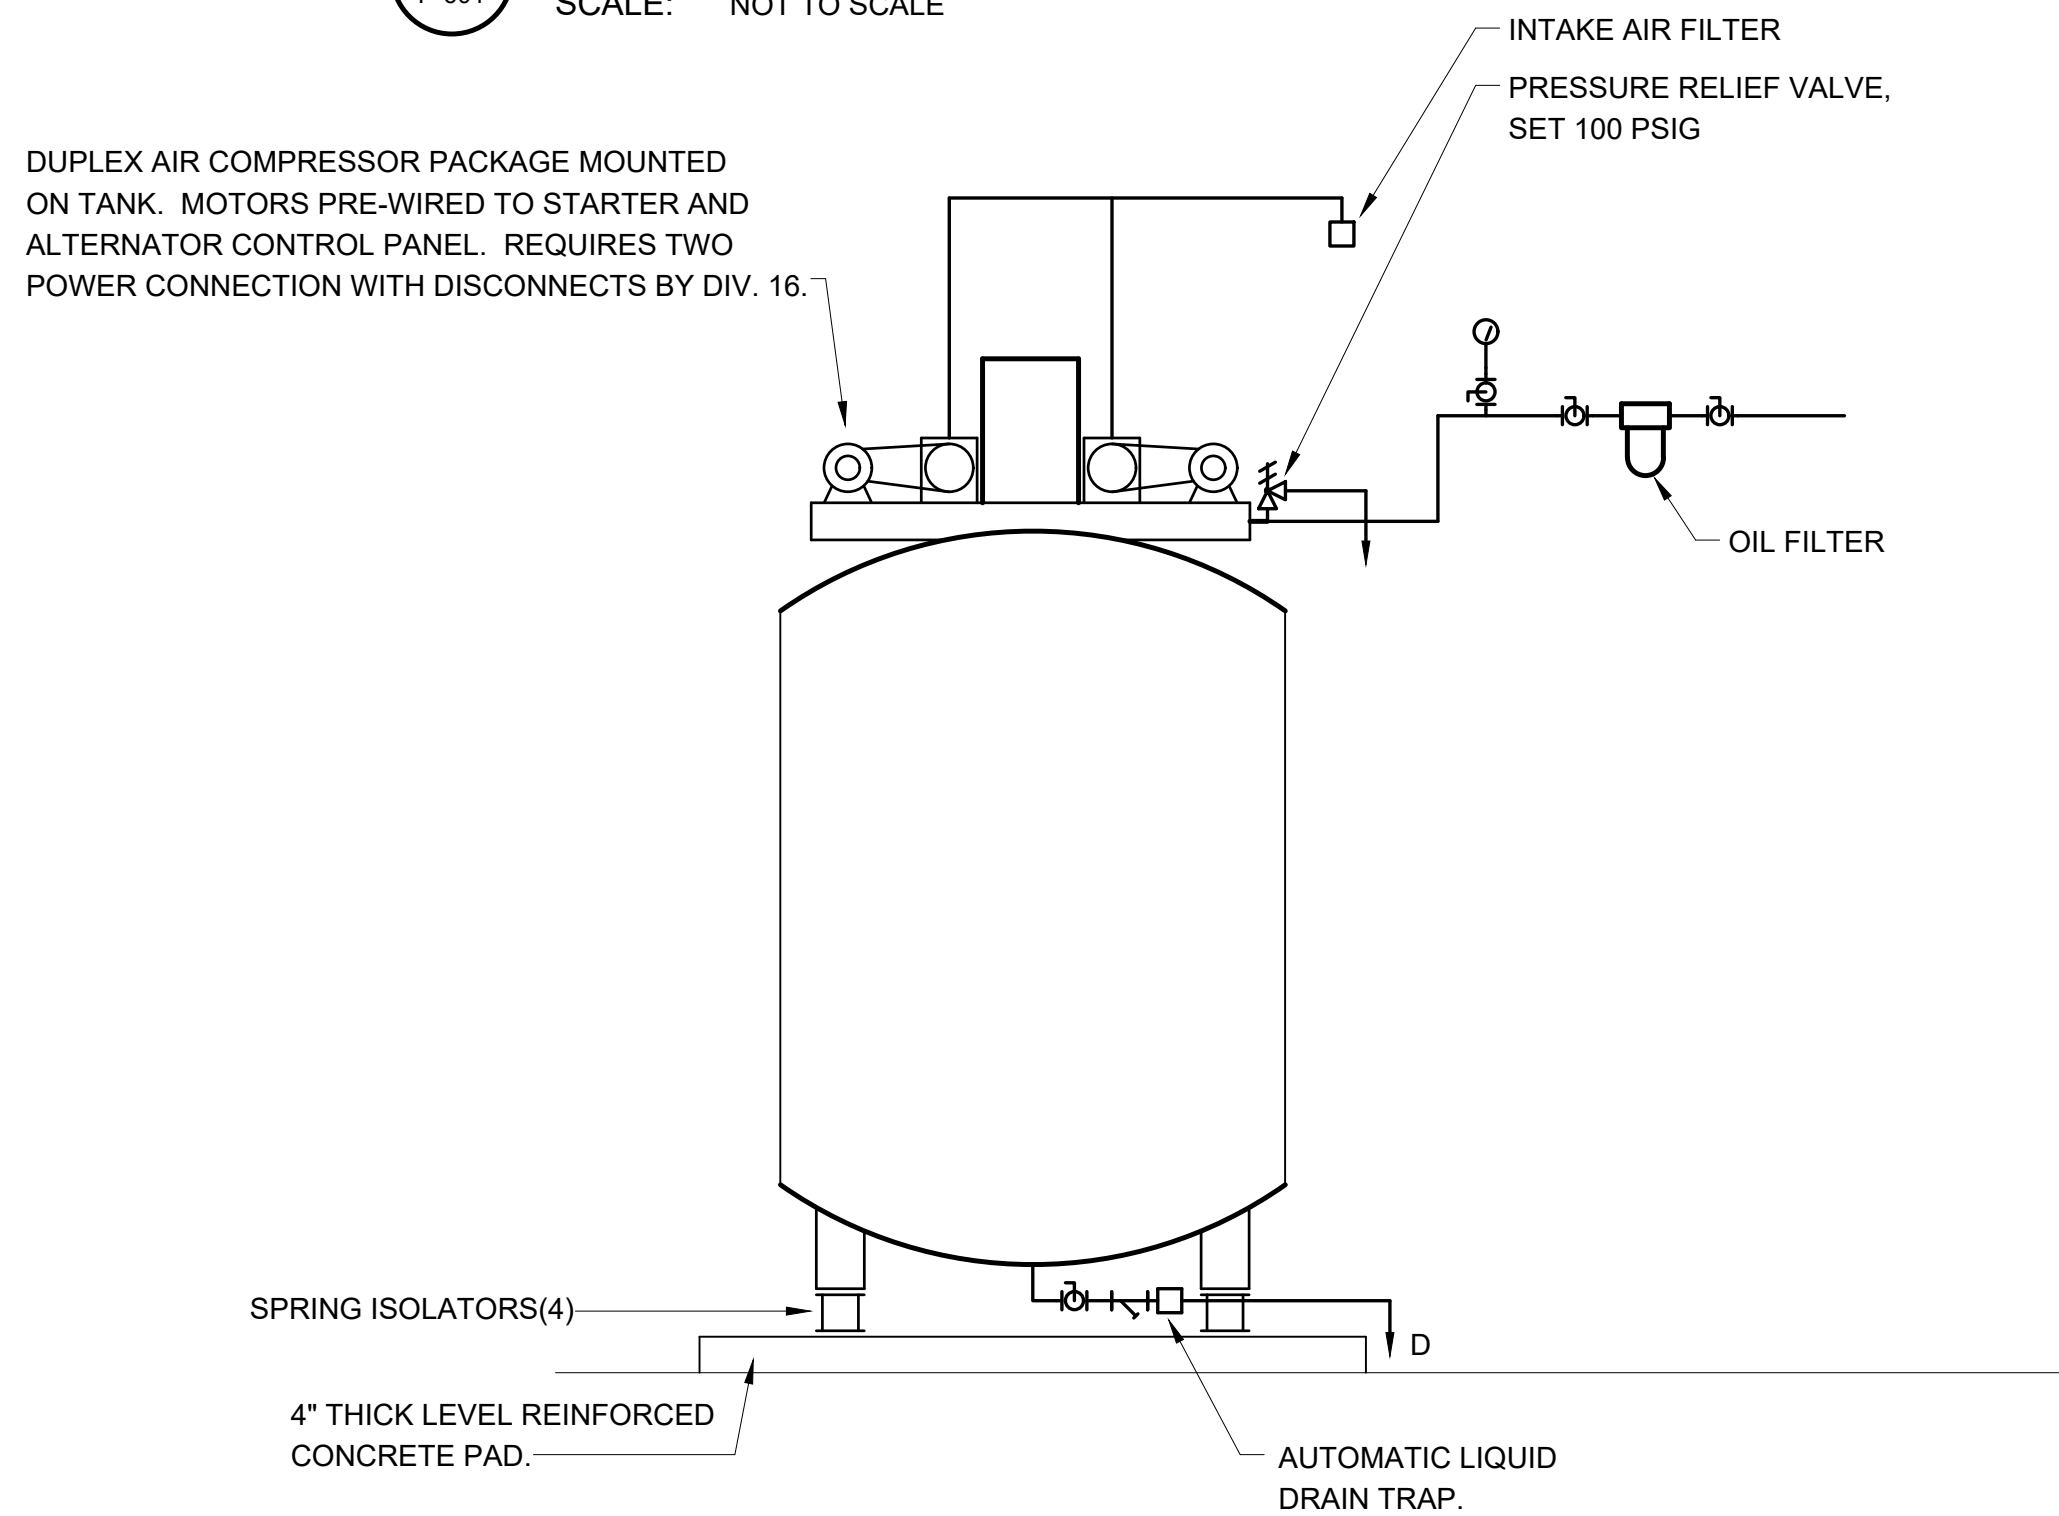


4 AIR COMPRESSOR DETAIL
P-601 SCALE: NOT TO SCALE

PLUMBING FIXTURE SCHEDULE							
MARK	DESCRIPTION	CW	HW	WASTE	VENT	BASIS OF DESIGN	REMARKS
P-1	SERVICE SINK	1/2"	1/2"	2"	2"	KRATOS (BOWL) 29N-006 WATERLOO (FAUCET) 750FW812	PROVIDE TYPE 304 STAINLESS STEEL COMPARTMENT SINK WITH GALVANIZED STEEL LEGS AND ADJUSTABLE BULLET FEET. PROVIDE WITH 2 GPM AERATOR, CHROME-PLATED BRASS CONSTRUCTED SWINGING SPOUT ON 8" CENTERS.


AIR COMPRESSOR SCHEDULE								
MARK	TYPE	BASIS OF DESIGN	MAX PRESSURE (PSIG)	FLOW AT MAX PRESSURE (CFM)	MOTOR POWER (HP)	TANK SIZE (GAL)	WEIGHT (LBS)	VOLTS/ PHASE
CP-1	TWO STAGE	INGERSOLL RAND 2475N5	175	14	5	80	597	460/3

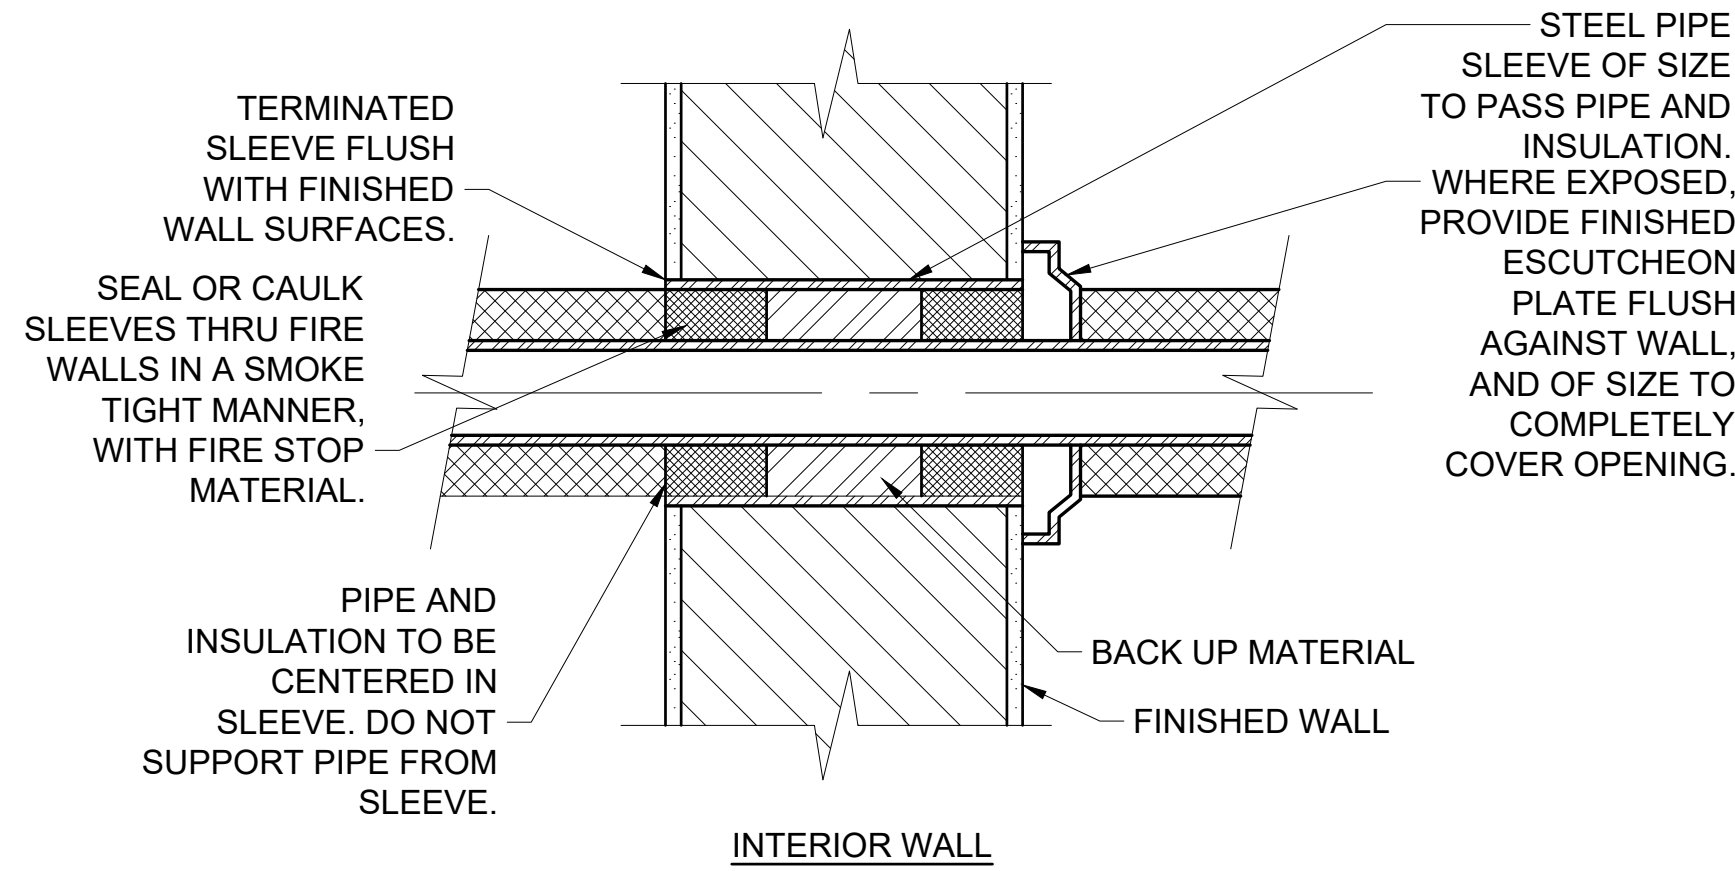

2 TYPICAL PIPE SLEEVES THRU WALLS
P-601 SCALE: NOT TO SCALE

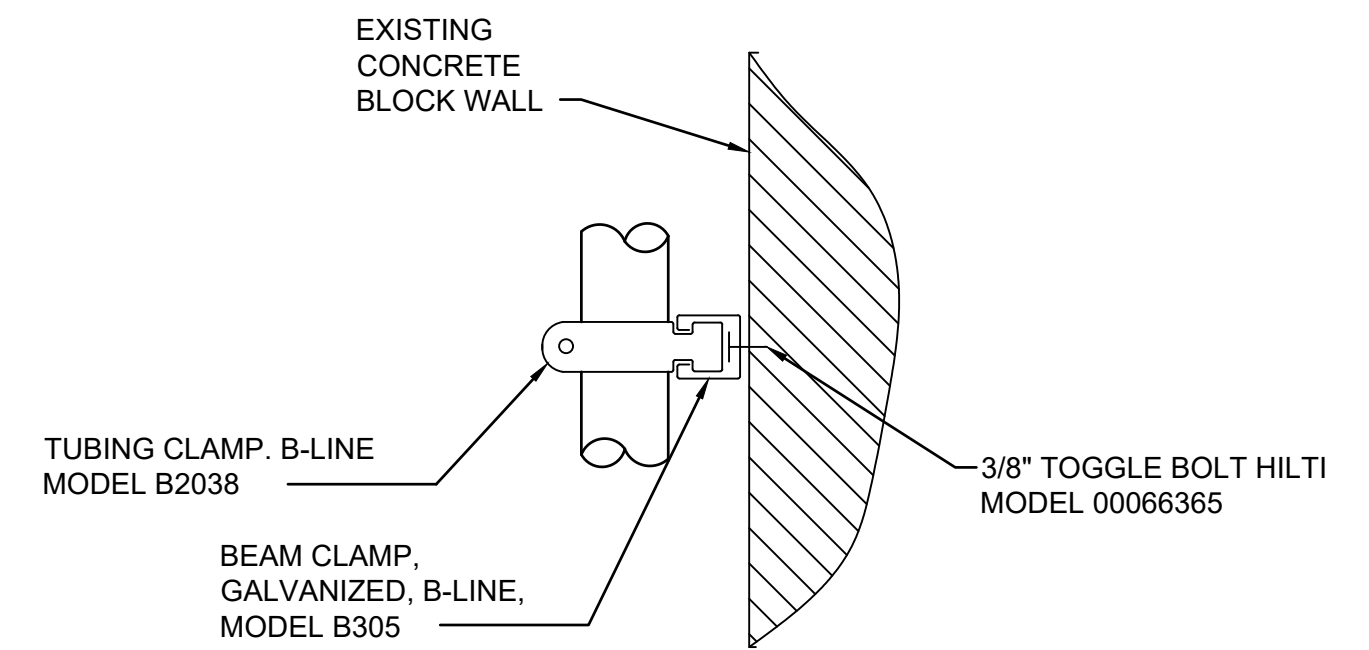


3 TYPICAL PIPE SUPPORT DETAIL
P-601 SCALE: NOT TO SCALE

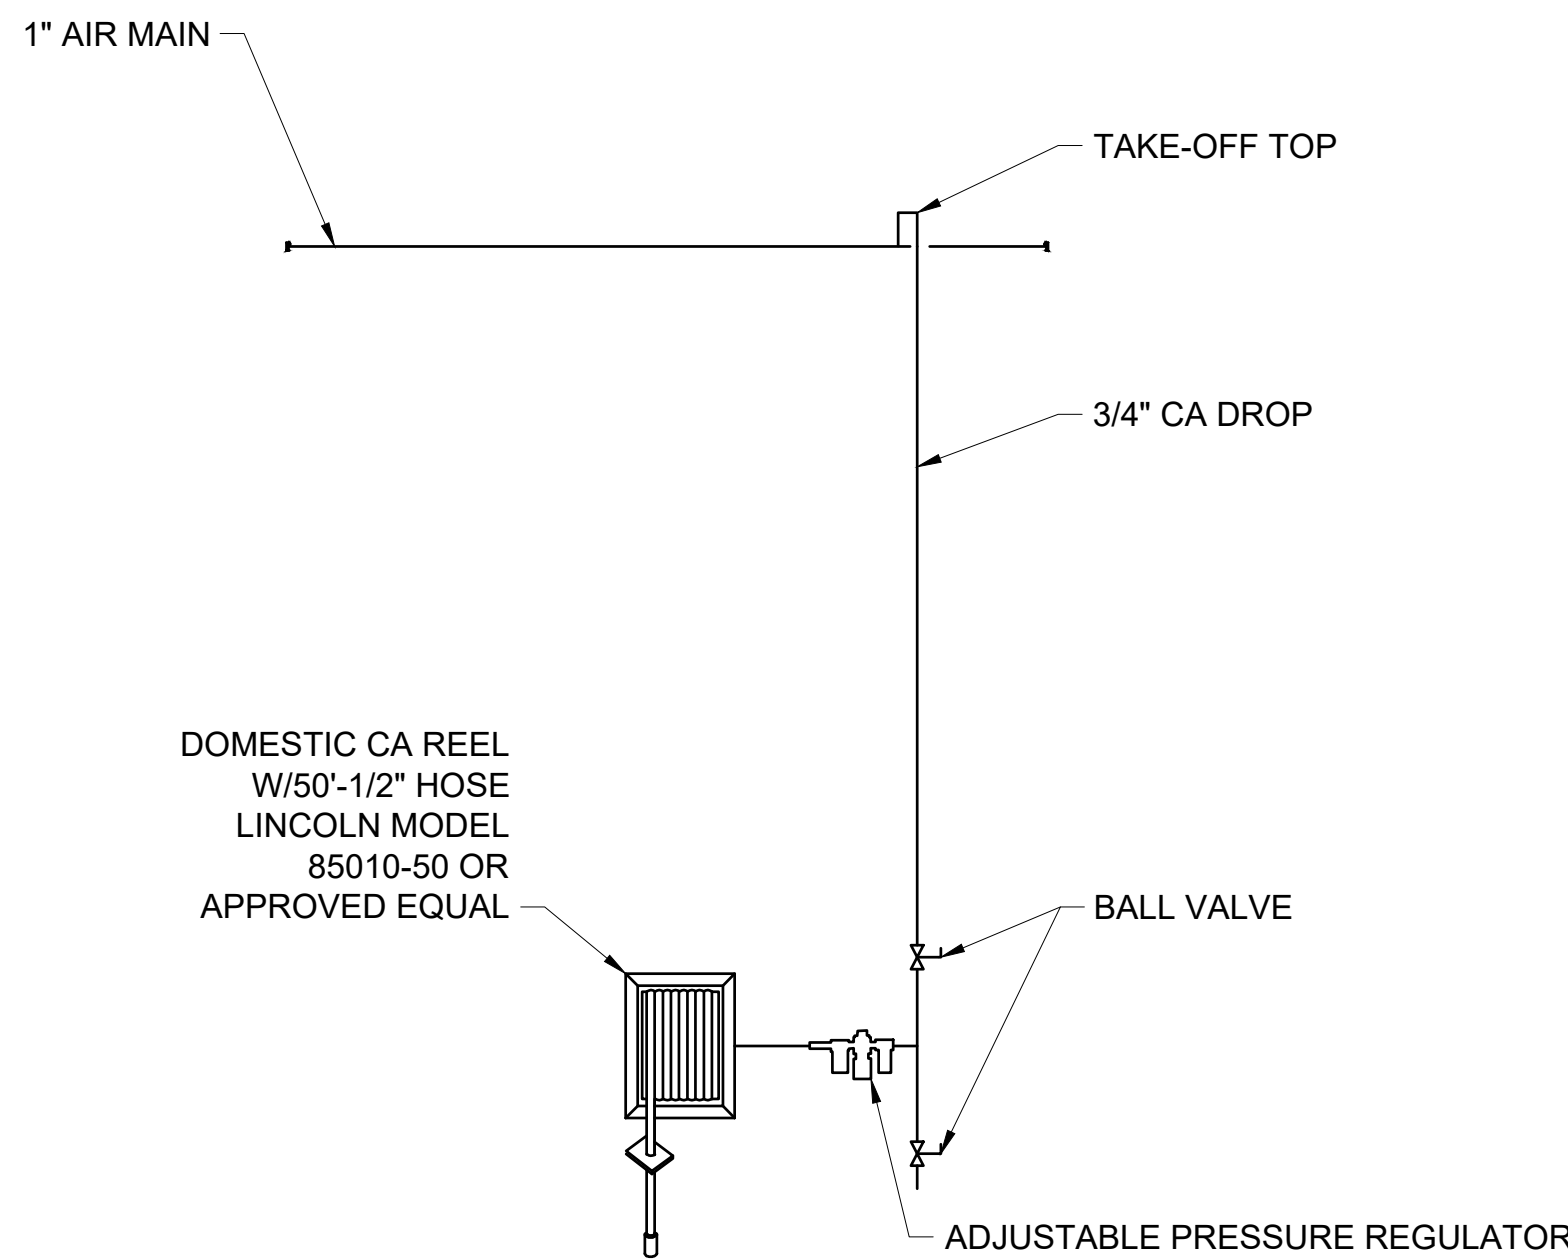



NOTE: HOSE REELS TO BE MOUNTED AT 6'-6" ABOVE FINISH FLOOR.

5 TYPICAL HOSE REEL INSTALLATION
P-601

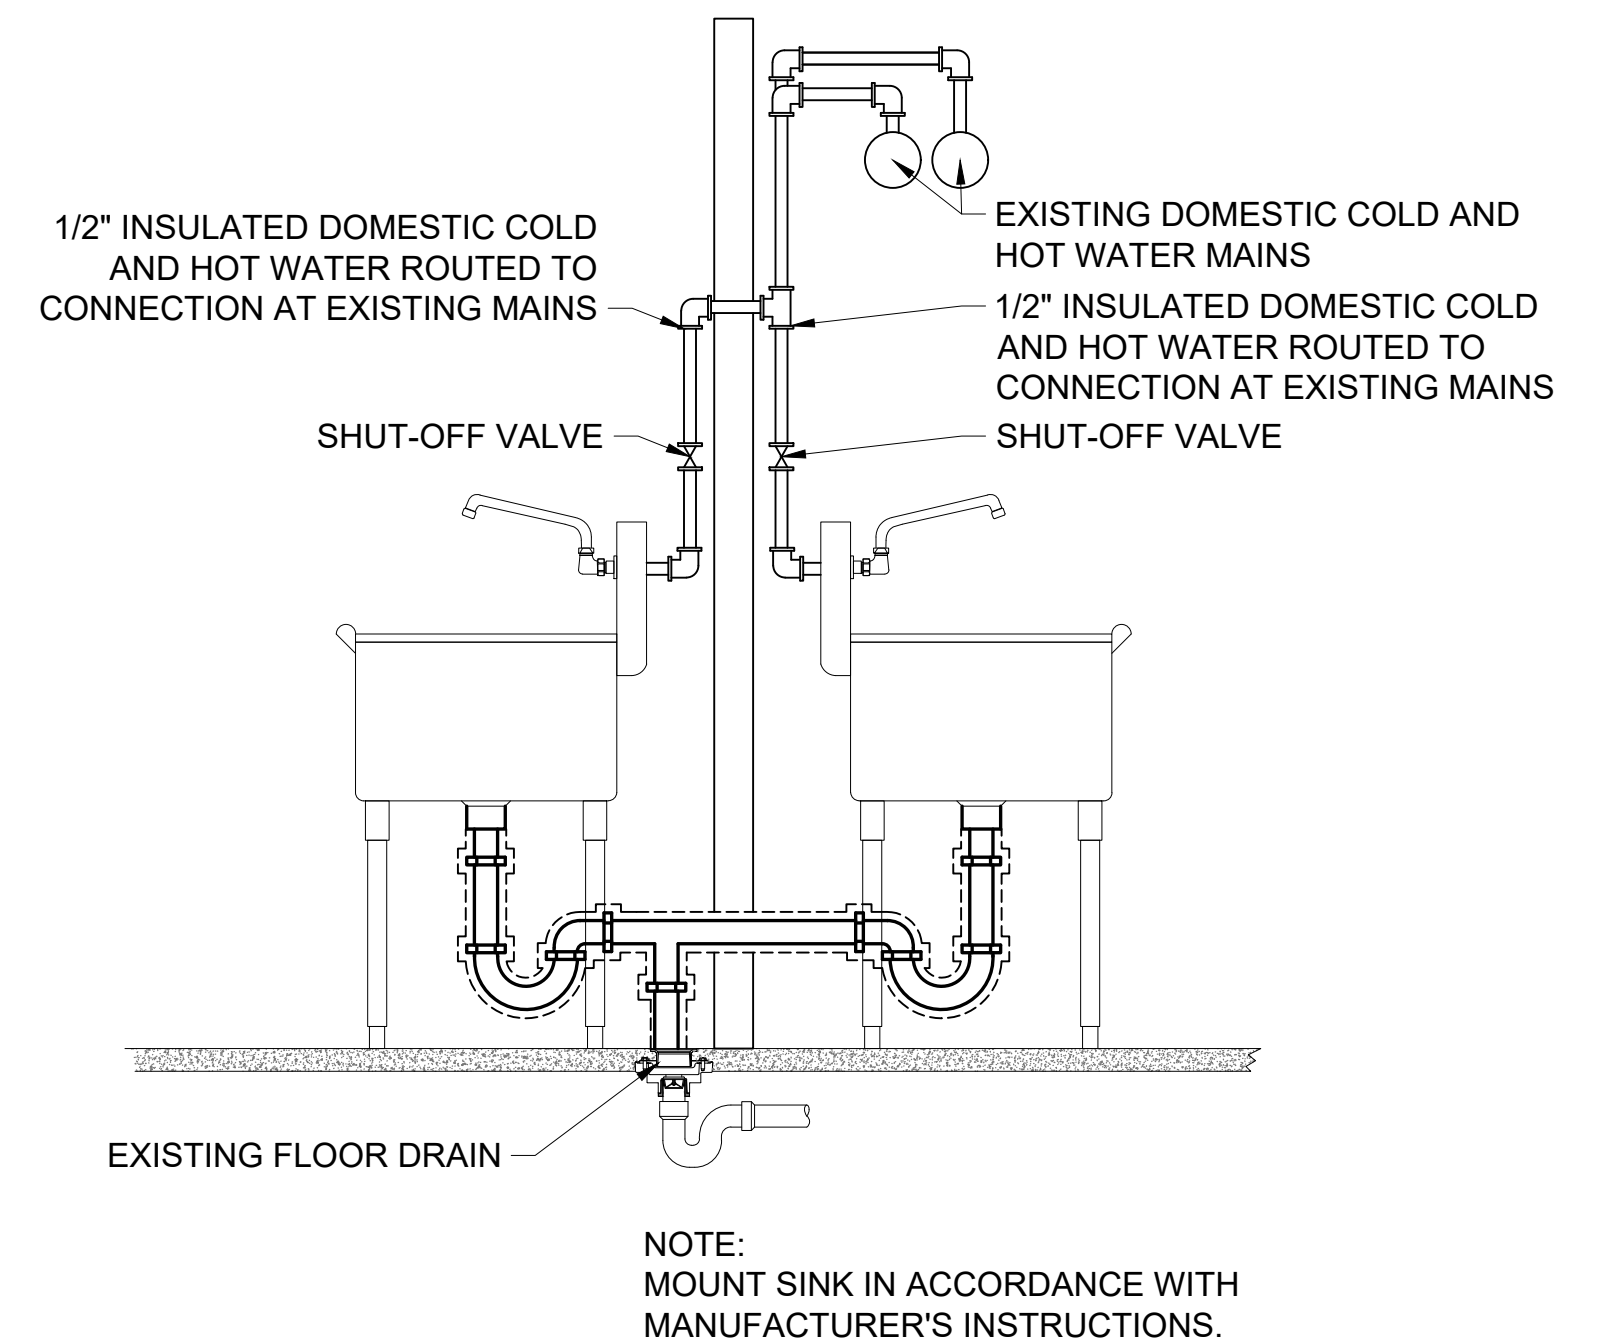



6 SERVICE SINK WASTE CONNECTION DETAIL
P-601 SCALE: NOT TO SCALE

 The Johnson-McAdams Group P.O. BOX 915, GREENWOOD, MISSISSIPPI 39202-4585					
		NO.	DATE	BY	DESCRIPTION
		REVISIONS			
A-E FIRM		USDA Agricultural Research Service USDA AGRICULTURAL RESEARCH SERVICE BUILDING 1, U.S. NATIONAL POULTRY RESEARCH CTR. RENOVATE ROOM P-111 ATHENS, GEORGIA			
PROJECT MANAGER		EPM			
RPP		XXX			
DESIGNER		PPM			
SME		XXX			
CHECKED BY		SAFETY & HEALTH			
CG		XXX			
JOB #		REAL PROPERTY			
6124-A		XXX			
		PROJECT NO.	AGRICULTURAL RESEARCH SERVICE		SHEET
		XXX	SOUTHEAST AREA		P-601
		DATE	STONEVILLE, MS		1 OF XX
		12/10/2024			

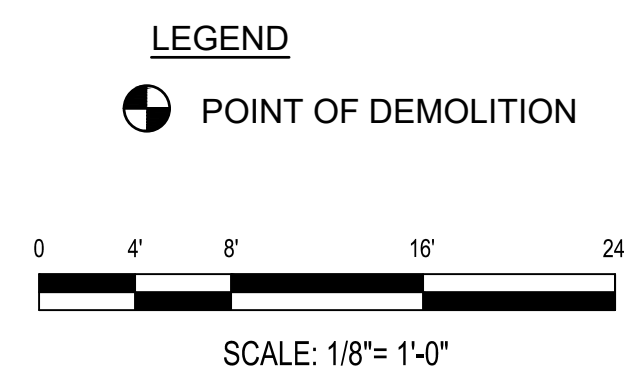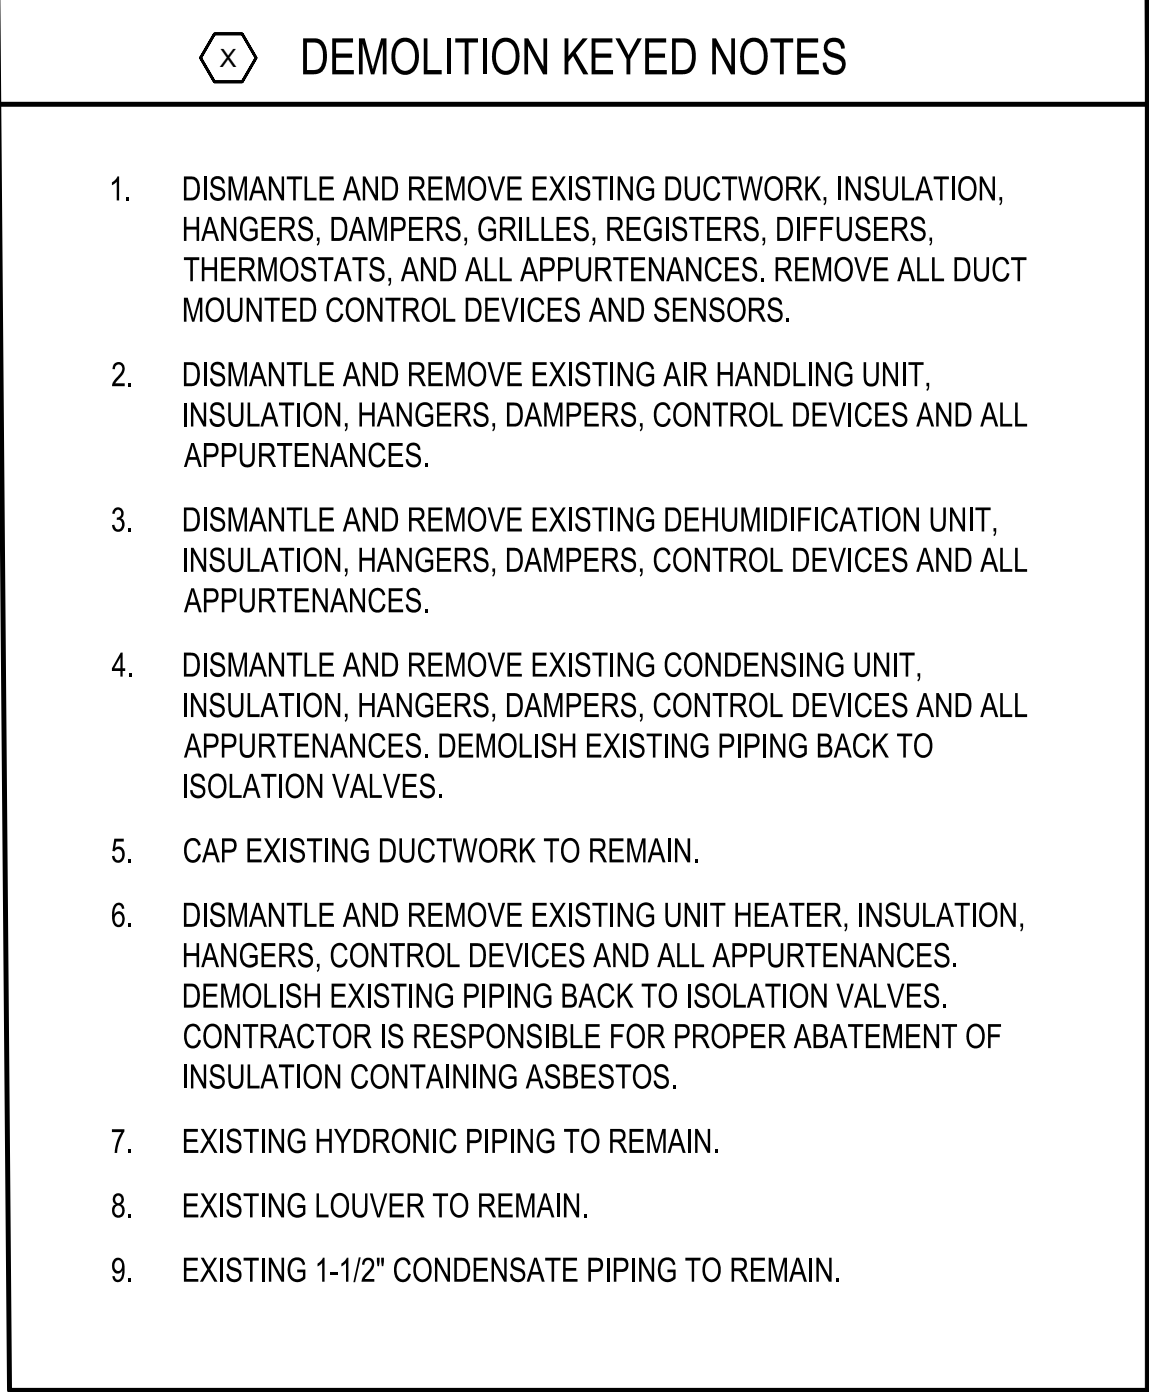


 Johnston • MAdams									
P.O. BOX 515, GREENWOOD, MISSISSIPPI - 39240-0515 TEL: 601-355-0000 FAX: 601-355-0003									
		NO.		DATE	BY	DESCRIPTION			
		REVISIONS							
A-E FIRM		USDA							
PROJECT MANAGER RPP XXXX		 Agricultural Research Service USDA AGRICULTURAL RESEARCH SERVICE BUILDING 1, U.S. NATIONAL POULTRY RESEARCH CTR. RENOVATE ROOM #111 ATHENS, GEORGIA PARTIAL FIRST FLOOR HVAC DEMOLITION PLAN							
DESIGNER SME PPM XXXX									
CHECKED BY CG SAFETY & HEALTH XXX									
JOB # 6124-A REAL PROPERTY XXX		PROJECT NO. XXX		AGRICULTURAL RESEARCH SERVICE				SHEET	
		DATE 12/10/2024		SOUTHEAST AREA STONEVILLE, MS				MD101 1 OF XX	

2:3024, Issue01(2)A4, USDA, B1 Renovate P111 Lab - Athens GA07 Working FederalMechM101.dwg
Apr 23, 2025 - 9:45am

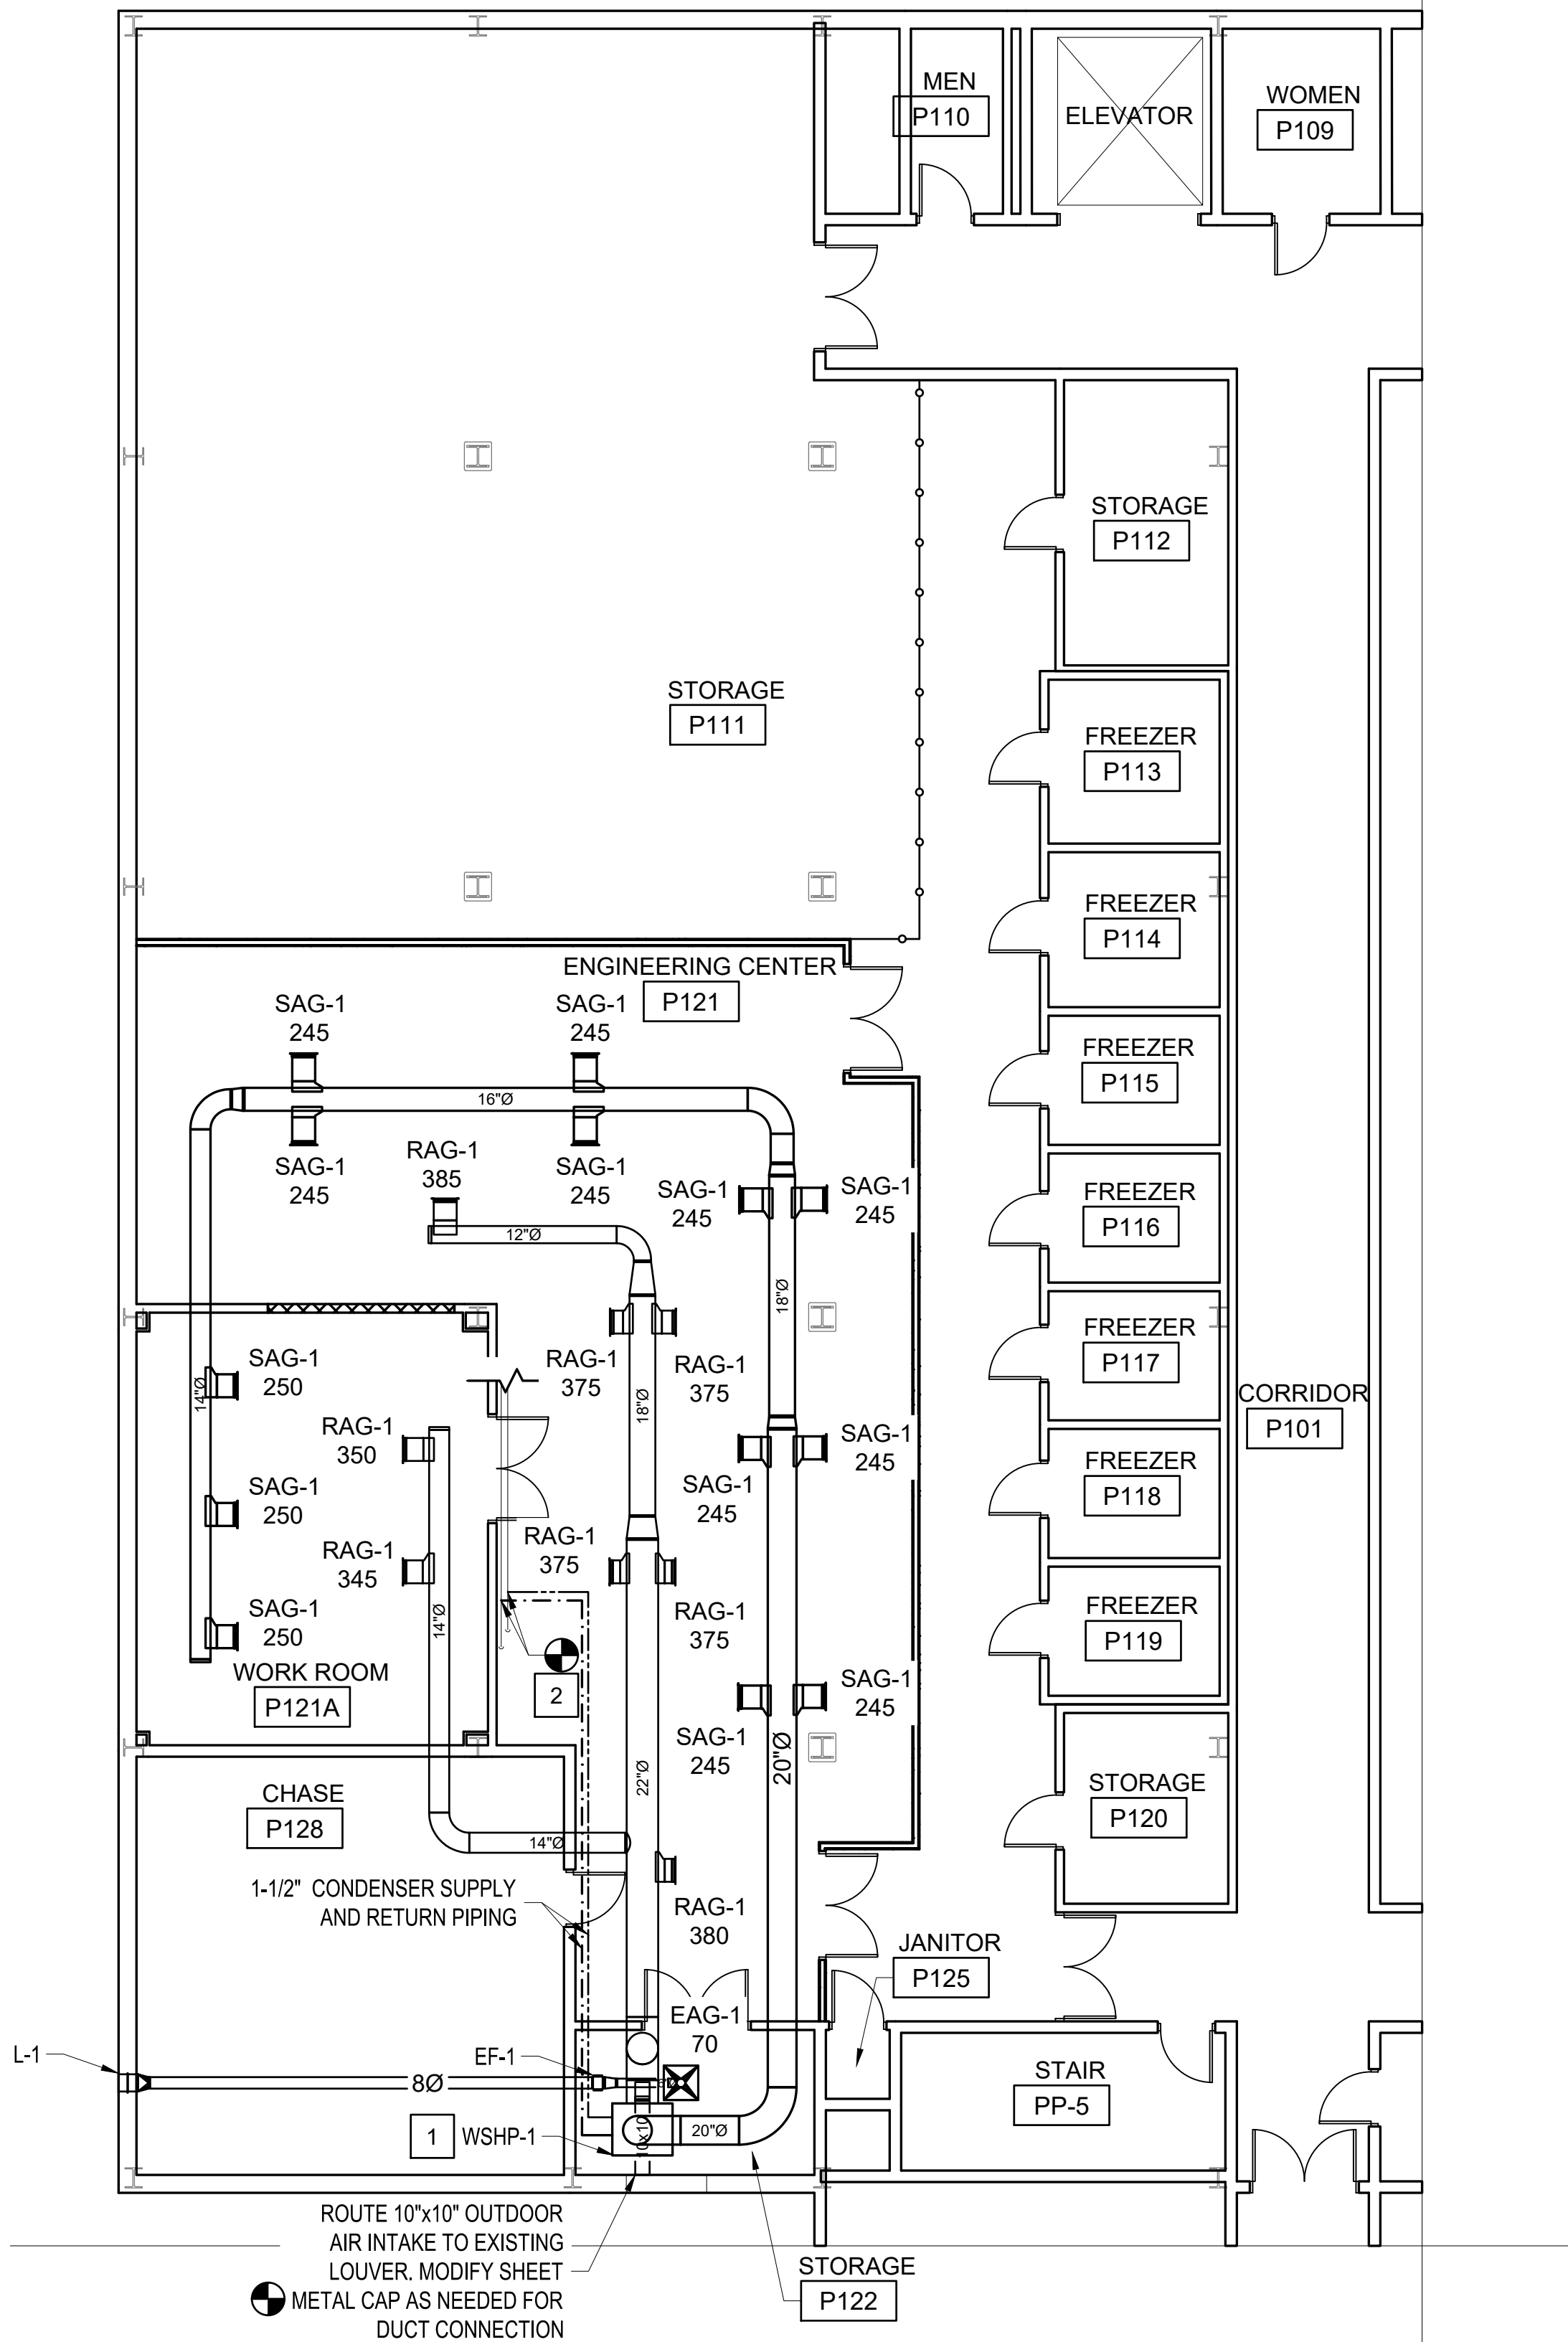

1
M-101

HVAC FLOOR PLAN
SCALE: 1/8"= 1'-0"

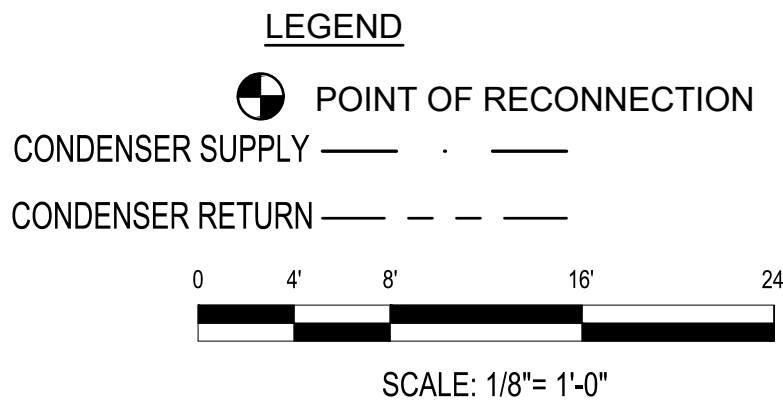


GENERAL NOTES

- IT IS THE CONTRACTOR'S RESPONSIBILITY TO PATCH AND PROTECT ALL EXISTING INSULATION IN THE AREA OF WORK.

X



KEYED NOTES

- PROVIDE UNIT WITH CONDENSATE PUMP AND ROUTE INSULATED 3/4" CONDENSATE OVERHEAD TO EXISTING MOP SINK LOCATED IN JANITOR P125. PROVIDE UNIT WITH EQUIPMENT PAD.
- CONNECT 1-1/2" CONDENSER SUPPLY AND RETURN PIPING TO EXISTING.

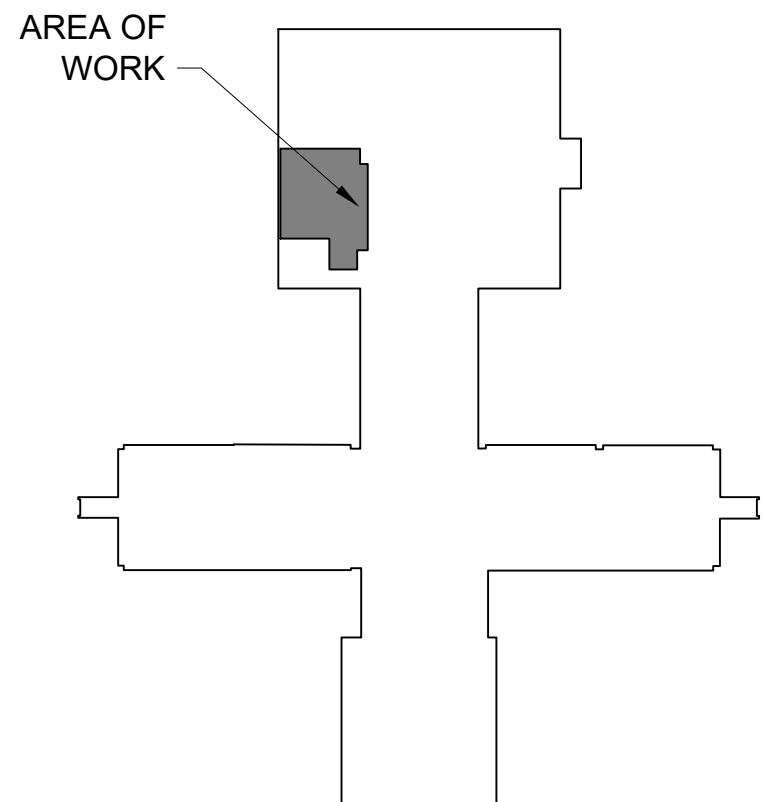




BUILDING 1 - KEY PLAN

 THE JOHNSON-McADAMS GROUP P.O. BOX 915, GREENWOOD, MISSISSIPPI 39202-4585		REVISIONS			
		NO.	DATE	BY	DESCRIPTION
A-E FIRM	USDA		 USDA AGRICULTURAL RESEARCH SERVICE BUILDING 1, U.S. NATIONAL POULTRY RESEARCH CTR. ATHENS, GEORGIA PARTIAL FIRST FLOOR HVAC PLAN		
	PROJECT MANAGER	EPM			
	DESIGNER	PPM			
	SMER	XXX			
CHECKED BY	SAFETY & HEALTH	PROJECT NO.		AGRICULTURAL RESEARCH SERVICE	
CG	XXX	DATE		SHEET	
JOB #	REAL PROPERTY	12/10/2024		M-101	
6124-A	XXX	SOUTHEAST AREA		1 OF XX	
		STONEVILLE, MS			

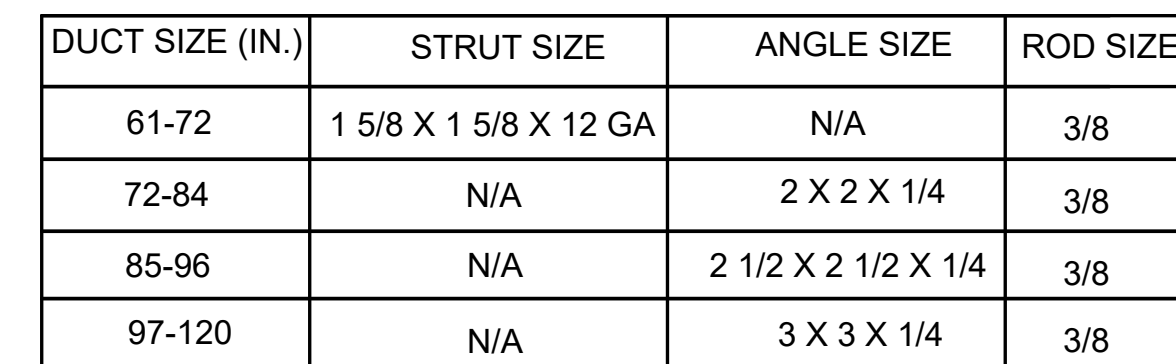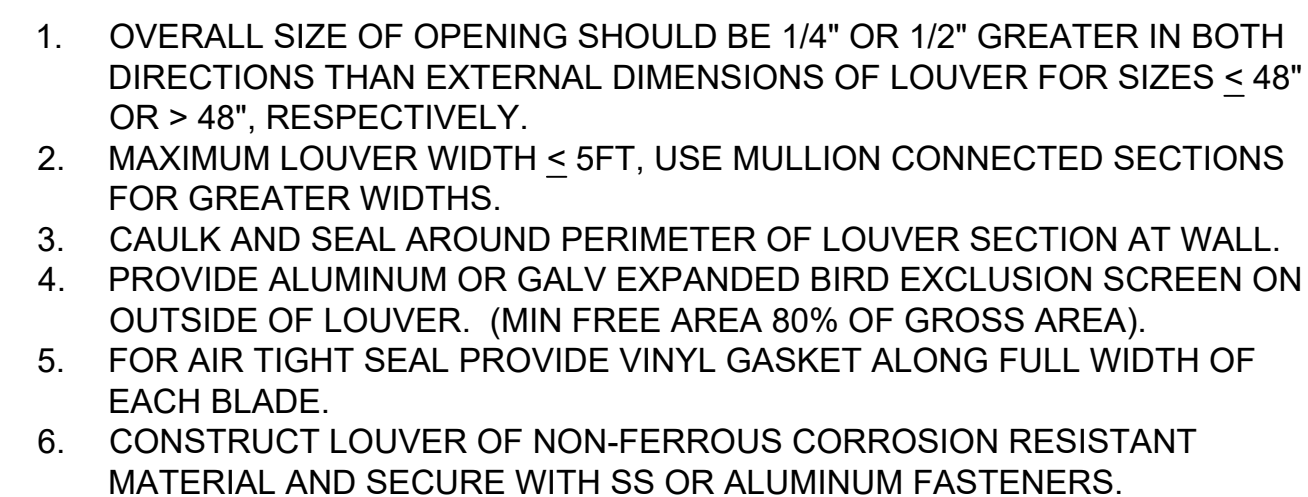


6 DUCT HANGER DETAILS
M-501 SCALE: N.T.S

 Johnson-M Adams PROJECTS • DESIGN • CONSTRUCTION MANAGEMENT P.O. BOX 515, GREENWOOD, MISSISSIPPI 39240-0515						
		NO.	DATE	BY	DESCRIPTION	
		REVISIONS				
A-E FIRM		U S D A  Agricultural Research Service				
USDA		USDA AGRICULTURAL RESEARCH SERVICE BUILDING 1, U.S. NATIONAL POULTRY RESEARCH CTR. RENOVATE ROOM P111 ATHENS, GEORGIA				
PROJECT MANAGER RPP	EPM XXX					
DESIGNER SME	PPM XXX					
CHECKED BY CG	SAFETY & HEALTH XXX	PROJECT NO. XXX	AGRICULTURAL RESEARCH SERVICE SOUTHEAST AREA			SHEET M-501
JOB # 6124-A	REAL PROPERTY XXX	DATE 12/10/2024	STONEVILLE, MS			1 OF XX

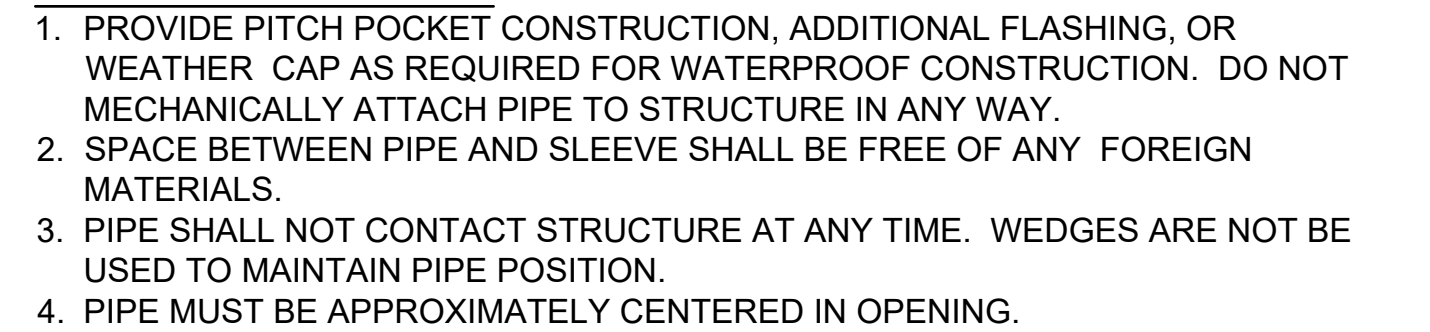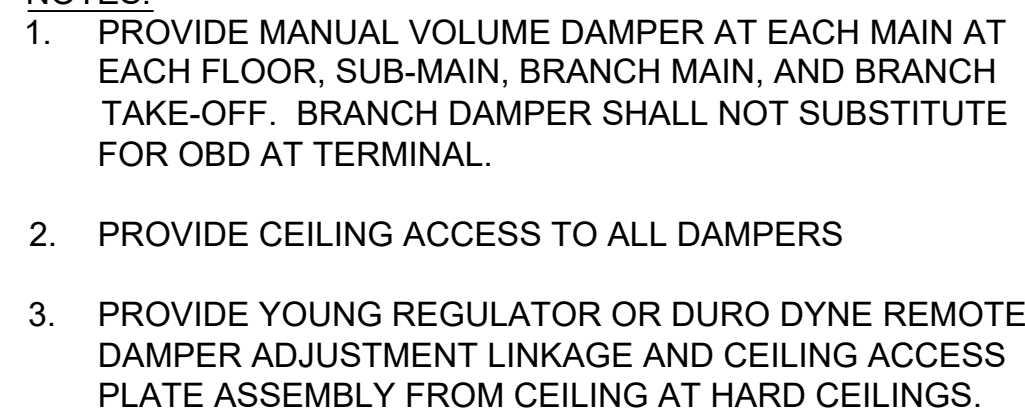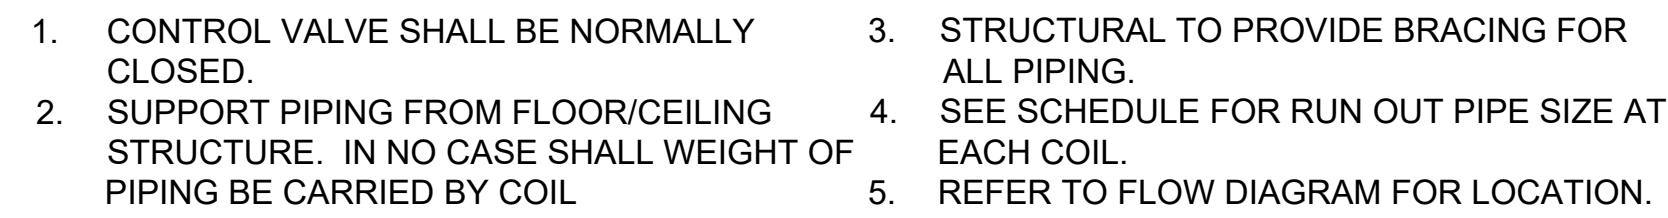

SCALE: N.T.S

SCALE: N.T.S



SCALE: N.T.S



SCALE: N.T.S.

THE Johnson • McAdams FIRM
P.A.
ARCHITECTS • ENGINEERS • PLANNING • SURVEYING • MANAGEMENT
P.O. BOX 513, GREENBAY, WISCONSIN 54301-0513

GRILLE, REGISTER AND DIFFUSER SCHEDULE												
MARK	TYPE	USE		PANEL SIZE IN.	NECK SIZE IN.	MAX CFM	MAX PD IN. WC	FINISH	PATTERN	MAX. NOISE CRITERIA (NC)	REMARKS	
		S	R									E
SAG-1	DUCT MOUNTED LOUVERED GRILLE	X			16X12	16X12	550	0.025	OFF WHITE	SEIDWALL	12	SEE NOTES
RAG-1	DUCT MOUNTED LOUVERED GRILLE	X			16X12	16X12	550	0.025	OFF WHITE	SEIDWALL	12	SEE NOTES
EAG-1	CEILING MOUNTED PERFORATED GRILLE			X	12X12	6Ø	110	0.025	MATCH CEILING	PERF.	15	SEE NOTES

NOTES:

- SUBMIT FINISH/FRAME STYLE OFF ALL DEVICES FOR REVIEW.
- PROVIDE WITH ALUMINUM CONSTRUCTION.

EXHAUST FAN SCHEDULE																	
MARK	BASIS OF DESIGN	TYPE	FAN DATA						ELEC. DATA					CONTROL INTERLOCKS		OPER. WEIGHT (LBS)	REMARKS
			AIRFLOW CFM	S.P. IN.WC.	DRIVE	FAN TYPE	RPM	MAX SONES	POWER HP	VOLTS/ PHASE	FLA	MCA	MOP	SWITCH	OTHER AS NOTED		
EF-1	GREENHECK SQ-70-VG	INLINE	70	0.2	DIRECT	CENT.	1164	1.9	1/15	115/1	1.3	1.6	15	NO	VARIABLE	27	SEE NOTES
NOTES:																	
1. INSTALL IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS.																	
2. PROVIDE WITH GRAVITY BACKDRAFT DAMPER.																	

LOUVER SCHEDULE													
MARK	DESCRIPTION	APPLICATION	WIDTH (IN)	HEIGHT (IN)	DEPTH (IN)	FREE AREA (SF)	VOLUME (CFM)	PRESSURE DROP (IN WG)	FREE AREA VELOCITY (FPM)	BEGINNING POINT OF WATER PENETRATION, BPWP (FPM)	BASIS OF DESIGN MAKE	BASIS OF DESIGN MODEL	REMARKS
L-1	FIXED BLADE HURRICANE LOUVER	EXHAUST	12	12	5	0.2	70	0.04	308	1083	GREENHECK	EHV-550	SEE NOTES
<u>NOTES:</u> 1. PROVIDE LOUVER WITH ALUMINUM INSECT SCREEN. 2. ALL LOUVERS MUST BE FLORIDA PRODUCT APPROVED.													



MARK	BASIS OF DESIGN	TYPE	SERVES	SUPPLY FAN					COOLING								
				TOTAL AIRFLOW (CFM)	OA AIRFLOW (TOTAL)	HP (EACH)	ESP (IN H2O)	TSP (IN H2O)	CAPACITY		AIR SIDE		WATER SIDE				
									TOTAL MBH	SENS MBH	EAT °F (DB/WB)	LAT °F (DB/WB)	FLUID	EWT (°F)	LWT (°F)	FLOW (GPM)	WPD (FT)
WSHP-1	TRANE	VERTICAL	P121 & P121A	3200	240	2.0	1.5	1.5	127.2	89.2	80.6/66.2	57/53.7	WATER	70.3	90.1	15.0	4.8

WATER SOURCE HEAT PUMP (PART 2 OF 2)															
HEATING								PRE / FINAL FILTERS	ELECTRICAL				OPER. WEIGHT (LBS)	AIRFLOW MONITORING STATION LOCATION	REMARKS
CAPACITY	AIR SIDE		WATER SIDE						FLA	MCA	MOP	VOLTS/ PHASE			
TOTAL MBH	EAT °F (DB)	LAT °F (DB)	FLUID	EWT (°F)	LWT (°F)	FLOW (GPM)	WPD (FT)								
126.1	56.8	105.8	WATER	70.3	56.8	15	4.8	NONE/ MERV 13	18.70	20.65	25	460V/3PH	857	OA INTAKE DUCT	SEE NOTES

NOTES:

- ALL UNITS TO BE DOUBLE WALL WITH HINGED ACCESS DOORS.
- PROVIDE UNITS WITH VARIABLE FREQUENCY DRIVE(S) AND SINGLE POINT POWER CONNECTIONS. COORDINATE WITH ELECTRICAL.
- PROVIDE SMOKE DETECTORS IN SUPPLY AND RETURN DUCTS. COORDINATE WITH ELECTRICAL AND FIRE ALARM.
- INTERLOCK AHU(S) VIA BAS TO DE-ENERGIZE ON ANY FIRE ALARM/SMOKE DETECTION IN THE BUILDING.
- PROVIDE DISPOSABLE MERV 13 FINAL FILTERS.
- PROVIDE UNIT WITH CONDENSATE PUMP.

 THE Johnson-McAdams FIRM ARCHITECTS • INTERIORS • LANDSCAPE ARCHITECTS • PLANNING P.O. BOX 515, GREENWOOD, MISSISSIPPI • (601) 455-8842									
		NO.		DATE		BY		DESCRIPTION	
		REVISIONS							
A-E FIRM		USDA		 Agricultural Research Service					
PROJECT MANAGER		RPP		EPM		USDA AGRICULTURAL RESEARCH SERVICE BUILDING 1, U.S. NATIONAL ROULTRY RESEARCH CTR. RENOVATE ROOM P111 ATHENS, GEORGIA			
DESIGNER		SME		PPM					
CHECKED BY		CG		SAFETY & HEALTH					
JOB #		6124-A		REAL PROPERTY					
				XXX					
				XXX					
				DATE		12/10/2024			
				PROJECT NO.		XXX			
				AGRICULTURAL RESEARCH SERVICE		SOUTHEAST AREA		M-601	
				STONEVILLE, MS				1 OF XX	

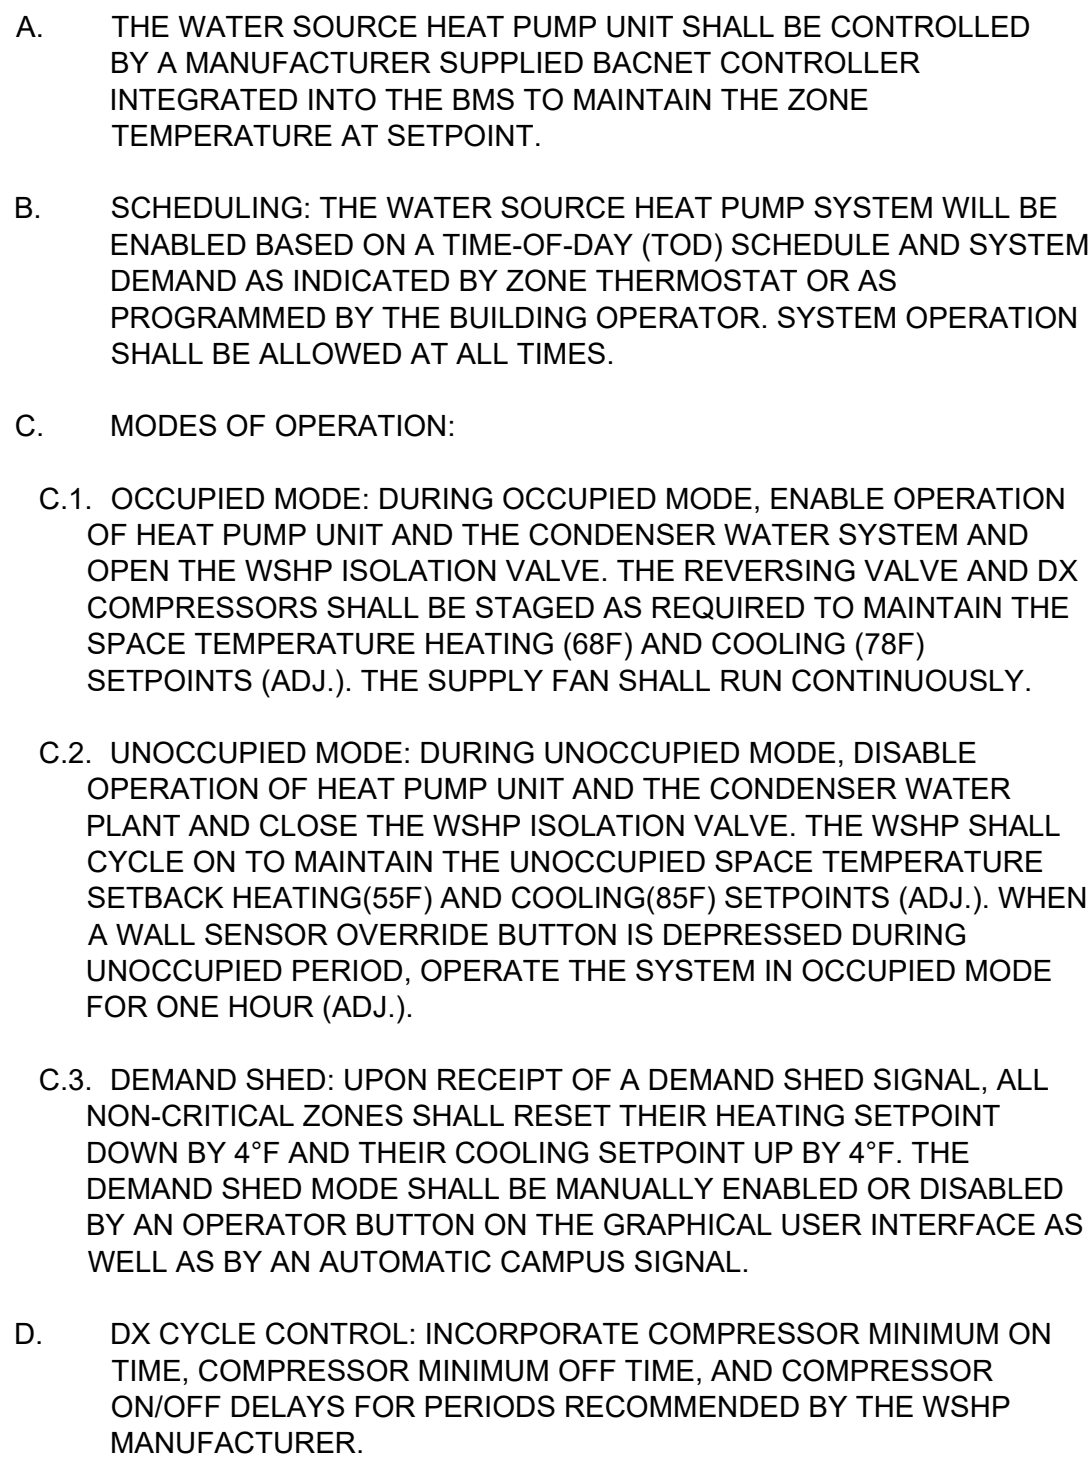

2 EXHAUST FAN CONTROLS
M-701 SCALE: NTS

ELECTRICAL GENERAL NOTES:

1. THE WORK MUST CONFORM WITH ALL REQUIREMENTS OF:
- NFPA 70, NATIONAL ELECTRICAL CODE (NEC) (2020)
 - NFPA 101, LIFE SAFETY CODE (2018)
 - NFPA 780, STANDARDS FOR INSTALLATION OF LIGHTNING PROTECTION SYSTEMS (2020)
 - IEEE C2, NATIONAL ELECTRICAL SAFETY CODE (NESC) (2017)
 - UFC 1-200-01, DOD BUILDING CODE (GENERAL BUILDING REQUIREMENTS),
 - UFC 1-200-02, HIGH PERFORMANCE AND SUSTAINABLE BUILDING REQUIREMENTS
 - UFC 3-501-01, ELECTRICAL ENGINEERING
 - UFC 3-520-01 INTERIOR ELECTRICAL SYSTEMS
 - UFC 3-530-01, INTERIOR AND EXTERIOR LIGHTING AND CONTROLS
 - UFC 3-550-01, EXTERIOR ELECTRICAL POWER DISTRIBUTION
 - UFC 3-560-01, OPERATION AND MAINTENANCE: ELECTRICAL SAFETY
 - UFC 3-575-01, LIGHTNING AND STATIC ELECTRICITY PROTECTION SYSTEMS
 - UFC 3-580-01, TELECOMMUNICATIONS BUILDING CABLING SYSTEMS PLANNING AND DESIGN
 - UFC 4-010-01, DOD ANTITERRORISM STANDARDS FOR BUILDINGS
 - UFC 4-011-06, CYBERSECURITY FOR FACILITY-RELATED CONTROL SYSTEMS
 - ASHRAE 90.1, ENERGY STANDARD FOR BUILDINGS EXCEPT LOW-RISE RESIDENTIAL BUILDINGS (2013)

*CRITERIA AND STANDARDS LISTED ALSO INCLUDE SPECIFIED STANDARDS AND RELATED SECTIONS AS PART OF THE DESIGN.

2. MINIMUM RACEWAY SIZE MUST BE 3/4". INCREASE RACEWAY SIZE AS REQUIRED TO LIMIT RACEWAY FILL RATIO TO LESS THAN 40% FULL FOR FEEDERS AND 20% FOR BRANCH CIRCUITS IAW CNFR REQUIREMENTS.

3. THE ELECTRICAL CONTRACTOR MUST CAREFULLY COORDINATE WORK WITH OTHER TRADES THROUGH THE GENERAL CONTRACTOR AND MUST BE RESPONSIBLE FOR SECURING SPACE REQUIREMENTS FOR ELECTRICAL EQUIPMENT CLEARANCE FOR RECESSED LUMINAIRES AND CORRECT ROUGH-IN LOCATIONS OF ELECTRICAL CONNECTIONS.

4. VERIFY DOOR SWINGS WITH ARCHITECTURAL DRAWINGS BEFORE ROUGHING IN WALL SWITCHES. SWITCHES IN THE SAME LOCATION MUST BE GANGED TOGETHER IN ONE COMMON BACKBOX AND MUST HAVE ONE COMMON FACE PLATE.

5. ALL FEEDERS AND BRANCH CIRCUITS MUST INCLUDE A GREEN INSULATED GROUND CONDUCTOR, SIZE PER NATIONAL ELECTRICAL CODE, OR AS SHOWN, CONNECTED TO EACH DEVICE AND OUTLET BOX ON THE CIRCUIT AND TO THE PANELBOARD GROUND BUS. PROVIDE A DEDICATED NEUTRAL CONDUCTOR FOR EACH BRANCH CIRCUIT. MULTIPLE BRANCH CIRCUITS IN ONE RACEWAY REQUIRE ONLY ONE GROUND CONDUCTOR.

6. VERIFY LUMINAIRE, CEILING MOUNTED OCCUPANCY SENSOR LOCATIONS WITH ARCHITECTURAL REFLECTED CEILING PLANS FOR EXACT LOCATIONS AND DIMENSIONS PRIOR TO INSTALLATION. VERIFY EXACT LOCATIONS OF MOTORS AND EQUIPMENT BEFORE ROUGHING-IN.

7. EXISTING ELECTRICAL WORK (NOT SHOWN) MUST REMAIN, UNLESS INDICATED OTHERWISE. SHOULD ANY EXISTING ELECTRICAL POWER, LIGHTING OR AUXILIARY CIRCUIT, FEEDER OR EQUIPMENT BE SEVERED, DISCONNECTED OR DELETED IN THE PROCESS OF CONSTRUCTION OR REMODELING WHICH IS DONE AS A RESULT OF CONTRACT PLANS AND SPECIFICATIONS, AND UNLESS SPECIFICALLY DESIGNATED BY THE DRAWINGS TO BE DELETED, THEN SAID CIRCUIT OR FEEDER MUST BE RESTORED TO WORKING CONDITION. THE RESTORATION MUST INCLUDE RE-ROUTING, RELOCATION, RECONNECTION OR REPLACEMENT AS MAY BE REQUIRED BY THE NEW WORK. ANY SUCH WORK REQUIRED MUST BE INCLUDED IN THE CONTRACT AND NO EXTRA COMPENSATION WILL BE GRANTED.

8. NEW WORK MUST BE MADE TO TIE INTO THE EXISTING IN A UNIFORM MANNER, SIMILAR ITEMS OF NEW WORK MUST BE CHECKED AGAINST EXISTING WORK

9. REFER TO ONE-LINE DIAGRAMS, SCHEDULES AND RISER DIAGRAMS FOR CONDUCTOR AND CONDUIT SIZES NOT SHOWN ON PLANS.

10. PROVIDE IS AN INCLUSIVE TERM USED TO DESCRIBE ASPECTS OF THE WORK TO BE ACCOMPLISHED, AND IS HEREBY DEFINED TO REQUIRE TO STORE, FURNISH, INSTALL, MOUNT, CONNECT, CONTROL AND POWER EQUIPMENT INDICATED, AS WELL AS ALL APPURTENANCES REQUIRED TO MAKE ELECTRICAL SYSTEMS OPERATE AS INDICATED WITHIN THESE DRAWINGS AND SPECIFICATIONS AND TO FULFILL THE SCOPE OF WORK.

11. DEMOLISH IS AN INCLUSIVE TERM USED TO DESCRIBE ASPECTS OF THE WORK TO BE ACCOMPLISHED, AND IS HEREBY DEFINED TO REQUIRE CONTRACTOR TO DISCONNECT EQUIPMENT FROM ALL CONNECTIONS, REMOVE FROM THE OWNER'S SITE, AND DISPOSE OF IN ACCORDANCE WITH FEDERAL, STATE AND LOCAL LAWS AND ORDINANCES. COST OF DISPOSAL IS ENTIRELY THE CONTRACTOR'S RESPONSIBILITY.

12. ALL CONDUCTORS ARE COPPER UNLESS SPECIFICALLY NOTED AS ALUMINUM.

13. CONTRACTOR MUST FIELD VERIFY ALL EXISTING CONDITIONS, DIMENSIONS AND ELEVATIONS BEFORE PROCUREMENT OF ANY MATERIALS AND DEVELOPMENT OF ANY SHOP DRAWINGS OR SUBMITTALS.

14. PROVIDE LABELS ON ALL RECEPTACLES, WALL MOUNTED LIGHT SWITCHES/OCCUPANCY SENSORS AND JUNCTION BOXES INDICATING THE SOURCE PANEL & CIRCUIT(S). TEXT MUST BE BLACK, 1/4" IN HEIGHT PRINTED ON A CLEAR LABEL. HANDWRITTEN LABELS ARE NOT PERMITTED EXCEPT FOR JUNCTION BOXES LOCATED ABOVE FINISHED CEILING WHICH CAN BE HANDWRITTEN WITH AN INDELEIBLE MARKER.

15. ALL EQUIPMENT PADS FOR INTERIOR ELECTRICAL EQUIPMENT MUST BE FLUSH WITH FRONT SIDE OF EQUIPMENT AND EXTEND AT LEAST 2" BEYOND THE FOOTPRINT OF THE EQUIPMENT ON ALL OTHER SIDES.








ELECTRICAL ABBREVIATIONS:

OR AMP	AMPERE(S)
ACC	AIR COOLED CHILLER
AC	ALTERNATING CURRENT
AC	AIR COMPRESSOR / AIR CURTAIN
AF	AMP FRAME
AF	ABOVE FINISHED FLOOR
AFG	ABOVE FINISHED GRADE
AHU	AIR HANDLING UNIT
AIC	AMPERE INTERRUPTING CAPACITY
AL	ALUMINUM
AM	AMMETER
ASYM	ASYMMETRICAL
AT	AMP TRIP
ATS	AUTOMATIC TRANSFER SWITCH
AUTO	AUTOMATIC
AWG	AMERICAN WIRE GAUGE
B	BOILER
BC	BRANCH CONTROLLER
BCW	BARE COPPER WIRE
BFF	BELOW FINISHED FLOOR
BFG	BELOW FINISHED GRADE
BLDG	BUILDING
BMGB	BUILDING MASTER GROUNDING BUSBAR
C	CONDUIT
CAT	CATEGORY
CB	CIRCUIT BREAKER
CCT	CORRELATED COLOR TEMPERATURE
CCTV	CLOSED CIRCUIT TELEVISION
CFCI	CONTRACTOR FURNISHED CONTRACTOR INSTALLED
CH	CHILLER
CHWCP	CHILLED WATER CIRCULATING PUMP IN A PRIMARY-SECONDARY SYSTEM
CHWP	CHILLED WATER PUMP
CHWSP	CHILLED WATER SUPPLY PUMP IN A PRIMARY-SECONDARY SYSTEM
CKT	CIRCUIT
CMH	COMMUNICATIONS MANHOLE
CMS	COMBINATION MOTOR STARTER
CP	CONDENSATE PUMP
CPT	CONTROL POWER TRANSFORMER
CRAC	COMPUTER ROOM AC UNIT
CRI	COLOR RENDERING INDEX
CT	CURRENT TRANSFORMER
CT	COOLING TOWER
CU	COPPER OR CONDENSING UNIT
CWP	CONDENSER WATER PUMP
D	DEPTH
DC	DIRECT CURRENT
DF	DESTRATIFICATION FAN
DH or DUH	DUCT HEATERS
DHWCP	DOMESTIC HOT WATER CIRCULATING PUMP
DISC	DISCONNECT SWITCH
DOAS	DEDICATED OUTSIDE AIR SYSTEM (UNIT)
DPST	DOUBLE POLE SINGLE THROW
DPDT	DOUBLE POLE DOUBLE THROW
DSU	DUCTLESS SPLIT CONDENSING UNIT (POWERS THE DSS INDOOR UNIT)
DSPH	DUCTLESS SPLIT HEAT PUMP (POWERS THE DSS INDOOR UNIT)
DSS	DUCTLESS SPLIT SYSTEM (INDOOR UNIT)
DWBP	DOMESTIC WATER BOOSTER PUMP
DX	DIRECT EXPANSION (DX) COOLING COIL
EC	EMPTY CONDUIT
ECB	ENCLOSED CIRCUIT BREAKER
EF	EXHAUST FAN
ELEC	ELECTRICAL
EMH	ELECTRICAL MANHOLE
EMT	ELECTRICAL METALLIC TUBING
E or EMER	EMERGENCY
EPA	EFFECTIVE PROJECTED AREA
EQUIP	EQUIPMENT
ERV	ENERGY RECOVERY VENTILATOR
ERU	ENERGY RECOVERY UNIT
EXIST or EX	EXISTING
EUH	ELECTRIC UNIT HEATER
EXP	EXPLOSION PROOF
EWC	ELECTRIC WATER COOLER
EWH	ELECTRIC WATER HEATER
F	FUSE
FACP	FIRE ALARM CONTROL PANEL
FCU	FAN COIL UNIT
FLEX	FLEXIBLE
FWE	FURNISHED WITH EQUIPMENT
G OR GND	GROUND
GFGI	GOVERNMENT FURNISHED GOVERNMENT INSTALLED
GFI	GROUND FAULT INTERRUPTER
GRS	GALVANIZED RIGID STEEL CONDUIT
GUH	GAS UNIT HEATER
GWH	GAS WATER HEATER
H or HT	HEIGHT
HAC	HEATED AIR CURTAIN
HOA	HAND-OFF AUTOMATIC
HP	HORSE POWER
HP	HEAT PUMP (OUTDOOR PORTION OF SPLIT SYSTEM HEAT PUMP, USE CU FOR STANDARD DX OUTDOOR UNIT)
HT	HEAT TRACKING
HVU	HEATING/VENTILATING UNIT
HWCP	HEATING WATER CIRCULATING PUMP IN A PRIMARY-SECONDARY SYSTEM
HWP	HEATING WATER SUPPLY IN A PRIMARY-ONLY SYSTEM
HWRP	HOT WATER RECIRCULATION PUMP
HWSP	HEATING WATER SUPPLY PUMP IN A PRIMARY-SECONDARY SYSTEM


HOT WATER UNIT HEATER	
HZ	HERTZ
I	IN ACCORDANCE WITH
IAD	INTRUSION DETECTION SYSTEM
IMC	INTERMEDIATE METAL CONDUIT
IRH	INFRARED HEATER
J OR JB	JUNCTION BOX
K	KILO
KAIC	THOUSAND AMPERE INTERRUPTING CAPACITY
KCM OR KCMIL	THOUSAND OF CIRCULAR MILS
KEF	KITCHEN EXHAUST FAN
KH	KITCHEN HOOD
KV	KILOVOLT
KVA	KILOVOLT-AMPERES
KW	KILOWATT
KWHR	KILOWATT-HOUR
L	LENGTH
LA	LIGHTNING ARRESTOR
LAN	LOCAL AREA NETWORK
LAV	LAVATORY
LM	LOCKHEED MARTIN
LTG	LIGHTING
MAU	MAKE-UP AIR UNIT
MAX	MAXIMUM
MCA	MINIMUM CIRCUIT AMPACITY
MCB or MB	MAIN CIRCUIT BREAKER
MCC	MOTOR CONTROL CENTER
MGB	MAIN GROUND BAR
MH	MANHOLE or MOUNTING HEIGHT
MIN	MINIMUM
MLO	MAIN LUGS ONLY
MOD	MOTOR OPERATED DAMPER
MT or MTD	MOUNT or MOUNTED
MRS	MOTOR RATED SWITCH
N	NEUTRAL
NEC	NATIONAL ELECTRICAL CODE
NEMA	NATIONAL ELECTRICAL MANUFACTURER'S ASSOCIATION
NFPA	NATIONAL FIRE PROTECTION ASSOCIATION
NC	NORMALLY CLOSED
NESC	NATIONAL ELECTRICAL SAFETY CODE
NL	NIGHT LIGHT
NO	NORMALLY OPEN
NTS	NOT TO SCALE
P	POLE(S) or PUMP
PA	PUBLIC ADDRESS
PBB	PRIMARY BONDING BUSBAR
PDU	POWER DISTRIBUTION UNIT
PF	POWER FACTOR
PH	PHASE
PIU	VAV TERMINAL UNIT WITH PARALLEL OR SERIES FAN (PRIMARY INDUCTION UNIT)
PMT	PAD MOUNTED TRANSFORMER
PNL	PANEL OR PANELBOARD
PTAC	PACKAGED THRU-WALL AIR CONDITIONER
PVC	POLYVINYL CHLORIDE
RBB	RACK BONDING BUSBAR
RECEPT or RECP	RECEPTACLE
RF	RETURN FAN
RH	RADIANT HEATERS (ELECTRIC)
RMC	RIGID METAL CONDUIT
RMS	ROOT MEAN SQUARE
RTU	ROOF TOP UNIT
RVNR	REDUCED VOLTAGE NON-REVERSING
SA	SURGE ARRESTOR
SBB	SECONDARY BONDING BUSBAR
SCCR	SHORT CIRCUIT CURRENT RATING
SD	SMOKE DAMPER
SF	SUPPLY FAN
S/N	SOLID NEUTRAL
SP	SUMP PUMP
SPD	SURGE PROTECTIVE DEVICE
SPDT	SINGLE POLE DOUBLE THROW
SPEC	SPECIFICATIONS
SPST	SINGLE POLE SINGLE THROW
SWBD	SWITCHBOARD
SWGR	SWITCHGEAR
TBEC	TELECOMMUNICATIONS EQUIPMENT BONDING CONDUCTOR
TMBG	TELECOMMUNICATIONS MAIN GROUNDING BUSBAR
TOL	THERMAL OVERLOAD
TP	TWISTED PAIR
TP	TWISTED PAIR
U	UNIT HEATER
UH	UNDERGROUND
UO	UNLESS INDICATED OTHERWISE
UL	UNDERWRITERS LABORATORY
UTP	UNSHIELDED TWISTED PAIR
V	VOLTS
VA	VOLT AMPERES
VAV	VAV TERMINAL UNIT
VEF	VEHICLE EXHAUST FAN
VM	VOLTMETER
VRF	VARIABLE REFRIGERANT FLOW SYSTEM
W	WATTS or WIRE or WIDTH
WC	WATER CLOSET
WEF	WELDING EXHAUST FAN
WH	WATER HEATER
WHDM	WATTHOUR DEMAND METER
WSPH	WATER SOURCE HEAT PUMP
WP	WEATHERPROOF
WPIU	WEATHERPROOF IN USE
XFMR	TRANSFORMER
Z	IMPEDANCE

 THE Johnson-McAdams FIRM P.O. BOX 915, GREENWOOD, MISSISSIPPI 39202-0915 (601) 452-4843									
		NO.		DATE		BY		DESCRIPTION	
A-E FIRM USDA		U S D A		 Agricultural Research Service USDA AGRICULTURAL RESEARCH SERVICE BUILDING 1, U.S. NATIONAL ANIMAL HUSBANDRY RESEARCH CTR. RENOVATE ROOM P111 ATHENS, GEORGIA					
				ELECTRICAL NOTES					
				PROJECT NO.		AGRICULTURAL RESEARCH SERVICE		SHEET	
				DATE		SOUTHEAST AREA		E-001	
JOB #		12/10/24		STONEVILLE, MS		1 OF XX			
6124-A									
REAL PROPERTY									
XXX									
CHECKED BY		SAFETY & HEALTH							
CG		XXX							
PROJECT MANAGER		WLS		XXX					
DESIGNER		RPP		XXX					
PPM									

I:\2024 Projects\6124-A USDA B1 Renovate P111 Lab - Athens GA\07 Working Folder\Elec\USDA\Unos\Elec - P111 Lab.dwg
Dec 10, 2024 - 10:08am

ELECTRICAL LEGEND			
LEGEND GENERAL NOTES	SWITCHES	CONDUIT AND WIRING	RECEPTACLES
1. ALL EQUIPMENT AND DEVICES ARE TO BE FLUSH MOUNTED UNLESS OTHERWISE NOTED. 2. DEVICES NOTED AS "GFI" MUST BE GROUND FAULT CIRCUIT INTERRUPTING DEVICES. 3. DEVICES NOTED AS "WP" MUST BE GFI AND WEATHERPROOF. 4. DEVICES NOTED AS "WPIU" MUST BE GFI AND WEATHERPROOF IN USE. 5. DEVICES NOTED AS "DL" MUST BE RATED FOR DAMP LOCATION. 6. DEVICES NOTED AS "NL" MUST BE NIGHT LIGHTS. PROVIDE UNSWITCHED POWER TO FIXTURE. 7. DEVICES NOTED AS "WG" MUST BE PROVIDED AND INSTALLED WITH A WIRE GUARD. 8. DEVICES NOTED AS "TR" MUST BE TAMPER RESISTANT. 9. PROVIDE UNSWITCHED POWER TO EMERGENCY BATTERY PACKS.	\$ SINGLE-POLE, SINGLE-THROW SWITCH. MOUNT CENTERLINE OF BOX AT 45"A.F.F. UNLESS NOTED OTHERWISE. \$₃ SINGLE-POLE, THREE-WAY SWITCH. MOUNT CENTERLINE OF BOX AT 45"A.F.F. UNLESS NOTED OTHERWISE. \$_D PASSIVE INFRARED AND ULTRASONIC DUAL TECHNOLOGY WALL SWITCH WITH INTEGRAL 0-10V DIMMER. MOUNT CENTERLINE OF BOX AT 45"A.F.F. UNLESS NOTED OTHERWISE. \$_O PASSIVE INFRARED AND ULTRASONIC DUAL TECHNOLOGY WALL SWITCH. MOUNT CENTERLINE OF BOX AT 45"A.F.F. UNLESS NOTED OTHERWISE. OS PASSIVE INFRARED AND ULTRASONIC DUAL TECHNOLOGY OCCUPANCY SENSOR WITH A 25' RADIAL COVERAGE. CEILING MOUNTED.	 CONDUCTORS IN CONDUIT CONCEALED WITHIN WALL OR CEILING. TIC MARKS INDICATE NUMBER OF CONDUCTORS. THE EQUIPMENT GROUNDING CONDUCTOR IS NOT SHOWN, BUT MUST BE PROVIDED. SIZE THE EQUIPMENT GROUNDING CONDUCTOR AND THE CONDUIT PER THE NEC. THE ABSENCE OF TIC MARKS SIGNIFIES THAT TWO CONDUCTORS PLUS AN EQUIPMENT GROUNDING CONDUCTOR SHOULD BE PROVIDED. FOR EXAMPLE, THE MARKINGS TO THE LEFT SIGNIFY THAT THREE CONDUCTORS PLUS AN EQUIPMENT GROUNDING CONDUCTOR SHOULD BE PROVIDED.  THE TEXT INSIDE THE ARC INDICATES THE AWG SIZE OF THE CONDUCTORS THAT MUST BE RUN IN THE CONDUIT. THE ABSENCE OF TEXT SIGNIFIES THAT THE CONDUCTORS SHOULD BE #12 AWG.  CIRCUITRY RUN IN STRAIGHT LINE SEGMENTS SIGNIFIES EXPOSED SURFACE-MOUNTED RACEWAY (SEE SPECIFICATIONS).  CONDUCTORS IN CONDUIT CONCEALED BELOW GRADE OR FLOOR. TIC MARKS INDICATE NUMBER OF CONDUCTORS. THE EQUIPMENT GROUNDING CONDUCTOR IS NOT SHOWN, BUT MUST BE PROVIDED. SIZE THE EQUIPMENT GROUNDING CONDUCTOR AND THE CONDUIT PER THE NEC. THE ABSENCE OF TIC MARKS SIGNIFIES THAT TWO CONDUCTORS PLUS AN EQUIPMENT GROUNDING CONDUCTOR SHOULD BE PROVIDED. THE MARKINGS TO THE LEFT SIGNIFY THAT THREE CONDUCTORS PLUS AN EQUIPMENT GROUNDING CONDUCTOR SHOULD BE PROVIDED.  HOMERUN TO PANELBOARD. ARC DENOTES CONCEALED CIRCUITRY. TEXT DENOTES PANELBOARD NAME WITH CIRCUIT NUMBER. DEVICES HAVING CIRCUIT NUMBERS LOCATED BESIDE THEM MAY NOT SHOW THE CIRCUIT NUMBERS AT THE HOMERUN ARROWS.  PARTIAL HOMERUN TO PANELBOARD. COMBINE ALL PARTIAL HOMERUNS THAT ARE ON THE SAME CIRCUIT IN A JUNCTION BOX PRIOR TO ENTERING THE PANELBOARD.  LOW VOLTAGE CONDUCTORS USED FOR MOTION DETECTOR CIRCUITRY. SEE MANUFACTURER'S RECOMMENDATIONS FOR CONDUCTOR REQUIREMENTS.  LONG TIC MARK IDENTIFIES CONDUCTOR. SHORT TICK MARK IDENTIFIES NEUTRAL. HOOKED TIC MARK IDENTIFIES GROUND.	 DUPLEX RECEPTACLE, NEMA 5-20R, MOUNTED 18" A.F.F. TO CENTERLINE OF BOX UNLESS NOTED OTHERWISE.  DOUBLE DUPLEX RECEPTACLE, NEMA 5-20R, ONE COVER PLATE, MOUNTED 18" A.F.F. TO CENTERLINE OF BOX UNLESS NOTED OTHERWISE.  DOUBLE DUPLEX RECEPTACLE, NEMA 5-20R, ONE COVER PLATE, MOUNTED WITH BOTTOM OF BOX 2" ABOVE COUNTER BACKSPASH. WHERE THERE IS NO BACKSPASH MOUNT 6" ABOVE COUNTER. WHERE RECEPTACLE IS SHOWN IN AN AREA WITH NO COUNTER, MOUNT 45"A.F.F. TO CENTERLINE OF BOX.  DUPLEX RECEPTACLE, NEMA 5-20R, MOUNTED WITH BOTTOM OF BOX 2" ABOVE COUNTER BACKSPASH. WHERE THERE IS NO BACKSPASH MOUNT 6" ABOVE COUNTER. WHERE RECEPTACLE IS SHOWN IN AN AREA WITH NO COUNTER, MOUNT 45"A.F.F. TO CENTERLINE OF BOX.  DUPLEX RECEPTACLE, NEMA 5-20R, FOR DRINKING FOUNTAIN FED FROM GFCI BREAKER. MOUNTED IN ACCORDANCE WITH MANUFACTURER'S ROUGH-IN REQUIREMENTS. VERIFY CONNECTION TYPE PRIOR TO BID. RECEPTACLE MUST BE MOUNTED, CONCEALED BEHIND THE SHROUD OF THE DRINKING FOUNTAIN.  FLOOR BOX. PROVIDE WITH NEMA 5-20R DUPLEX RECEPTACLE AND DATA OUTLET AS SHOWN ON COMMUNICATIONS PLANS.  DOUBLE DUPLEX RECEPTACLE, NEMA 5-20R, MOUNTED IN A FLOOR BOX.  SINGLE RECEPTACLE, NEMA 6-50R. PROVIDE 6' CORD AND MATCHING PLUG WHERE REQUIRED. MOUNTING DETERMINED BY NEC FOR TYPE OF EQUIPMENT BEING CONNECTED.  HALF CONTROLLED DUPLEX RECEPTACLE, NEMA5-20R. MOUNTED 18"A.F.F. TO CENTERLINE OF BOX UNLESS NOTED OTHERWISE. LEVITON 16252 SERIES OR APPROVED EQUAL.  SINGLE RECEPTACLE, NEMA 6-30R, MOUNTED 18" A.F.F. TO CENTERLINE OF BOX UNLESS NOTED OTHERWISE.  SINGLE RECEPTACLE, NEMA 14-30R, MOUNTED 36" A.F.F. TO CENTERLINE OF BOX UNLESS NOTED OTHERWISE. PROVIDE 6' CORD AND MATCHING PLUG WHERE REQUIRED.  DUPLEX RECEPTACLE, NEMA 5-20R, MOUNTED FLUSH IN THE CEILING UNLESS NOTED OTHERWISE.  50A WELDING RECEPTACLE, NON-NEMA FEMALE PIN-SLEEVE, MOUNTED 48" A.F.F. UNLESS NOTED OTHERWISE. PROVIDE WITH DUST COVER FLAP TO COVER THE RECEPTACLE WHEN NOT IN USE. RECEPTACLE IS TO BE OF TYPE WHERE GROUND MAKES BEFORE CONDUCTORS AND BREAKS AFTER CONDUCTORS. REFER TO D1/EP103.  QUAD RECEPTACLE, NEMA 5-20R, CEILING MOUNTED CORD REEL.  SINGLE RECEPTACLE, NEMA L6-30R, MOUNTED IN A FLOOR BOX.  SINGLE RECEPTACLE, NEMA 15-50R. PROVIDE 6' CORD AND MATCHING PLUG WHERE REQUIRED. MOUNTING DETERMINED BY NEC FOR TYPE OF EQUIPMENT BEING CONNECTED.  RECEPTACLE, NEMA L5-20R, MOUNTED AT CEILING, DEDICATED CIRCUIT.
LUMINAIRES (SEE LIGHT FIXTURE SCHEDULE) NOTE: THE NUMBER BESIDE THE SYMBOL IS THE CIRCUIT NUMBER. THE LETTER BESIDE THE SYMBOL IS THE FIXTURE TYPE DESCRIBED IN THE LIGHT FIXTURE SCHEDULE.			
 2'X2' RECESSED FIXTURE.  2'X4' RECESSED FIXTURE.  2'X2' RECESSED EMERGENCY FIXTURE.  2'X4' RECESSED EMERGENCY FIXTURE.  SURFACE MOUNTED/SUSPENDEED LINEAR FIXTURE.  SURFACE MOUNTED/SUSPENDEED EMERGENCY FIXTURE.  RECESSED CEILING FIXTURE.  RECESSED EMERGENCY CEILING FIXTURE.  CEILING MOUNTED EXIT SIGN. PROVIDE CHEVRONS AS INDICATED BY ARROWS.  WALL MOUNTED EXIT SIGN. PROVIDE CHEVRONS AS INDICATED BY ARROWS.  WALL MOUNTED FIXTURE.  SITE POLE TOP LIGHT FIXTURE.  LED HIGH BAY LIGHT  LED EMERGENCY LIGHTING UNIT	MISCELLANEOUS  CONTACTOR.  PHOTOCCELL.  CEILING MOUNTED JUNCTION BOX.  WALL MOUNTED JUNCTION BOX.  FLEXIBLE CONNECTION TO EQUIPMENT.  OVERHEAD COLUMN POWER SINGLE POLE. PROVIDE POWER TO BASE OF FURNITURE SYSTEM.  OVERHEAD COLUMN POWER SINGLE POLE. PROVIDE POWER TO BASE OF FURNITURE SYSTEM.  FURNITURE WHIP SINGLE POLE. PROVIDE POWER TO BASE OF FURNITURE SYSTEM.  FURNITURE WHIP DOUBLE POLE. PROVIDE POWER TO BASE OF FURNITURE SYSTEM.  FURNITURE WHIP THREE POLE. PROVIDE POWER TO BASE OF FURNITURE SYSTEM.		

 The Johnson-MAdams Group P.O. BOX 910, GREENWOOD, MISSISSIPPI 39202-4504-0001				
	NO.	DATE	BY	DESCRIPTION
	REVISIONS			
A-E FIRM	USDA		 USDA Agricultural Research Service	USDA AGRICULTURAL RESEARCH SERVICE BUILDING 1, U.S. STATION 1, ROULIERY RESEARCH CTR. RENOVATE ROOM P111 ATHENS, GEORGIA
PROJECT MANAGER	EPM	XXX	SHEET	
DESIGNER	PPM	XXX		
CHECKED BY	SAFETY & HEALTH	XXX		
JOB #	REAL PROPERTY	XXX		
		DATE	12/10/24	E-002 1 OF XX
		AGRICULTURAL RESEARCH SERVICE		
		SOUTHEAST AREA		
		STONEVILLE, MS		

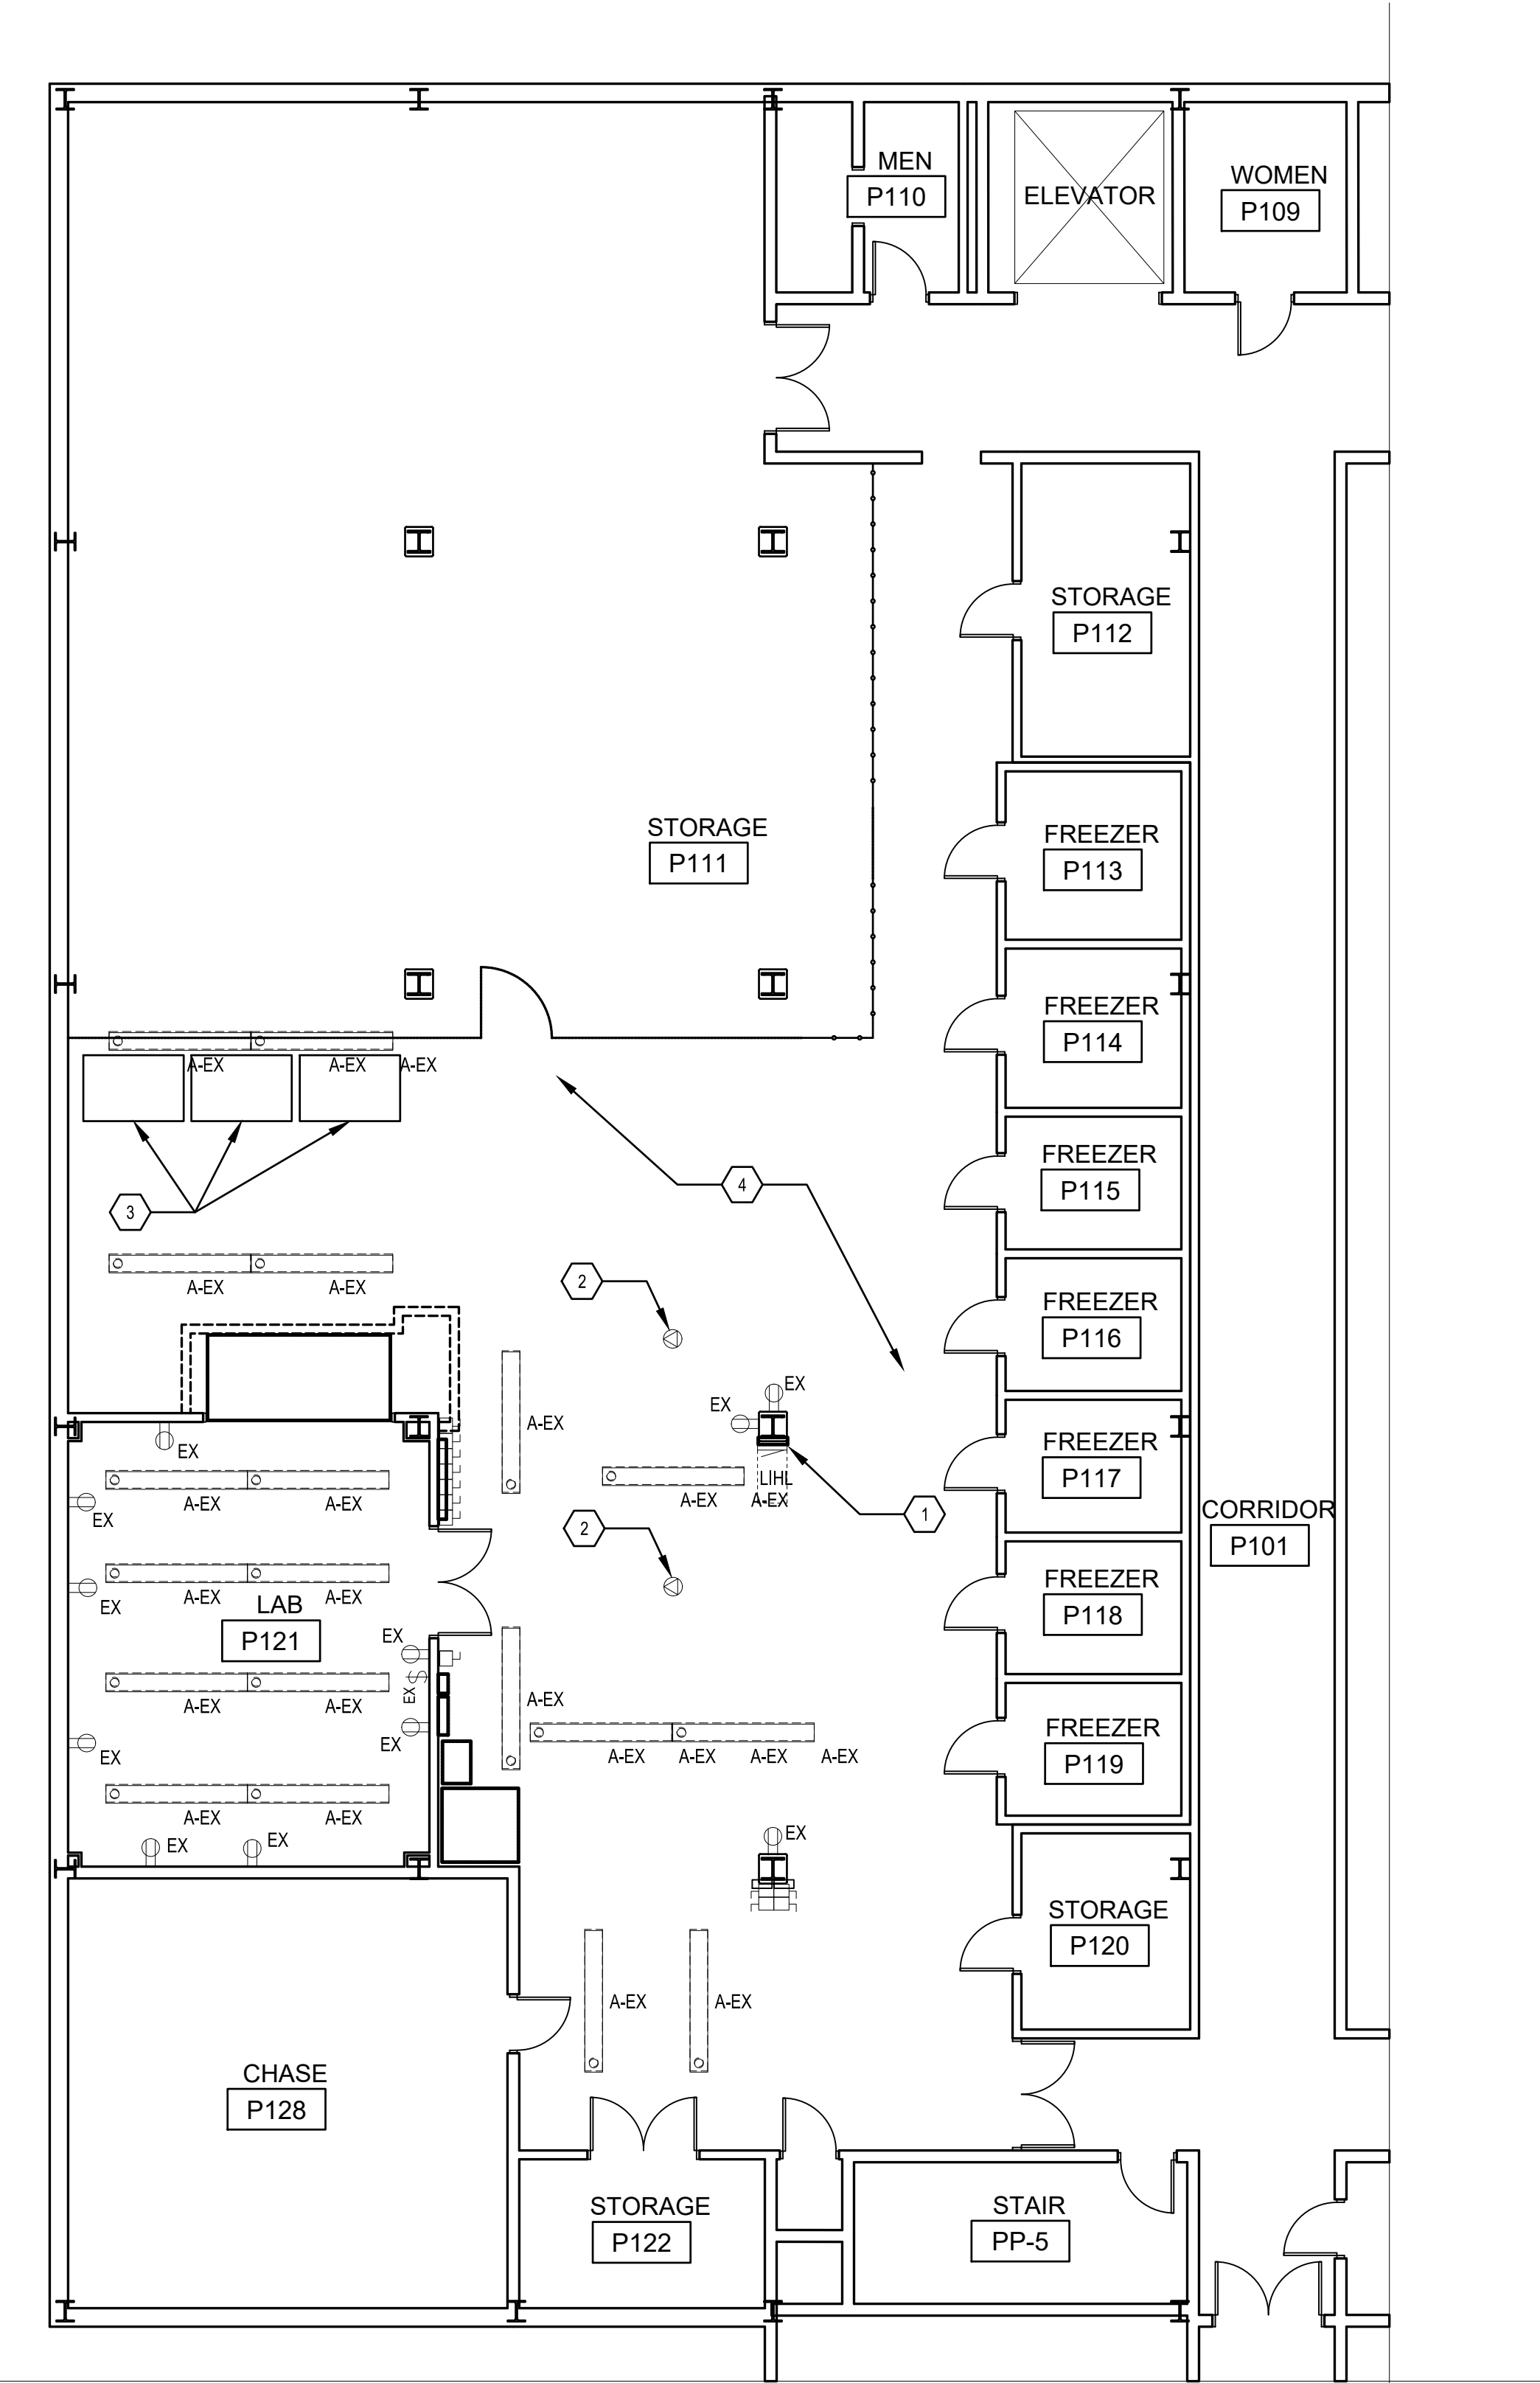

 **1** ELECTRICAL DEMOLITION
SCALE: 1/8" = 1'-0"



GENERAL NOTES


1. DEVICES SHOWN ON DEMO DRAWINGS ARE TO BE DEMOLISHED. DEMOLISH CONDUIT AND WIRE BACK TO NEAREST JUNCTION BOX. MAKE-UP WIRE AND CONDUIT AS REQUIRED TO MAINTAIN ELECTRICAL FUNCTION OF OTHER FIXTURES TO REMAIN.

 DEMOLITION KEYED NOTES

1. REMOVE EXISTING PANEL. PROTECT FEEDER CONDUIT AND WIRE FOR NEW PANEL. PROTECT BRANCH CONDUIT AND WIRES TO BE RE-USED.
2. REMOVE EXISTING CEILING MOUNTED RECEPTACLE BACK TO ITS SOURCE.
3. EXISTING TO REMAIN REFRIGERATION UNITS. POWER IS EXISTING TO REMAIN.
4. DEMOLISH AN ADDITIONAL 1000 LF OF SURFACE MOUNTED CONDUIT AS IDENTIFIED BY THE GOVERNMENT.

GRAPHIC SCALE

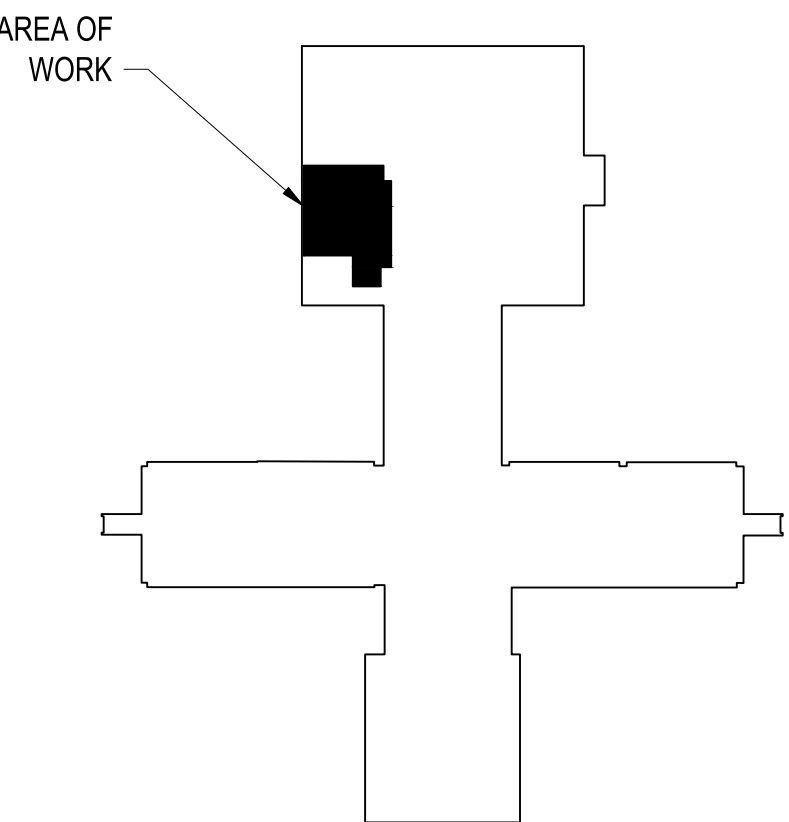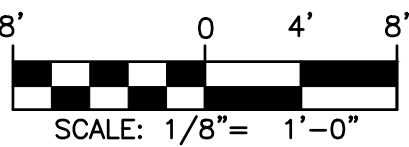


 **BUILDING 1 - KEY PLAN**


 **The Johnson-McAdams** FIRM
P.O. BOX 915, GREENWOOD, MISSISSIPPI 39202-0915

A-E FIRM	USDA
PROJECT MANAGER	EPM
WLS	XXX
DESIGNER	PPM
RPP	XXX
CHECKED BY	SAFETY & HEALTH
CG	XXX
JOB #	REAL PROPERTY
6124-A	XXX

NO.	DATE	BY	DESCRIPTION
REVISIONS			
 USDA Agricultural Research Service			
USDA AGRICULTURAL RESEARCH SERVICE BUILDING 1, U.S. NATIONAL POULTRY RESEARCH CTR. RENOVATE ROOM P111 ATHENS, GEORGIA			
ELECTRICAL DEMOLITION			
PROJECT NO.	AGRICULTURAL RESEARCH SERVICE	SHEET	
XXX	SOUTHEAST AREA	ED101	
DATE	STONEVILLE, MS	1 OF XX	
12/10/24			

T:\2024 Projects\6124-A USDA B1 Renovate P111 Lab - Athens GA\07 Working Folder\Elec\USDA\DWG\Elec - P111 Lab.dwg
Dec 10, 2024 - 10:58am

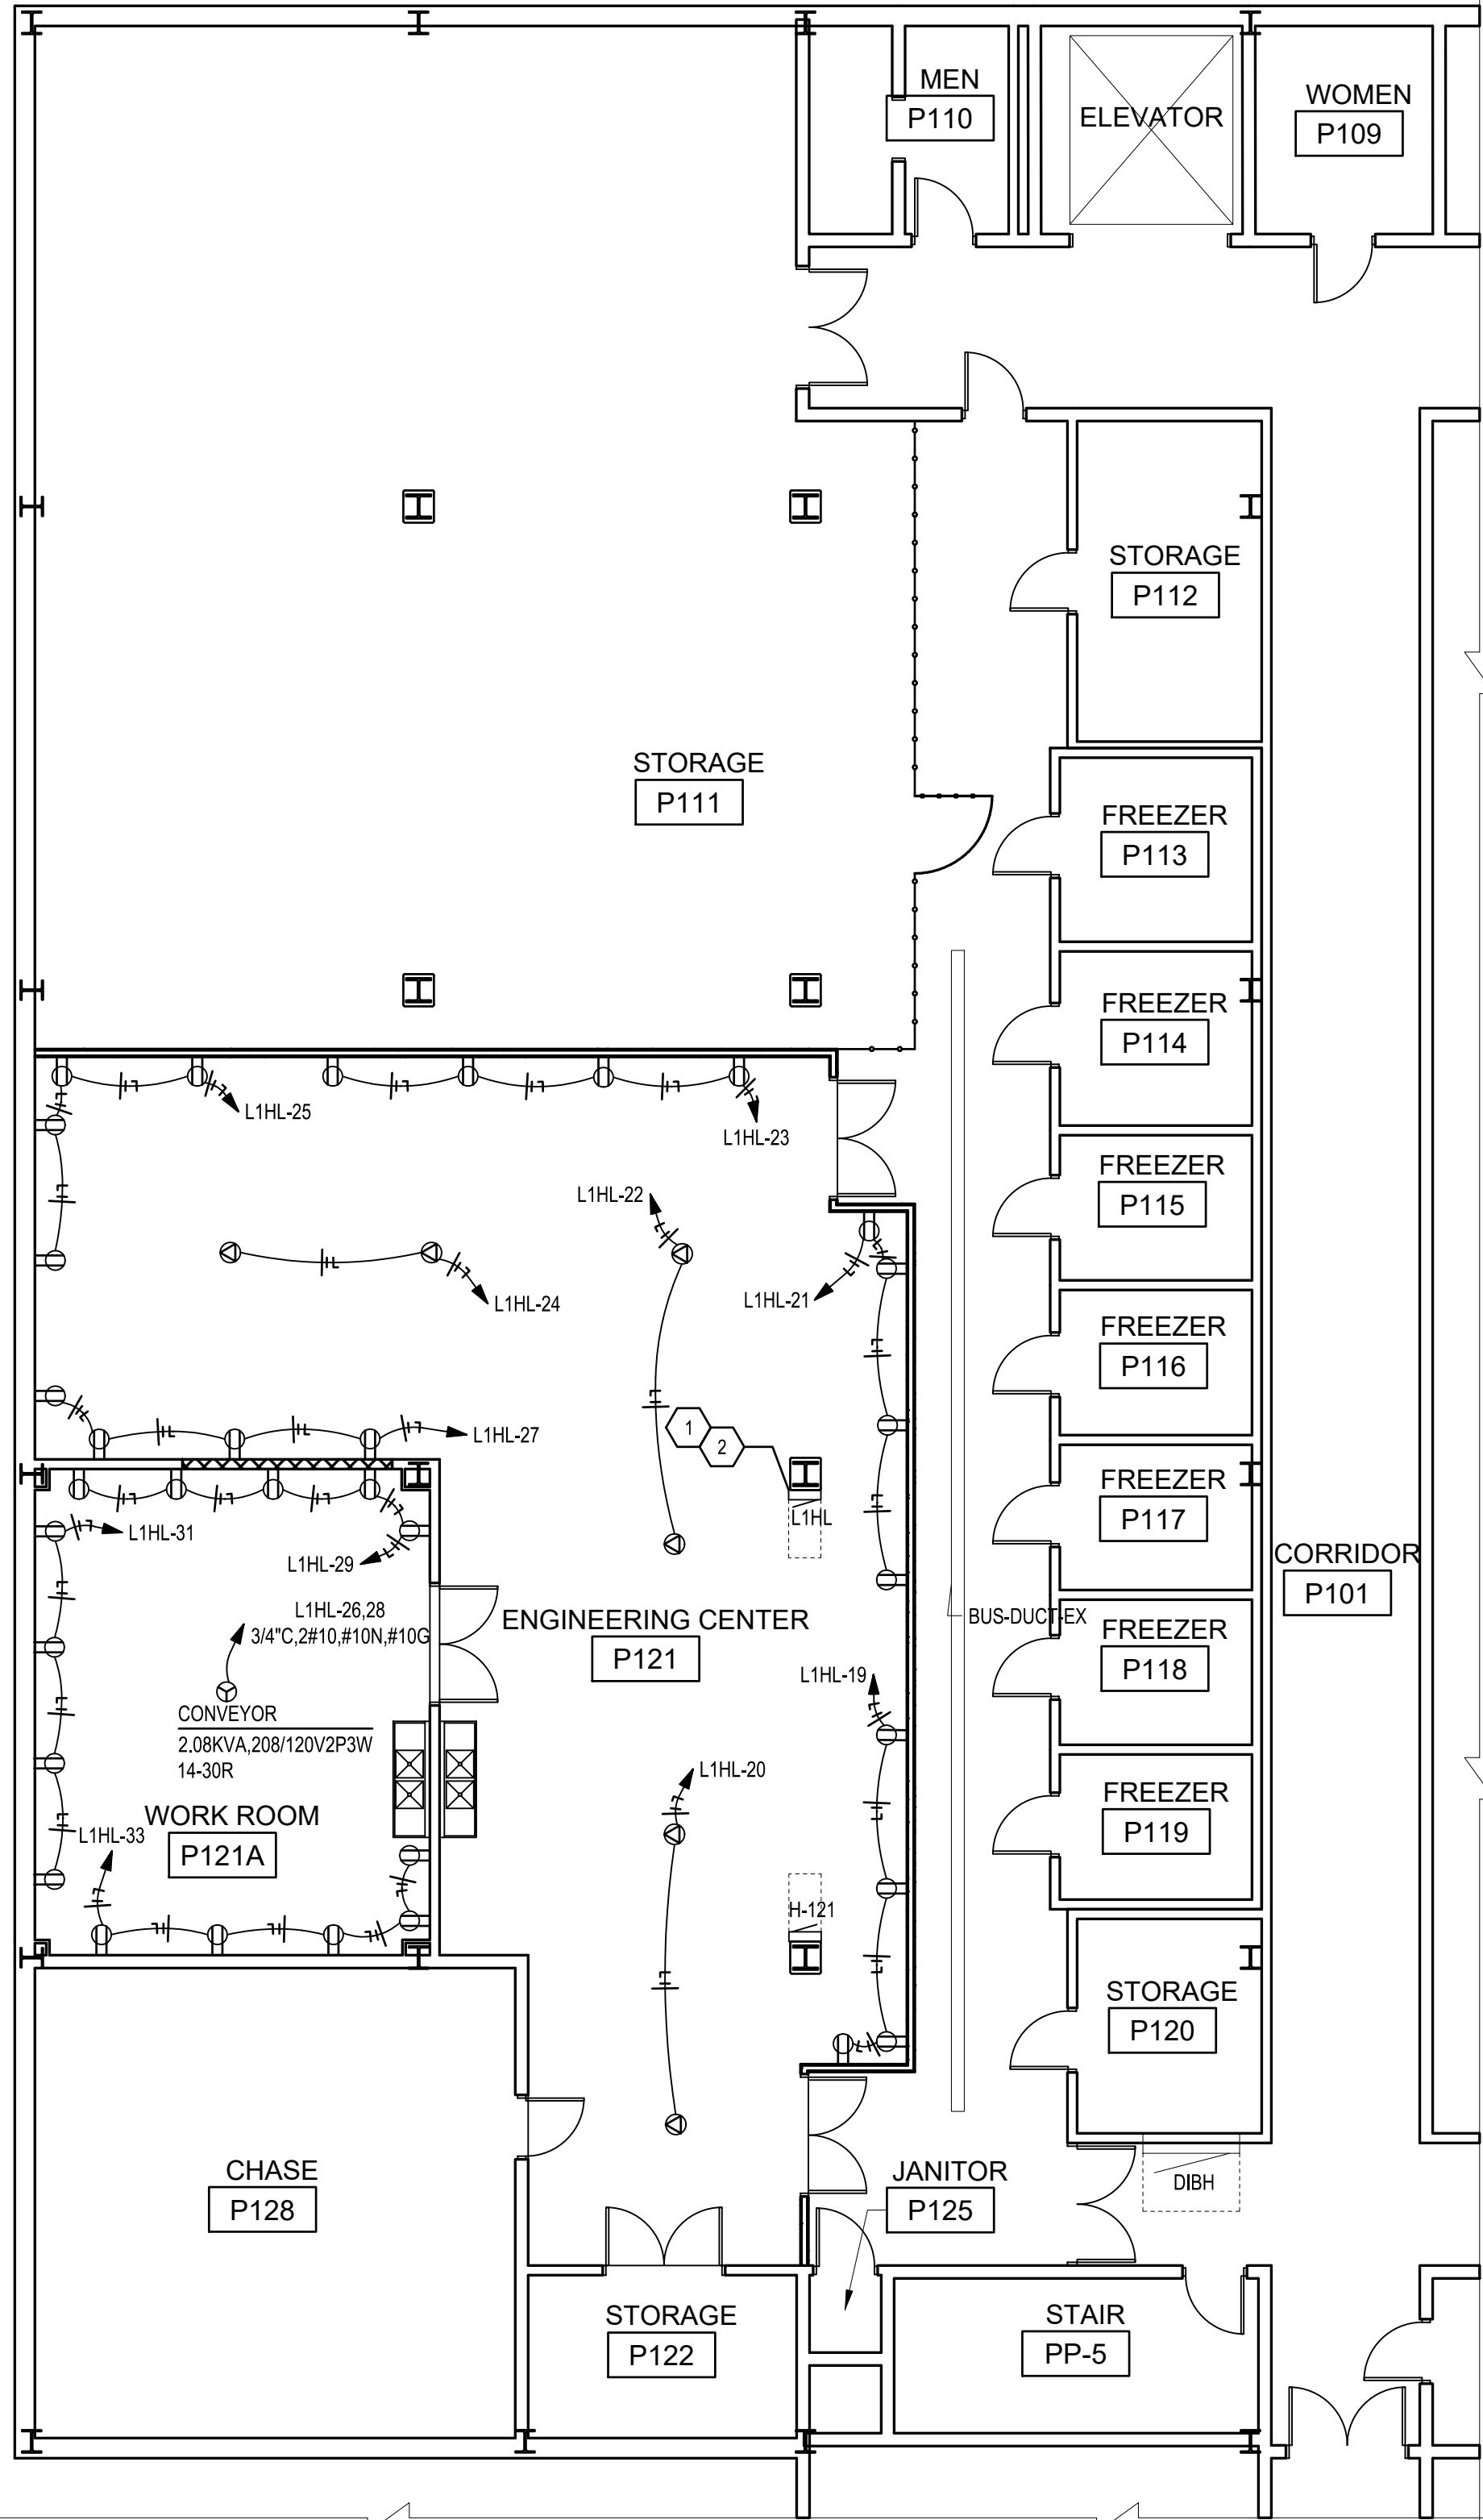

 **1 POWER PLAN**
E-101 SCALE: 1/8"= 1'-0"



GENERAL NOTES


1. UNLESS OTHERWISE NOTED, INSTALL DUPLEX RECEPTACLES AT 42" A.F.F.

 KEYED NOTES

1. REPLACE EXISTING PANEL WITH NEW 54 CIRCUIT PANELBOARD. SURFACE MOUNT TO COLUMN.
2. RE-USE EXISTING FEEDER SUPPLYING OLD PANEL.
3. CIRCUITS MARKED AS "EXISTING" ARE TO CIRCUITS TO BE MAINTAINED TO NEW PANEL. MAKEUP WIRE AND EXTEND AS NECESSARY TO MAKE CONNECTIONS TO NEW PANEL.

GRAPHIC SCALE

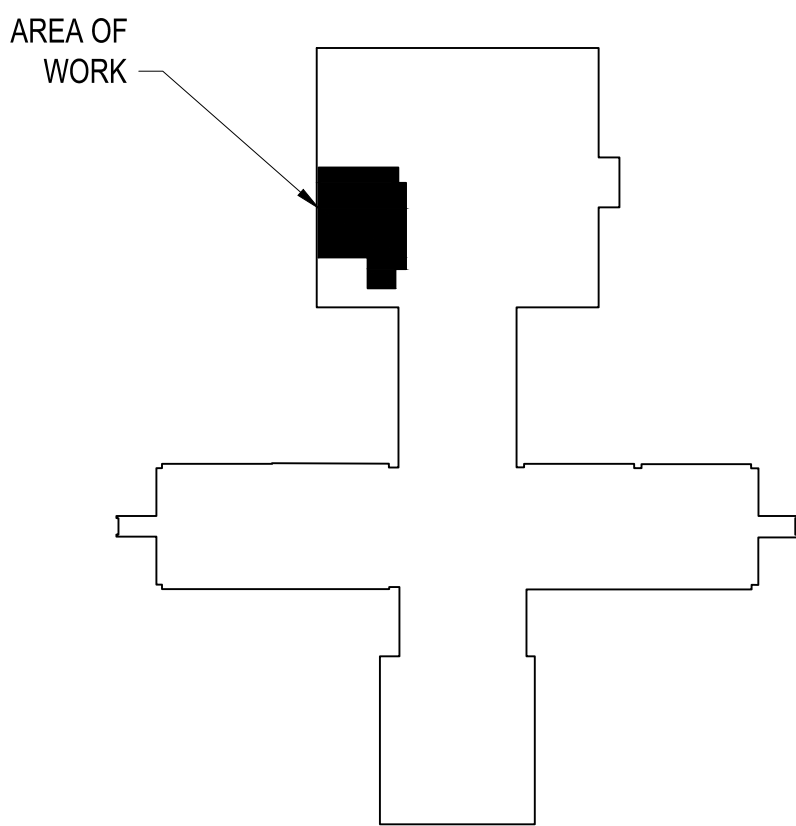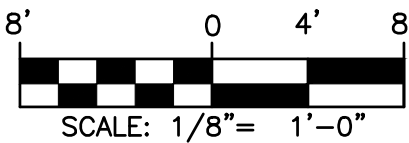

 **BUILDING 1 - KEY PLAN**

 **The Johnson-McAdams Firm**
12701
10001 N. HUNTER STREET, SUITE 100, GREENWOOD, MISSISSIPPI 39201-4500
P.O. BOX 515, GREENWOOD, MISSISSIPPI 39202-4505

A-E FIRM	USDA
PROJECT MANAGER	EPM
WLS	XXX
DESIGNER	PPM
RPP	XXX
CHECKED BY	SAFETY & HEALTH
CG	XXX
JOB #	REAL PROPERTY
6124-A	XXX

NO.		DATE	BY	DESCRIPTION
REVISIONS				
U S D A	 Agricultural Research Service			
	USDA AGRICULTURAL RESEARCH SERVICE BUILDING 1, U. S. NATIONAL POULTRY RESEARCH CTR. RENOVATE ROOM P111 ATHENS, GEORGIA			
	POWER PLAN			
PROJECT NO.		AGRICULTURAL RESEARCH SERVICE		SHEET
XXX		SOUTHEAST AREA		E-101
DATE		STONEVILLE, MS		1 OF XX
12/10/24				

I:\2024 Projects\6124-A USDA B1 Renovate P111 Lab - Athens GA\07 Working Folder\Elec\USDA\WKS\Elec - P111 Lab.dwg
Dec 10, 2024 10:08am




1


LIGHTING PLAN


E-201

SCALE: 1/8"= 1'-0"

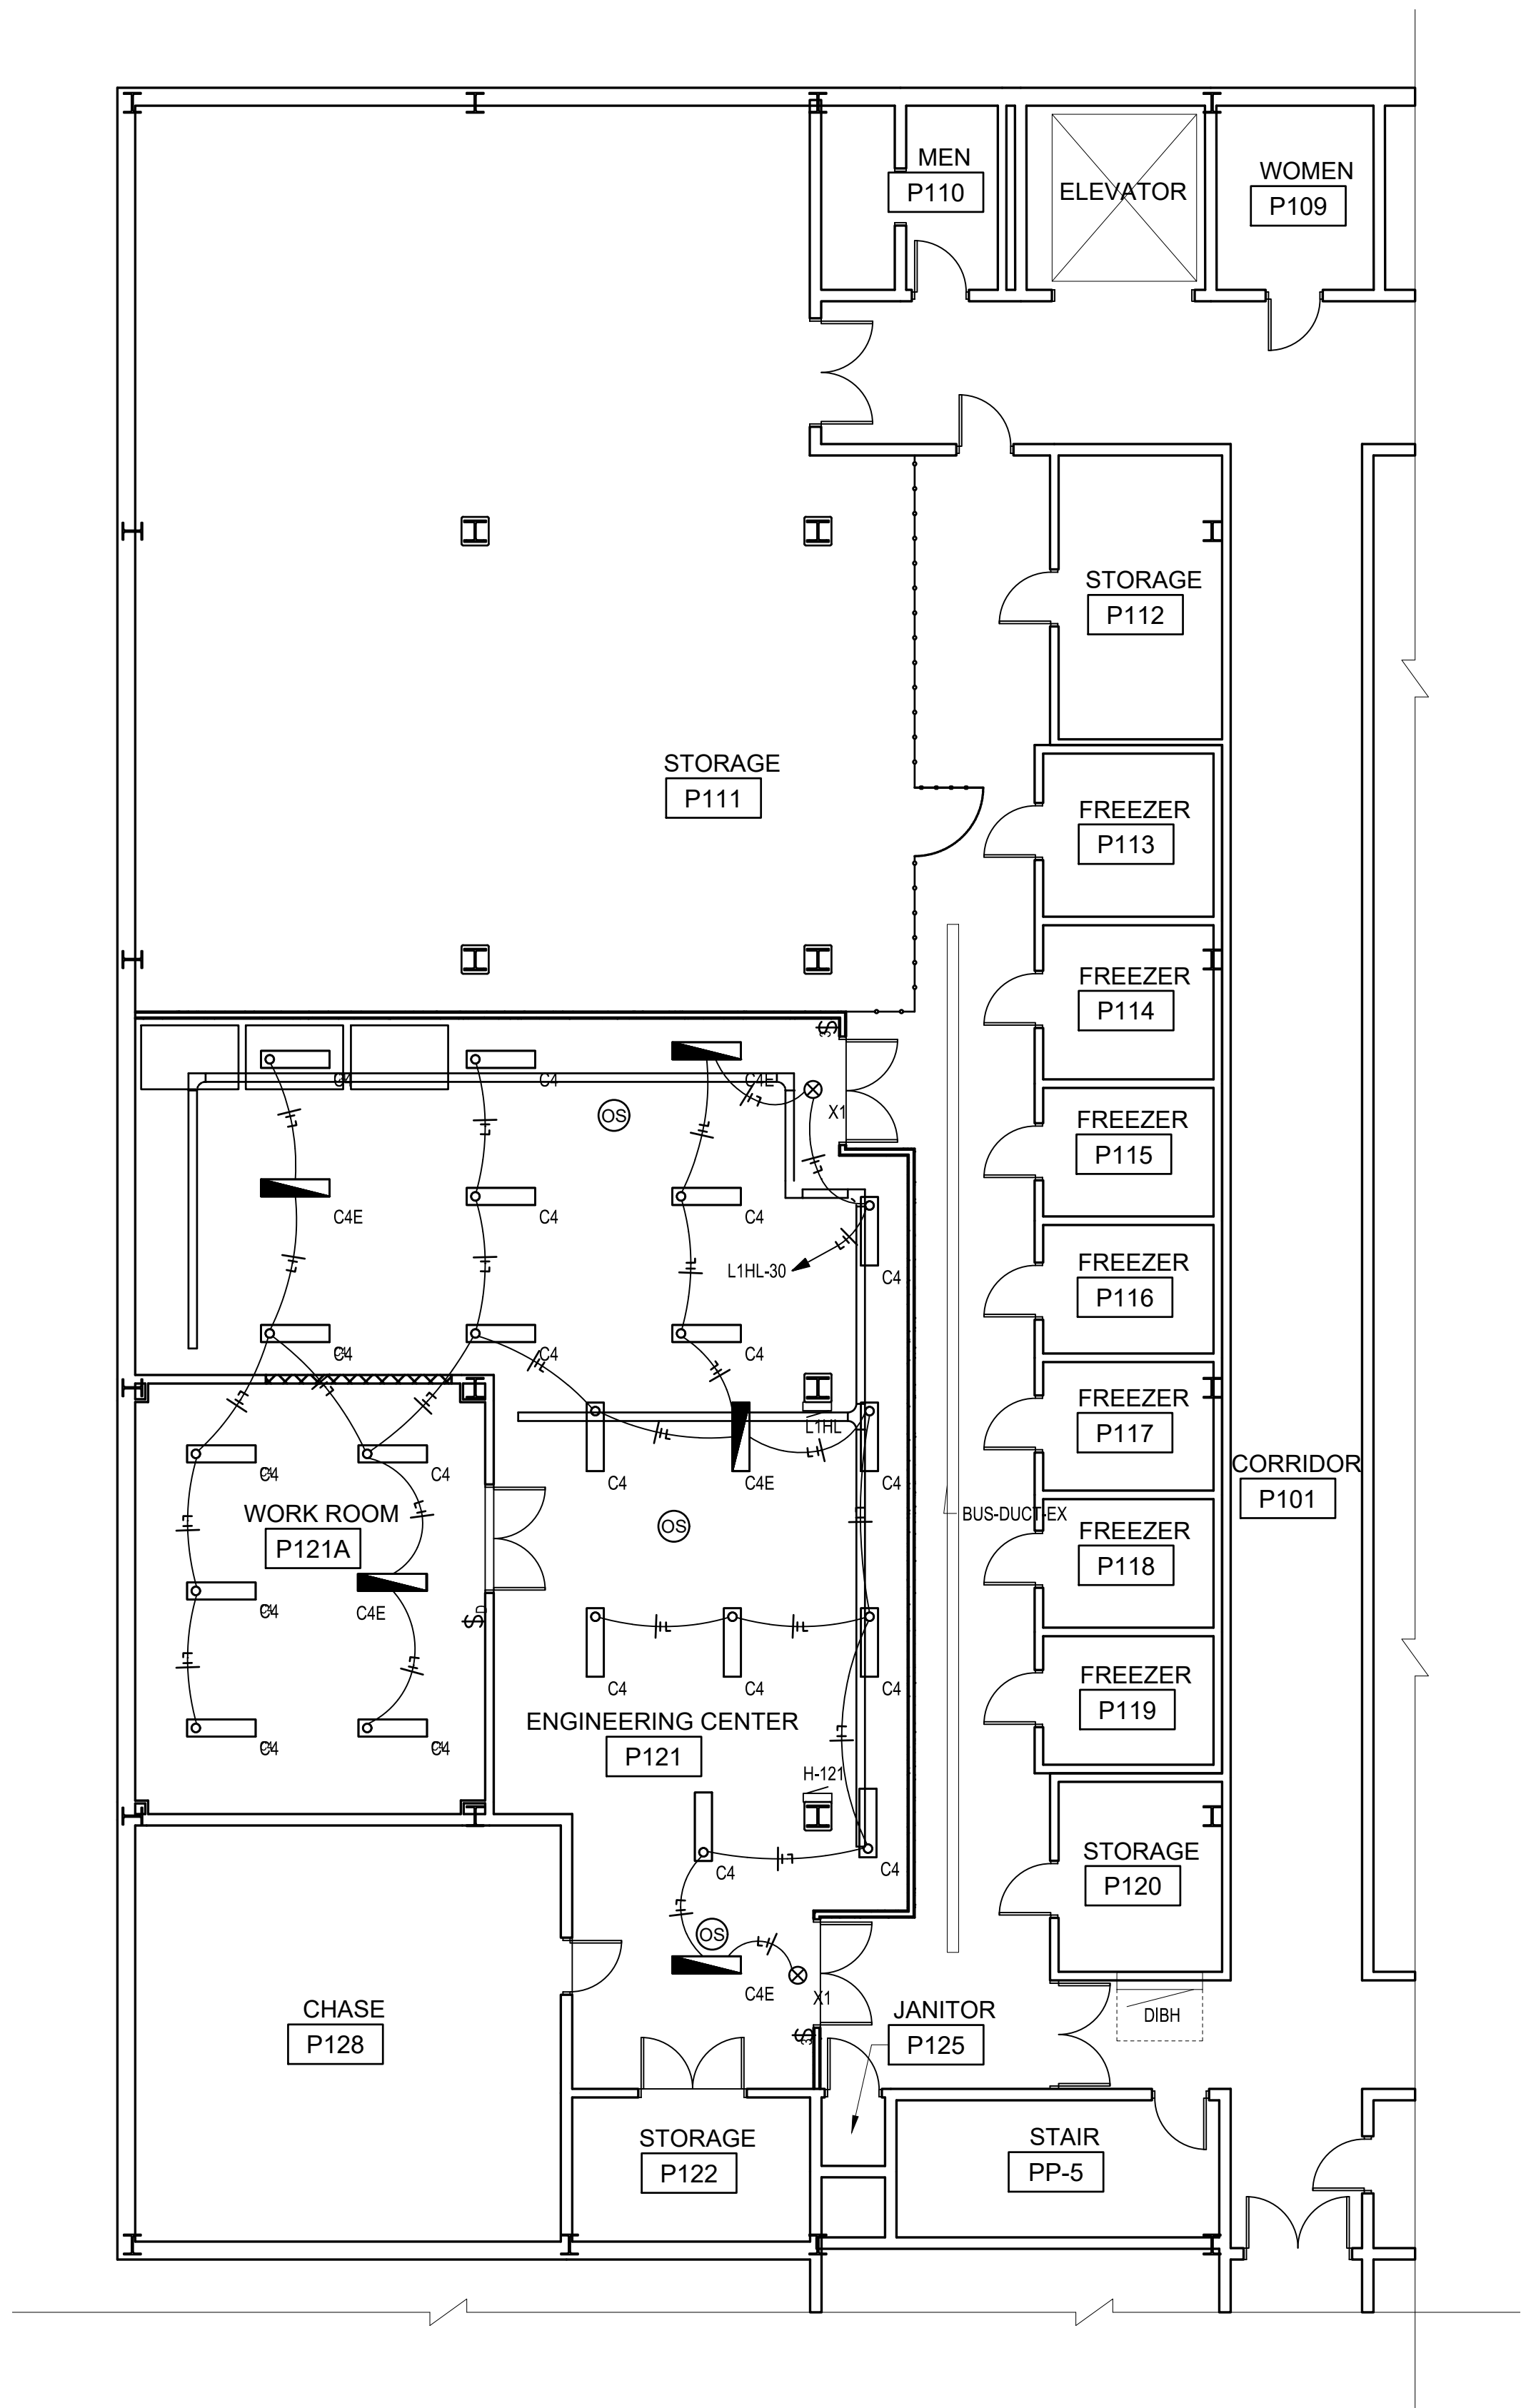


GRAPHIC SCALE

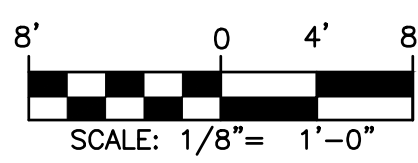

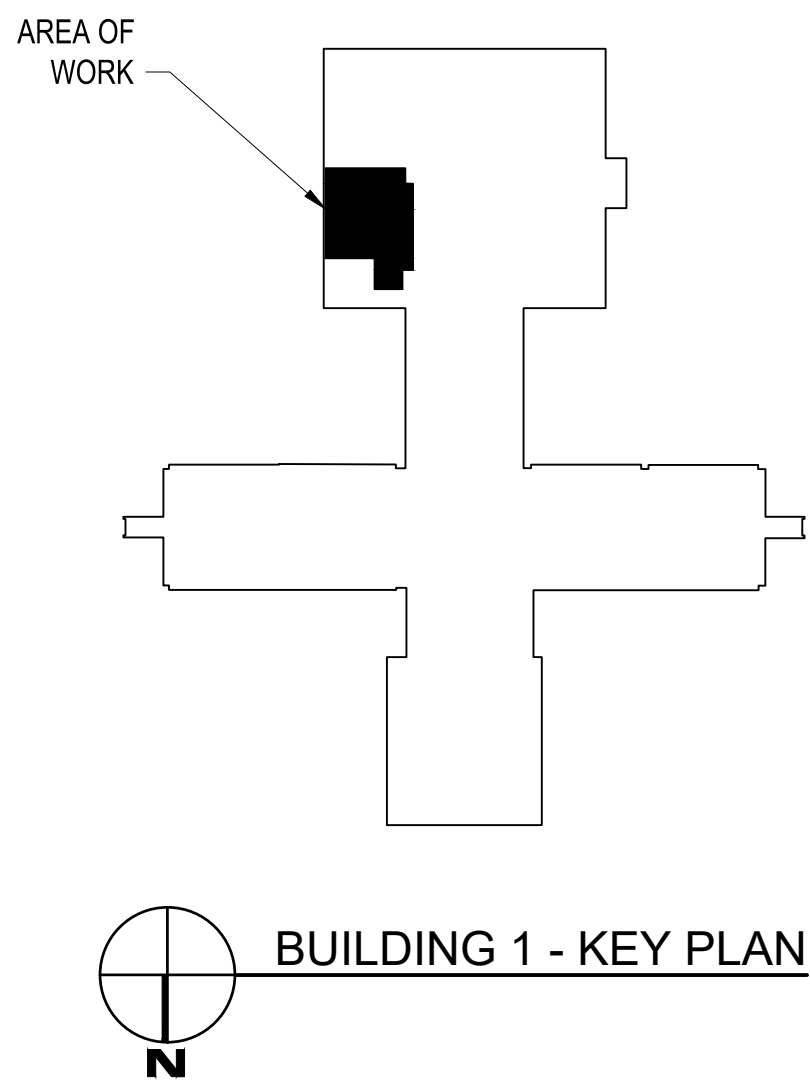


 F.O. BOX 515, GREENWOOD, MISSISSIPPI 39202-4554					
		NO.	DATE	BY	DESCRIPTION
		REVISIONS			
A-E FIRM	USDA	U S D A	 Agricultural Research Service		
			USDA AGRICULTURAL RESEARCH SERVICE BUILDING 1, U.S. NATIONAL POULTRY RESEARCH CTR. RENOVATE ROOM P111 ATHENS, GEORGIA		
			LIGHTING PLAN		
PROJECT MANAGER	EPM	XXX	AGRICULTURAL RESEARCH SERVICE	SHEET	
WLS	XXX		SOUTHEAST AREA	E-201	
DESIGNER	PPM		STONEVILLE, MS	1 OF XX	
RPP	XXX				
CHECKED BY	SAFETY & HEALTH				
CG	XXX				
JOB #	REAL PROPERTY				
6124-A	XXX				

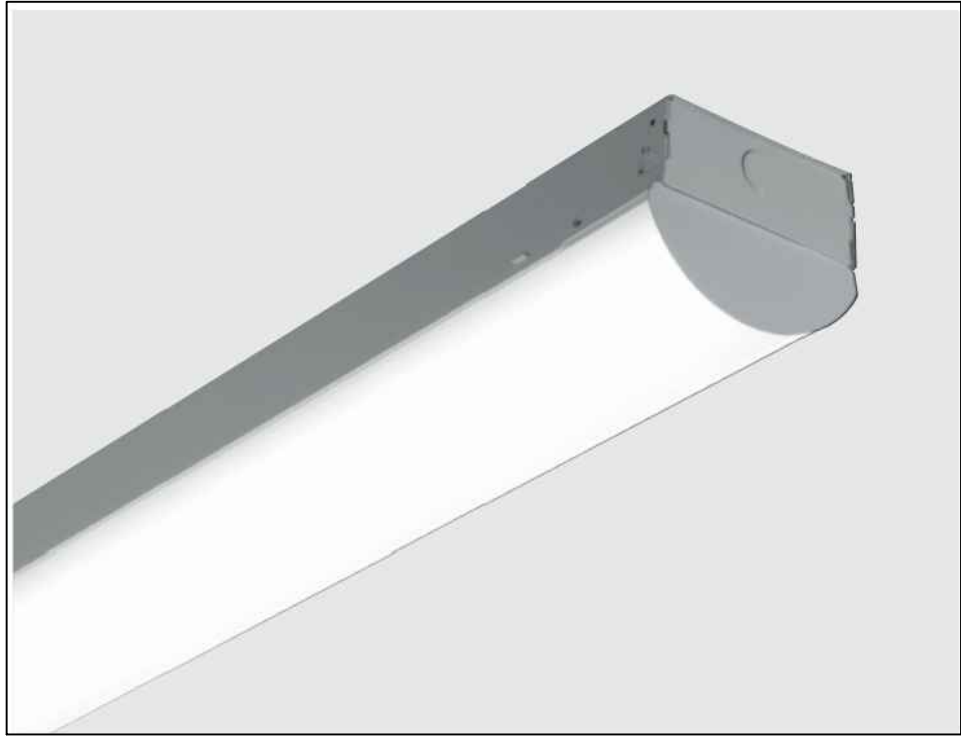

LUMINAIRE REQUIREMENTS:

- HOUSING - PRECISION FORMED USING COLD ROLLED STEEL. LENSING MANUFACTURED FROM A DIFFUSED ACRYLIC POLYMER.
- LIGHT SOURCE - 4000K COLOR TEMPERATURE , EFFICACY OF 143-146 LUMENS/WATT, WITH A MINIMUM CRI OF 80.
- DRIVER - OPERATING VOLTAGE OF 120-277V. DIMMABLE TO 10%. (0-10 VOLT DIMMING)
- CERTIFICATION - UL 1598, DLC QUALIFIED, AND ROHS COMPLIANT. COMPLIES WITH LM79, LM80 AND TM21 TESTING STANDARDS, UL 924 WHEN EQUIPPED WITH EMERGENCY BATTERY BACK-UP. IC RATED WHEN INDICATED.
- MOUNTING - SUSPENDED/SURFACE MOUNTED.
- THIS SKETCH IS A NON-PROPRIETARY GRAPHIC REPRESENTATION OF A LUMINAIRE THAT MAY MEET THE SPECIFICATION REQUIREMENTS. IT IS NOT INTENDED TO INDICATE A CERTAIN MANUFACTURER OR PREFERENCE.
- NOM. DIMENSIONS: (L=48" X W=9 7/8" X D=4 3/8")


LED SUSPENDED INDUSTRIAL	
	FIXTURE TYPE: C4, C4E

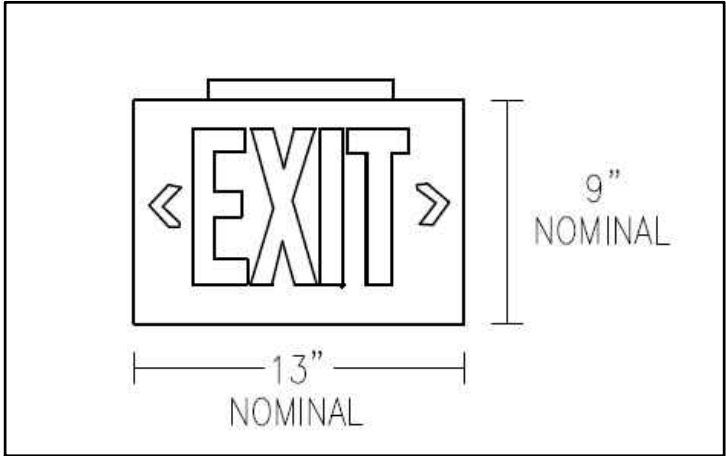

LUMINAIRE REQUIREMENTS:

- HOUSING - IMPACT RESISTANT ENGINEERING-GRADE THERMOPLASTIC HOUSING, SCRATCH RESISTANT, CORROSION PROOF. UNIVERSAL DIRECTIONAL CHEVRONS. REINFORCED, IMPACT-RESISTANT COLOR PANELS.
- LIGHT SOURCE - LED'S MOUNTED ON PRINTED CIRCUIT BOARD. 10 YEARS WARRANTY.
- LETTERS/CHEVRONS - MINIMUM 6" HIGH WITH 3/4" STROKE. GREEN LETTERS AS INDICATED. PROVIDE CHEVRONS AS INDICATED EITHER LEFT, RIGHT OR BOTH DIRECTIONS AS INDICATED. CHEVRONS PUNCHED OUT THROUGH HOUSING AS REQUIRED.
- EMERGENCY PACK - SOLID-STATE, CONSTANT-CURRENT TYPE BATTERY CHARGER WITH MAINTENANCE-FREE, NICKEL-CADMIUM BATTERY, AC-ON INDICATOR LAMP AND TEST SWITCH.
- MOUNTING - UNIVERSAL MOUNTING KIT FOR CEILING, WALL OR END-OF-FIXTURE MOUNTING.
- ILLUMINATION - PROVIDED BY RED HIGH-OUTPUT LEDS INSIDE OF FIXTURE HOUSING. PROVIDE POLYSTYRENE DIFFUSER IN COLOR INDICATED WITH FREQUENCY-MATCHED SILKSCREEN COATING FOR MAXIMUM LED LIGHT OUTPUT.
- VOLTAGE - OPERATING VOLTAGE OF 120-277V.

LED EXIT SIGN	
	FIXTURE TYPE: X1

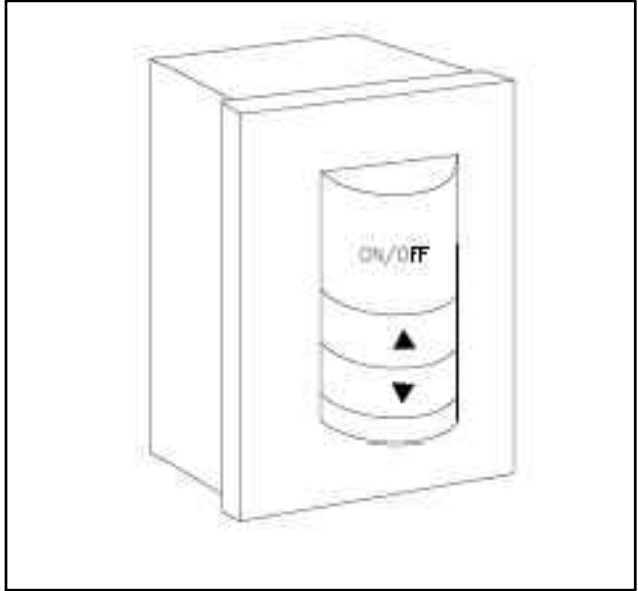

DEVICE REQUIREMENTS:

- FEATURES: COMPATIBLE WITH 0-10V DIMMING LUMINARIES.
- HOUSING: IMPACT RESISTANT INJECTION MOLDED ABS
- MOUNTING: WALL MOUNTED (SINGLE GANG SWITCH BOX)
- INPUT RATING: 120/277 VAC.
- TECHNOLOGY: MANUAL ON/OFF WITH 0-10V DIMMING
- FINISH: WHITE
- NOM. DIMENSIONS: 2.74"H X 1.68"W X 1.63"D

DIMMER	


LUMINAIRE SCHEDULE


CALLOUT	SYMBOL	DESCRIPTION	MOUNTING	INPUT WATTS	VOLTS	NOTE 1
A-EX		EXISTING PENDANT INDUSTRIAL FIXTURE. EXISTING TO REMAIN.	CEILING	40	120V 1P 2W	
C4		PENDANT LED NARROW STRIP.	CEILING	40	120V 1P 2W	90 CRI. 0-10V DIMMABLE.
C4E		PENDANT LED NARROW STRIP WITH INTEGRAL BATTERY BACKUP.	CEILING	40	120V 1P 2W	90 CRI. 0-10V DIMMABLE. PROVIDE WITH SELF-TESTING BATTERY BACKUP.
X1		EXIT SIGN WITH INTEGRAL BATTERY.	CEILING	5	120V 1P 2W	

I:\2024 Projects\6124-A USDA B1 Renovate P111 Lab - Athens GA\07 Working Folder\Draw\USDA\W06\Elec - P111 Lab.dwg
Dec 10, 2024 10:08am

The Johnson-McAdams Firm, Inc. 1700 N. W. 10th St., Suite 100 Fort Lauderdale, FL 33304 (954) 551-1111 USDA Agricultural Research Service USDA AGRICULTURAL RESEARCH SERVICE BUILDING 1, U.S. NATIONAL POULTRY RESEARCH CTR. RENOVATE ROOM P111 ATHENS, GEORGIA					
		NO.	DATE	BY	DESCRIPTION
		REVISIONS			
A-E FIRM	USDA	USDA Agricultural Research Service USDA AGRICULTURAL RESEARCH SERVICE BUILDING 1, U.S. NATIONAL POULTRY RESEARCH CTR. RENOVATE ROOM P111 ATHENS, GEORGIA LIGHTING DETAILS			
PROJECT MANAGER	WLS				
DESIGNER	RPP				
CHECKED BY	CG				
JOB #	6124-A	PROJECT NO.	XXX	AGRICULTURAL RESEARCH SERVICE	SHEET
		DATE	12/10/24	SOUTHEAST AREA	E-202
				STONEVILLE, MS	1 OF XX



I:\2024 Projects\6124-A USDA B1 Renovate P111 Lab - Athens GA\07 Working Folder\Elec\555\DWG\Elec - P111 Lab.dwg
Dec 10, 2024 - 10:08am

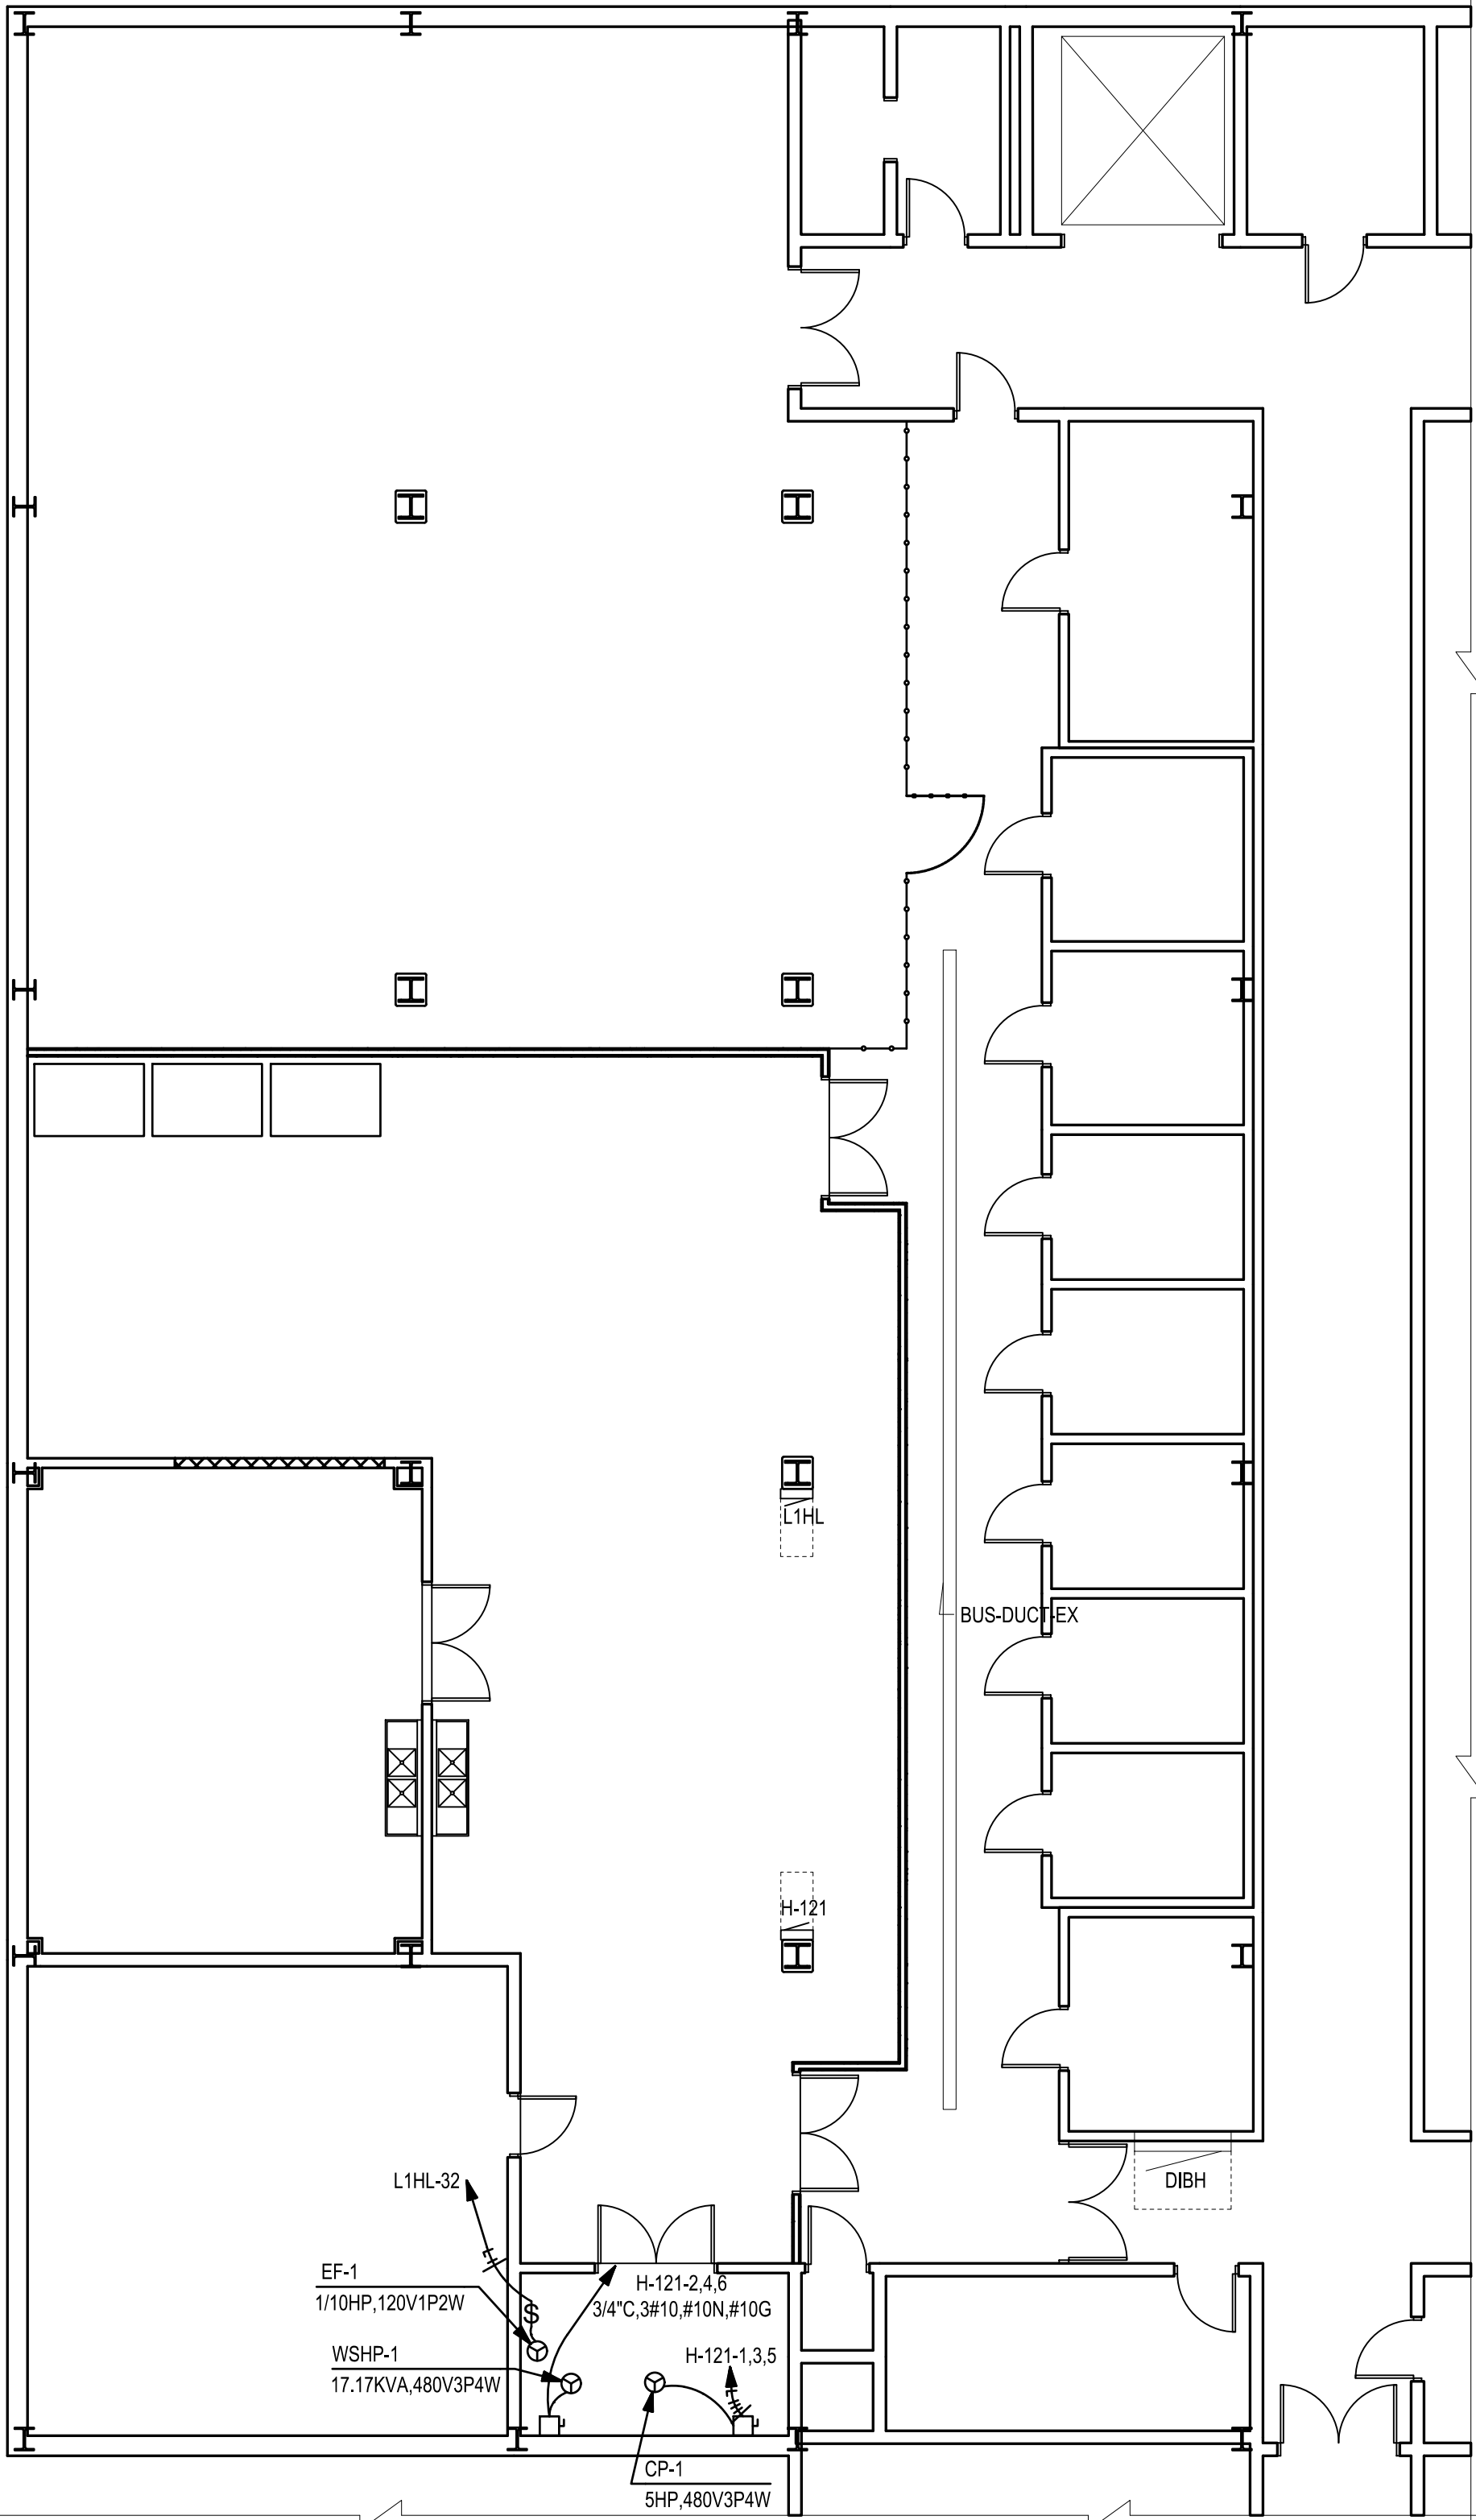


 **1**
E-301 **EQUIPMENT PLAN**
SCALE: 1/8"= 1'-0"

EQUIPMENT CONNECTIONS SCHEDULE											
CALLOUT	DESCRIPTION	CIRCUIT	VOLTS	AMPS	BREAKER	HP	KVA	WIRE SIZE	DISCONNECT	WIRE LENGTH	NOTE 1
EF-1	EXHAUST FAN	L1HL-32	120V 1P 2W	3.5	15/1	1/10 HP	0.42	#10	TOGGLE SWITCH	47'	
CONVEYOR	CONVEYOR 220V OUTLET	L1HL-26,28	208/120V 2P 3W	10	30/2		2.08	#10	HARDWIRED CONNECTION	32'	NEMA 14-30R
CP-1	AIR COMPRESSOR	H-121-1,3,5	480V 3P 4W	7.6	20/3	5 HP	6.32	#12	NON-FUSED	24'	
WSHP-1	WATER SOURCE HEAT PUMP	H-121-2,4,6	480V 3P 4W	20.65	25/3		17.17	#10	NON-FUSED	25'	


GRAPHIC SCALE

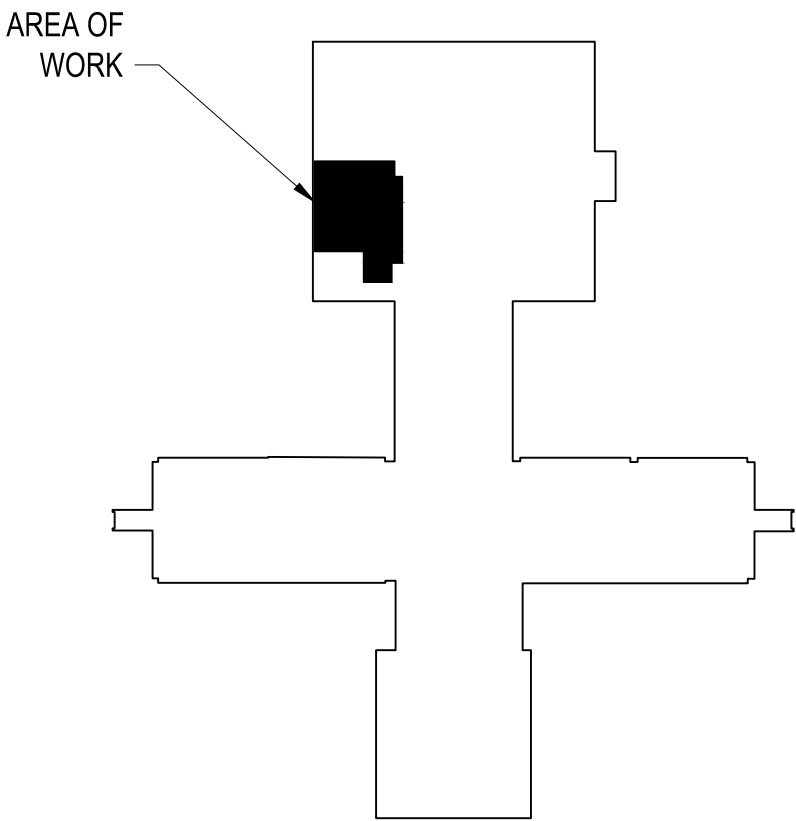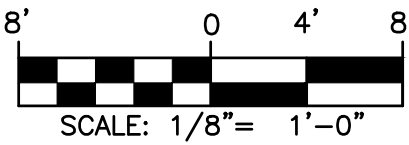

 **BUILDING 1 - KEY PLAN**

 THE Johnson-McAdams GROUP, INC. REGISTERED PROFESSIONAL ENGINEERS P.O. BOX 111, GREENWOOD, MISSISSIPPI 39202-0111					
		NO.	DATE	BY	DESCRIPTION
		REVISIONS			
A-E FIRM	USDA	U S D A	 Agricultural Research Service		
PROJECT MANAGER	EPM		USDA AGRICULTURAL RESEARCH SERVICE BUILDING 1, U.S. NATIONAL POULTRY RESEARCH CTR. RENOVATE ROOM P111 ATHENS, GEORGIA		
WLS	XXX				
DESIGNER	PPM				
RPP	XXX	EQUIPMENT PLAN			
CHECKED BY	SAFETY & HEALTH	PROJECT NO.	AGRICULTURAL RESEARCH SERVICE		SHEET
CG	XXX	XXX	SOUTHEAST AREA		E-301 1 OF XX
JOB #	REAL PROPERTY	DATE	STONEVILLE, MS		
6124-A	XXX	12/10/24			

L1HL

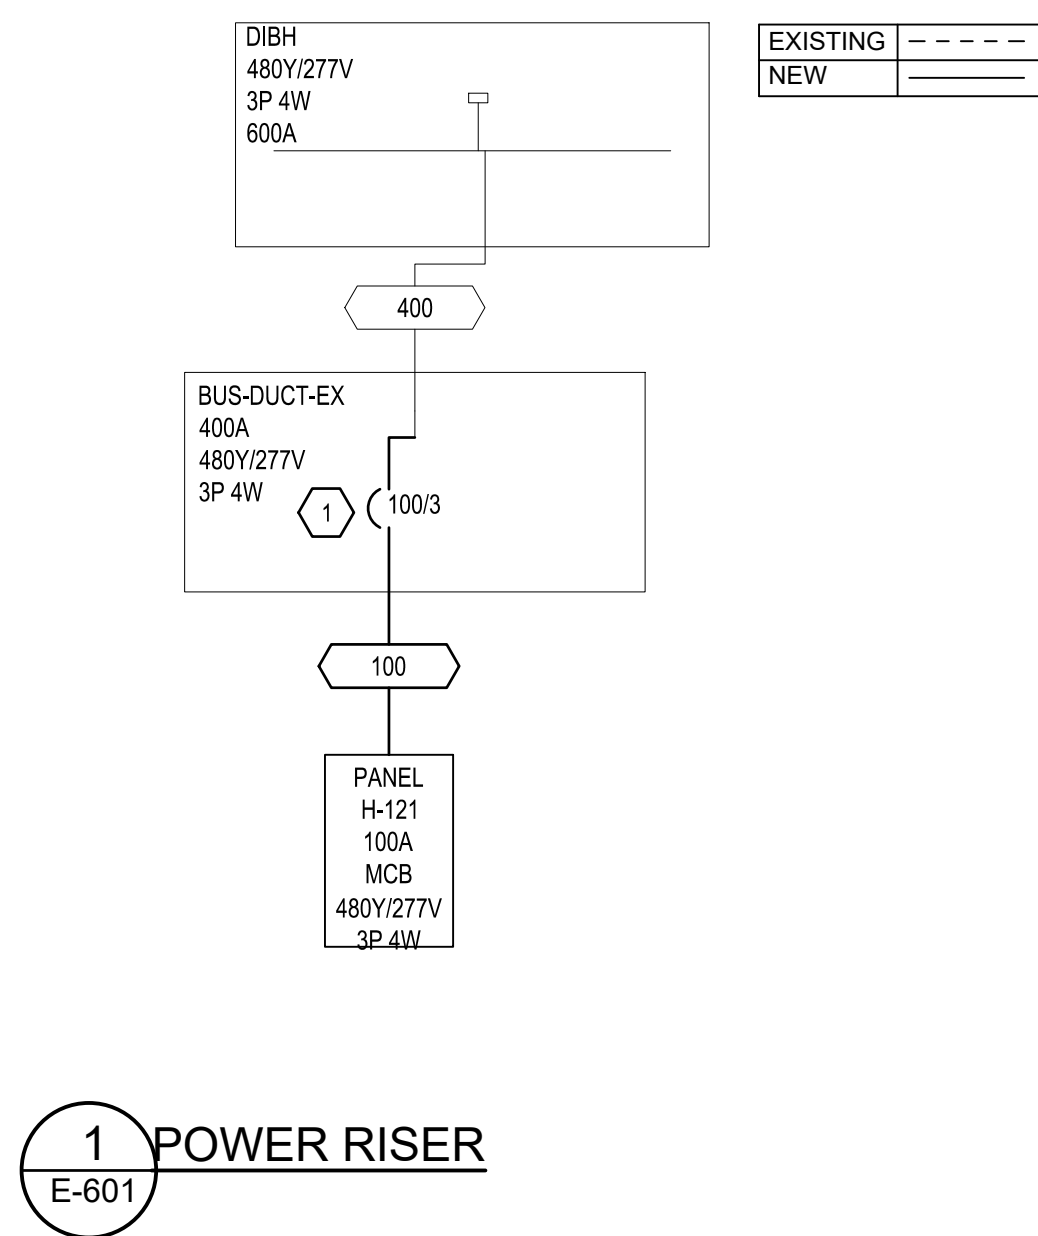[illegible]

GENERAL NOTES

1. CIRCUITS MARKED AS "EXISTING" ARE TO CIRCUITS TO BE MAINTAINED TO NEW PANEL. MAKEUP WIRE AND EXTEND AS NECESSARY TO MAKE CONNECTIONS TO NEW PANEL.

DEMOLITION KEYED NOTES


1. CONNECT NEW FEEDER TO EXISTING OVERHEAD 100A BUS FUSED DISCONNECT.

H-121

ROOM MOUNTING FLUSH FED FROM BUS-DUCT-EX NOTE			VOLTS 480Y/277V 3P 4W BUS AMPS 100 NEUTRAL 100%			AIC 22,000 MAIN BKR 100 LUGS STANDARD					
CKT #	CKT BKR	CIRCUIT DESCRIPTION	LOAD KVA			CKT #	CKT BKR	CIRCUIT DESCRIPTION	LOAD KVA		
			A	B	C				A	B	C
1	20/3	CP-1	2.11			2	25/3	WSHP-1	5.72		
3				2.11		4				5.72	
5					2.11	6					5.72
7	20/3	SPACE	0			8	20/1	SPACE	0		
9				0		10	20/1	SPACE		0	
11					0	12	20/1	SPACE			0
13	20/1	SPACE	0			14	20/1	SPACE	0		
15	20/1	SPACE		0		16	20/1	SPACE		0	
17	20/1	SPACE			0	18	20/1	SPACE			0
19	20/1	SPACE	0			20	20/1	SPACE	0		
21	20/1	SPACE		0		22	20/1	SPACE		0	
23	20/1	SPACE			0	24	20/1	SPACE			0
25	20/1	SPACE	0			26	20/1	SPACE	0		
27	20/1	SPACE		0		28	20/1	SPACE		0	
29	20/1	SPACE			0	30	20/1	SPACE			0
31	20/1	SPACE	0			32	20/1	SPACE	0		
33	20/1	SPACE		0		34	20/1	SPACE		0	
35	20/1	SPACE			0	36	20/1	SPACE			0
37	20/1	SPACE	0			38	20/1	SPACE	0		
39	20/1	SPACE		0		40	20/1	SPACE		0	
41	20/1	SPACE			0	42	20/1	SPACE			0
						TOTAL CONNECTED KVA BY PHASE			7.83	7.83	7.83
			CONN KVA		CALC KVA				CALC KVA		
LARGEST MOTOR			17.2	4.29	(25%)	TOTAL LOAD			27.8		
MOTORS			23.5	23.5	(100%)	BALANCED 3-PHASE LOAD			33.4 A		


 Johnson-McAdams INCORPORATED P.O. BOX 513 GREENWOOD, MISSISSIPPI - (662) 450-5465					
		NO.	DATE	BY	DESCRIPTION
		REVISIONS			
A-E FIRM USDA		U S D A	 Agricultural Research Service		
PROJECT MANAGER WLS XXX	EPM		USDA AGRICULTURAL RESEARCH SERVICE BUILDING 1, U.S. NATIONAL POULTRY RESEARCH CTFR. RENOVATE ROOM P111 ATHENS, GEORGIA		
DESIGNER RPP XXX	PPM		POWER SCHEDULES AND RISER		
CHECKED BY CG	SAFETY & HEALTH XXX	PROJECT NO. XXX	AGRICULTURAL RESEARCH SERVICE		SHEET
JOB # 6124-A	REAL PROPERTY XXX	DATE 12/10/24	SOUTHEAST AREA STONEVILLE, MS		E-601 1 OF XX

T:\2024 Projects\6124-A USDA B1 Renovate P111 Lab - Athens GA\07 Working Folder\Elec\USDA\WKS\Elec - P111 Lab.dwg
Dec 10, 2024 - 10:08am

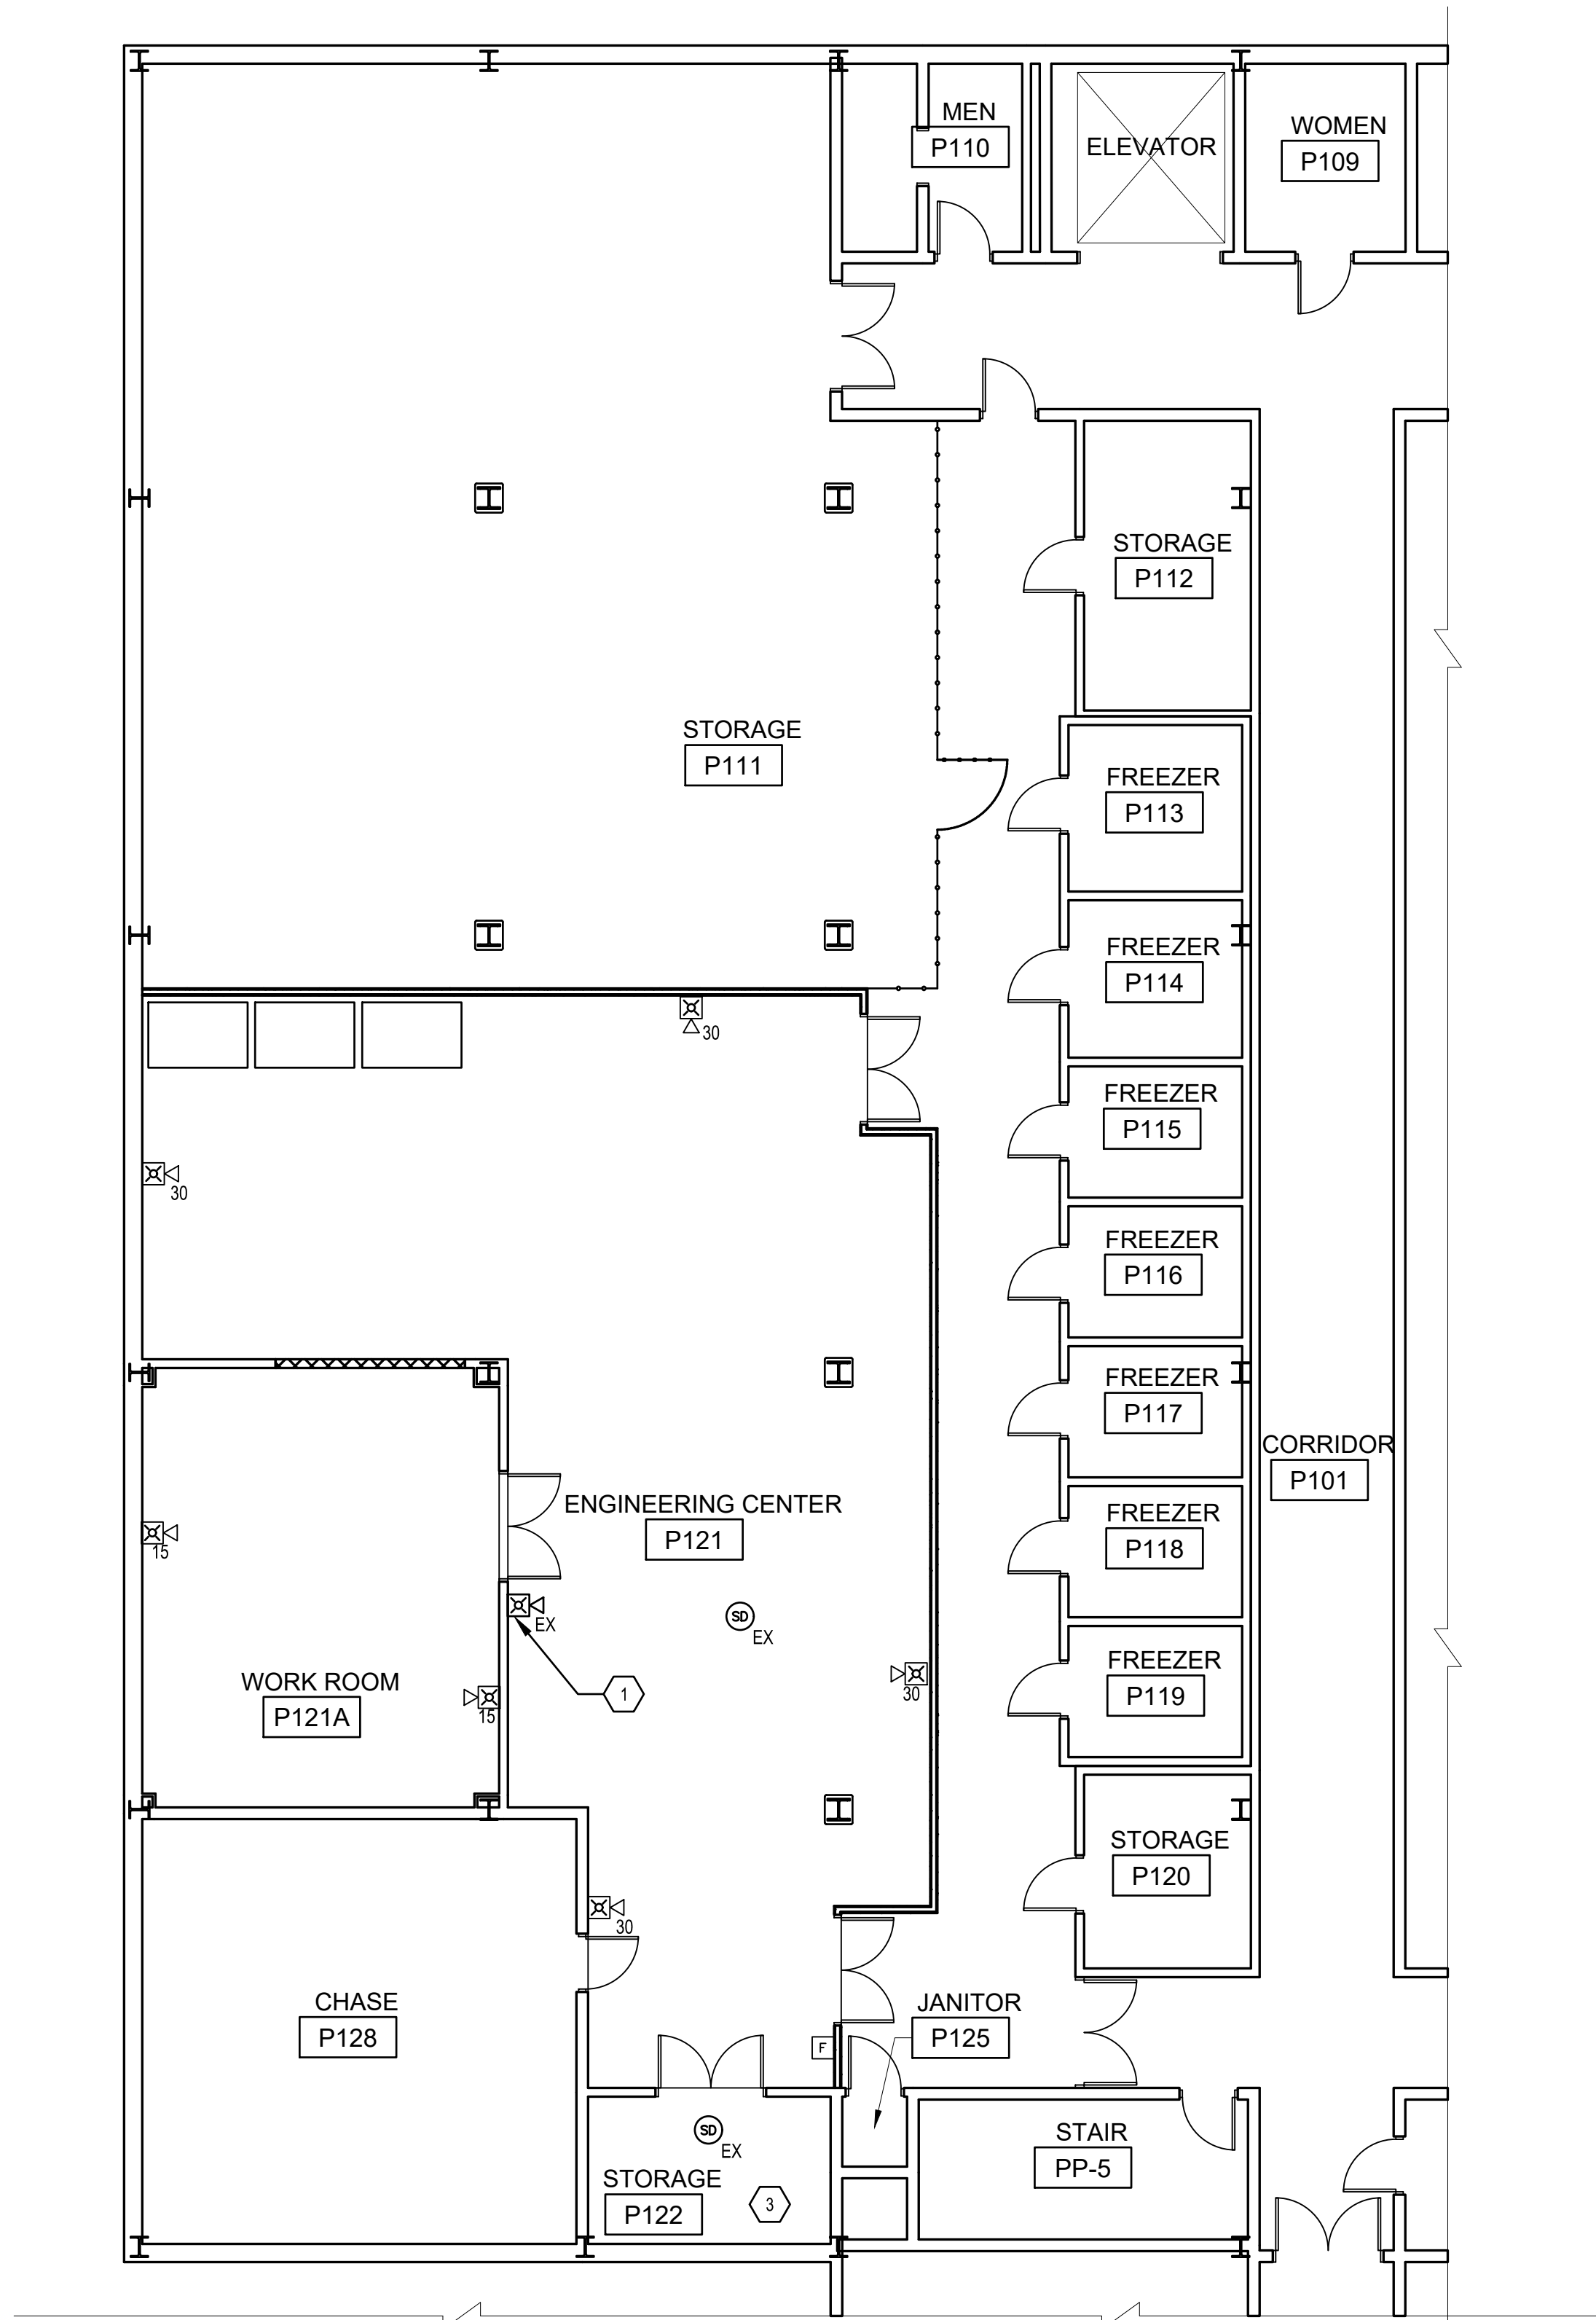

1 FIRE ALARM PLAN
F-101 SCALE: 1/8"= 1'-0"

Fire Alarm Schedule				
CALLOUT	SYMBOL	NOTE 1	NOTE 2	NOTE 3
Audio / Visual Alarm		NUMBER DENOTES CANDELA RATING		
Manual Alarm Station				
Smoke Detector				

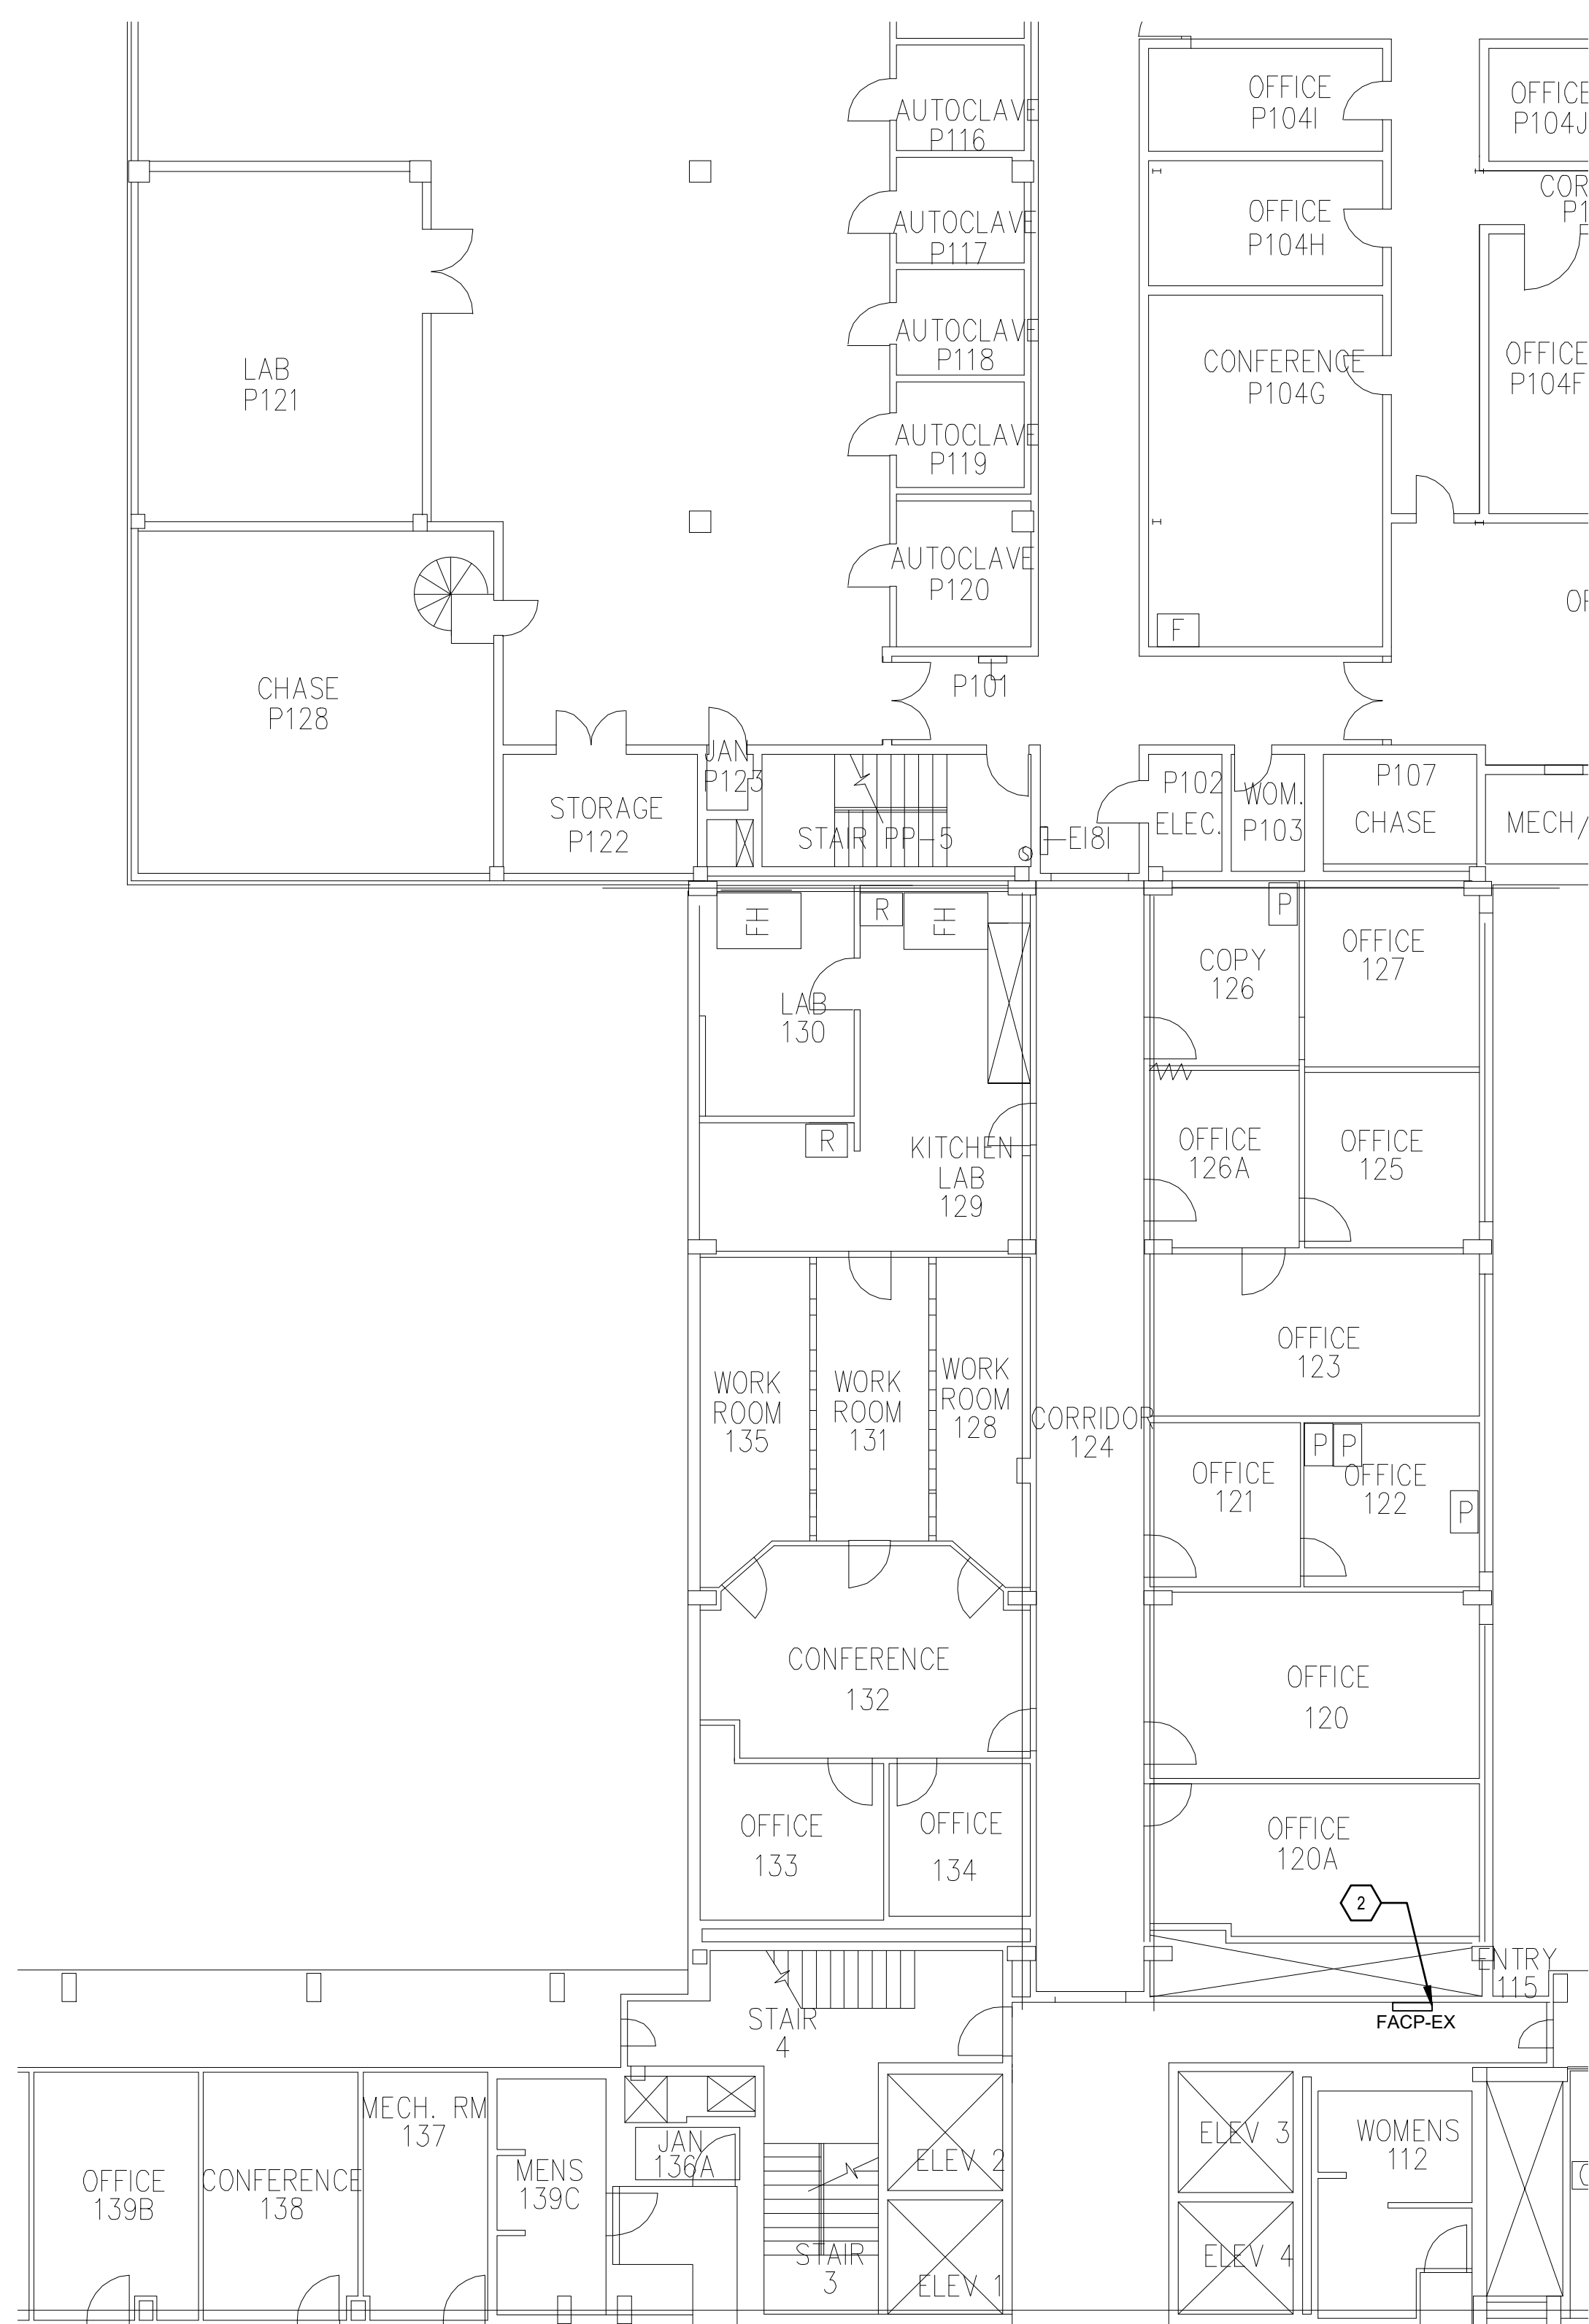

2 FIRE ALARM EXISTING FACP LOCATION
F-102 SCALE: 3/32"= 1'-0"



GENERAL NOTES

- DEVICES SHOWN WITH "EX" ARE EXISTING TO REMAIN. DEVICES MUST BE PROTECTED DURING CONSTRUCTION.
- NOT ALL EXISTING DEVICES ARE SHOWN ON PLANS.

KEYED NOTES

- EXISTING TO REMAIN FIRE ALARM DEVICE AND BOX. INTERCEPT AND EXTEND WIRING AND CONDUIT TO NEW FIRE ALARM SPEAKER/STROBES. USE MINIMUM 14 AWG WIRE AND 3/4" CONDUIT TO NEW DEVICES.
- EXISTING TO REMAIN FIRE ALARM CONTROL PANEL. NEW DUCT SMOKE DETECTOR, SMOKE DETECTORS AND PULL STATIONS ARE TO TERMINATE THEIR CIRCUITS INTO A NEW FACP CIRCUIT. SEGREGATE DUCT DETECTOR CIRCUIT FROM OTHER INITIATION CIRCUITS. USE MINIMUM 12 AWG WIRE AND 3/4" CONDUIT TO NEW DEVICES.
- INCLUDE SHUNT TRIP CONNECTION AND BREAKER TO MECHANICAL UNITS WITH GREATER THAN 2000 CFM OUTPUT.

GRAPHIC SCALE

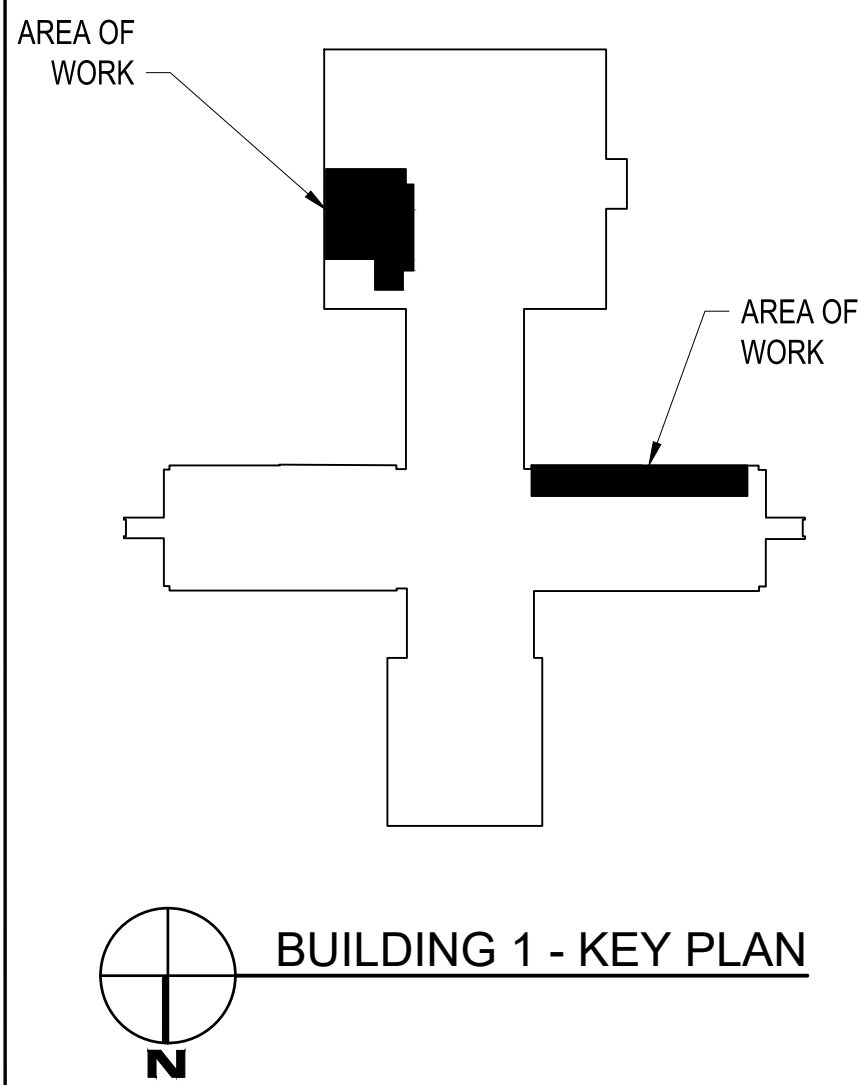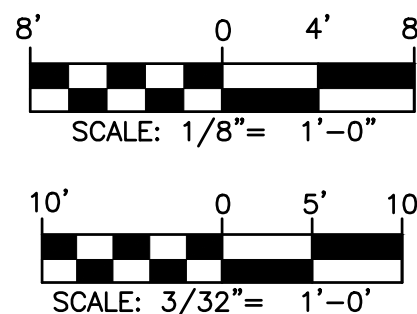

BUILDING 1 - KEY PLAN

The Johnson-McAdams Group, Inc.
P.O. BOX 915, GREENWOOD, MISSISSIPPI 39202-0915

A-E FIRM	USDA
PROJECT MANAGER WLS	EPM XXX
DESIGNER RPP	PPM XXX
CHECKED BY CG	SAFETY & HEALTH XXX
JOB # 6124-A	REAL PROPERTY XXX

USDA

USDA Agricultural Research Service


USDA AGRICULTURAL RESEARCH SERVICE
BUILDING 1, U.S. NATIONAL POULTRY RESEARCH CTR.
RENOVATE ROOM P111
ATHENS, GEORGIA

FIRE ALARM PLAN

PROJECT NO.	AGRICULTURAL RESEARCH SERVICE	SHEET
XXX	SOUTHEAST AREA	F-101
DATE 12/10/24	STONEVILLE, MS	1 OF XX

T:\2024 Projects\0124-A USDA BI Renovation P111 Lab - Athens GA\07 Working Folder\Elec\0355\DWG\Doc - P111 Lab.dwg
Dec 10, 2024 - 10:00am



Telephone and Data Schedule				
CALLOUT	SYMBOL	NOTE 1	NOTE 2	NOTE 3
CEILING DROP	◁W	CEILING MOUNTED DUAL DATA OUTLET. PROVIDE TWO (2) CAT 6 CABLES.		
QUAD DATA	◁D	QUAD DATA. PROVIDE TWO (4) CAT 6 CABLES.		

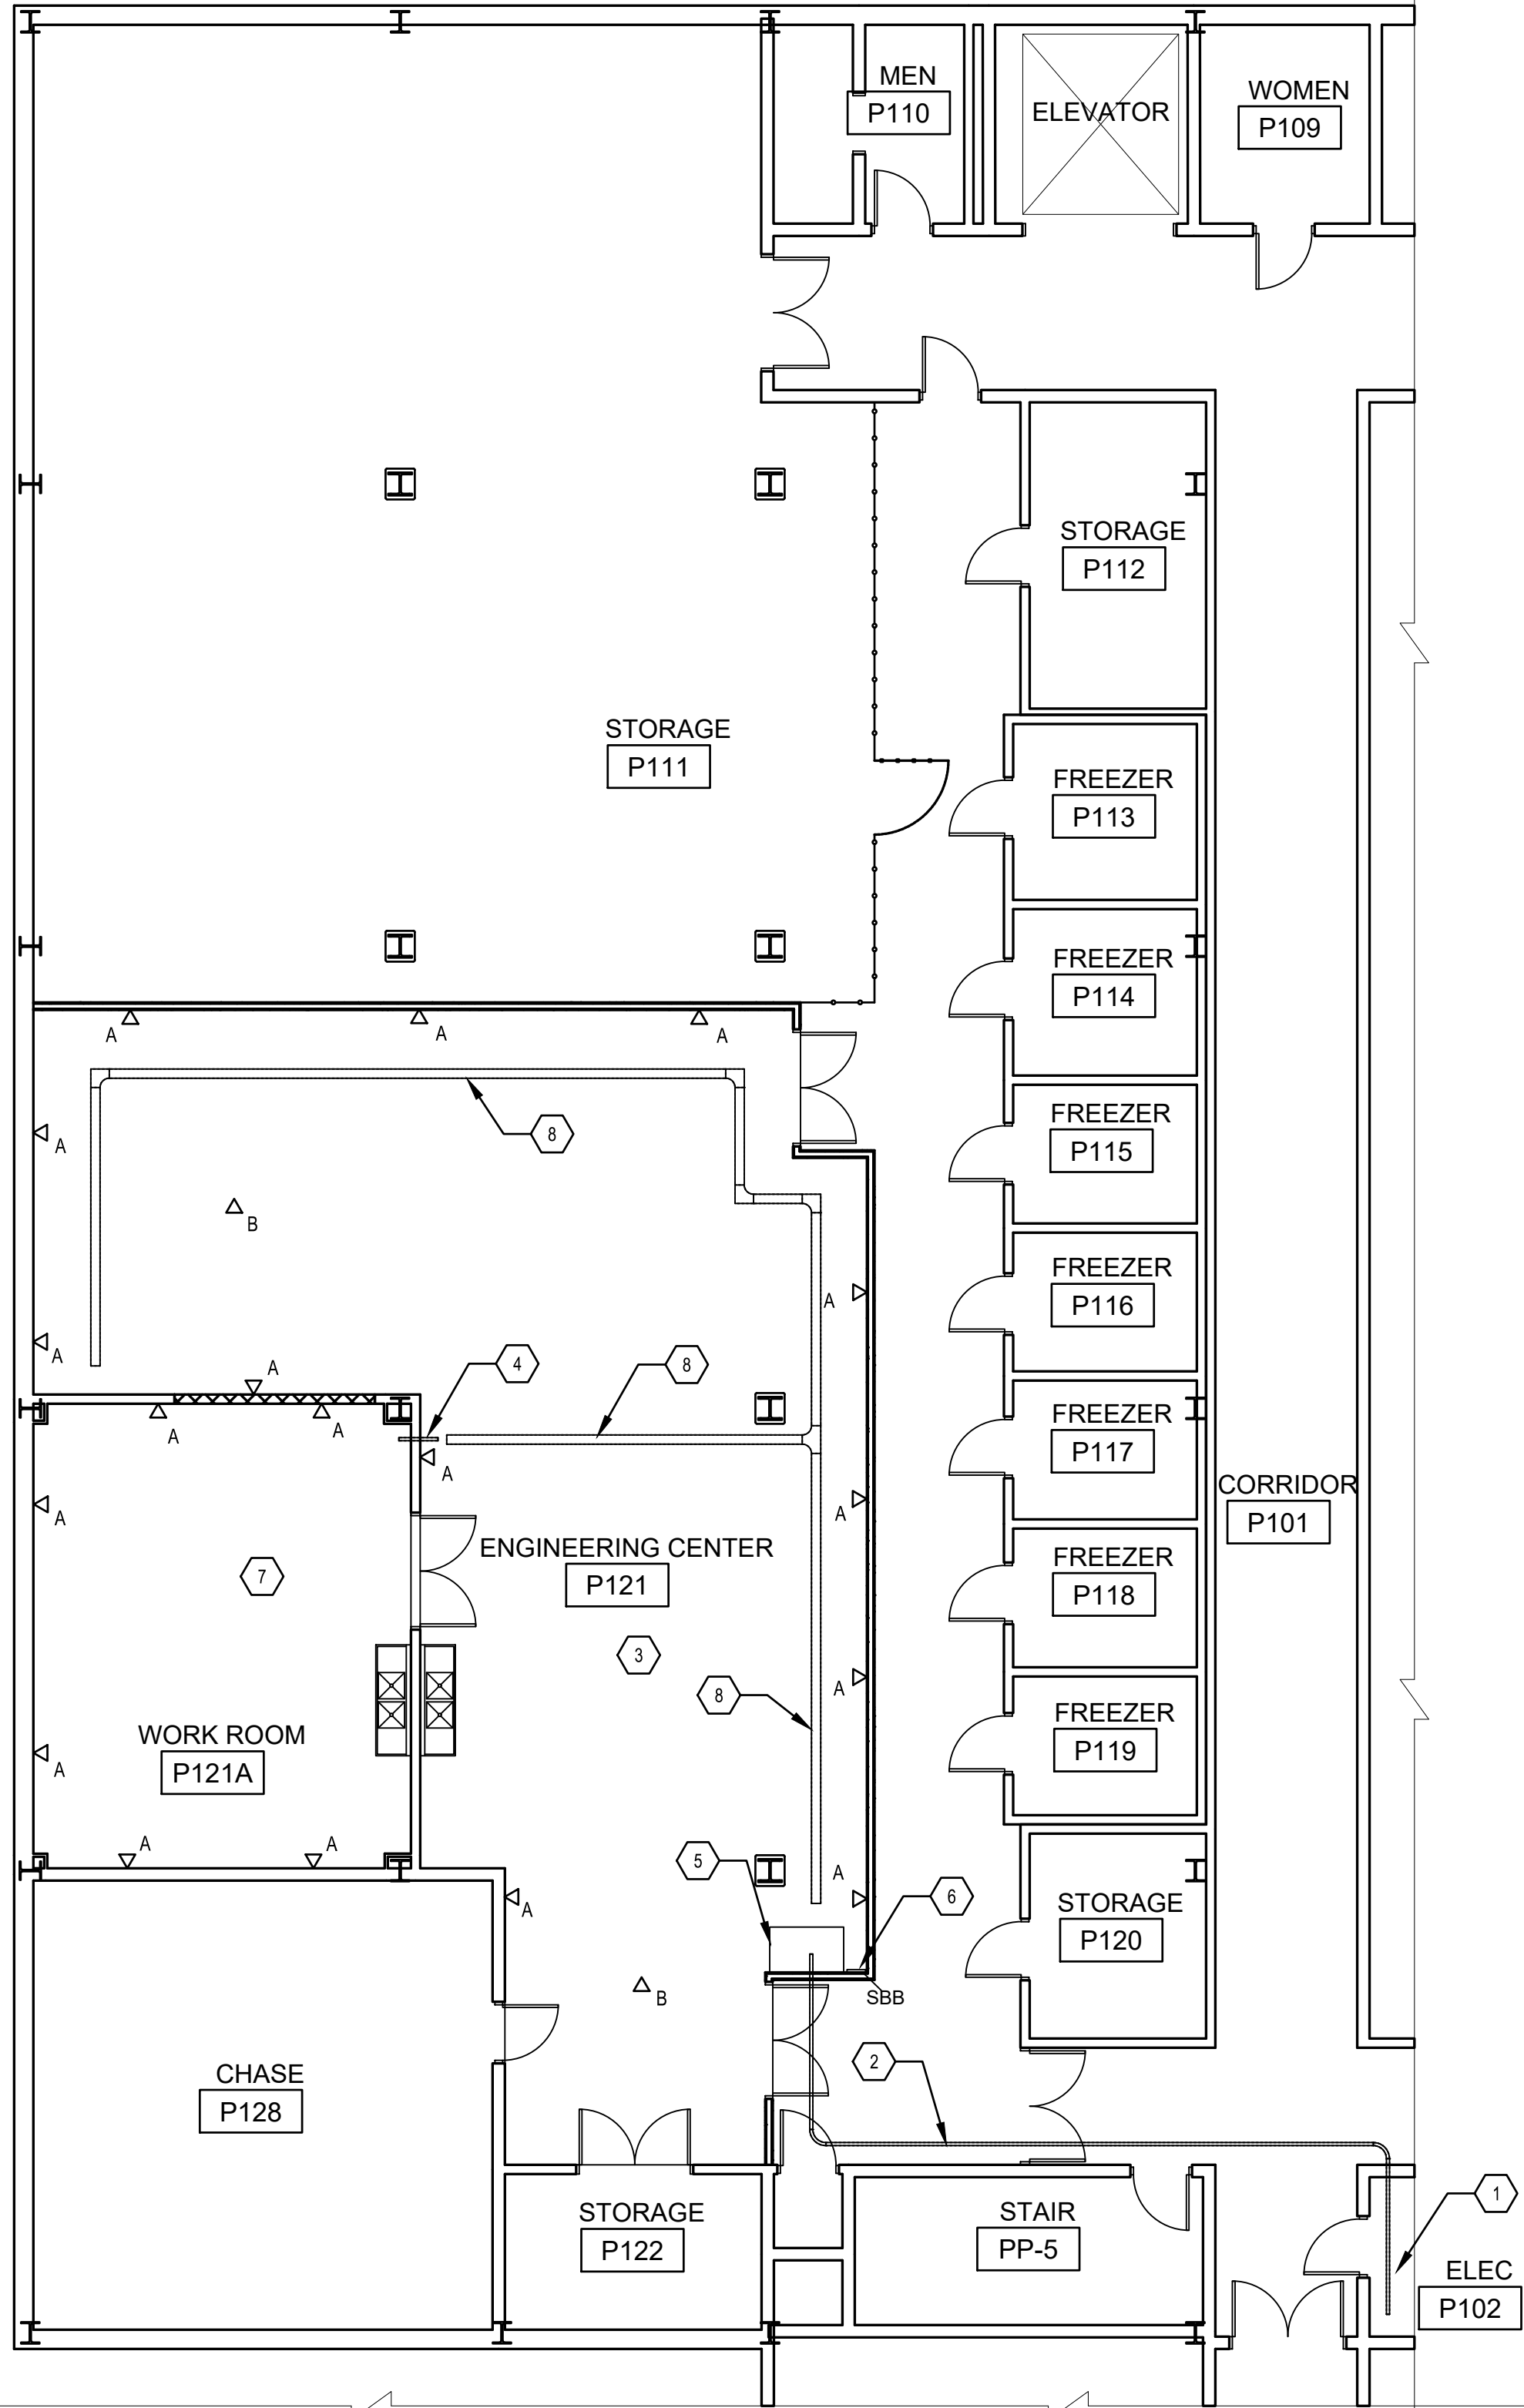


1 TELECOMMUNICATIONS PLAN
T-101 SCALE: 1/8"= 1'-0"

- KEYED NOTES**
- ROOM "P102". FIBER CABLING CONTINUING ROUTE FROM FLOOR BELOW. SEE 1/T102 FOR MORE DETAILS.
 - INSTALL 2" CONDUIT AT CEILING HEIGHT. FIBER CABLING TO ROUTE IN THIS CONDUIT. ENSURE APPROPRIATE FIRESTOPPING AS REQUIRED TO MAINTAIN FIRE RATING OF WALL.
 - RUN CAT6 CABLES ON CABLE TRAY AND J-HOOKS AS REQUIRED TO DEVICE LOCATIONS. MATCH CABLE COLOR WITH OPEN CEILING COLOR.
 - RUN CAT 6 CABLES INTO ROOM P121A THROUGH THIS 2" CONDUIT PATHWAY. ENSURE APPROPRIATE FIRESTOPPING AS REQUIRED TO MAINTAIN FIRE RATING OF WALL.
 - TELECOMMUNICATIONS CABINET. MOUNT TO WALL ON FIRE RETARDANT PLYWOOD BACKBOARD. CABINET MUST INCLUDE LOCKABLE DOOR.
 - SECONDARY BONDING BUSBAR. MOUNT TO PLYWOOD BACKBOARD. TIE TELECOMMUNICATIONS BACKBONE BONDING CONDUCTOR TO SBB AND MDF PRIMARY BONDING BUS BAR ON BASEMENT FLOOR. SEE 1/T-102 FOR MDF LOCATION.
 - UTILIZE J-HOOKS IN THIS SPACE FOR THE CAT-6 CABLING. MATCH CEILING COLOR FOR HOOKS AND CABLING COLOR.
 - CABLE TRAY. MOUNT TO CEILING. MATCH COLOR OF CEILING. TRAY IS 6"(W) x 2"(H) MINIMUM.

GRAPHIC SCALE

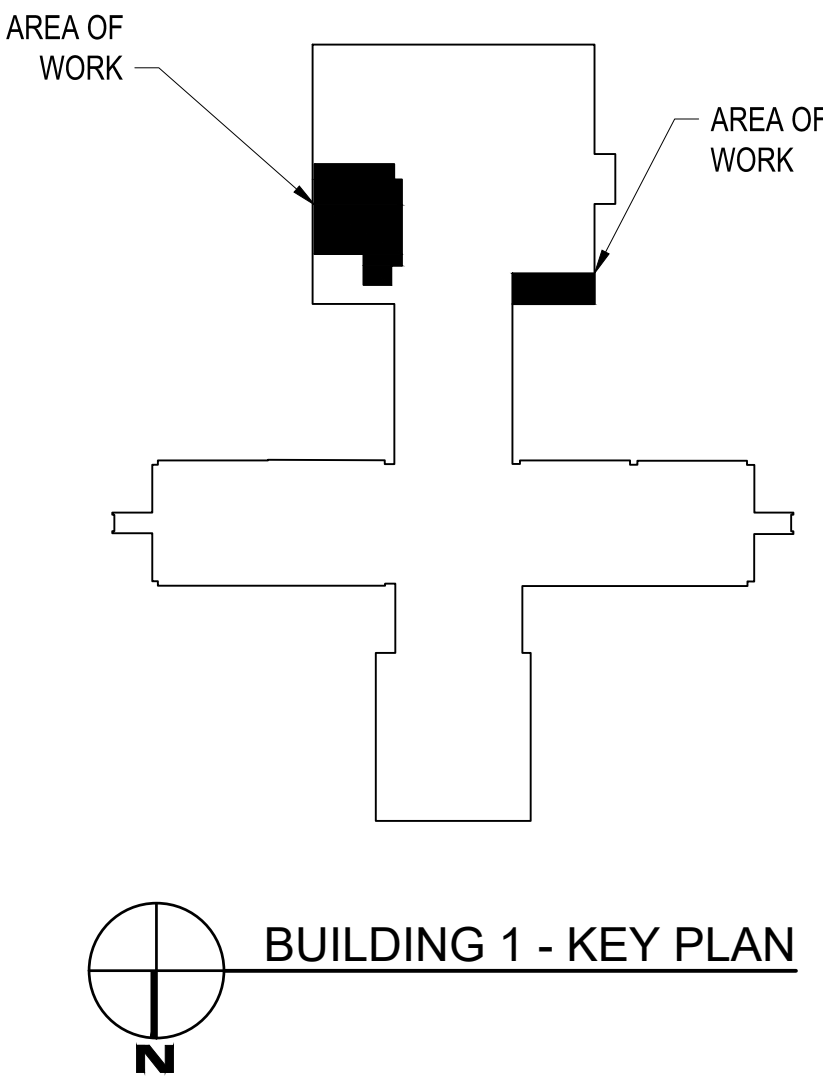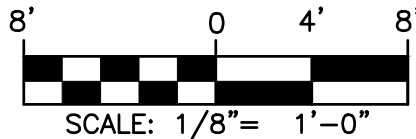

 THE Johnson-McAdams FIRM, INC. (A MISSISSIPPI CORPORATION) P.O. BOX 915, GREENWOOD, MISSISSIPPI 38921-0915 (662) 455-4943									
		NO.		DATE		BY		DESCRIPTION	
		REVISIONS							
A-E FIRM		USDA		USDA		 Agricultural Research Service USDA AGRICULTURAL RESEARCH SERVICE BUILDING 1, U.S. NATIONAL POULTRY RESEARCH CTR. RENOVATE ROOM P111 ATHENS, GEORGIA TELECOMMUNICATIONS PLAN			
PROJECT MANAGER		EPM							
WLS		XXX							
DESIGNER		PPM							
RPP		XXX							
CHECKED BY		SAFETY & HEALTH		PROJECT NO.		AGRICULTURAL RESEARCH SERVICE		SHEET	
CG		XXX		XXX				T-101	
JOB #		REAL PROPERTY		DATE		SOUTHEAST AREA			
6124-A		XXX		12/10/24		STONEVILLE, MS		1 OF XX	

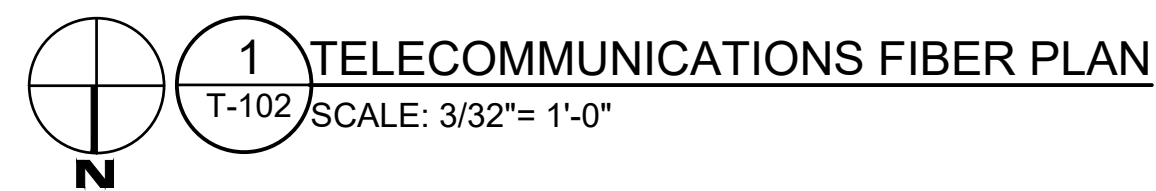

 Johnson • M'Adams ARCHITECTS ENGINEERS PLANNERS 800 ROCK HILL, GREENSBORO, MISSISSIPPI • (802) 485-8848																	
		NO.		DATE		BY											
						DESCRIPTION											
		REVISIONS															
<table><tr><td>A-E FIRM</td><td>USDA</td></tr><tr><td>PROJECT MANAGER WLS</td><td>EFM XXX</td></tr><tr><td>DESIGNER RPP</td><td>PPM XXX</td></tr><tr><td>CHECKED BY CG</td><td>SAFETY & HEALTH XXX</td></tr><tr><td>JOB # 6124-A</td><td>REAL PROPERTY XXX</td></tr></table>		A-E FIRM	USDA	PROJECT MANAGER WLS	EFM XXX	DESIGNER RPP	PPM XXX	CHECKED BY CG	SAFETY & HEALTH XXX	JOB # 6124-A	REAL PROPERTY XXX	USDA  Agricultural Research Service		USDA AGRICULTURAL RESEARCH SERVICE BUILDING 1, U.S. NATIONAL POULTRY RESEARCH CTR. RENOVATE ROOM P111 ATHENS, GEORGIA			
		A-E FIRM	USDA														
		PROJECT MANAGER WLS	EFM XXX														
		DESIGNER RPP	PPM XXX														
		CHECKED BY CG	SAFETY & HEALTH XXX														
JOB # 6124-A	REAL PROPERTY XXX																
TELECOMMUNICATIONS FIBER PLAN																	
PROJECT NO.		AGRICULTURAL RESEARCH SERVICE		SHEET													
XXX		SOUTHEAST AREA		T-102													
DATE		STONEVILLE, MS		1 OF XX													
12/10/24																	